High-Voltage Half-Bridge Driver with Inbuilt Oscillator

The NCP1392B/D is a self-oscillating high voltage MOSFET driver primarily tailored for the applications using half bridge topology. Due to its proprietary high-voltage technology, the driver accepts bulk voltages up to 600 V. Operating frequency of the driver can be adjusted from 25 kHz to 480 kHz using a single resistor. Adjustable Brown-out protection assures correct bulk voltage operating range. An internal 100 ms or 12.6 ms PFC delay timer guarantee that the main downstream converter will be turned on in the time the bulk voltage is fully stabilized. The device provides fixed dead time which helps lowering the shoot-through current.

Features

- Wide Operating Frequency Range from 25 kHz to 480 kHz
- Minimum frequency adjust accuracy $\pm 3\%$
- Fixed Dead Time 0.6 μs or 0.3 μs
- Adjustable Brown-out Protection for a Simple PFC Association
- 100 ms or 12.6 ms PFC Delay Timer
- Non-latched Enable Input
- Internal 16 V V_{CC} Clamp
- Low Startup Current of 50 μA
- 1 A / 0.5 A Peak Current Sink / Source Drive Capability
- Operation up to 600 V Bulk Voltage
- Internal Temperature Shutdown
- SOIC-8 Package
- These are Pb-Free Devices

Typical Applications

- Flat Panel Display Power Converters
- Low Cost Resonant SMPS
- High Power AC/DC Adapters for Notebooks
- Offline Battery Chargers
- Lamp Ballasts



ON Semiconductor®

http://onsemi.com



L

٧



MARKING

1392x = Specific Device Code


x = B or D

= Assembly Location

= Wafer Lot = Year

WW = Work Week
■ = Pb-Free Package

PINOUT DIAGRAM




ORDERING INFORMATION

Device	Package	Shipping [†]
NCP1392BDR2G	SOIC-8 (Pb-Free)	2500 / Tape & Reel
NCP1392DDR2G	SOIC-8 (Pb-Free)	2500 / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

1

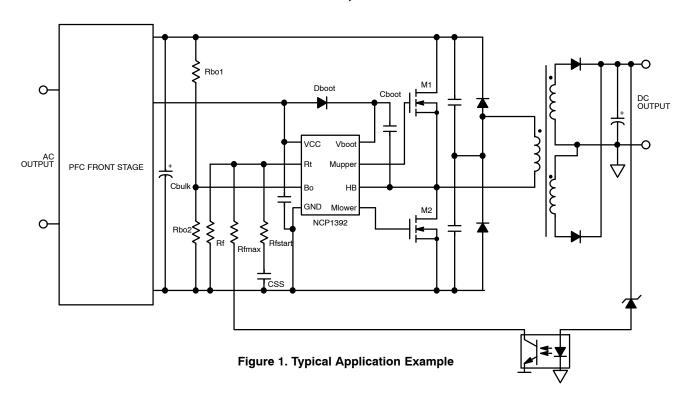

PIN FUNCTION DESCRIPTION

Pin #	Pin Name	Function	Pin Description
1	V_{CC}	Supplies the Driver	The driver accepts up to 16 V (given by internal zener clamp)
2	Rt	Timing Resistor	Connecting a resistor between this pin and GND, sets the operating frequency
3	ВО	Brown-Out	Detects low input voltage conditions. When brought above Vref_EN, it stops the driver. Operation is restored (without any delay) when BO pin voltage drops 100 mV below Vref_EN.
4	GND	IC Ground	
5	Mlower	Low-Side Driver Output	Drives the lower side MOSFET
6	НВ	Half-Bridge Connection	Connects to the half-bridge output
7	Mupper	High-Side Driver Output	Drives the higher side MOSFET
8	Vboot	Bootstrap Pin	The floating supply terminal for the upper stage

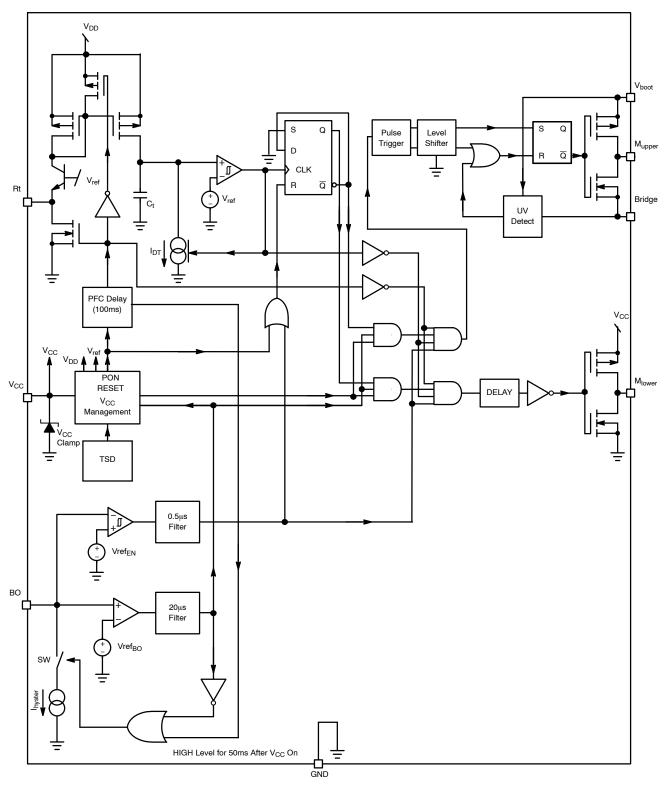


Figure 2. Internal Circuit Architecture (B Version)

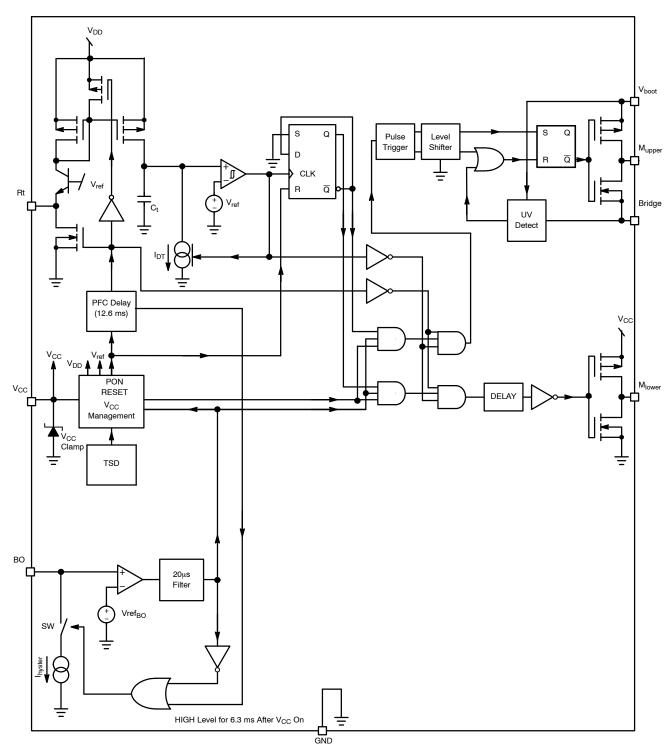


Figure 3. Internal Circuit Architecture (D Version)

MAXIMUM RATINGS TABLE

Symbol	Rating	Value	Unit
Vbridge	High Voltage Bridge Pin – Pin 6	-1 to +600	V
Vboot – Vbridge	Floating Supply Voltage	0 to 20	V
VDRV_HI	High-Side Output Voltage	Vbridge – 0.3 to Vboot + 0.3	V
VDRV_LO	Low-Side Output Voltage	-0.3 to V _{CC} +0.3	٧
dVbridge/dt	Allowable Output Slew Rate	± 50	V/ns
I _{CC}	Maximum Current that Can Flow into V _{CC} Pin (Pin 1), (Note 1)	20	mA
V_Rt	Rt Pin Voltage	-0.3 to 5	V
	Maximum Voltage, All Pins (Except Pins 4 and 5)	-0.3 to 10	٧
$R_{\theta JA}$	Thermal Resistance Junction-to-Air, IC Soldered on 50 mm ² Cooper 35 μm	178	°C/W
$R_{\theta JA}$	Thermal Resistance Junction-to-Air, IC Soldered on 200 mm ² Cooper 35 μm	147	°C/W
	Storage Temperature Range	-60 to +150	°C
	ESD Capability, Human Body Model (All Pins Except HV Pins 6, 7 and 8)	2.0	kV
	ESD Capability, Human Body Model (HV Pins 6, 7 and 8)	1.5	kV
	ESD Capability, Machine Model	200	V

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

This device contains internal zener clamp connected between V_{CC} and GND terminals. Current flowing into the V_{CC} pin has to be limited
by an external resistor when device is supplied from supply which voltage is higher than VCC_{clamp} (16 V typically). The I_{CC} parameter is
specified for VBO = 0 V.

ELECTRICAL CHARACTERISTICS (For typical values $T_J = 25^{\circ}C$, for min/max values $T_J = -40^{\circ}C$ to $+125^{\circ}C$, Max $T_J = 150^{\circ}C$, $V_{CC} = 12$ V, unless otherwise noted)


V _{CC} = 12 V, unless otherwise noted)								
Characteristic	Pin	Symbol	Min	Тур	Max	Unit		
SUPPLY SECTION								
Turn-On Threshold Level, V _{CC} Going Up	1	VCC _{ON}	10	11	12	V		
Minimum Operating Voltage after Turn-On	1	VCC _{min}	8	9	10	V		
Startup Voltage on the Floating Section	1	Vboot _{ON}	7.8	8.8	9.8	V		
Cutoff Voltage on the Floating Section,	1	Vboot _{min}	7	8	9	V		
V _{CC} Level at which the Internal Logic gets Reset	1	VCC _{reset}	-	6.5	-	V		
Startup Current, $V_{CC} < VCC_{ON}$, $0^{\circ}C \le T_{amb} \le +125^{\circ}C$	1	Icc	-	-	50	μΑ		
Startup Current, $V_{CC} < VCC_{ON}$, $-40^{\circ}C \le T_{amb} < 0^{\circ}C$	1	Icc	-	-	65	μΑ		
Internal IC Consumption, No Output Load on Pins 8/7 – 5/4, Fsw = 100 kHz	1	I _{CC} 1	-	2.2	-	mA		
Internal IC Consumption, 1 nF Output Load on Pins 8/7 - 5/4, Fsw = 100 kHz	1	I _{CC} 2	-	3.4	-	mA		
Consumption in Fault Mode (Drivers Disabled, $V_{CC} > V_{CC(min)}$, $R_T = 3.5 \text{ k}\Omega$)	1	I _{CC} 3	-	2.56	-	mA		
Consumption During PFC Delay Period, 0°C ≤ T _{amb} ≤ +125°C		I _{CC} 4	-	-	400	μΑ		
Consumption During PFC Delay Period, −40°C ≤ T _{amb} < 0°C		I _{CC} 4	-	-	470	μΑ		
Internal IC Consumption, No Output Load on Pin 8/7 F _{SW} = 100 kHz	8	I _{boot1}	-	0.3	-	mA		
Internal IC Consumption, 1 nF Load on Pin 8/7 F _{SW} = 100 kHz	8	I _{boot2}	-	1.44	-	mA		
Consumption in Fault Mode (Drivers Disabled, V _{boot} > Vboot _{min})	8	I _{boot3}	-	0.1	-	mA		
V _{CC} Zener Clamp Voltage @ 20 mA	1	VCC _{clamp}	15.4	16	17.5	V		
INTERNAL OSCILLATOR								
Minimum Switching Frequency (R _t = 35 k Ω on Pin 2 for D _T = 600 ns, R _t = 70 k Ω on Pin 2 for D _T = 300 ns)	2	F _{SW} min	24.25	25	25.75	kHz		
Maximum Switching Frequency (B Version), R_t = 3.5 k Ω on Pin 2, D_T = 600 ns	2	F _{SW} maxB	208	245	282	kHz		
Maximum Switching Frequency (D Version), R _t = 3.5 k Ω on Pin 2, D _T = 300 ns	2	F _{SW} maxD	408	480	552	kHz		
Reference Voltage for all Current Generations	2	V _{ref} RT	3.33	3.5	3.67	V		
Internal Resistance Discharging C _{soft-start}	2	Rt _{discharge}	-	500	-	Ω		
Operating Duty Cycle Symmetry	5, 7	DC	48	50	52	%		
NOTE: Maximum capacitance directly connected to Pin 2 must be under 100 p	NOTE: Maximum capacitance directly connected to Pin 2 must be under 100 pF.							
DRIVE OUTPUT								
Output Voltage Rise Time @ CL = 1 nF, 10–90% of Output Signal	5, 7	T _r	_	40	-	ns		
Output Voltage Fall Time @ CL = 1 nF, 10-90% of Output Signal	5, 7	T _f	-	20	-	ns		
Source Resistance	5, 7	R _{OH}	_	12	-	Ω		
Sink Resistance	5, 7	R _{OL}	-	5	-	Ω		
Deadtime (B Version)	5,7	T _{deadB}	540	610	720	ns		
Deadtime (D Version)	5,7	T _{deadD}	260	305	360	ns		
Leakage Current on High Voltage Pins to GND (600 Vdc)	6,7,8	IHV _{Leak}	-	-	5	μΑ		
PROTECTION		I.						
Brown-Out Input Bias Current		IBO _{bias}	<u> </u>	0.01	-	μΑ		
Brown-Out Level		VBO	0.95	1	1.05	·		
Hysteresis Current, V _{pin3} < VBO		IBO	15.6	18.2	20.7	μА		
Reference Voltage for EN Input (B Version)		V _{ref} EN	1.9	2	2.1	V		
EN Comparator (not available in D Version)		V _{ref} EN_D	_	_	_	V		
Enable Comparator Hysteresis		EN_Hyste	_	100	_	mV		
Propagation Delay Before Drivers are Stopped	3	EN_Delay	-	0.5	_	μS		
	_	PFC Delay	_	100	_	ms		
Delay Betore Any Driver Restart (B Version)		,	ļ					
Delay Before Any Driver Restart (B Version) Delay Before Any Driver Restart (D Version)	_	PFC Delav	-	12.6	-	ms		
Delay Before Any Driver Restart (B Version) Delay Before Any Driver Restart (D Version) Temperature Shutdown	-	PFC Delay TSD	- 140	12.6	-	°C		

ELECTRICAL CHARACTERISTICS (For typical values $T_J = 25^{\circ}C$, for min/max values $T_J = -40^{\circ}C$ to $+125^{\circ}C$, Max $T_J = 150^{\circ}C$, $V_{CC} = 12$ V, unless otherwise noted)

Characteristic	Pin	Symbol	Min	Тур	Max	Unit
PROTECTION						
Brown Out discharge time (B Version) (Note 2)	_	BOdisch	-	50	-	ms
Brown Out discharge time (D Version) (Note 2)	-	BOdisch	-	6.3	-	ms

^{2.} Guaranteed by design.

TYPICAL CHARACTERISTICS

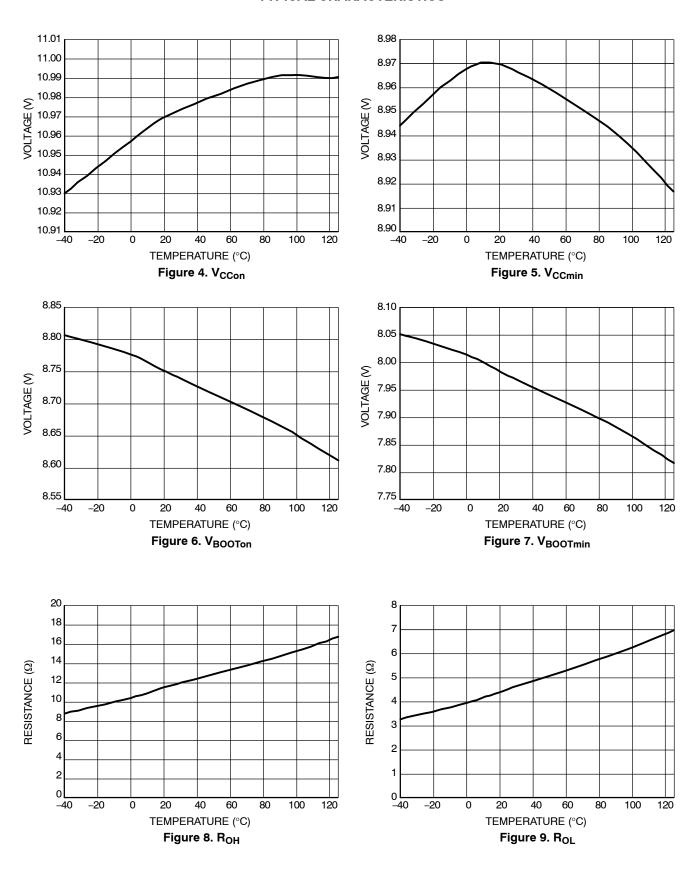

TYPICAL CHARACTERISTICS

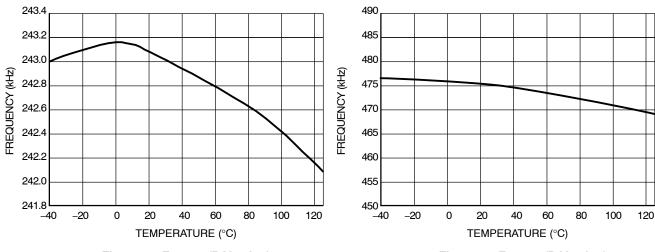


Figure 10. F_{SWmax} (B Version)

Figure 11. F_{SWmax} (D Version)

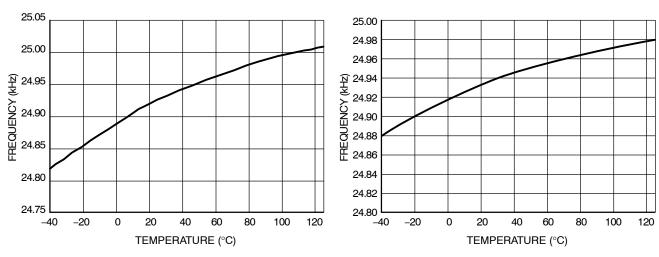


Figure 12. F_{SWmin} (B Version)

Figure 13. F_{SWmin} (D Version)

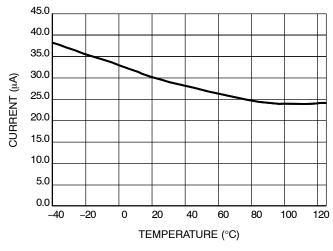


Figure 14. I_{CC_startup}


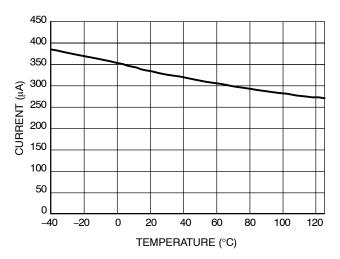


Figure 15. I_{CC4}


TYPICAL CHARACTERISTICS

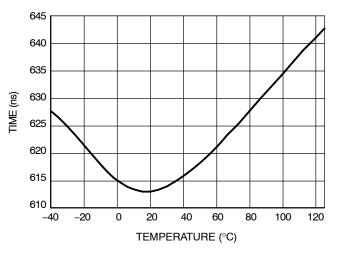

330 325 320 TIME (ns) 315 310 305 300 _40 -20 0 20 40 60 80 100 120 TEMPERATURE (°C)

Figure 16. T_{dead} (B Version)

Figure 17. T_{dead} (D Version)

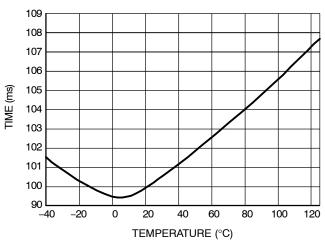

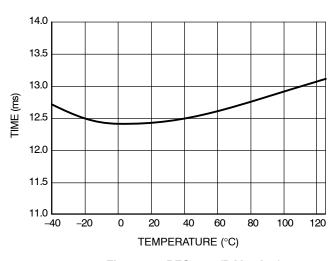
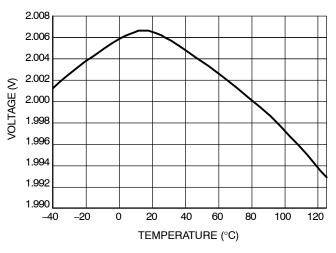


Figure 18. PFC_{delay} (B Version)

Figure 19. PFC_{delay} (D Version)




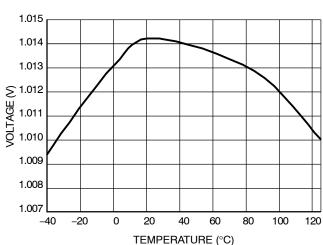


Figure 20. V_{ref_EN}

Figure 21. V_{BO}

TYPICAL CHARACTERISTICS

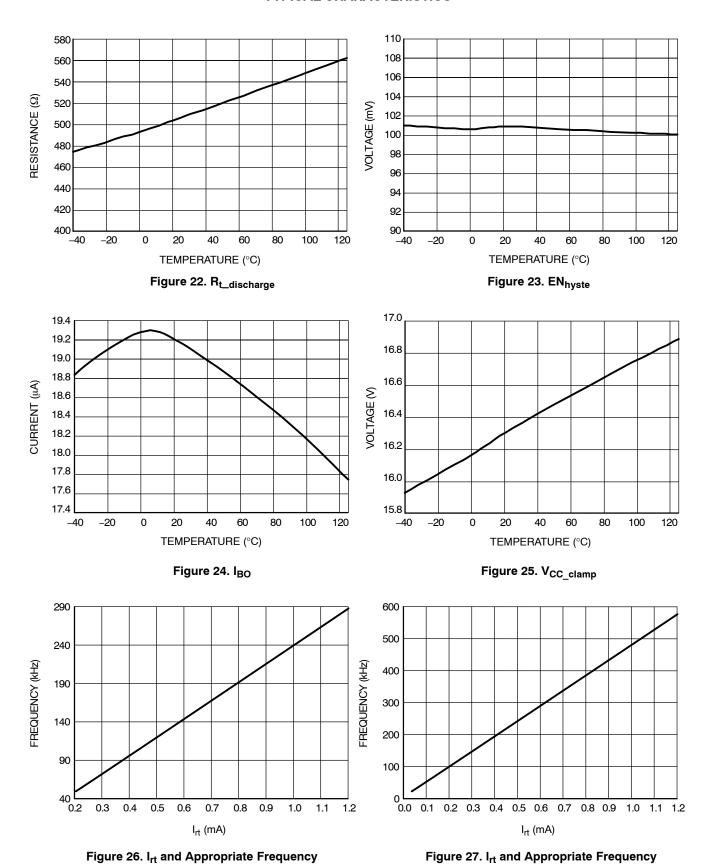

(D Version)

(B Version)

APPLICATION INFORMATION

The NCP1392 is primarily intended to drive low cost half bridge applications and especially resonant half bridge applications. The IC includes several features that help the designer to cope with resonant SPMS design. All features are described thereafter:

- Wide Operating Frequency Range: The internal current controlled oscillator is capable to operate over wide frequency range. Minimum frequency accuracy is ±3%.
- **Fixed Dead–Time**: The internal dead–time helping to fight with cross conduction between the upper and lower power transistors. Three versions with different dead time values are available to cover wide range of applications.
- PFC Timer: Fixed delay is placed to IC operation
 whenever the driver restarts (VCC_{ON} or BO_OK detect
 events). This delay assures that the bulk voltage will be
 stabilized in the time the driver provides pulses on the
 outputs. Another benefit of this delay is that the soft
 start capacitor will be full discharged before any restart.
- Brown-Out Detection: The BO input monitors bulk voltage level via resistor divider and thus assures that the application is working only for wanted bulk voltage band. The BO input sinks current of 18.2 μA until the Vref_{BO} threshold is reached. Designer can thus adjust the bulk voltage hysteresis according to the application needs.

- Non-Latched Enable Input: The enable comparator
 input is connected in parallel to the BO terminal to
 allow the designer stop the output drivers when needed.
 There is no PFC delay when enable input is released so
 skip mode for resonant SMPS applications and
 dimming for light ballast applications are possible.
- Internal V_{CC} Clamp: The internal zener clamp offers a way to prepare passive voltage regulator to maintain V_{CC} voltage at 16 V in case the controller is supplied from unregulated power supply or from bulk capacitor.
- Low Startup Current: This device features maximum startup current of 50 µA which allows the designer to use high value startup resistor for applications when driver is supplied from the auxiliary winding. Power dissipation of startup resistor is thus significantly reduced.

Current Controlled Oscillator

The current controlled oscillator features a high–speed circuitry allowing operation from 50 kHz up to 960 kHz. However, as a division by two internally creates the two Q and \overline{Q} outputs, the final effective signal on output Mlower and Mupper switches in half frequency range. The VCO is configured in such a way that if the current that flows out from the Rt pin increases, the switching frequency also goes up. Figure 28 shows the architecture of this oscillator.

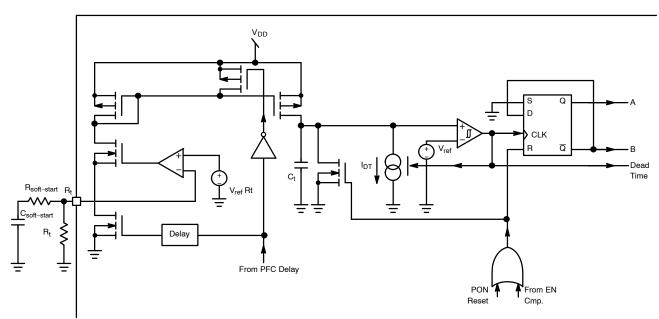


Figure 28. The Internal Current Controlled Oscillator Architecture

The internal timing capacitor Ct is charged by current which is proportional to the current flowing out from the Rt pin. The discharging current I_{DT} is applied when voltage on this capacitor reaches 2.5 V. The output drivers are disabled during discharge period so the dead time length is

given by the discharge current sink capability. Discharge sink is disabled when voltage on the timing capacitor reaches zero and charging cycle starts again. The charging current and thus also whole oscillator is disabled during the PFC delay period to keep the IC consumption below 400 μA .

This is valuable for applications that are supplied from auxiliary winding and V_{CC} capacitor is supposed to provide energy during PFC delay period.

For the resonant applications and light ballast applications it is necessary to adjust minimum operating frequency with

high accuracy. The designer also needs to limit maximum operating and startup frequency. All these parameters can be adjusted using few external components connected to the Rt pin as depicted in Figure 29.

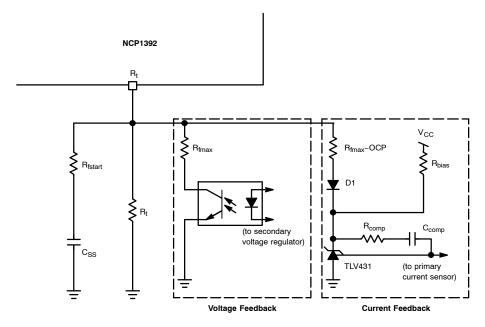


Figure 29. Typical Rt Pin Connection

The minimum switching frequency is given by the Rt resistor value. This frequency is reached if there is no optocoupler or current feedback action and soft start period has been already finished. The maximum switching frequency excursion is limited by the Rf_{max} selection. Note that the F_{max} value is influenced by the optocoupler saturation voltage value. Resistor Rfstart together with capacitor C_{SS} prepares the soft start period after PFC timer elapses. The Rt pin is grounded via an internal switch during the PFC delay period to assure that the soft start capacitor will be fully discharged via Rfstart resistor.

There is a possibility to connect other control loops (like current control loop) to the Rt pin. The only one limitation lies in the Rt pin reference voltage which is $Vref_{Rt} = 3.5 \text{ V}$. Used regulator has to be capable to work with voltage lower than $Vref_{Rt}$.

The TLV431 shunt regulator is used in the example from figure 4 to prepare current feedback loop. Diode D1 is used to enable regulator biasing via resistor Rbias. Total saturation voltage of this solution is 1.25 + 0.6 = 1.85 V for room temperature. Shottky diode will further decrease saturation voltage. Rf_{max} – OCP resistor value, limits the maximum frequency that can be pushed by this regulation loop. This parameter is not temperature stable because of the D1 temperature drift.

Brown-Out Protection

The Brown-Out circuitry (BO) offers a way to protect the application from low DC input voltages. Below a given level, the controller blocks the output pulses, above it, it authorizes them. The internal circuitry, depicted by Figure 30, offers a way to observe the high-voltage (HV) rail.

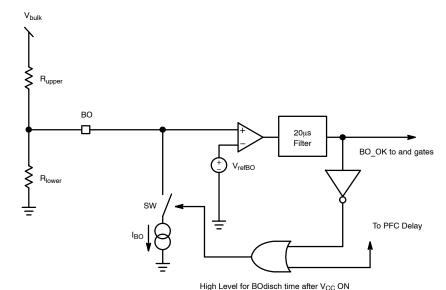


Figure 30. The internal Brown-Out Configuration with an Offset Current Sink

A resistive divider made of R_{upper} and R_{lower} , brings a portion of the HV rail on Pin 3. Below the turn—on level, the $18.2~\mu A$ current sink (IBO) is on. Therefore, the turn—on level is higher than the level given by the division ratio brought by the resistive divider. To the contrary, when the

internal BO_OK signal is high (PFC timer runs or Mlower and Mupper pulse), the I_{BO} sink is deactivated. As a result, it becomes possible to select the turn-on and turn-off levels via a few lines of algebra:

IBO is on

$$Vref_{BO} = V_{bulk1} \cdot \frac{R_{lower}}{R_{lower} + R_{upper}} - I_{BO} \cdot \left(\frac{R_{lower} \cdot R_{upper}}{R_{lower} + R_{upper}}\right)$$
(eq. 1)

IBO is off

$$Vref_{BO} = V_{bulk2} \cdot \frac{R_{lower}}{R_{lower} + R_{upper}}$$
 (eq. 2)

We can extract R_{lower} from Equation 2 and plug it into Equation 1, then solve for R_{upper}:

$$R_{lower} = Vref_{BO} \cdot \frac{V_{bulk1} - V_{bulk2}}{I_{BO} \cdot (V_{bulk2} - Vref_{BO})}$$
 (eq. 3)

$$R_{upper} = R_{lower} \cdot \frac{V_{bulk2} - Vref_{BO}}{Vref_{BO}}$$
 (eq. 4)

If we decide to turn–on our converter for V_{bulk1} equals 350 V and turn it off for V_{bulk2} equals 250 V, then for I_{BO} = 18.2 μ A and $Vref_{BO}$ = 1.0 V we obtain:

 $R_{upper} = 5.494 \text{ M}\Omega$

 $R_{lower} = 22.066 \text{ k}\Omega$

The bridge power dissipation is $400^2 / 5.517 \text{ M}\Omega = 29 \text{ mW}$ when front–end PFC stage delivers 400 V. Figure 31 simulation result confirms our calculations.

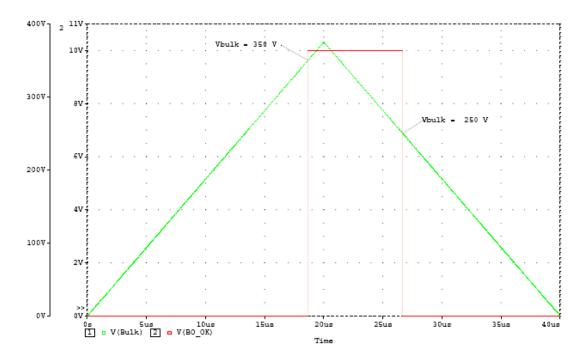


Figure 31. Simulation Results for 350/250 ON/OFF Brown-Out Levels

The IBO current sink is turned ON for BOdisch time after any controller restart to let the BO input voltage stabilize (there can be connected big capacitor to the BO input and the IBO is only $18.2~\mu A$ so it will take some time to discharge). Once the BOdisch time one shoot pulse ends the BO

comparator is supposed to either hold the I_{BO} sink turned ON (if the bulk voltage level is not sufficient) or let it turned OFF (if the bulk voltage is higher than V_{bulk1}).

See Figures 10 – 13 for better understanding on how the BO input works.

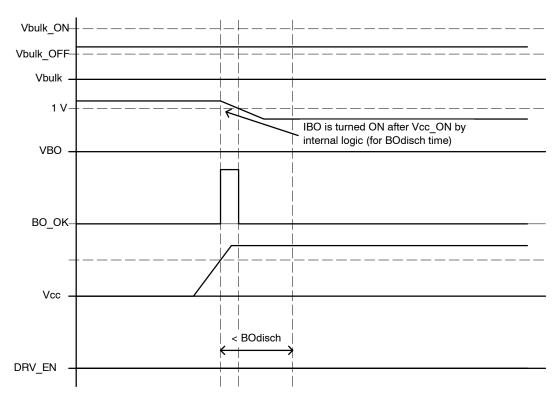


Figure 32. BO Input Functionality – V_{bulk2} < V_{bulk} < V_{bulk1}

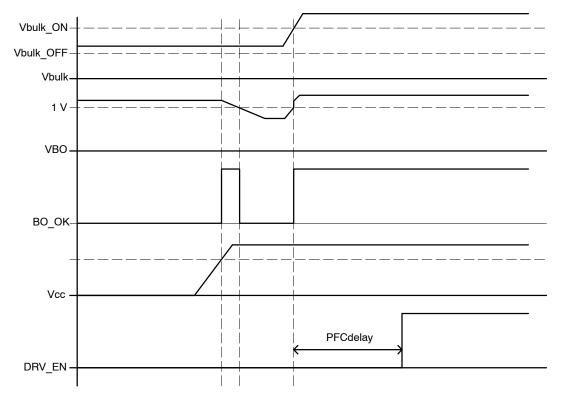


Figure 33. BO Input Functionality $-V_{bulk2} < V_{bulk} < V_{bulk1}$, PFC Start Follows

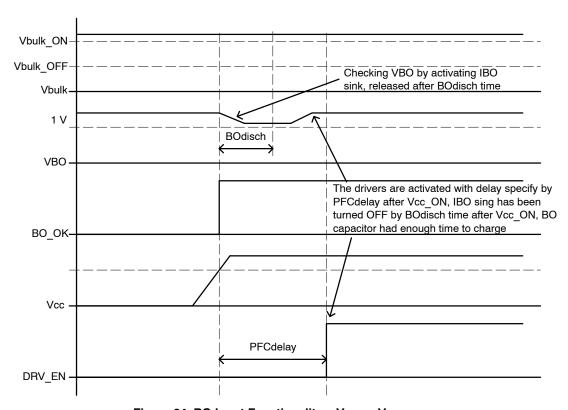


Figure 34. BO Input Functionality – $V_{bulk} > V_{bulk1}$

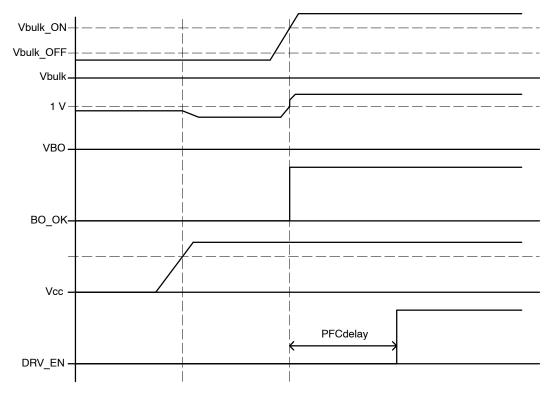


Figure 35. BO Input Functionality – V_{bulk} < V_{bulk2}, PFC Start Follows

Non-Latched Enable Input (B Version only)

The non-latched input stops output drivers immediately the BO terminal voltage grows above 2 V threshold. The enable comparator features 100 mV hysteresis so the BO terminal has to go down below 1.9 V to recover IC operation.

This input offers other features to the NCP1392 like dimming function for lamp ballasts (Figure 36) or skip mode capability for resonant converters (Figures 37 and 39).

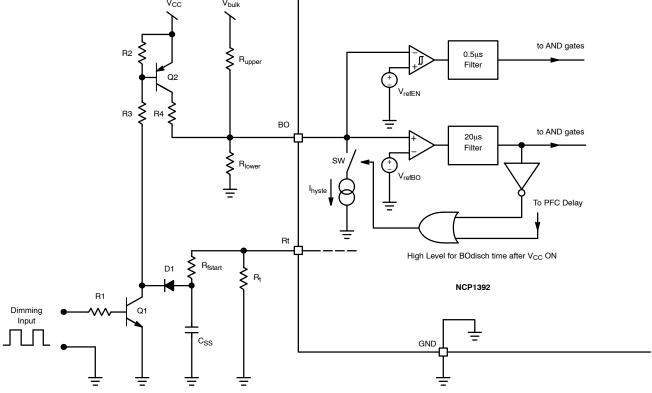


Figure 36. Dimming Feature Implementation Using Nonlatched Input on BO Terminal

The dimming feature can be easily aid to the ballast application by adding two bipolar transistors (Figure 14). Transistor Q2 pullup BO input when dimming signal is high.

In the same time the Q1 discharges soft start capacitor via diode D1. Ballast application is enabled (including soft-start phase) when dimming signal becomes low again.

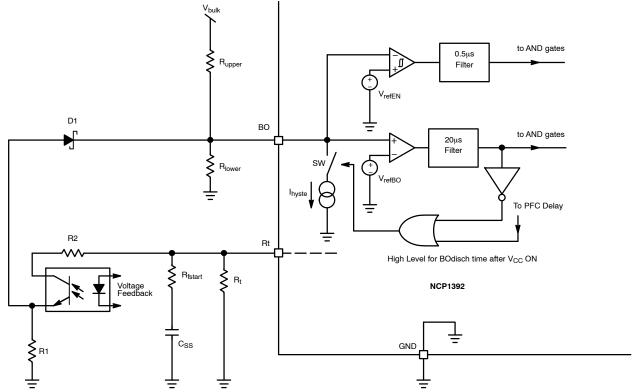


Figure 37. Skip Mode Feature Implementation (Temperature Dependent, Cost Effective)

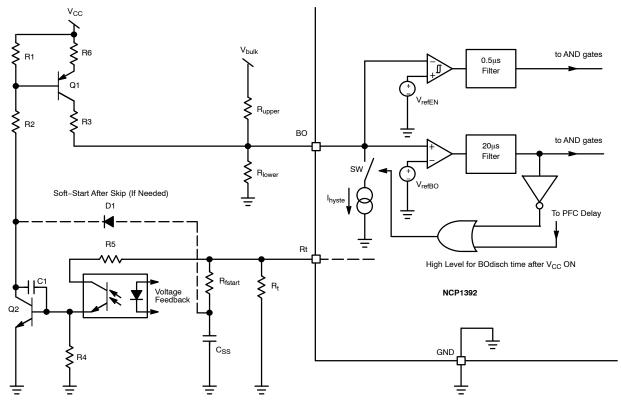


Figure 38. Skip Mode with Transistor Feature Implementation (Temperature Dependent, Cost Effective)

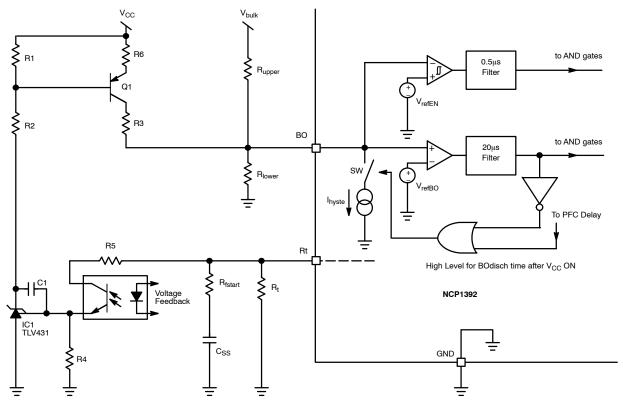


Figure 39. Skip Mode Feature Implementation (Better Accuracy)

Figures 37 and 39 shows skip mode feature implementation using NCP1392 driver. Voltage across resistor R1 (R4) increases when converter enters light load conditions. The enable comparator is triggered when voltage across R1 is higher than Vref EN + Vf(D1) for connection from Figure 37 (voltage across R4 is higher than 1.24 V for connection from figure 16). IC then prevents outputs from pulsing until BO terminal voltage decreases below 1.92 V.

Note that enable comparator serves also as an automatic overvoltage protection. When bulk voltage is too high, the enable input is triggered via BO divider.

Following equations can be used for easy calculations of devices connected to Rt pin:

Minimum frequency:

$$R_{t} = \frac{3.5 \cdot k}{Frequency - q}$$
 (eq. 5)

Maximum frequency where soft-start begins:

$$\label{eq:Rfstart} \textbf{R}_{\text{fstart}} = \frac{3.5 \cdot \textbf{k} \cdot \textbf{R}_{\text{t}}}{\text{Frequency} \cdot \textbf{R}_{\text{t}} - \textbf{R}_{\text{t}} \cdot \textbf{q} - 3.5 \cdot \textbf{k}} \ \ (\text{eq. 6})$$

The soft-start duration is set by Css capacitor:

$$C_{SS} = \frac{SS_{duration}}{R_{fstart} \cdot 5}$$
 (eq. 7)

A resistor to set maximum frequency, if the optocoupler is fully conductive is calculated by the following equation:

$$\begin{aligned} \textbf{R}_{(\text{R4}+\text{R5})} \, = \, -\frac{\left(-3.5 \, + \, \textbf{V}_{\text{ce_sat}}\right) \cdot \, \textbf{k} \, \cdot \, \textbf{R}_{\text{t}}}{\text{Frequency} \cdot \, \textbf{R}_{\text{t}} - \, \textbf{R}_{\text{t}} \cdot \, \textbf{q} - 3.5 \, \cdot \, \textbf{k} \, + \, \textbf{k} \, \cdot \, \textbf{V}_{\text{ce_sat}}} \end{aligned} \tag{eq. 8}$$

The constants in the equations are as follows:

Version B:
$$k = 244.4 \cdot 10^6$$
, $q = 0.555 \cdot 10^3$
Version D: $k = 478.9 \cdot 10^6$, $q = 1.053 \cdot 10^3$

The High-Voltage Driver

Figure 40 shows the internal architecture of the high-voltage section. The device incorporates an upper UVLO circuitry that makes sure enough $V_{\rm gs}$ is available for

the upper side MOSFET. The V_{CC} for floating driver section is provided by C_{boot} capacitor that is refilled by external bootstrap diode.

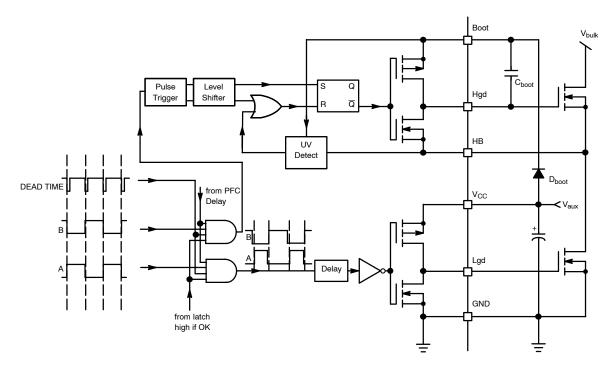



Figure 40. The Internal High-Voltage Section of the NCP1392

The A and B outputs are delivered by the internal logic, as depicted in block diagram. This logic is constructed in such a way that the Mlower driver starts to pulse firs after any driver restart. The bootstrap capacitor is thus charged during first pulse. A delay is inserted in the lower rail to ensure good

matching between these propagating signals. As stated in the maximum rating section, the floating portion can go up to 600 Vdc and makes the IC perfectly suitable for offline applications featuring a 400 V PFC front-end stage.

PACKAGE DIMENSIONS

SOIC-8 NB CASE 751-07 **ISSUE AK**

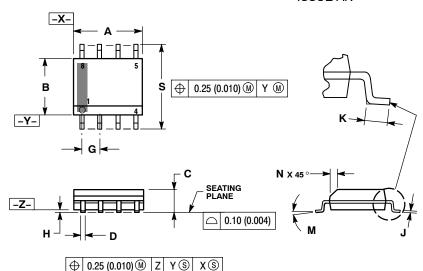


NOTES

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 CONTROLLING DIMENSION: MILLIMETER.
- DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
- MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
- DIMENSION D DOES NOT INCLUDE DAMBAR DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.
- 751-01 THRU 751-06 ARE OBSOLETE. NEW STANDARD IS 751-07.

	MILLIN	IETERS	INCHES		
DIM	MIN	MAX	MIN	MAX	
Α	4.80	5.00	0.189	0.197	
В	3.80	4.00	0.150	0.157	
С	1.35	1.75	0.053	0.069	
D	0.33	0.51	0.013	0.020	
G	1.27	BSC	0.050 BSC		
Н	0.10	0.25	0.004	0.010	
J	0.19	0.25	0.007	0.010	
K	0.40	1.27	0.016	0.050	
М	0 °	8 °	0 °	8 °	
N	0.25	0.50	0.010	0.020	
S	5.80	6.20	0.228	0.244	

SOLDERING FOOTPRINT*



(mm inches SCALE 6:1

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and un are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163. Denver. Colorado 80217 USA **Phone**: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru