Integrated Driver and MOSFET

The NCP302155 integrates a MOSFET driver, high-side MOSFET and low-side MOSFET into a single package.

The driver and MOSFETs have been optimized for high-current DC-DC buck power conversion applications. The NCP302155 integrated solution greatly reduces package parasitics and board space compared to a discrete component solution.

Features

- Capable of Average Currents up to 55 A
- Capable of Switching at Frequencies up to 2 MHz
- Compatible with 3.3 V or 5 V PWM Input
- Responds Properly to 3-level PWM Inputs
- Option for Zero Cross Detection with 3-level PWM
- Internal Bootstrap Diode
- Undervoltage Lockout
- Supports Intel® Power State 4
- Thermal Warning output
- Thermal Shutdown

Applications

- Notebook, Tablet PC and Ultrabook
- Servers and Workstations, V-Core and Non-V-Core DC-DC Converters
- Desktop and All-in-One Computers, V-Core and Non-V-Core DC-DC Converters
- High-Current DC-DC Point-of-Load Converters
- Small Form-Factor Voltage Regulator Modules





Figure 1. Application Schematic




ON Semiconductor®

www.onsemi.com



PQFN31 5X5, 0.5P CASE 483BR


MARKING DIAGRAM



A = Assembly Location

WL = Wafer Lot YY = Year WW = Work Week

PINOUT DIAGRAM



ORDERING INFORMATION

Device	Package	Shipping [†]
NCP302155MNTWG	5 x 5 PQFN	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

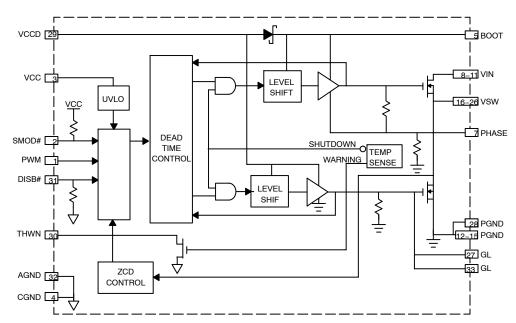


Figure 2. Block Diagram

Table 1. PIN LIST AND DESCRIPTION

Pin No.	Symbol	Description
1	PWM	PWM Control Input and Zero Current Detection Enable
2	SMOD#	Skip Mode pin. 3–state input (see Table 6): SMOD# = High → State of PWM determine whether the NCP302155 performs ZCD or not. SMOD# = Mid → Connects PWM to internal resistor divider placing a bias voltage on PWM pin. Otherwise, logic is equivalent to SMOD# in the high state. SMOD# = Low → Placing PWM into mid–state pulls GH and GL low without delay. There is an internal pull–up resistor to VCC on this pin.
3	VCC	Control Power Supply Input
4, 32	CGND, AGND	Signal Ground (pin 4 and pad 32 are internally connected)
5	воот	Bootstrap Voltage
6	nc	Open pin (not used)
7	PHASE	Bootstrap Capacitor Return
8–11	VIN	Conversion Supply Power Input
12–15, 28	PGND	Power Ground
16–26	VSW	Switch Node Output
27, 33	GL	Low Side FET Gate Access (pin 27 and pad 33 are internally connected)
29	VCCD	Driver Power Supply Input
30	THWN	Thermal warning indicator. This is an open–drain output. When the temperature at the driver die reaches T _{THWN} , this pin is pulled low.
31	DISB#	Output disable pin. When this pin is pulled to a logic high level, the driver is enabled. There is an internal pull-down resistor on this pin.

Table 2. ABSOLUTE MAXIMUM RATINGS (Electrical Information – all signals referenced to PGND unless noted otherwise)

Pin Name / Parameter	Min	Max	Unit
VCC, VCCD	-0.3	6.5	V
VIN	-0.3	30	V
BOOT (DC)	-0.3	35	V
BOOT (< 20 ns)	-0.3	40	V
BOOT to PHASE (DC)	-0.3	6.5	V
VSW, PHASE (DC)	-0.3	30	V
VSW, PHASE (< 20 ns)	-5	35	V
All Other Pins	-0.3	V _{VCC} + 0.3	V

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Table 3. THERMAL INFORMATION

Rating	Symbol	Value	Unit
Thermal Desistance (under On Comi CDC Thermal Desiral)	$\theta_{\sf JA}$	12.4	°C/W
Thermal Resistance (under On Semi SPS Thermal Board)	θЈ-РСВ	1.8	°C/W
Operating Junction Temperature Range (Note 1)	T _J	-40 to +150	°C
Operating Ambient Temperature Range	T _A	-40 to +125	°C
Maximum Storage Temperature Range	T _{STG}	-55 to +150	°C
Maximum Power Dissipation		TBD	W
Moisture Sensitivity Level	MSL	1	

^{1.} The maximum package power dissipation must be observed.

Table 4. RECOMMENDED OPERATING CONDITIONS

Parameter	Pin Name	Conditions	Min	Тур	Max	Unit
Supply Voltage Range	VCC, VCCD		4.5	5.0	5.5	V
Conversion Voltage	VIN		4.5	19	24	V
Continuous Output Current		F _{SW} = 1 MHz, V _{IN} = 12 V, V _{OUT} = 1.0 V, T _A = 25°C			55	Α
Continuous Output Current		F_{SW} = 300 kHz, V_{IN} = 12 V, V_{OUT} = 1.0 V, T_A = 25°C			60	Α
Junction Temperature			-40		125	°C

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

^{2.} JESD 51-5 (1S2P Direct-Attach Method) with 0 LFM

^{3.} JESD 51-7 (1S2P Direct-Attach Method) with 0 LFM

Table 5. ELECTRICAL CHARACTERISTICS

 $(V_{VCC} = V_{VCCD} = 5.0 \text{ V}, V_{VIN} = 12 \text{ V}, V_{DISB\#} = 2.0 \text{ V}, C_{VCCD} = C_{VCC} = 0.1 \ \mu\text{F} \text{ unless specified otherwise)} \ \text{Min/Max values are valid for the temperature range } -40^{\circ}\text{C} \leq T_{J} \leq 125^{\circ}\text{C} \text{ unless noted otherwise, and are guaranteed by test, design or statistical correlation.)}$

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
VCC SUPPLY CURRENT	•	•				
Operating		DISB# = 5 V, PWM = 400 kHz	-	1	2	mA
No switching		DISB# = 5 V, PWM = 0 V	_	-	2	mA
Disabled		DISB# = 0 V, SMOD# = VCC	-	0.4	1	μΑ
		DISB# = 0 V, SMOD# = GND		6	15	μΑ
UVLO Start Threshold	V _{UVLO}	VCC rising	2.89	-	3.37	٧
UVLO Hysteresis			150	-	-	mV
VCCD SUPPLY CURRENT	•					
Enabled, No switching		DISB# = 5 V, PWM = 0 V, V _{PHASED} = 0 V	-	175	300	μΑ
Disabled		DISB# = 0 V	-	0.4	1	μΑ
Operating		DISB# = 5 V, PWM = 400 kHz	-	-	26	mA
DISB# INPUT	•					•
Input Resistance		To Ground	-	467	_	kΩ
Upper Threshold	V _{UPPER}		-	-	2.0	٧
Lower Threshold	V _{LOWER}		0.8	-	-	V
Hysteresis		V _{UPPER} - V _{LOWER}	200	-	-	mV
Enable Delay Time		Time from DISB# transitioning HI to when VSW responds to PWM.	_	_	40	μs
Disable Delay Time		Time from DISB# transitioning LOW to when both output FETs are off.	_	21	50	ns
SMOD# INPUT				I	I	
SMOD# Input Voltage High	V _{SMOD_HI}		2.65	_	-	V
SMOD# Input Voltage Mid-state	V _{SMOD#_MID}		1.4	_	2.0	٧
SMOD# Input Voltage Low	V _{SMOD_LO}		_	_	0.7	٧
SMOD# Input Resistance	R _{SMOD#_UP}	Pull-up resistance to VCC	_	455	_	kΩ
SMOD# Propagation Delay, Falling	T _{SMOD#_PD_F}	SMOD# = Low to GL = 90%, PWM = MID	_	34	42	ns
SMOD# Propagation Delay, Rising	T _{SMOD} #_PD_R	SMOD# = High to GL = 10%, PWM = MID	_	22	30	ns
PWM INPUT	•					
Input Voltage High	V _{PWM_HI}		2.65	_	_	٧
Input Mid-state Voltage	V _{PWM_MID}		1.4	-	2.0	٧
Input Low Voltage	V _{PWM_LO}		-	-	0.7	٧
Input Resistance	R _{PWM_HIZ}	SMOD# = V _{SMOD} #_HI or V _{SMOD} #_LO	10	-	-	МΩ
Input Resistance	R _{PWM_BIAS}	SMOD# = V _{SMOD} #_MID	_	68	-	kΩ
PWM Input Bias Voltage	V _{PWM_BIAS}	SMOD# = V _{SMOD} #_MID	_	1.7	_	V
Non-overlap Delay, Leading Edge	T _{NOL_L}	GL Falling = 1 V to GH–VSW Rising = 1 V	-	13	_	ns
Non-overlap Delay, Trailing Edge	T _{NOL_T}	GH-VSW Falling = 1 V to GL Rising = 1 V	_	12	-	ns
PWM Propagation Delay, Rising	T _{PWM,PD_R}	PWM = High to GL = 90%	-	13	35	ns

Table 5. ELECTRICAL CHARACTERISTICS

 $(V_{VCC} = V_{VCCD} = 5.0 \text{ V}, V_{VIN} = 12 \text{ V}, V_{DISB\#} = 2.0 \text{ V}, C_{VCCD} = C_{VCC} = 0.1 \ \mu\text{F} \text{ unless specified otherwise)} \ \text{Min/Max values are valid for the temperature range } -40^{\circ}\text{C} \leq T_{J} \leq 125^{\circ}\text{C} \text{ unless noted otherwise, and are guaranteed by test, design or statistical correlation.)}$

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
PWM Propagation Delay, Falling	T _{PWM,PD_F}	PWM = Low to SW = 90%	-	47	52	ns
Exiting PWM Mid-state Propagation Delay, Mid-to-Low	T _{PWM_EXIT_L}	PWM = Mid-to-Low to GL = 10%	-	14	25	ns
Exiting PWM Mid-state Propagation Delay, Mid-to-High	T _{PWM_EXIT_H}	PWM = Mid-to-High to SW = 10%	-	13	25	ns
ZD FUNCTION	•			•		
Zero Cross Detect Threshold	V _{ZCD}		-	-6	-	mV
ZCD Blanking + Debounce Time	t _{BLNK}		-	330	-	ns
THERMAL WARNING & SHUTDOWN						•
Thermal Warning Temperature	T _{THWN}	Temperature at Driver Die	-	150	-	°C
Thermal Warning Hysteresis	T _{THWN_HYS}		-	15	-	°C
Thermal Shutdown Temperature	T _{THDN}	Temperature at Driver Die	-	180	-	°C
Thermal Shutdown Hysteresis	T _{THDN_HYS}		-	25	-	°C
THWM Open Drain Current	I _{THWN}		-	_	5	mA
BOOST STRAP DIODE						
Forward Voltage		Forward Bias Current = 2.0 mA	-	380	-	mV
HIGH-SIDE DRIVER						
Output Impedance, Sourcing	R _{SOURCE_GH}	Source Current = 100 mA	-	0.9	-	Ω
Output Sourcing Peak Current	I _{SOURCE_GH}		-	2	-	Α
Output Impedance, Sinking	R _{SINK_GH}	Source Current = 100 mA	=	0.7	-	Ω
Output Sinking Peak Current	I _{SINK_GH}		=	2.5	-	Α
LOW-SIDE DRIVER						
Output Impedance, Sourcing	R _{SOURCE_GL}	Source Current = 100 mA	=	0.9	-	Ω
Output Sourcing Peak Current	ISOURCE_GL	GL = 2.5 V	-	2	-	Α
Output Impedance, Sinking	R _{SINK_GH}	Sink Current = 100 mA	-	0.4	-	Ω
Output Sinking Peak Current	I _{SINK_GL}	GL = 2.5 V	-	4.5	-	Α
GL Rise Time	T _{R_GL}	GL = 10% to 90%, C _{LOAD} = 3.0 nF	-	12	-	ns
GL Fall Time	T _{F_GL}	GL = 90% to 10%, C _{LOAD} = 3.0 nF	-	6	-	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

Table 6. LOGIC TABLE

	INPUT TRUTH TABLE						
DISB#	PWM	SMOD# (Note 4)	GH (not a pin)	GL			
L	X	Х	L	L			
Н	Н	X	Н	L			
Н	L	X	L	Н			
Н	MID	H or MID	L	ZCD (Note 5)			
Н	MID	L	L	L (Note 6)			

PWM input is driven to mid-state with internal divider resistors when SMOD# is driven to mid-state and PWM input is undriven externally.
 GL goes low following 80 ns de-bounce time, 250 ns blanking time and then SW exceeding ZCD threshold.
 There is no delay before GL goes low.

TYPICAL PERFORMANCE CHARACTERISTICS

Test Conditions: V_{IN} = 12 V, V_{CC} = V_{CCD} = 5 V, V_{OUT} = 1 V, L_{OUT} = 250 nH, T_A = 25 °C and natural convection cooling, unless otherwise noted.




Figure 3. Efficiency - 19 V Input, 1.0 V Output




Figure 4. Efficiency - 19 V Input, 1.8 V Output




Figure 5. Efficiency - 12 V Input, 1.0 V Output




Figure 6. Efficiency - 12 V Input, 1.8 V Output




Figure 7. Power losses vs. Output Current, 12 Vin





Figure 8. Power losses vs. Output Current, 19 Vin

TYPICAL PERFORMANCE CHARACTERISTICS


Test Conditions: V_{IN} = 12 V, V_{CC} = PV_{CC} = 5 V, V_{OUT} = 1 V, L_{OUT} = 250 nH, T_A = 25 °C and natural convection cooling, unless otherwise noted.



1.15 $V_{IN} = 12 \text{ V}, V_{CC} = 5 \text{ V},$ Normalized Module Power Loss $V_0 = 1 V, I_{OUT} = 35 A$ 1.1 1.05 1 0.95 7 9 5 11 13 15 17 19 21 Module Input Voltage, V_{IN} (V)

Figure 9. Power Loss vs. Switching Frequency

Figure 10. Power Loss vs. Input Voltage







Figure 11. Power Loss vs. Driver Supply Voltage

Figure 12. Power Loss vs. Output Voltage






Figure 13. Driver Supply Current vs. Switching Frequency

Figure 14. Driver Supply Current vs. Driver Supply Voltage

Theory of Operation

The NCP302155 is an integrated driver and MOSFET module designed for use in a synchronous buck converter topology. The NCP302155 supports numerous application control definitions including ZCD (Zero Current Detect) and alternately PWM Tristate control. A PWM input signal is required to control the drive signals to the high-side and low-side integrated MOSFETs.

Low-Side Driver

The low-side driver drives an internal, ground-referenced low-R_{DS}(on) N-Channel MOSFET. The voltage supply for the low-side driver is internally connected to the VCCD and PGND pins.

High-Side Driver

The high-side driver drives an internal, floating low-R_{DS}(on) N-channel MOSFET. The gate voltage for the high side driver is developed by a bootstrap circuit referenced to Switch Node (VSW and PHASE) pins.

The bootstrap circuit is comprised of the integrated diode and an external bootstrap capacitor and resistor. When the NCP302155 is starting up, the VSW pin is at ground, allowing the bootstrap capacitor to charge up to VCCD through the bootstrap diode (See Figure 1). When the PWM input is driven high, the high-side driver turns on the high-side MOSFET using the stored charge of the bootstrap capacitor. As the high-side MOSFET turns on, the voltage at the VSW and PHASE pins rises. When the high-side MOSFET is fully turned on, the switch node settles to VIN and the BST pin settles to VIN + VCCD (excluding parasitic ringing).

Bootstrap Circuit

The bootstrap circuit relies on an external charge storage capacitor (C_{BST}) and an integrated diode to provide current to the HS Driver. A multi–layer ceramic capacitor (MLCC) with a value greater than 100 nF should be used as the bootstrap capacitor. An optional 1 to 4 Ω resistor in series with the bootstrap capacitor decreases the VSW overshoot.

Power Supply Decoupling

The NCP302155 sources relatively large currents into the MOSFET gates. In order to maintain a constant and stable supply voltage (VCCD) a low–ESR capacitor should be placed near the power and ground pins. A multi–layer ceramic capacitor (MLCC) between $1~\mu F$ and $4.7~\mu F$ is typically used.

A separate supply pin (VCC) is used to power the analog and digital circuits within the driver. A 1 μF ceramic capacitor should be placed on this pin in close proximity to the NCP302155. It is good practice to separate the VCC and VCCD decoupling capacitors with a resistor (10 Ω typical) to avoid coupling driver noise to the analog and digital circuits that control the driver function (See Figure 1).

Safety Timer and Overlap Protection Circuit

It is important to avoid cross-conduction of the two MOSFETS which could result in a decrease in the power conversion efficiency or damage to the device.

The NCP302155 prevents cross-conduction by monitoring the status of the MOSFETs and applying the appropriate amount of non-overlap (NOL) time (the time between the turn-off of one MOSFET and the turn-on of the other MOSFET). When the PWM input pin is driven high, the gate of the low-side MOSFET (LSGATE) goes low after a propagation delay (tpdlGL). The time it takes for the low-side MOSFET to turn off is dependent on the total charge on the low-side MOSFET gate.

The NCP302155 monitors the gate voltage of both MOSFETs and the switch node voltage to determine the conduction status of the MOSFETs. Once the low-side MOSFET is turned off an internal timer delays (tpdhGH) the turn-on of the high-side MOSFET. When the PWM input pin goes low, the gate of the high-side MOSFET (HSGATE) goes low after the propagation delay (tpdlGH). The time to turn off the high-side MOSFET (tfGH) is dependent on the total gate charge of the high-side MOSFET. A timer is triggered once the high-side MOSFET stops conducting, to delay (tpdhGL) the turn-on of the low-side MOSFET.

Zero Current Detect

The Zero Current Detect PWM (ZCD_PWM) mode is enabled when SMOD# is high (see tables 6 and 8).

With PWM set to > VPWM_HI, GL goes low and GH goes high after the non-overlap delay. When PWM is driven to < VPWM_HI and to > VPWM_LO, GL goes high after the non-overlap delay, and stays high for the duration of the ZCD blanking timer (T_{ZCD_BLANK}) and an 80 ns de-bounce timer. Once this timer expires, VSW is monitored for zero current detection, and GL is pulled low once zero current is detected. The threshold on VSW to determine zero current undergoes an auto-calibration cycle every time DISB# is brought from low to high. This auto-calibration cycle typically takes 25 µs to complete.

PWM Input

The PWM Input pin is a tri–state input used to control the HS MOSFET ON/OFF state. It also determines the state of the LS MOSFET. See Table 6 for logic operation. The PWM in some cases must operate with frequency programming resistances to ground. These resistances can range from $10~k\Omega$ to $300~k\Omega$ depending on the application. When SMOD# is set to > VSMOD#_HI or to < VSMOD#_LO, the input impedance to the PWM input is very high in order to avoid interferences with controllers that must use programming resistances on the PWM pin.

If SMOD# is set to < VSMOD#_HI and > VSMOD#_LO (Mid-State), the PWM pin undriven default voltage is set to Mid-State with internal divider resistances.

Disable Input (DISB#)

The DISB# pin is used to disable the GH to the High-Side FET to prevent power transfer. The pin has a pull-down resistance to force a disabled state when it is left unconnected. DISB# can be driven from the output of a logic device or set high with a pull-up resistance to VCC.

Table 7. Table 2. UVLO/DISB# LOGIC TABLE

UVLO	DISB#	Driver State
L	Х	Disabled (GH = GL = 0)
Н	L	Disabled (GH = GL = 0)
Н	Н	Enabled (See Table 1)
Н	Open	Disabled (GH = GL = 0)

Thermal Warning/Thermal Shutdown Output

The THWN pin is an open drain output. When the temperature of the driver exceeds T_{THWN} , the THWN pin is pulled low indicating a thermal warning. At this point, the part continues to function normally. When the temperature drops T_{THWN_HYS} below T_{THWN} , the THWN pin goes high. If the driver temperature exceeds T_{THDN} , the part enters thermal shutdown and turns off both MOSFETs. Once the temperature falls T_{THDN_HYS} below T_{THDN} , the part resumes normal operation.

Skip Mode Input (SMOD#)


The SMOD# tri-state input pin has an internal pull-up resistance to VCC. When driven high, the SMOD# pin


VCC Undervoltage Lockout

The VCC pin is monitored by an Undervoltage Lockout Circuit (UVLO). VCC voltage above the rising threshold enables the NCP302155.

enables the low side synchronous MOSFET to operate independently of the internal ZCD function. When the SMOD# pin is set low during the PWM cycle it disables the low side MOSFET to allow discontinuous mode operation.

The NCP302155 has the capability of internally connecting a resistor divider to the PWM pin. To engage this mode, SMOD# needs to be placed into mid-state. While in SMOD# mid-state, the IC logic is equivalent to SMOD# being in the high state.





NOTE: If the Zero Current Detect circuit detects zero current after the ZCD Wait timer period, the GL is driven low by the Zero Current Detect signal.

If the Zero Current Detect circuit detects zero current before the ZCD Wait timer period expires, the Zero Current detect signal is ignored and the GL is driven low at the end of the ZCD Wait timer period.

NOTE: If the SMOD# input is driven low at any time after the GL has been driven high, the SMOD# Falling edge triggers the GL to go low.

If the SMOD# input is driven low while the GH is high, the SMOD# input is ignored.

For Use with Controllers with 3-State PWM and No Zero Current Detection Capability:

Table 8. LOGIC TABLE - 3-STATE PWM CONTROLLERS WITH NO ZCD


PWM	SMOD#	GH (not a pin)	GL
Н	Н	ON	OFF
M	Н	OFF	ZCD
L	Н	OFF	ON

This section describes operation with controllers that are capable of 3 states in their PWM output and relies on the NCP302155 to conduct zero current detection during discontinuous conduction mode (DCM).

The SMOD# pin needs to either be set to 5 V or left disconnected. The NCP302155 has an internal pull-up resistor that connects to VCC that sets SMOD# to the logic high state if this pin is disconnected.

To operate the buck converter in continuous conduction mode (CCM), PWM needs to switch between the logic high and low states. To enter into DCM, PWM needs to be switched to the mid-state.

Whenever PWM transitions to mid-state, GH turns off and GL turns on. GL stays on for the duration of the de-bounce timer and ZCD blanking timers. Once these timers expire, the NCP302155 monitors the SW voltage and turns GL off when SW exceeds the ZCD threshold voltage. By turning off the LS FET, the body diode of the LS FET allows any positive current to go to zero but prevents negative current from conducting.



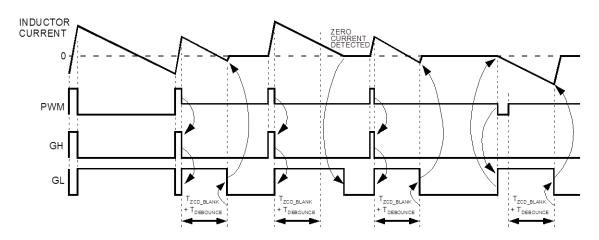


Figure 15. Timing Diagram - 3-state PWM Controller, No ZCD

FOR USE WITH CONTROLLERS WITH 3-STATE PWM CONTROLLERS DETECTION CAPABILITY:

Table 9. LOGIC TABLE - 3-STATE PWM CONTROLLERS WITH ZCD

PWM	SMOD#	GH (not a pin)	GL
Н	L	ON	OFF
М	L	OFF	OFF
L	L	OFF	ON

This section describes operation with controllers that are capable of 3 PWM output levels and have zero current detection during discontinuous conduction mode (DCM).

The SMOD# pin needs to be pulled low (below $\rm V_{SMOD\#_LO)}.$

To operate the buck converter in continuous conduction mode (CCM), PWM needs to switch between the logic high and low states. During DCM, the controller is responsible for detecting when zero current has occurred, and then notifying the NCP302155 to turn off the LS FET. When the controller detects zero current, it needs to set PWM to mid-state, which causes the NCP302155 to pull both GH and GL to their off states without delay.

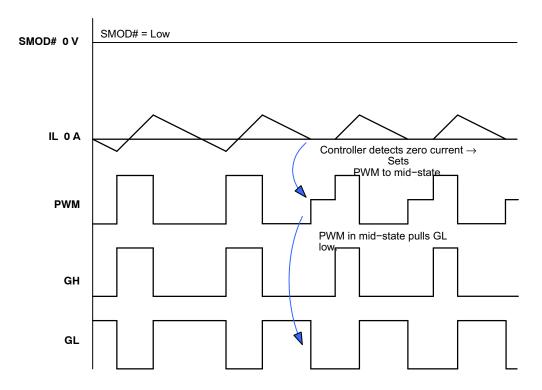


Figure 16. Timing Diagram - 3-state PWM Controller, with ZCD

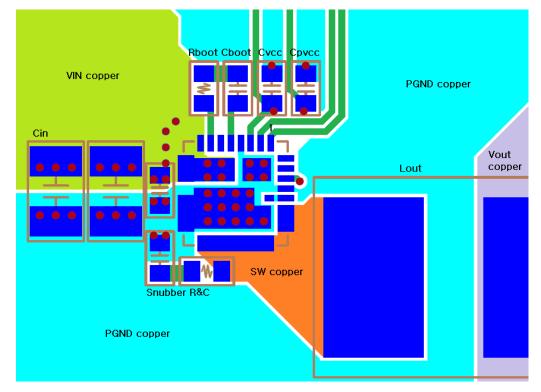


Figure 17. Top Copper Layer



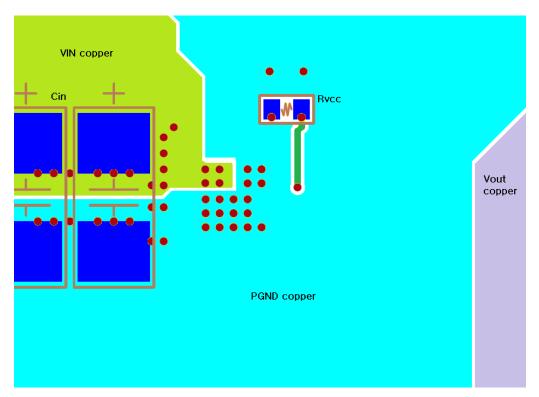



Figure 18. Bottom Copper Layer

PACKAGE DIMENSIONS

PQFN31 5X5, 0.5P CASE 483BR ISSUE O

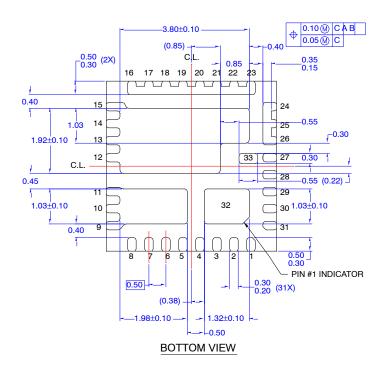






SEE


NOTES: UNLESS OTHERWISE SPECIFIED

- A) DOES NOT FULLY CONFORM TO JEDEC REGISTRATION MO-220, DATED MAY/2005.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH. MOLD FLASH OR BURRS DOES NOT EXCEED 0.10MM.
- D) DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
- E) DRAWING FILE NAME: MKT-PQFN31BREV3




TOP VIEW

RECOMMENDED PCB FOOTPRINT (Option 1)

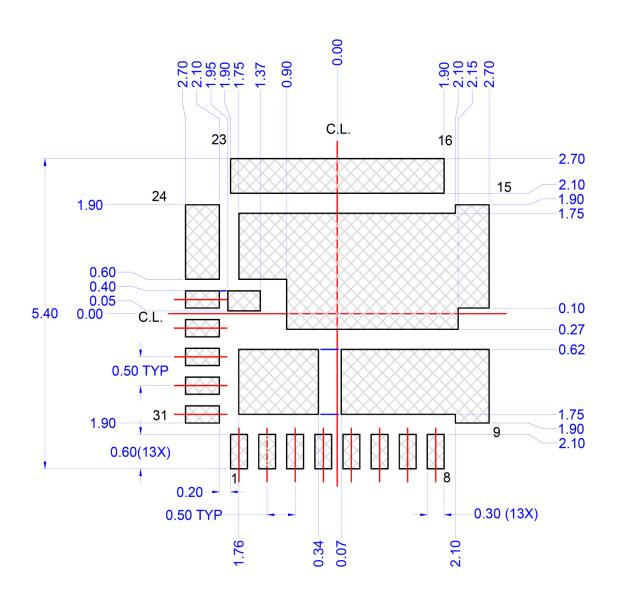

LAND PATTERN RECOMMENDATION

RECOMMENDED PCB FOOTPRINT (Option 2)

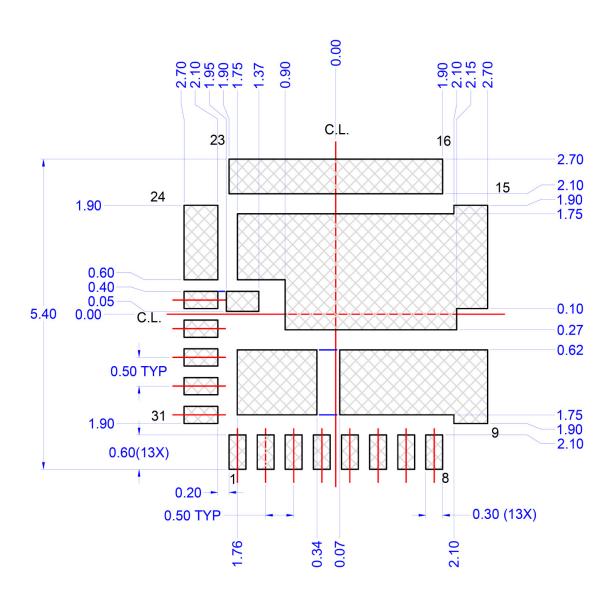

LAND PATTERN RECOMMENDATION

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and h

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru