

AXL F DI16/1 HS 1H

Axioline F digital input module, 16 inputs, high speed, 24 V DC, single-conductor connection technology

Data sheet
8610_en_01

© PHOENIX CONTACT 2013-12-19



1 Description

The module is designed for use within an Axioline F station. It is used to acquire digital signals.

The internal update time of $< 5 \mu\text{s}$ enables a practical counter function to be implemented with the module. The maximum counting input frequency is 100 kHz.

Features

- 16 digital inputs according to EN 61131-2 type 1 and type 3
- 24 V DC, 2.4 mA
- Connection of sensors in 1-wire technology
- Minimum update time $< 5 \mu\text{s}$, bus-synchronous
- Maximum input frequency: 100 kHz
- Device type label stored
- Diagnostic and status indicators



This data sheet is only valid in association with the UM EN AXL SYS INST user manual.



Make sure you always use the latest documentation. It can be downloaded from the product at phoenixcontact.net/products.


| | | |
|----------|--|----|
| 2 | Table of contents | |
| 1 | Description | 1 |
| 2 | Table of contents | 2 |
| 3 | Ordering data | 3 |
| 4 | Technical data | 3 |
| 5 | Internal circuit diagram | 6 |
| 6 | Terminal point assignment..... | 6 |
| 7 | Connection example..... | 6 |
| 8 | Local status and diagnostic indicators | 7 |
| 9 | Process data..... | 8 |
| 10 | Parameter, diagnostics and information (PDI) | 8 |
| 11 | Standard objects | 9 |
| | 11.1 Objects for identification (device rating plate)..... | 9 |
| | 11.2 Object for multilingual capacity..... | 10 |
| | 11.3 Diagnostics objects | 10 |
| | 11.4 Objects for process data management..... | 11 |
| 12 | Device descriptions | 11 |

3 Ordering data

| Description | Type | Order No. | Pcs. / Pkt. |
|---|--------------------------|-----------|-------------|
| Axioline digital input module, 16 inputs, high speed, 24 V DC, 1-wire connection technology (including bus base module and connectors) | AXL F DI16/1 HS 1H | 2701722 | 1 |
| Accessories | Type | Order No. | Pcs. / Pkt. |
| Axioline F bus base module for housing type H (Replacement item) | AXL F BS H | 2700992 | 5 |
| Axioline plug set (e.g., for AXL DI 16/1) (Replacement item) | AXL CNS 2L-O/D/UI/E1/E2 | 2700985 | 1 |
| Zack marker strip for Axioline (device labeling), in 2 x 20.3 mm pitch, unprinted, 25-section, for individual labeling with B-STIFT 0.8, X-PEN, or CMS-P1-PLOTTER (Marking) | ZB 20,3 AXL UNPRINTED | 0829579 | 25 |
| Zack marker strip, flat, in 10 mm pitch, unprinted, 10-section, for individual labeling with M-PEN 0,8, X-PEN, or CMS-P1-PLOTTER (Marking) | ZBF 10/5,8 AXL UNPRINTED | 0829580 | 50 |
| Documentation | Type | Order No. | Pcs. / Pkt. |
| User manual, English, Axioline F: System and installation | UM EN AXL F SYS INST | - | - |

4 Technical data

Dimensions (nominal sizes in mm)

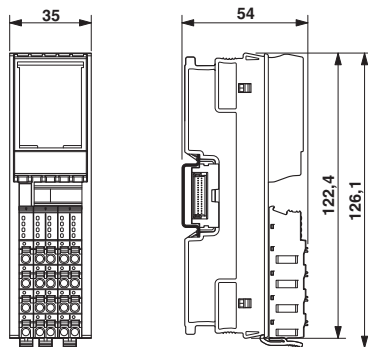

| | |
|--------------------|---|
| Width | 35 mm |
| Height | 126.1 mm |
| Depth | 54 mm |
| Note on dimensions | The depth is valid when a TH 35-7.5 DIN rail is used (according to EN 60715). |

General data

| | |
|--|---|
| Color | gray |
| Weight | 133 g |
| Ambient temperature (operation) | -25 °C ... 60 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Permissible humidity (operation) | 5 % ... 95 % (according to DIN EN 61131-2) |
| Permissible humidity (storage/transport) | 5 % ... 95 % (according to DIN EN 61131-2) |
| Air pressure (operation) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Air pressure (storage/transport) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Degree of protection | IP20 |
| Protection class | III, IEC 61140, EN 61140, VDE 0140-1 |

Connection data

| | |
|--|---|
| Name | Axioline plug |
| Connection method | Spring-cage connection with direct plug-in method |
| Conductor cross section solid / stranded | 0.2 mm ² ... 1.5 mm ² |
| Conductor cross section [AWG] | 24 ... 16 |

Interface Axioline F local bus

| | |
|--------------------|-----------------|
| Connection method | Bus base module |
| Transmission speed | 100 MBit/s |

Communications power

| | |
|------------------------------------|------------------------------|
| Communications power U_{BUS} | 5 V DC (via bus base module) |
| Current consumption from U_{BUS} | max. 120 mA |
| Power consumption at U_{BUS} | max. 600 mW |

I/O supply

| | |
|--|--|
| Supply of digital input modules U_I | 24 V DC |
| Maximum permissible voltage range | 19.2 V DC ... 30 V DC (including all tolerances, including ripple) |
| Current consumption from U_I | 20 mA |
| Power consumption at U_I | typ. 380 mW, max. 480 mW |
| Surge protection of the supply voltage | Electronic (35 V, 0.5 s) |
| Polarity reversal protection of the supply voltage | Parallel diode; with external 5 A fuse (for startup only) |
| Protection | max. 8 A (polarity reversal protection up to 5 A) |



When using for the first time, protect the module with a 5 A fuse. If all the modules are correctly connected in the system, the 5 A fuse can be replaced by an 8 A fuse. you can now load the module up to 8 A.



NOTE: Damage to the electronics

Provide the module with an external fuse to protect it against polarity reversal. The power supply unit must be able to supply four times the nominal current of the external fuse, to ensure that it trips in the event of an error.

Digital inputs

| | |
|--|---|
| Number of inputs | 16 |
| Connection method | Direct plug-in method |
| Connection method | 1-wire |
| Description of the input | EN 61131-2 types 1 and 3 |
| Nominal input voltage | 24 V DC |
| Input voltage range | -3 V DC ... 30 V DC |
| Nominal input current | 2.3 mA |
| Current flow | Linear until nominal current is reached, then constantly approximately 2.3 mA |
| Input voltage range "0" signal | -3 V DC ... 8.4 V DC |
| Input voltage range "1" signal | 9.4 V ... 30 V DC |
| Input filter time | < 5 μ s |
| Process data update | < 5 μ s (bus-synchronous) |
| Polarity reversal protection of the inputs | Parallel diode (30 V, 5 s) |



The minimum update time of the module can only be fully utilized if the station is configured accordingly, as the runtime of the local bus depends on the number of connected Axioline F modules (see also Axioline system manual).

PROFIBUS telegram data

| | |
|-----------------------------|--------|
| Required parameter data | 3 Byte |
| Need for configuration data | 6 Byte |

Error messages to the higher level control or computer system

| | |
|--------------------|-----|
| I/O supply failure | Yes |
|--------------------|-----|

Electrical isolation/isolation of the voltage areas

| | |
|---|------------------------|
| 5 V communications power (logic), 24 V supply (I/O) | 500 V AC, 50 Hz, 1 min |
| 5 V supply (logic)/functional earth ground | 500 V AC, 50 Hz, 1 min |
| 24 V supply (I/O) / functional earth ground | 500 V AC, 50 Hz, 1 min |

Mechanical tests

| | |
|--|---|
| Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6 | 5 g |
| Shock in acc. with EN 60068-2-27/IEC 60068-2-27 | 25 g, 11 ms period, half-sine shock pulse |
| Continuous shock according to EN 60068-2-27/IEC 60068-2-27 | 10 g |

Conformance with EMC Directive 2004/108/EC

Noise immunity test in accordance with EN 61000-6-2

| | |
|--|---|
| Electrostatic discharge (ESD) EN 61000-4-2/IEC 61000-4-2 | Criterion B; 6 kV contact discharge, 8 kV air discharge |
| Electromagnetic fields EN 61000-4-3/IEC 61000-4-3 | Criterion A; Field intensity: 10 V/m |
| Fast transients (burst) EN 61000-4-4/IEC 61000-4-4 | Criterion B, 2 kV |
| Transient surge voltage (surge) EN 61000-4-5/IEC 61000-4-5 | Criterion B; DC supply lines: ± 0.5 kV/ ± 0.5 kV (symmetrical/asymmetrical) |
| Conducted interference EN 61000-4-6/IEC 61000-4-6 | Criterion A; Test voltage 10 V |

Noise emission test according to EN 61000-6-3

| | |
|--|---------|
| Radio interference properties EN 55022 | Class B |
|--|---------|

Approvals

For the latest approvals, please visit phoenixcontact.net/products.

5 Internal circuit diagram

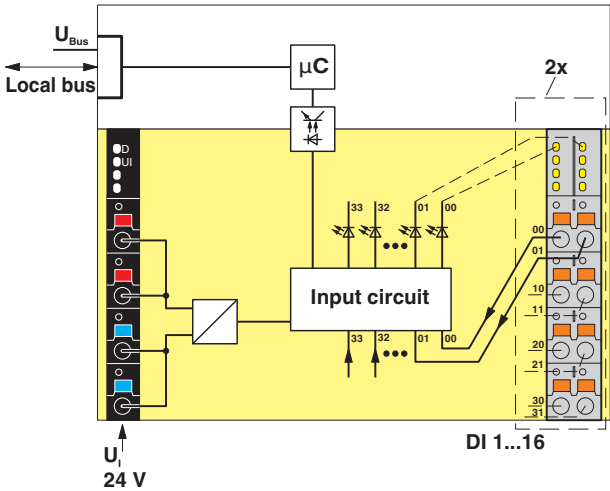


Figure 1 Internal wiring of the terminal points

Key:

- Microprocessor
 - Optocoupler
 - LED
 - Power supply unit
 - Electrically isolated area
 - Input circuit
 - Local bus
- Input circuit
Local bus

6 Terminal point assignment




Figure 2 Terminal point assignment

| Terminal point | Color | Assignment | |
|-----------------------------|--------|---------------------------|---|
| Supply voltage input | | | |
| a1, a2 | Red | 24 V DC (U ₁) | Digital input module supply (internally jumpered) |
| b1, b2 | Blue | GND | Reference potential of the supply voltage (internally jumpered) |
| Digital inputs | | | |
| 00 ... 03 | Orange | IN1 ... IN4 | Digital inputs 1 ... 4 |
| 10 ... 13 | Orange | IN5 ... IN8 | Digital inputs 5 ... 8 |
| 20 ... 23 | Orange | IN9 ... IN12 | Digital inputs 9 ... 12 |
| 30 ... 33 | Orange | IN13 ... IN16 | Digital inputs 13 ... 16 |

7 Connection example

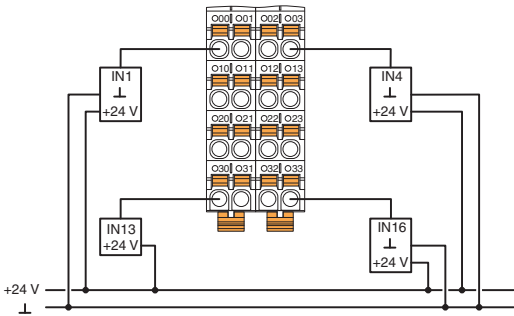


Figure 3 Example of a connection of sensors when using external busbars

Ensure that GND of the sensors and GND for U₁ have the same potential.

8 Local status and diagnostic indicators




Figure 4 Local status and diagnostic indicators

| Designation | Color | Meaning | State | Description |
|---|------------------|--|--------------------------|---|
| D | Red/yellow/green | Diagnostics of local bus communication | | |
| | | Power down | OFF | Device in (power) reset. |
| | | Not connected | Red flashing | Device operating, but there is no connection to previous device. |
| | | Reset | Red ON | Application reset Device operating, but there is still a connection to the previous device, the application is reset. |
| | | Ready | Yellow ON | Device operating, there is still a connection to the previous device, but the device has not yet detected a valid cycle after power on. |
| | | Connected | Yellow flashing | Valid data cycles have been detected, but the device is (not) yet part of the current configuration. |
| | | Device application not active | Green/yellow alternating | Valid data cycles are being detected. The master application set the output data to valid, however, the slave application has not set the input data to valid as yet. |
| | | Active | Green flashing | Device operating, communications within the station is OK. The master application does not read the input data. (The connection to the controller has not yet been established, for example.) |
| | | Run | Green ON | Valid data cycles are being detected. All data is valid |
| UI | Green | U _{Input} | ON | Supply of digital input modules present. |
| | | | OFF | Supply of digital input modules not present. |
| 00 ... 03, 10 ... 13, 20 ... 23, 30 ... 33 | Yellow | Status of the inputs | ON | Input is set. |
| | | | OFF | Input is not set. |



For more information on the meaning of local diagnostic and status indicators, please refer to the UM EN AXL SYS INST user manual.

9 Process data

The I/O data is displayed in S7-compatible format.

| Byte | Byte 0 (high byte) | | | | | | | |
|----------------|--------------------|----|----|----|----|----|----|----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Channel | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| Terminal point | 13 | 12 | 11 | 10 | 03 | 02 | 01 | 00 |

| Byte | Byte 1 (low byte) | | | | | | | |
|----------------|-------------------|----|----|----|----|----|----|----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Channel | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 |
| Terminal point | 33 | 32 | 31 | 30 | 23 | 22 | 21 | 20 |

10 Parameter, diagnostics and information (PDI)

Parameter and diagnostic data as well as other information is transmitted via the PDI channel of the Axioline F station.



For information on PDI, please refer to the UM EN AXL SYS INST user manual.

The standard and application objects stored in the module are described in the following section.



Please refer to the basic profile for comprehensive information.

The following applies to all tables below:

Please refer to the UM EN AXL SYS INST or the basic profile for an explanation of the object codes and data types.

| Abbreviation | Meaning |
|--------------|------------------------|
| A | Number of elements |
| L | Length of the elements |
| R | Read |
| W | Write |



Every visible string is terminated with a zero terminator (00_{hex}). The length of a visible string element is therefore one byte larger than the amount of user data.

11 Standard objects

11.1 Objects for identification (device rating plate)

| Index (hex) | Object name | Object type | Data type | A | L | Rights | Meaning | Contents |
|--------------------------|-----------------|-------------|----------------|---|--------|--------|-----------------------------|--|
| Manufacturer | | | | | | | | |
| 0001 | VendorName | Var | Visible String | 1 | 16 | R | Manufacturer name | Phoenix Contact |
| 0002 | VendorID | Var | Visible String | 1 | 7 | R | Manufacturer identification | 00A045 |
| 0003 | VendorText | Var | Visible String | 1 | 49 | R | Comment on the manufacturer | Components and systems for industrial automation |
| 0012 | VendorURL | Var | Visible String | 1 | 30 | R | URL of the manufacturer | http:// phoenixcontact.com |
| Module - general | | | | | | | | |
| 0004 | DeviceFamily | Var | Visible String | 1 | 15 | R | Device family | I/O digital IN |
| 0006 | ProductFamily | Var | Visible String | 1 | 33 | R | Product family | Axioline - High speed I/O system |
| 000E | CommProfile | Var | Visible String | 1 | 4 | R | Communication profile | 633 |
| 000F | DeviceProfile | Var | Visible String | 1 | 5 | R | Device profile | 0010 |
| 0011 | ProfileVersion | Record | Visible String | 2 | 11; 22 | R | Device profile version | 2009-10-22; Basic - Profile V1.12 |
| 003A | VersionCount | Array | Unsigned 16 | 4 | 4 * 2 | R | Version counter | 0007 0001 0000 0000 _{hex} |
| Module - special | | | | | | | | |
| 0005 | Capabilities | Array | Visible String | 1 | 8 | R | Properties | SyncI_0 |
| 0007 | ProductName | Var | Visible String | 1 | 19 | R | Product designation | AXL F DI16/1 HS 1H |
| 0008 | SerialNo | Var | Visible String | 1 | 11 | R | Serial number | xxxxxxxx (e. g., 1234512345) |
| 0009 | ProductText | Var | Visible String | 1 | 18 | R | Product text | 16 digital inputs |
| 000A | OrderNumber | Var | Visible String | 1 | 8 | R | Order No. | 2701722 |
| 000B | HardwareVersion | Record | Visible String | 2 | 11; 3 | R | Hardware version | e. g., 2011-02-04; 00 |
| 000C | FirmwareVersion | Record | Visible String | 2 | 11; 3 | R | Firmware version | 0000-00-00; -- |
| 000D | PChVersion | Record | Visible String | 2 | 11; 20 | R | Parameter channel version | 2011-12-07; Basic Profile V2.0 |
| 0037 | DeviceType | Var | Octet string | 1 | 8 | R | Module identification | 00 80 00 02 00 00 00 DB _{hex} |
| Use of the device | | | | | | | | |
| 0014 | Location | Var | Visible String | 1 | 59 | R/W | Installation location | Can be filled out by the user. |
| 0015 | EquipmentIdent | Var | Visible String | 1 | 59 | R/W | Equipment identifier | Can be filled out by the user. |
| 0016 | ApplDeviceAddr | Var | Unsigned 16 | 1 | 2 | R/W | User-defined device number | Can be filled out by the user. |

11.2 Object for multilingual capacity

| Index (hex) | Object name | Object type | Data type | A | L | Rights | Meaning | Contents |
|-------------|-------------|-------------|----------------|---|------|--------|----------|----------------|
| 0017 | Language | Record | Visible String | 2 | 6; 8 | R | Language | en-us; English |

11.3 Diagnostics objects

| Index (hex) | Object name | Object type | Data type | A | L | Rights | Assignment/content |
|-------------|-------------|-------------|-----------|---|---------------------|--------|------------------------------|
| 0018 | DiagState | Record | | 6 | 2; 1; 1; 2; 1; 1 | R | Diagnostics state; see below |

Diagnostics state (0018_{hex}: DiagState)

This object is used for a structured message of an error.

| 0018 _{hex} : DiagState (Read) | | | | | |
|--|----------------|-----------------|--------------------------|-----------------------------------|--------------------|
| Subindex | Data type | Length in bytes | Meaning | Contents | |
| 0 | Record | 8 | Diagnostic state | Complete diagnostics information | |
| 1 | Unsigned 16 | 2 | Error number | 0 ... 65535 _{dec} | |
| 2 | Unsigned 8 | 1 | Priority | 00 _{hex} | No error |
| | | | | 01 _{hex} | Error |
| | | | | 02 _{hex} | Warning |
| | | | | 81 _{hex} | Error removed |
| | | | | 82 _{hex} | Warning eliminated |
| 3 | Unsigned 8 | 1 | Group | 00 _{hex} | No error |
| | | | | FF _{hex} | Entire device |
| 4 | Unsigned 16 | 2 | Error code | See table below | |
| 5 | Unsigned 8 | 1 | More information follows | 00 _{hex} (not supported) | |
| 6 | Visible String | 1 | Text | 00 _{hex} (not supported) | |

Error code and status of the local status and diagnostics indicators

| Error code | Error | Priority | Group | D LED | UI LED |
|---------------------|--------------------|-------------------|-------------------|-----------------------|--------|
| 0000 _{hex} | No error | 00 _{hex} | 00 _{hex} | Green ON | ON |
| 3412 _{hex} | I/O supply failure | 01 _{hex} | FF _{hex} | Flashing green/yellow | OFF |



After all errors have been eliminated, it is automatically reset.

11.4 Objects for process data management

| Index (hex) | Object name | Object type | Data type | A | L | Rights | Assignment |
|-------------|--------------|-------------------|--------------|---|---------|--------|--|
| 0025 | PDIN | Var | Octet string | 1 | 2 | R | Input process data |
| 003B | PDIN_Descr | Array of Re-cords | | 3 | 8; 2; 2 | R | Description of the IN process data |
| 003C | PDOOUT_Descr | Array of Re-cords | | 3 | 8; 2; 2 | R | Description of the output process data |

The objects 003B_{hex} and 003C_{hex} are only applicable to tools.

IN process data (0025_{hex}: PDIN)

You can read the IN process data of the module with this object.

The structure corresponds to the representation in the "Process data" section.

| 0025 _{hex} : PDIN (Read) | | | |
|-----------------------------------|--------------|-----------------|--------------------|
| Subindex | Data type | Length in bytes | Meaning |
| 0 | Octet string | 2 | Input process data |

12 Device descriptions

The device is described in the device description files.

The device descriptions for controllers from Phoenix Contact are included in PC Worx and the corresponding service packs.

The device description files for other systems are available for download at phoenixcontact.net/download in the download area of the bus coupler used.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru