

Shelf Mount Version



Stand Alone Version

## Features

- Conduction cooling for fan less operation
- Compact 0.5U Profile
- Overall Dimensions:  
Shelf Mount Version: 0.877 in. x 3.35 in. x 8.790 in.  
Stand Alone Version: 0.888 in. x 4.392 in. x 10.40 in.
- 12V<sub>dc</sub>, 500W Output
- 10.8 to 13.2V<sub>dc</sub> Output Voltage Programmability
- Universal AC input with Active PFC
- Hot Pluggable (Shelf Mount Version)
- Redundant Parallel Operation
- Active Load Sharing (Single Wire)
- Analog, I<sup>2</sup>C or PMBus<sup>^</sup> means of control and monitoring
- Remote On/Off
- Remote Sense (up to 0.25V of total compensation)
- No Minimum Load Requirements
- Three visual LED Indicators; Input, Output and Fault status
- 3.3V<sub>dc</sub> 2A Standby Output
- UL\*Recognized to UL60950-1, CAN/CSA<sup>†</sup> C22.2 No.60950-1, and EN60950-1(VDE<sup>‡</sup> 0805-1) Licensed
- CE mark meets 2006/95/EC directive<sup>§</sup>
- ISO\*\* 9001 and ISO 14001 certified manufacturing facility
- Compliant to RoHS EU Directive 2011/65/EU

## Applications

- Test Equipment
- Network Support Equipment
- Storage Area Networks (SAN)
- Network Attached Storage (NAS)
- Servers

## Description

The CCR0512FP power supply is a universal ac input, 12V<sub>dc</sub>, 500W output fan-less conduction cooled, 0.5U thick product designed for environments, where conduction or system airflow is available for cooling. The 0.5U form factor makes locating the supply very flexible and space efficient. The supply includes capability for hot plug and redundant load sharing applications. Standard features include remote sense, output voltage programmability, active load sharing, status LEDs, 3.3V<sub>dc</sub> standby output, and analog, I<sup>2</sup>C and PMBus control and communication interfaces.

<sup>^</sup>PMBus name and logo are registered trademarks of SMIF, Inc.

\* UL is a registered trademark of Underwriters Laboratories, Inc.

† CSA is a registered trademark of Canadian Standards Association.

‡ VDE is a trademark of Verband Deutscher Elektrotechniker e.V

§ This product is intended for integration into end-user equipment. All of the required procedures of end-use equipment should be followed.

\*\* ISO is a registered trademark of the International Organization of Standards

## CCR0512FP Power Supply

90 - 264V<sub>ac</sub> Input; 12V<sub>dc</sub>, 500W Output

### Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage. These conditions are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the data sheet's specifications sections. Exposure to absolute maximum ratings for extended periods can adversely affect the device reliability.

| Parameter  | Min  | Max  | Unit            |
|--|------|------|-----------------|
| Input Voltage - Continuous   | 90   | 264  | V <sub>ac</sub> |
| Operating Ambient Temperature (see Thermal Considerations section) | -20* | 55   | °C              |
| Operating Case Temperature (Cold Plate)                            | -20* | 85   | °C              |
| (*See exceptions for spec variations between -10C to -20C)         |      |      |                 |
| Storage Temperature  | -40  | 90   | °C              |
| Humidity (non-condensing)  | 30   | 95   | %               |
| Altitude   |      | 2250 | m               |
| Isolation Voltage - Input to Output                                |      | 3000 | V <sub>ac</sub> |
| Input to Chassis   |      | 1500 | V <sub>dc</sub> |
| Output and Signal/Comm pin to Chassis                              |      | 100  | V <sub>dc</sub> |

### Electrical Specifications

Unless otherwise indicated, specifications apply over all operating input voltage, resistive load, and temperature conditions.

| Parameter  | Min   | Typ     | Max    | Unit                   |
|--|-------|---------|--------|------------------------|
| <b>Input</b>   |       |         |        |                        |
| Operating Voltage  | 90    | 115/230 | 264    | V <sub>ac</sub>        |
| Source Frequency   | 47    | 50/60   | 63     | Hz                     |
| Turn On Voltage (*Turn On Max may increase to 95 V <sub>ac</sub> at -20C)  | 78    | 85      | 90*    | V <sub>ac</sub>        |
| Turn Off Voltage (*Turn Off Max may increase to 90 V <sub>ac</sub> at -20C)  | 73    | 80      | 85*    | V <sub>ac</sub>        |
| Turn On/Turn Off Hysteresis  | 3     | 4       |        | V <sub>ac</sub>        |
| Current, V <sub>IN</sub> = 90V <sub>ac</sub>   |       |         | 6.8    | A <sub>RMS</sub>       |
| Fuse Rating, 250V <sub>ac</sub>  |       | 15      |        | A                      |
| Power Factor, 230V <sub>ac</sub> , 100% Load   |       | 0.96    |        | %                      |
| Inrush Transient Current, V <sub>IN</sub> = 264V <sub>ac</sub> , T <sub>A</sub> = 25°C   |       | 50      |        | A <sub>PEAK</sub>      |
| Efficiency: V <sub>IN</sub> = 115V <sub>ac</sub> , 20% load  |       | 87.0    |        | %                      |
| 50% load   |       | 90.0    |        | %                      |
| 100% load  |       | 89.0    |        | %                      |
| V <sub>IN</sub> = 230V <sub>ac</sub> , 20% load  |       | 87.8    |        | %                      |
| 50% load   |       | 91.8    |        | %                      |
| 100% load  |       | 91.4    |        | %                      |
| Holdup Time, V <sub>IN</sub> = 90V <sub>ac</sub> to 264V <sub>ac</sub> 80% load, C <sub>OUT</sub> = 2,200 μF, V <sub>OUT</sub> ≥ 10.8V <sub>dc</sub> |       | 12      |        | ms                     |
| Leakage Current to earth ground, V <sub>IN</sub> = 264V <sub>ac</sub>  |       |         | 3.5    | mA                     |
| <b>Output 1 – Main Output</b>  |       |         |        |                        |
| Voltage Set-point (50% load)   | 11.98 | 12.00   | 12.02  | V <sub>dc</sub>        |
| Voltage Programming Limits   | 10.8  |         | 13.2   | V <sub>dc</sub>        |
| Voltage Tolerance (due to set point, temperature, load, and line regulation)   | -2    |         | 2      | %V <sub>OUT, set</sub> |
| Load Regulation  | -100  |         | 100    | mV <sub>dc</sub>       |
| Line Regulation  | -40   |         | +40    | mV <sub>dc</sub>       |
| Ripple and Noise (C <sub>OUT</sub> = 0.1μF ceramic    with 10μF tantalum capacitor)  |       |         | 120    | mV <sub>p-p</sub>      |
| Peak-to-peak (20MHz Bandwidth)   |       |         |        |                        |
| Dynamic Load Response (50% to 100% load transient, 1A/μs slew rate)  |       |         |        |                        |
| Voltage deviation  |       |         | 5      | %V <sub>OUT, set</sub> |
| Settling Time  |       |         | 1.5    | ms                     |
| Current Range  | 0     |         | 42     | A <sub>dc</sub>        |
| Current Limit Inception  | 110   |         | 135    | %I <sub>o,max</sub>    |
| Current Sharing Accuracy, >20% load  | -5    |         | 5      | %I <sub>o,max</sub>    |
| External Capacitance Range   | 0     |         | 10,000 | μF                     |
| Turn On Delay Time from AC Input (*Delay Time Max may increase to 3s at -20C)  |       |         | 2*     | s                      |
| Turn On Delay Time from Remote On, V <sub>IN</sub> within limits   |       |         | 40     | ms                     |
| Rise Time (from 10% to 90% of final value)   |       |         | 50     | ms                     |
| Voltage Overshoot  |       |         | 5      | %V <sub>OUT, set</sub> |
| Turn Off Delay Time from Remote On, V <sub>IN</sub> within limits  |       |         | 40     | ms                     |
| Over Voltage Protection  | 13.8  | 14.8    | 15.8   | V <sub>dc</sub>        |

## CCR0512FP Power Supply

90 - 264V<sub>ac</sub> Input; 12V<sub>dc</sub>, 500W Output

### Electrical Specifications (continued)

| Output 2 – Standby (V <sub>SB</sub> ) Output  |       |     |       |                       |
|---|-------|-----|-------|-----------------------|
| Parameter   | Min   | Typ | Max   | Unit                  |
| Voltage Set-point (50% load) Model: CCR0512FPHXXZ01A [V <sub>OUT,set</sub> ]  | 3.23  | 3.3 | 3.37  | V <sub>dc</sub>       |
| Voltage Tolerance (due to set point, temperature, load, and line regulation)  | -5    |     | 5     | %V <sub>OUT,set</sub> |
| Load Regulation   | -0.17 |     | +0.17 | V <sub>dc</sub>       |
| Line Regulation   | -0.17 |     | +0.17 | V <sub>dc</sub>       |
| Ripple and Noise (C <sub>OUT</sub> = 0.1μF ceramic    with 10μF tantalum capacitor)<br>Peak-to-peak (20MHz Bandwidth) |       |     | 100   | mV <sub>p-p</sub>     |
| Dynamic Load Response (50% to 100% load transient, 1A/μs slew rate)   |       |     |       |                       |
| Voltage deviation   |       |     | 5     | %V <sub>OUT,set</sub> |
| Settling Time   |       |     | 1.5   | ms                    |
| Current Range   | 0     |     | 2.0   | A <sub>dc</sub>       |
| Current Limit Inception   | 110   |     | 150   | %I <sub>O,max</sub>   |

### General Specifications

| Parameter   | Symbol      | Typ                | Unit                            |
|---|-------------|--------------------|---------------------------------|
| Calculated Reliability based on Telcordia SR-332 Issue 2: Method 1 Case 3<br>(V <sub>IN</sub> =230V <sub>ac</sub> , I <sub>o1</sub> = 42A, I <sub>o2</sub> = 2.0A, T <sub>A</sub> = 30°C, airflow 200LFM, 90% confidence) | FIT<br>MTBF | 602.8<br>1,659,038 | 10 <sup>9</sup> /Hours<br>Hours |
| Weight  |             | 825<br>29.1        | g<br>oz.                        |

### Feature Specification

| Parameter                               | Min | Typ | Max  | Unit            |
|---|-----|-----|------|-----------------|
| Remote On Signal, High turns supply on  | 2.0 |     | 12.0 | V <sub>dc</sub> |
| Remote Off Signal, Low turns supply off | 0.0 |     | 0.8  | V <sub>dc</sub> |
| Maximum Remote On/Off Sink Current      |     |     | 4    | mA              |
| Output Current Monitoring Signal ±250mV |     | 0.1 |      | V/A             |

### Environmental Specifications

| Parameter                                 | Specification                                     |
|---|---|
| IPC-9592A                                 | Category 1, Class II Product Classification       |
| Radiated Emissions                        | FCC and CISPR22 (EN55022) Class A with 3dB margin |
| Conducted Emissions                       | FCC and CISPR22 (EN55022) Class A with 3dB margin |
| Shock & Vibration Operational Test        | IPC-9592A, section 5.2.8- 5.2.13                  |
| Conducted Continuous Wave                 | IPC-9592A, section 5.3.1                          |
| Radiated Immunity                         | IPC-9592A, section 5.3.2                          |
| Conducted Electrical Fast Transient (EFT) | IPC-9592A, section 5.3.3                          |
| Conducted Surges                          | IPC-9592A, section 5.3.4                          |
| Ring Waves                                | IPC-9592A, section 5.3.5                          |
| Electrostatic Discharge –Packaged Power   | IPC-9592A, section 5.3.6                          |
| Power Line Disturbance Immunity           | IPC-9592A, section 5.3.8                          |
| Input Harmonics                           | EN61000-3-2                                       |

### Safety Specifications

| Parameter                              | Specification                  |
|--|--------------------------------|
| Isolation Voltage Input to Output      | 3000V <sub>ac</sub> (1 minute) |
| Isolation Voltage Input to Chassis     | 1500V <sub>dc</sub>            |
| Isolation Output/Signal GND to Chassis | 100V <sub>dc</sub>             |
| Insulation Resistance Input to Output  | >10MΩ                          |
| Safety Certifications                  | UL, CSA, VDE                   |

CCR0512FP Power Supply  
90 - 264V<sub>ac</sub> Input; 12V<sub>dc</sub>, 500W Output

Characteristic Curves

The following figures provide typical characteristics for the CCR0515FP (12.0V, 42.0A) at 25°C (unless otherwise noted).

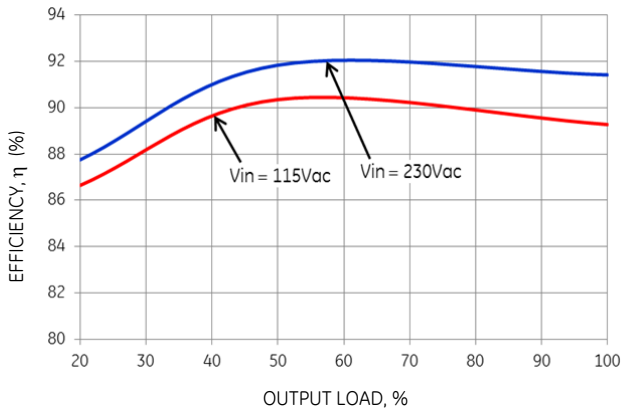


Figure 1. Converter Efficiency versus % Load.

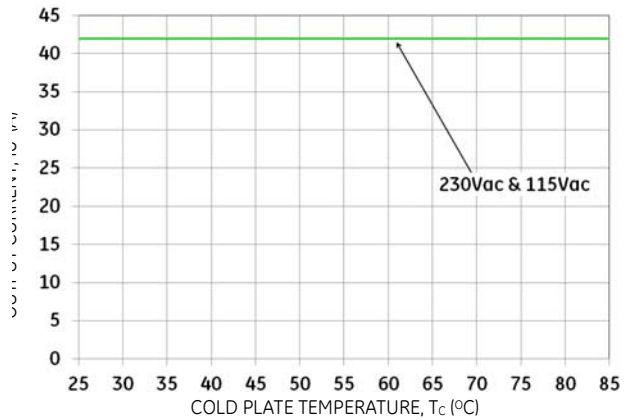


Figure 2. Output Power Derating in Conduction cooling (cold plate) applications; Ta < 70°C adjacent to module.

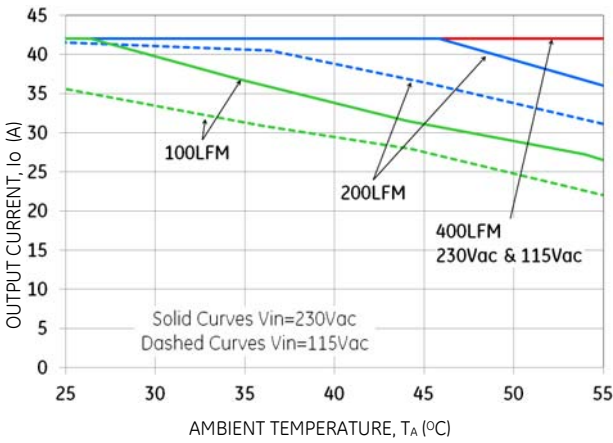


Figure 3. Derating Output Current versus Airflow and Ambient Temperature, 0.6" horizontal heat sink, front to back airflow. See Mechanical Figures for airflow direction.

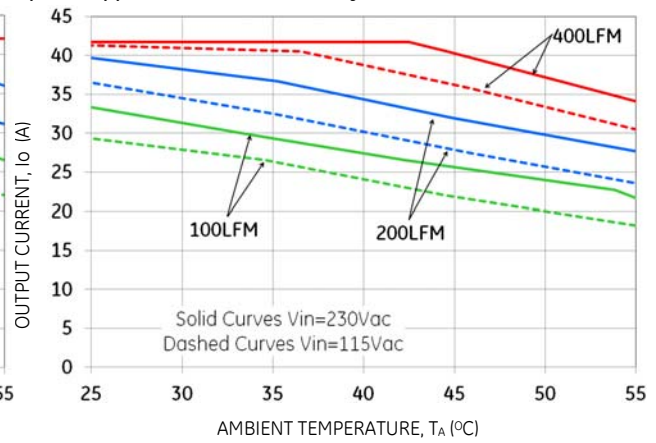


Figure 4. Derating Output Current versus Airflow and Ambient Temperature, no heat sink, front to back airflow. See Mechanical Figures for airflow direction.

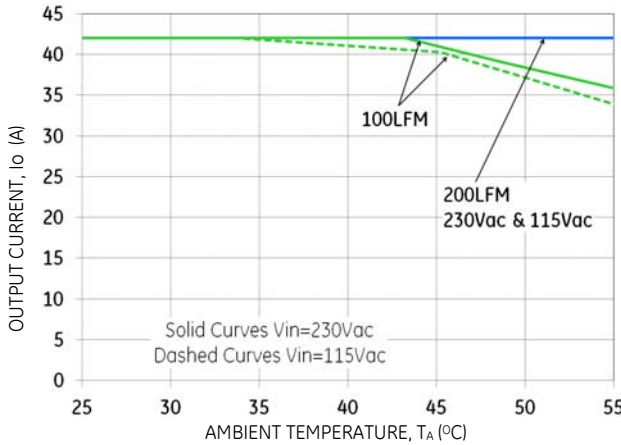


Figure 5. Derating Output Current versus Airflow and Ambient Temperature, 0.6" vertical heat sink, side to side airflow. See Mechanical Figures for airflow direction.

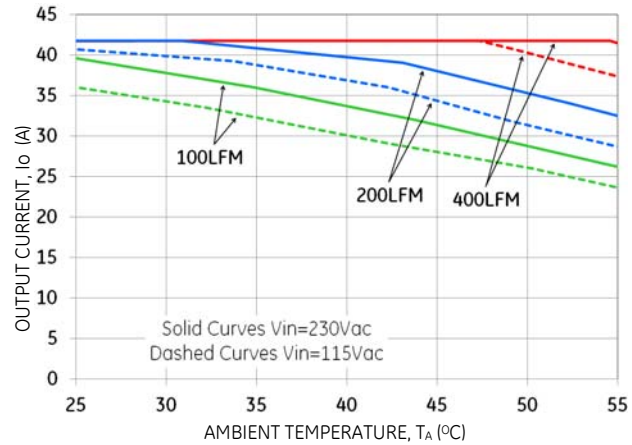


Figure 6. Derating Output Current versus Airflow and Ambient Temperature, no heat sink, side to side airflow. See Mechanical Figures for airflow direction.

Characteristic Curves (continued)

The following figures provide typical characteristics for the CCR0515FP (12.0V, 42.0A) at 25°C (unless otherwise noted).

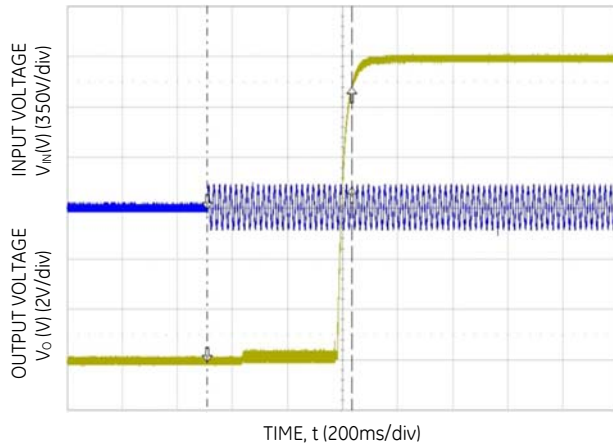


Figure 7. Start-up ( $V_{IN} = 90V$ ,  $I_o = I_{o,max}$ ).

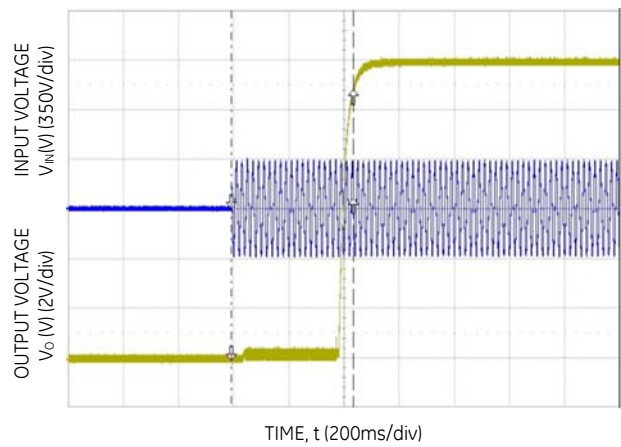


Figure 8. Start-up ( $V_{IN} = 264V$ ,  $I_o = I_{o,max}$ ).

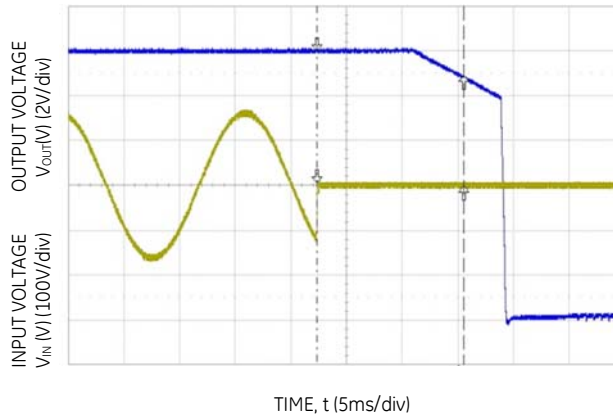


Figure 9. Hold-up ( $V_{IN} = 115V$ ,  $I_o = 80\% I_{o,max}$ ).

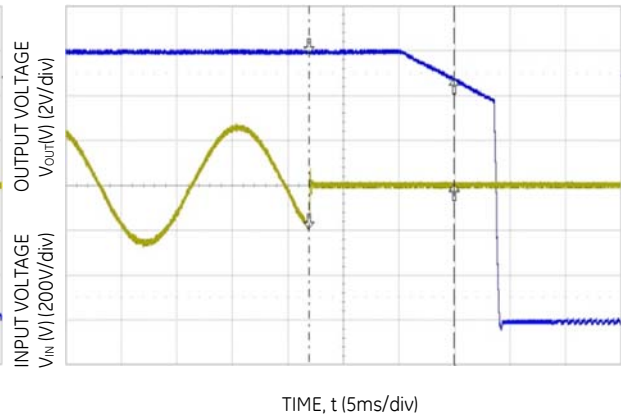


Figure 10. Hold-up ( $V_{IN} = 230V$ ,  $I_o = 80\% I_{o,max}$ ).

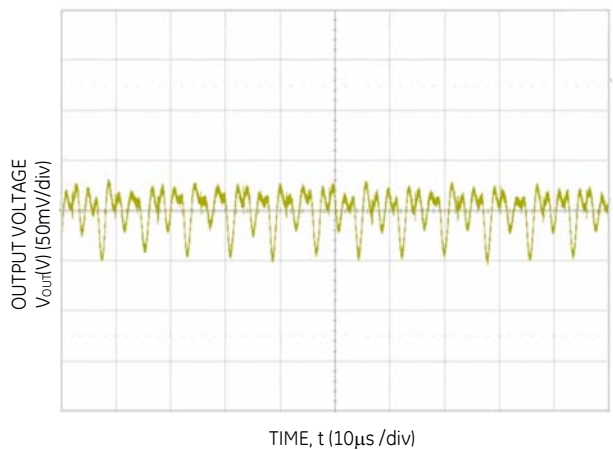


Figure 11. Output ripple and noise ( $C_o=22\mu F$  ceramic,  $V_{IN} = 230V$ ,  $I_o = I_{o,max}$ ).

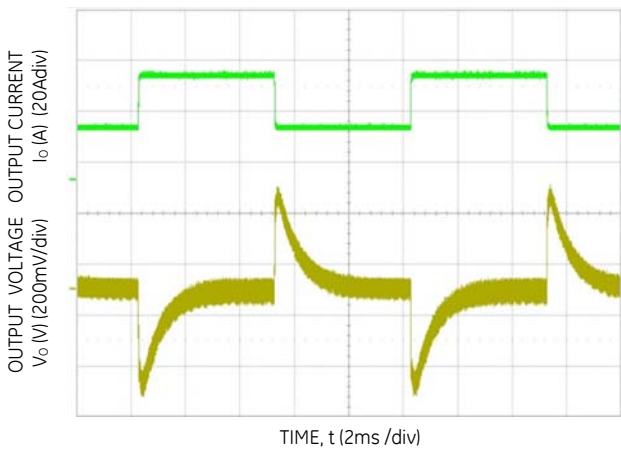


Figure 12. Transient Response to Dynamic Load Change from 50% to 100%  $I_{o,max}$  at  $V_{IN} = 230V$ .



## Safety Considerations

The CCR0512 power supply is intended for inclusion in other equipment and the user must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion within other equipment and must not be operated as a stand-alone product.

## Thermal Considerations

The power supply can be operated in a variety of thermal environments; however sufficient cooling should be provided to ensure reliable operation.

Considerations include ambient temperature, airflow, power supply dissipation and the need for increased reliability. A reduction in the operating temperature of the power supply will result in increased reliability. The thermal derating presented in Figures 2-6 is based on measurements taken in a wind tunnel.

## Feature Descriptions

### Standby Power Supply

A standby output, V<sub>SB</sub>, in the CCR0512 power supply comes on when AC input in the operating range is applied.

### Remote Sense

The power supply has both positive and negative remote sense connections that can be connected to the positive and negative rails of the main output near the load. Care should be taken in routing the sense lines to ensure that noise is not picked up or that additional filtering elements that affect the stability of the power supply are not used. The power supply will operate without the remote sense connections being made, however if remote sense near the load is not used it is recommended that the remote sense lines be connected directly to the main output terminals.

### Overcurrent Protection

To provide protection in a fault condition (output overload), the power supply is equipped with internal current-limiting circuitry and can endure current limiting continuously. At the point of current-limit inception, the unit enters hiccup mode. The power supply operates normally once the output current is brought back into its specified range.

### Overvoltage Protection

Overvoltage protection is a feature of the CCR0512 power supply that protects both the load and the power supply from an output overvoltage condition. When an overvoltage occurs, the power supply shuts down and latches off. It is necessary to recycle the input to restart the power supply when this protection is activated.

### Overtemperature Protection

The CCR0512 also features overtemperature protection in order to provide additional protection in a fault condition. The power supply is equipped with a thermal shutdown circuit which detects excessive internal temperatures and shuts the unit down. In the event of an over temperature condition, the unit protects itself by providing a low warning signal for 10 seconds (typical) and then shutting off. Once the power

supply goes into overtemperature shutdown, it will cool before attempting to restart.

### Input Undervoltage Lockout

At input voltages below the input undervoltage lockout limit, power supply operation is disabled. The power supply will begin to operate at an input voltage above the undervoltage lockout turn-on threshold.

### DC OK

The CCR0512 provides a DC OK signal that indicates when the output has come up and is in regulation. This is an open-collector type signal that goes high when the output is available and within regulation.

### Paralleling/Load Share

This power supply can be paralleled to provide larger load currents than can be delivered from a single power supply. Up to four power supplies may be paralleled. Paralleling is accomplished by connecting the Current Share signals of multiple power supplies together. At load current levels above 20%, the output currents of multiple power supplies will be within  $\pm 5\%$  of the full load value.

If remote sense is used when paralleling is employed, the remote sense connection points should be common to both power supplies.

The supply is equipped with internal Or-ring mosfets in the +V<sub>OUT</sub> leg and designed for hot swap operation.

## Signal Considerations

### Signal Return

The signal return is the referenced for all the signals and is internally connected to the output return (+V<sub>OUT</sub> return).

### Fault Signal

TTL compatible. Open collector (High) for normal operation. Sink current: 4mA. Max collector voltage: 12V<sub>dc</sub>. This alarm is an opto-isolated open collector signal referenced to +V<sub>OUT</sub> Return or chassis ground. The signal indicates that a failure has been detected in the unit (OTP, OVP, AC Fail or No Input).

### Output Current Monitoring

Analog output signal. Voltage proportional to the power supply output current (0.1V/AMP) +/- 250mv.

### Module Enable

The power supply will turn on when the pin engages to the mating connector and senses it connected to Signal Return. It is required to tie the mating connector pin to the Signal Return pin for the power supply to function.

### PSU Present

Binary signal delivered when the rectifier is present (active low, strap to return signal).

### Load Share/Paralleling

Analog signal. Single wire connection. Unit will load share within  $\pm 5\%$  of full load.

# CCR0512FP Power Supply

## 90 - 264V<sub>ac</sub> Input; 12V<sub>dc</sub>, 500W Output

### Over Temperature Warning

TTL compatible. Open collector (High) for normal operation. Sink current: 4mA. Max collector voltage: 12V<sub>dc</sub>. In the event of an over temperature condition, the unit protects itself by providing a low warning signal for 10 seconds (typical) and then shutting off. Auto restart after the condition is cleared.

### Output Voltage Programming

Analog input signal - voltage determining the rectifier output voltage.

$V_{OUT} = 10.8V + (V_{prog} \times 0.96)V$ , for  $V_{prog}$  from 0V to 2.5V  
 $V_{OUT} = 13.2V$ , for  $V_{prog}$  from 2.5V to 3.0V  
 $V_{OUT} = 12.0V$ , for  $V_{prog}$  higher than 3.0V or left open

### Remote ON-OFF

TTL compatible. Open collector (High) for normal operation. Sink current: 4mA. Max collector voltage: 12V<sub>dc</sub>. Logic 1 (TTL High) or open enables unit (ON); Logic 0 (TTL Low) or short shuts unit down (OFF). Cycling this signal resets the over-voltage protection memory.

### DC OK

TTL compatible. Open collector (High) for normal operation. Sink current: 4mA. Max collector voltage: 12V<sub>dc</sub>.

### AC OK

TTL compatible. Open collector (High) for normal operation. Sink current: 4mA. Max collector voltage: 12V<sub>dc</sub>. AC OK indicates that AC is applied within the specified input range for the rectifier.

## Serial Bus Communications

All signals are referenced to 'Signal Return'.

**Device addressing:** The microcontroller (MCU) and the EEPROM have the following addresses:

| Device    | Address | Address Bit Assignments (Most to Least Significant) |   |   |   |    |    |    |     |
|-----------|---------|---|---|---|---|----|----|----|-----|
| MCU       | 0xBx    | 1   | 0 | 1 | 1 | A2 | A1 | A0 | R/W |
| Broadcast | 0x00    | 0   | 0 | 0 | 0 | 0  | 0  | 0  | 0   |
| EEPROM    | 0xAx    | 1   | 0 | 1 | 0 | A2 | A1 | A0 | R/W |

**Address lines (A2, A1, A0):** These signal pins allow up to eight (8) modules to be addressed on a single I<sup>2</sup>C bus. The pins are pulled HI internally. For logic LO connect to 'Output Return'.

**Global broadcast:** This is a powerful command because it instruct all power supplies to respond simultaneously. A *read* instruction should never be accessed globally. The power supply should issue an 'invalid command' state if a 'read' is attempted globally.

For example, changing the 'system' output voltage requires the global broadcast so that all paralleled power supplies change their output simultaneously. This command can also turn OFF the 'main' output or turn ON the 'main' output of all power supplies simultaneously. Unfortunately, this command does have a side effect. Only a single power supply needs to pull down the ninth *acknowledge* bit. To be certain that each power supply responded to the global instruction, a *READ* instruction should be executed to each

power supply to verify that the command properly executed. The GLOBAL BROADCAST command should only be executed for write instructions to slave devices.

The I<sup>2</sup>C interface facilitates the monitoring and control of various operating parameters within the unit and transmits these on demand over an industry standard I<sup>2</sup>C Serial bus.

**Serial Clock (SCL):** Clock pulses are host generated initiating communications across the I<sup>2</sup>C Serial bus, and are pulled up internally to 3.3V by a 10kΩ resistor. The end user should add additional pull up resistance as necessary to ensure that rise and fall time timing and the maximum sink current is in compliance to the I<sup>2</sup>C specifications.

**Serial Data (SDA):** This is a bi-directional data line, pulled up internally to 3.3V by a 10kΩ resistor. The end user should add additional pull up resistance as necessary to ensure that rise and fall time timing and the maximum sink current is in compliance to the I<sup>2</sup>C specifications.

## Basic Operation

**PMBus™ compliance:** The power supply is fully compliant to the Power Management Bus (PMBus™) rev1.2 requirements.


Manufacturer specific commands located between addresses 0xD0 to 0xEF provide instructions that either do not exist in the general PMBus specification or make the communication interface simpler and more efficient.

**Master/Slave:** The 'host controller' is always the MASTER. Power supplies are always SLAVES. SLAVES cannot initiate communications or toggle the Clock. SLAVES also must respond expeditiously at the command of the MASTER as required by the clock pulses generated by the MASTER.

**Clock stretching:** The 'slave' μController inside the power supply may initiate clock stretching if it is busy and it desires to delay the initiation of any further communications. During the clock stretch the 'slave' may keep the clock LO until it is ready to receive further instructions from the host controller. The maximum clock stretch interval is 25ms.

The host controller needs to recognize this clock stretching, and refrain from issuing the next clock signal, until the clock line is released, or it needs to delay the next clock pulse beyond the clock stretch interval of the power supply.

Note that clock stretching can only be performed after completion of transmission of the 9<sup>th</sup> ACK bit, the exception being the START command.

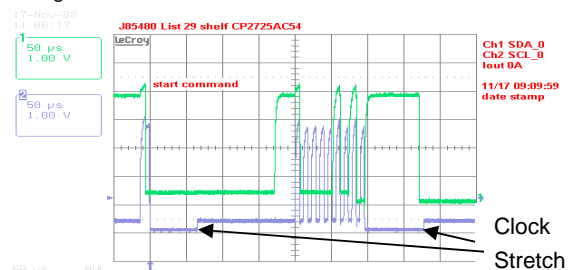

**Figure 13. Example waveforms showing clock stretching.**

**I<sup>2</sup>C Bus Lock-Up detection:** The device will abort any transaction and drop off the bus if it detects the bus being held low for more than 35ms.

# CCR0512FP Power Supply

## 90 - 264V<sub>ac</sub> Input; 12V<sub>dc</sub>, 500W Output

**Communications speed:** Both 100kHz and 400kHz clock rates are supported. The power supplies default to the 100kHz clock rate. The minimum clock speed specified by SMBus is 10 kHz.

**Packet Error Checking (PEC):** Although the power supply will respond to commands with or without the trailing PEC, it is highly recommended that PEC be used in all communications. The integrity of communications is compromised if packet error correction is not employed. There are many functional features, including turning OFF the main output, which should require validation to ensure that the correct command is executed.

PEC is a CRC-8 error-checking byte, based on the polynomial  $C(x) = x^8 + x^2 + x + 1$ , in compliance with PMBus™ requirements. The calculation is based in all message bytes, including the originating write address and command bytes preceding read instructions. The PEC is appended to the message by the device that supplied the last byte.

**SMBAlert (E4):** The  $\mu$ C driven SMBAlert signal informs the 'master/host' controller that either a STATE or ALARM change has occurred. Normally this signal is HI. The signal will change to its LO level if the power supply has changed states and the signal will be latched LO until the power supply receives a 'clear' instruction as outlined below. If the alarm state is still present after the 'clear\_faults' command has been received, then the signal will revert back into its LO state again and will latch until a subsequent 'clear\_faults' signal is received from the host controller.

The signal will be triggered for any state change, including the following conditions;

- VIN under or over voltage
- Vout under or over voltage
- IOUT over current
- Over Temperature warning or fault
- Communication error
- PEC error
- Invalid command
- Detected internal faults

The power supply will clear the SMBAlert# signal (release the signal to its HI state) upon the following events:

- the STATUS\_BYTE (0x78) or STATUS\_WORD (0x79) are read
- Receiving a CLEAR\_FAULTS command
- The main output recycled (turned OFF and then ON) via the REMOTE ON/OFF signal pin
- The main output recycled (turned OFF and then ON) by the OPERATION command

**Read back delay:** The power supply issues the SMBAlert # notification as soon as the first state change occurred. During an event a number of different states can be transitioned to before the final event occurs. If a read back is implemented rapidly by the host a successive SMBAlert# could be triggered by the transitioning state of the power supply. In order to avoid successive SMBAlert# s and read back and also to avoid reading a transitioning state, it is prudent to wait more than 2 seconds after the receipt of an SMBAlert# before executing a read back. This delay will

ensure that only the final state of the power supply is captured.

**Successive read backs:** Successive read backs to the power supply should not be attempted at intervals faster than every one second. This time interval is sufficient for the internal processors to update their data base so that successive reads provide fresh data.

**Invalid commands or data:** The power supply notifies the MASTER if a non-supported command has been sent or invalid data has been received. Notification is implemented by setting the appropriate STATUS and ALARM registers and setting the SMBAlert# flag.

If a non-supported read is requested the power supply will return all 0x00h.

### PMBus™ Commands

**Standard instruction:** Up to two bytes of data may follow an instruction depending on the required data content. Analog data is always transmitted as LSB followed by MSB. PEC is optional and includes the address and data fields.

|   |               |    |   |              |
|---|---------------|----|---|--------------|
| 1 | 8             | 1  | 8 | 1            |
| S | Slave address | Wr | A | Command Code |

|               |   |                |   |     |   |   |
|---------------|---|----------------|---|-----|---|---|
| 8             | 1 | 8              | 1 | 8   | 1 | 1 |
| Low data byte | A | High data byte | A | PEC | A | P |

□ Master to Slave   □ Slave to Master

SMBUS annotations; S – Start , Wr – Write, Sr – re-Start, Rd – Read,

A – Acknowledge, NA – not-acknowledged, P – Stop

**Standard READ:** Up to two bytes of data may follow a READ request depending on the required data content. Analog data is always transmitted as LSB followed by MSB. PEC is mandatory and includes the address and data fields. PEC is optional and includes the address and data fields.

|   |               |    |   |              |   |
|---|---------------|----|---|--------------|---|
| 1 | 7             | 1  | 1 | 8            | 1 |
| S | Slave address | Wr | A | Command Code | A |

|    |               |    |   |     |   |
|----|---------------|----|---|-----|---|
| 1  | 7             | 1  | 1 | 8   | 1 |
| Sr | Slave Address | Rd | A | LSB | A |

|     |   |     |        |   |
|-----|---|-----|--------|---|
| 8   | 1 | 8   | 1      | 1 |
| MSB | A | PEC | No-ack | P |

**Block communications:** When writing or reading more than two bytes of data at a time, BLOCK instructions for WRITE and READ commands must be used instead of the Standard Instructions

Block write format:

|   |               |    |   |              |   |
|---|---------------|----|---|--------------|---|
| 1 | 7             | 1  | 1 | 8            | 1 |
| S | Slave address | Wr | A | Command Code | A |

|                |   |        |   |        |   |
|----------------|---|--------|---|--------|---|
| 8              | 1 | 8      | 1 | 8      | 1 |
| Byte count = N | A | Data 1 | A | Data 2 | A |

|       |   |         |   |     |   |   |
|-------|---|---------|---|-----|---|---|
| 8     | 1 | 8       | 1 | 8   | 1 | 1 |
| ..... | A | Data 48 | A | PEC | A | P |



Block read format:

|   |               |    |   |              |   |
|---|---------------|----|---|--------------|---|
| 1 | 7             | 1  | 1 | 8            | 1 |
| S | Slave address | Wr | A | Command Code | A |

|    |               |    |   |
|----|---------------|----|---|
| 1  | 7             | 1  | 1 |
| Sr | Slave Address | Rd | A |

|                |   |        |   |        |   |
|----------------|---|--------|---|--------|---|
| 8              | 1 | 8      | 1 | 8      | 1 |
| Byte count = N | A | Data 1 | A | Data 2 | A |

|       |   |         |   |     |       |   |
|-------|---|---------|---|-----|-------|---|
| 8     | 1 | 8       | 1 | 8   | 1     | 1 |
| ..... | A | Data 48 | A | PEC | NoAck | P |

**Linear Data Format** The definition is identical to Part II of the PMBus Specification. All standard PMBus values, with the exception of output voltage related functions, are represented by the linear format described below. Output voltage functions are represented by a 16 bit mantissa. Output voltage has a E=-9 constant exponent.

The Linear Data Format is a two byte value with an 11-bit, two's complement mantissa and a 5-bit, two's complement exponent or scaling factor, its format is shown below.

| Data Byte High |              |   |   |   |   |   |   | Data Byte Low |              |   |   |   |   |   |   |   |
|----------------|--------------|---|---|---|---|---|---|---------------|--------------|---|---|---|---|---|---|---|
| Bit            | 7            | 6 | 5 | 4 | 3 | 2 | 1 | 0             | 7            | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|                | Exponent (E) |   |   |   |   |   |   |               | Mantissa (M) |   |   |   |   |   |   |   |

The relationship between the Mantissa, Exponent, and Actual Value (V) is given by the following equation:

$$V = M * 2^E$$

Where: V is the value, M is the 11-bit, two's complement mantissa, E is the 5-bit, two's complement exponent

Notes: Settings and read backs above support the 12Vdc main output. There are no adjustments or read backs of the standby output. Failure of the standby output is reported by the STATUS\_MFR\_SPECIFIC register. The code does not check the validity of, or whether the data being changed is within the expected boundary. The user is responsible to make sure that data placed in the registers is within the monitored range.

### Command Descriptions

**Operation (01) :** By default the Power supply is turned ON at power up as long as *Power ON/OFF* signal pin is active HI. The Operation command is used to turn the Power Supply ON or OFF via the PMBus. The data byte below follows the OPERATION command.

| FUNCTION | DATA BYTE |
|----------|-----------|
| Unit ON  | 80        |
| Unit OFF | 00        |

To **RESET** the power supply cycle the power supply OFF, wait at least 2 seconds, and then turn back ON. All alarms and shutdowns are cleared during a restart.

**Clear\_faults (03):** This command clears all STATUS and FAULT registers and resets the SMBAlert# line.

If a fault still persists after the issuance of the clear\_faults command the specific registers indicating the fault are reset and the SMBAlert# line is activated again.

**WRITE\_PROTECT register (10):** Used to control writing to the PMBus device. The intent of this command is to provide protection against accidental changes. All supported

command parameters may have their parameters read, regardless of the write\_protect settings. The contents of this register can be stored to non-volatile memory using the Store\_default\_code command. The default setting of this register is disable\_all\_writes except write\_protect 0x80h.

| FUNCTION  | DATA BYTE |
|---|-----------|
| Enable all writes                                     | 00        |
| Disable all writes except write_protect               | 80        |
| Disable all writes except write_protect and OPERATION | 40        |

**Vout\_Command (21) :** This command is used to change the output voltage of the power supply. Changing the output voltage should be performed simultaneously to all power supplies operating in parallel using the Global Address (Broadcast) feature. If only a single power supply is instructed to change its output, it may attempt to source all the required power which can cause either a power limit or shutdown condition.

Software programming of output voltage permanently overrides the set point voltage configured by the Vprog signal pin. The program no longer looks at the 'Vprog pin' and will not respond to any hardware voltage settings. If power is removed from the µController it will reset itself into its default configuration looking at the Vprog signal for output voltage control. In many applications, the Vprog pin is used for setting initial conditions, if different that the factory setting. Software programming then takes over once I<sup>2</sup>C communications are established.

To properly hot-plug a power supply into a live backplane, the system generated voltage should get re-configured into either the factory adjusted firmware level or the voltage level reconfigured by the margin pin. Otherwise, the voltage state of the plugged in power supply could be significantly different than the powered system.

**Vout\_OV\_warn\_limit (42):** OV\_warning is extremely useful because it gives the system controller a heads up that the output voltage is drifting out of regulation and the power supply is close to shutting down. Preemptive action may be taken before the power supply would shut down and potentially disable the system.

**OC and OT\_fault\_response (47, 50):** The default response for both OC and OT is auto\_restart (hiccup). Each register, individually, can be reconfigured into a latched state. Latched and hiccup are the only supported states.

**Restart after a latch off:** Either of four restart possibilities are available. The hardware pin Remote ON/OFF may be turned OFF and then ON. The unit may be commanded to restart via i2c through the *Operation* command by first turning OFF then turning ON. The third way to restart is to remove and reinsert the unit. The fourth way is to turn OFF and then turn ON ac power to the unit. Each of these commands must keep the power supply in the OFF state for at least 2 seconds, with the exception of changing to restart.

A power system that is comprised of a number of power supplies could have difficulty restarting after a shutdown event because of the non-synchronized behavior of the individual power supplies. Implementing the latch-off mechanism permits a synchronized restart that guarantees the simultaneous restart of the entire system.

A synchronous restart can be implemented by;

1. Issuing a GLOBAL OFF and then ON command to all power supplies,
2. Toggling Off and then ON the Remote ON/OFF signal
3. Removing and reapplying input commercial power to the entire system.

The power supplies should be turned OFF for at least 20 – 30 seconds in order to discharge all internal bias supplies and

**Vin\_UV\_warn\_limit (58):** This is another warning flag indicating that the input voltage is decreasing dangerously close to the low input voltage shutdown level.

**Status\_word (79):** returns two bytes of information. The upper byte bit functionality is tabulated in the Status\_word section. The lower byte bit functionality is identical to Status\_byte.

**Status Register Bit Allocation:**

| Register                           | Code | Bit | Function                           |
|------------------------------------|------|-----|------------------------------------|
| Status_Byte                        | 78   | 7   | N/A                                |
|                                    |      | 6   | N/A                                |
|                                    |      | 5   | Output OV Fault detected           |
|                                    |      | 4   | Output OC Fault detected           |
|                                    |      | 3   | Input UV Fault detected            |
|                                    |      | 2   | Temperature Fault/warning detected |
|                                    |      | 1   | CML (communication fault) detected |
|                                    |      | 0   | N/A                                |
| Status_word (includes Status_byte) | 79   | 7   | OV Fault detected                  |
|                                    |      | 6   | OC Fault detected                  |
|                                    |      | 5   | Input Fault detected               |
|                                    |      | 4   | N/A                                |
|                                    |      | 3   | N/A                                |
|                                    |      | 2   | N/A                                |
|                                    |      | 1   | N/A                                |
|                                    |      | 0   | N/A                                |
| Status_Vout                        | 7A   | 7   | Vout OV Fault                      |
|                                    |      | 6   | Vout OV Warning                    |
|                                    |      | 5   | Vout UV Warning                    |
|                                    |      | 4   | Vout UV Fault                      |
|                                    |      | 3   | N/A                                |
|                                    |      | 2   | N/A                                |
|                                    |      | 1   | N/A                                |
|                                    |      | 0   | N/A                                |
| Status_Iout                        | 7B   | 7   | IOUT OC Fault                      |
|                                    |      | 6   | N/A                                |
|                                    |      | 5   | IOUT OC Warning                    |
|                                    |      | 4   | N/A                                |
|                                    |      | 3   | N/A                                |
|                                    |      | 2   | N/A                                |
|                                    |      | 1   | N/A                                |
|                                    |      | 0   | N/A                                |
| Status_input                       | 7C   | 7   | Vin OV Fault                       |
|                                    |      | 6   | Vin OV Warning                     |
|                                    |      | 5   | Vin UV Warning                     |
|                                    |      | 4   | Vin UV Fault                       |
|                                    |      | 3   | N/A                                |
|                                    |      | 2   | N/A                                |
|                                    |      | 1   | N/A                                |
|                                    |      | 0   | N/A                                |

| Register            | Code | Bit | Function  |
|---------------------|------|-----|---|
| Status_temperature  | 7D   | 7   | OT Fault  |
|                     |      | 6   | OT Warning  |
|                     |      | 5   | UT Fault  |
|                     |      | 4   | UT Warning  |
|                     |      | 3   | N/A   |
|                     |      | 2   | N/A   |
|                     |      | 1   | N/A   |
|                     |      | 0   | N/A   |
| Status_cml          | 7E   | 7   | Invalid Command   |
|                     |      | 6   | Invalid Data  |
|                     |      | 5   | ERROR PEC   |
|                     |      | 4   | N/A   |
|                     |      | 3   | N/A   |
|                     |      | 2   | N/A   |
|                     |      | 1   | Other Fault   |
|                     |      | 0   | N/A   |
| Status_mfr_specific | 80   | 7   | 0 = V <sub>SB</sub> Fault, 1 = No V <sub>SB</sub> Fault |
|                     |      | 6   | 0 = OV Fault, 1 = No OV Fault                           |
|                     |      | 5   | 0 = Interrupt, 1 = No Interrupt                         |
|                     |      | 4   | 0 = Any Fault, 1 = No Fault                             |
|                     |      | 3   | 0 = OT Fault; 1 = Temperature OK                        |
|                     |      | 2   | 0 = DC Fault, 1 = DC OK                                 |
|                     |      | 1   | 0 = Input AC Fault, 1 = Input AC OK                     |
|                     |      | 0   | 0 = AC high line, 1 = AC low line                       |

**Mfr\_ID (99):** Manufacturer in ASCII – 5 characters maximum, General Electric – Critical Power represented as, 'GECP\_'

**Mfr\_Model (9A):** Total 15 bytes: 'CCR0512FPXXZ01A'

**Mfr\_Location (9C):** Total 4 bytes: 'CHN\_'

**Mfr\_Date (9D):** Total 6 bytes: yymmdd

**Mfr\_Serial (9E):** Total 15 bytes

**Read\_mfr\_rev (D0):** Total 1 bytes

Each byte is partitioned into high and low nibbles.

Example: FF (11111111) is read as 16.16

1A (00011010) is read as 1.10

**EEPROM**

The microcontroller has 96 bytes of EEPROM memory available for the system host.

## CCR0512FP Power Supply

90 - 264V<sub>ac</sub> Input; 12V<sub>dc</sub>, 500W Output

### PMBus™ Command set:

| Hex Code | Command                | Data Byte | Read/Write | Function                                      | Factory Default/Notes            |
|----------|------------------------|-----------|------------|---|----------------------------------|
| 01       | OPERATION              | 1         | R/W        | Output ON/OFF                                 | 0x80/ Only 0x00 and 0x80 allowed |
| 02       | ON_OFF_CONFIG          | 1         | R          | On/Off Control Configuration                  | 0x09/ Only 0x09 allowed          |
| 03       | CLEAR_FAULTS           | 0         |            | Clear Status                                  |                                  |
| 10       | WRITE_PROTECT          | 1         | R/W        | Write control                                 | 0x80                             |
| 11       | STORE_DEFAULT_ALL      | 0         | W          | Store permanently                             |                                  |
| 12       | RESTORE_DEFAULT_ALL    | 0         | W          | Reset defaults                                |                                  |
| 19       | CAPABILITY             | 1         | R          | PEC support (data ≥ 2 byte); 400kHz; SMBAlert | 0x30                             |
| 20       | VOUT_MODE              | 1         | R          | Vout constants, Exp=-9                        | 0x17                             |
| 21       | VOUT_COMMAND           | 2         | R/W        | Set Output Vout                               | 12.0V                            |
| 40       | VOUT_OV_FAULT_LIMIT    | 2         | R/W        | Set Output OV fault limit                     | 14.0V                            |
| 41       | VOUT_OV_FAULT_RESPONSE | 1         | R/W        | Set Response to Output OV fault               | 0xC0                             |
| 42       | VOUT_OV_WARN_LIMIT     | 2         | R/W        | Set Output OV warn limit                      | 13.5V                            |
| 43       | VOUT_UV_WARN_LIMIT     | 2         | R/W        | Set Output UV warn limit                      | 10.5V                            |
| 44       | VOUT_UV_FAULT_LIMIT    | 2         | R/W        | Set Output UV fault limit                     | 10.0V                            |
| 45       | VOUT_UV_FAULT_RESPONSE | 1         | R/W        | Set Response to Output UV fault               | 0xC0                             |
| 46       | IOUT_OC_FAULT_LIMIT    | 2         | R/W        | Set Output OC fault limit                     | 48A                              |
| 47       | VOUT_OC_FAULT_RESPONSE | 1         | R/W        | Set Response to Output OC fault               | 0xC0                             |
| 4A       | IOUT_OC_WARN_LIMIT     | 2         | R/W        | Set Output OC warn limit                      | 45A                              |
| 4F       | OT_FAULT_LIMIT         | 2         | R/W        | Set OT fault limit                            | 112C                             |
| 50       | OT_FAULT_RESPONSE      | 1         | R/W        | Set Response to OT fault                      | 0xC0                             |
| 51       | OT_WARN_LIMIT          | 2         | R/W        | Set OT warn limit                             | 100C                             |
| 55       | VIN_OV_FAULT_LIMIT     | 2         | R/W        | Set Input OV fault limit                      | 270V                             |
| 57       | VIN_OV_WARN_LIMIT      | 2         | R/W        | Set Input OV warn limit                       | 266V                             |
| 58       | VIN_UV_WARN_LIMIT      | 2         | R/W        | Set Input UV warn limit                       | 90V                              |
| 59       | VIN_UV_FAULT_LIMIT     | 2         | R/W        | Set Input UV shutdown                         | 83V                              |
| 78       | STATUS_BYTE            | 1         | R          |   |                                  |
| 79       | STATUS_WORD            | 2         | R          |   |                                  |
| 7A       | STATUS_VOUT            | 1         | R          |   |                                  |
| 7B       | STATUS_IOUT            | 1         | R          |   |                                  |
| 7C       | STATUS_INPUT           | 1         | R          |   |                                  |
| 7D       | STATUS_TEMPERATURE     | 1         | R          |   |                                  |
| 7E       | STATUS_CML             | 1         | R          |   |                                  |
| 7F       | STATUS_OTHER           | 1         | R          |   |                                  |
| 80       | STATUS_MFR_SPECIFIC    | 1         | R          |   |                                  |
| 88       | READ_VIN               | 2         | R          | Read input voltage                            |                                  |
| 89       | READ_IIN               | 2         | R          | Read input current                            |                                  |
| 8B       | READ_VOUT              | 2         | R          | Read output voltage                           |                                  |
| 8C       | READ_IOUT              | 2         | R          | Read output current                           |                                  |
| 8D       | READ_TEMPERATURE       | 2         | R          | Read temperature                              |                                  |
| 96       | READ_POUT              | 2         | R          | Read output power                             |                                  |
| 97       | READ_PIN               | 2         | R          | Read input power                              |                                  |
| 98       | PMBUS REVISION         | 1         | R          |   | 0x11                             |
| 99       | MFR_ID                 | 5         | R          |   | ASCII                            |
| 9A       | MFR_MODEL              | 15        | R          |   | ASCII                            |
| 9C       | MFR_LOCATION           | 4         | R          | FRU_ID  | ASCII                            |
| 9D       | MFR_DATE               | 6         | R          |   | ASCII                            |
| 9E       | MFR_SERIAL             | 15        | R          |   | ASCII                            |
| B0       | USER_DATA_00           | 48        | R/W        | User memory space                             |                                  |
| B1       | USER_DATA_01           | 48        | R/W        | User memory space                             |                                  |
| D0       | READ_FRW_REVISION      | 1         | R          |   | 1.10                             |

# CCR0512FP Power Supply

90 - 264V<sub>ac</sub> Input; 12V<sub>dc</sub>, 500W Output

## Visual Indicators (LEDs)

AC OK (Green)  
DC OK (Green)  
FAULT (Red)

| # | Condition                 | LED Indicators |          |          | Monitoring Signals |       |       |         |
|---|---------------------------|----------------|----------|----------|--------------------|-------|-------|---------|
|   |                           | AC OK          | DC OK    | FAULT    | FAULT              | DC OK | AC OK | TEMP OK |
| 1 | Normal Operation          | GREEN          | GREEN    | OFF      | HIGH               | HIGH  | HIGH  | HIGH    |
| 2 | Input Out of Range        | OFF            | OFF      | OFF      | HIGH               | LOW   | LOW   | HIGH    |
| 3 | Over Voltage Shutdown     | GREEN          | OFF      | RED      | LOW                | LOW   | HIGH  | HIGH    |
| 4 | Over Current Hiccup       | GREEN          | BLINKING | OFF      | HIGH               | PULSE | HIGH  | HIGH    |
| 5 | Temperature Warning       | GREEN          | GREEN    | OFF      | HIGH               | HIGH  | HIGH  | LOW     |
| 6 | Over Temperature Shutdown | GREEN          | OFF      | BLINKING | PULSE              | LOW   | HIGH  | LOW     |

**NOTES:**


- Condition # 2 has two modules plugged in. The second module provided back bias to the module with no-input applied.
- Blinking: 0.5, +/-0.05 seconds ON, and 0.5, +/-0.05 seconds OFF.
- Pulse: 0.5, +/-0.05 seconds high, and 0.5, +/-0.05 seconds low.

## Connector Information –Shelf version

| Connector On Power Supply | Mating Connector                               |
|---------------------------|--|
| Molex part # 46437-1154   | Molex part # 46436-1154 (Right Angle Mounting) |

| Pin No. | Function                  | Pin No. | Function                      | Pin No. | Function             |
|---------|---------------------------|---------|-------------------------------|---------|----------------------|
| A1      | +V <sub>SB</sub>          | C1      | SDA (I <sup>2</sup> C bus)    | E1      | Remote ON/OFF        |
| A2      | -V <sub>SB</sub> Return   | C2      | SCL (I <sup>2</sup> C bus)    | E2      | DC OK                |
| A3      | Signal Return             | C3      | I <sub>share</sub>            | E3      | AC OK                |
| A4      | Reserved (do not connect) | C4      | N/C                           | E4      | Interrupt (SMBALERT) |
| A5      | Remote Sense (+)          | C5      | Over Temperature Warning      | E5      | Signal Return        |
| B1      | Remote Sense (-)          | D1      | I <sup>2</sup> C Address (A0) | P1      | +V <sub>OUT</sub>    |
| B2      | Fault                     | D2      | I <sup>2</sup> C Address (A1) | P2      | V <sub>OUT</sub> RTN |
| B3      | I Monitor (IMON)          | D3      | I <sup>2</sup> C Address (A2) | P3      | SAFETY GND           |
| B4      | Module Enable             | D4      | V <sub>prog</sub>             | P4      | AC NETURAL           |
| B5      | PSU Present               | D5      | Reserved (do not connect)     | P5      | AC LINE              |


Yellow denotes short pins (last to make), Green denotes long pins (first to make).

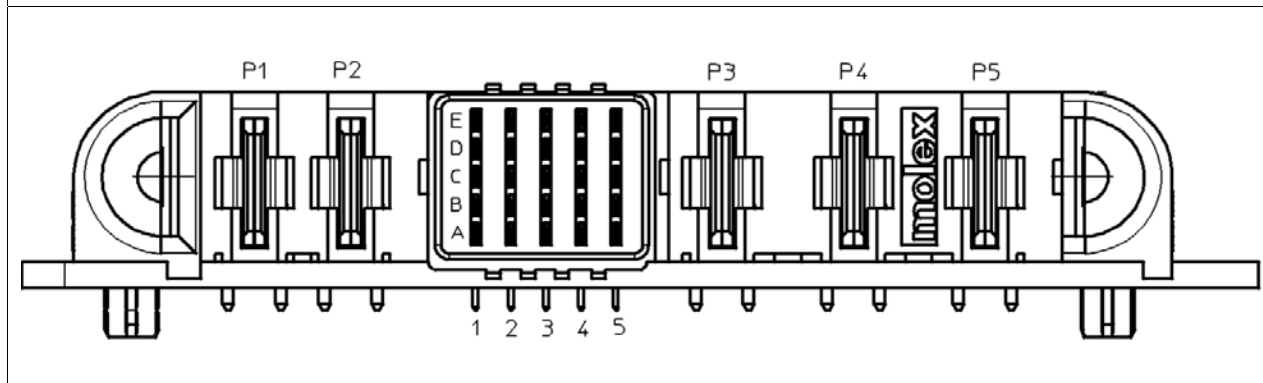

CCR0512FP Power Supply  
 90 - 264V<sub>ac</sub> Input; 12V<sub>dc</sub>, 500W Output

Mechanical Outline –  
 Shelf Version

Dimensions are in millimeters and [inches].  
 Tolerances: x.x mm ± 0.5 mm [x.xx in. ± 0.02 in.] (unless otherwise indicated)  
 x.xx mm ± 0.25 mm [x.xxx in. ± 0.010 in.] (unless otherwise indicated)

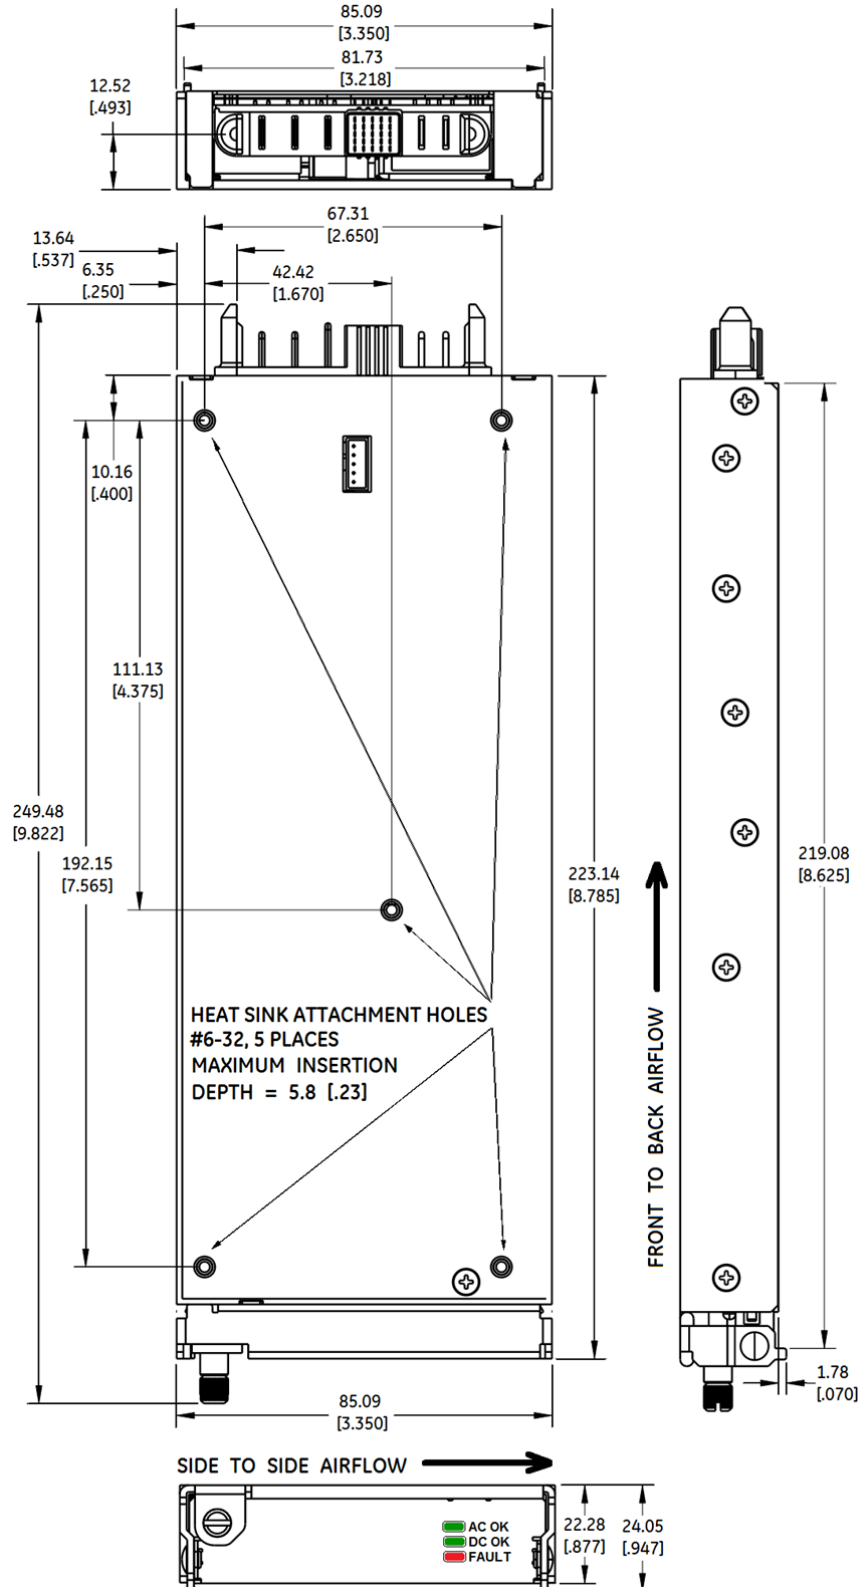




CCR0512FP Power Supply  
90 - 264V<sub>ac</sub> Input; 12V<sub>dc</sub>, 500W Output

Connector Information –Stand Alone version

| Function              | Connector On Power Supply                      | Mating Connector  |
|-----------------------|--|---|
| AC Input              | EK500V-03P                                     | Discrete Wires 20A 300VAC 24-12AWG  |
| DC Output             | PFC250 FASTON TAB                              | 250FASTON TERMINAL  |
| Control/Communication | CI0126P1HDL-LF RA W/LOCKING LATCH 26-CTS 2-ROW | CI01 Series 2.00mm(.079") Dual Row Wire to Board Housing & Terminal (or equivalent) |


| Pin No. | Function                      | Pin No. | Function                      | Pin No. | Function                  |
|---------|-------------------------------|---------|-------------------------------|---------|---------------------------|
| 1       | +V <sub>SB</sub>              | 11      | I <sup>2</sup> C Address (A2) | 21      | Signal Return             |
| 2       | -V <sub>SB</sub> Return       | 12      | I <sup>2</sup> C Address (A1) | 22      | Module Enable             |
| 3       | Remote Sense (-)              | 13      | DC OK                         | 23      | PSU Present               |
| 4       | Remote Sense (+)              | 14      | I <sub>share</sub>            | 24      | Over Temperature Warning  |
| 5       | Fault                         | 15      | AC OK                         | 25      | Reserved (do not connect) |
| 6       | I Monitor (IMON)              | 16      | N/C                           | 26      | Reserved (do not connect) |
| 7       | SCL (I <sup>2</sup> C bus)    | 17      | Interrupt (SMBALERT)          |         |                           |
| 8       | SDA (I <sup>2</sup> C bus)    | 18      | V <sub>prog</sub>             | G       | SAFETY GND                |
| 9       | Remote ON/OFF                 | 19      | Signal Return                 | N       | AC NETURAL                |
| 10      | I <sup>2</sup> C Address (A0) | 20      | Reserved (do not connect)     | L       | AC LINE                   |

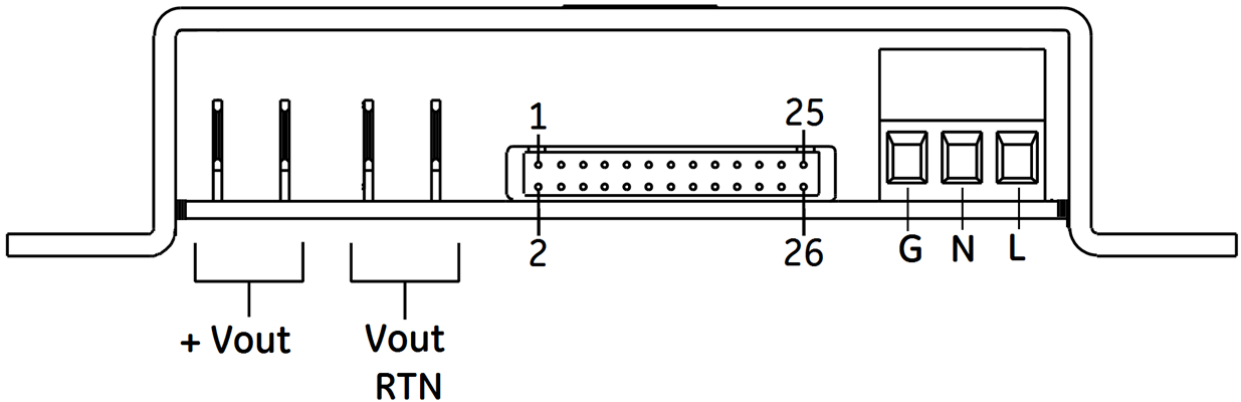

CCR0512FP Power Supply  
 90 - 264V<sub>ac</sub> Input; 12V<sub>dc</sub>, 500W Output

Mechanical Outline –  
 Stand Alone Version

Dimensions are in millimeters and [inches].  
 Tolerances: x.x mm ± 0.5 mm [x.xx in. ± 0.02 in.] (unless otherwise indicated)  
 x.xx mm ± 0.25 mm [x.xxx in. ± 0.010 in.] (unless otherwise indicated)

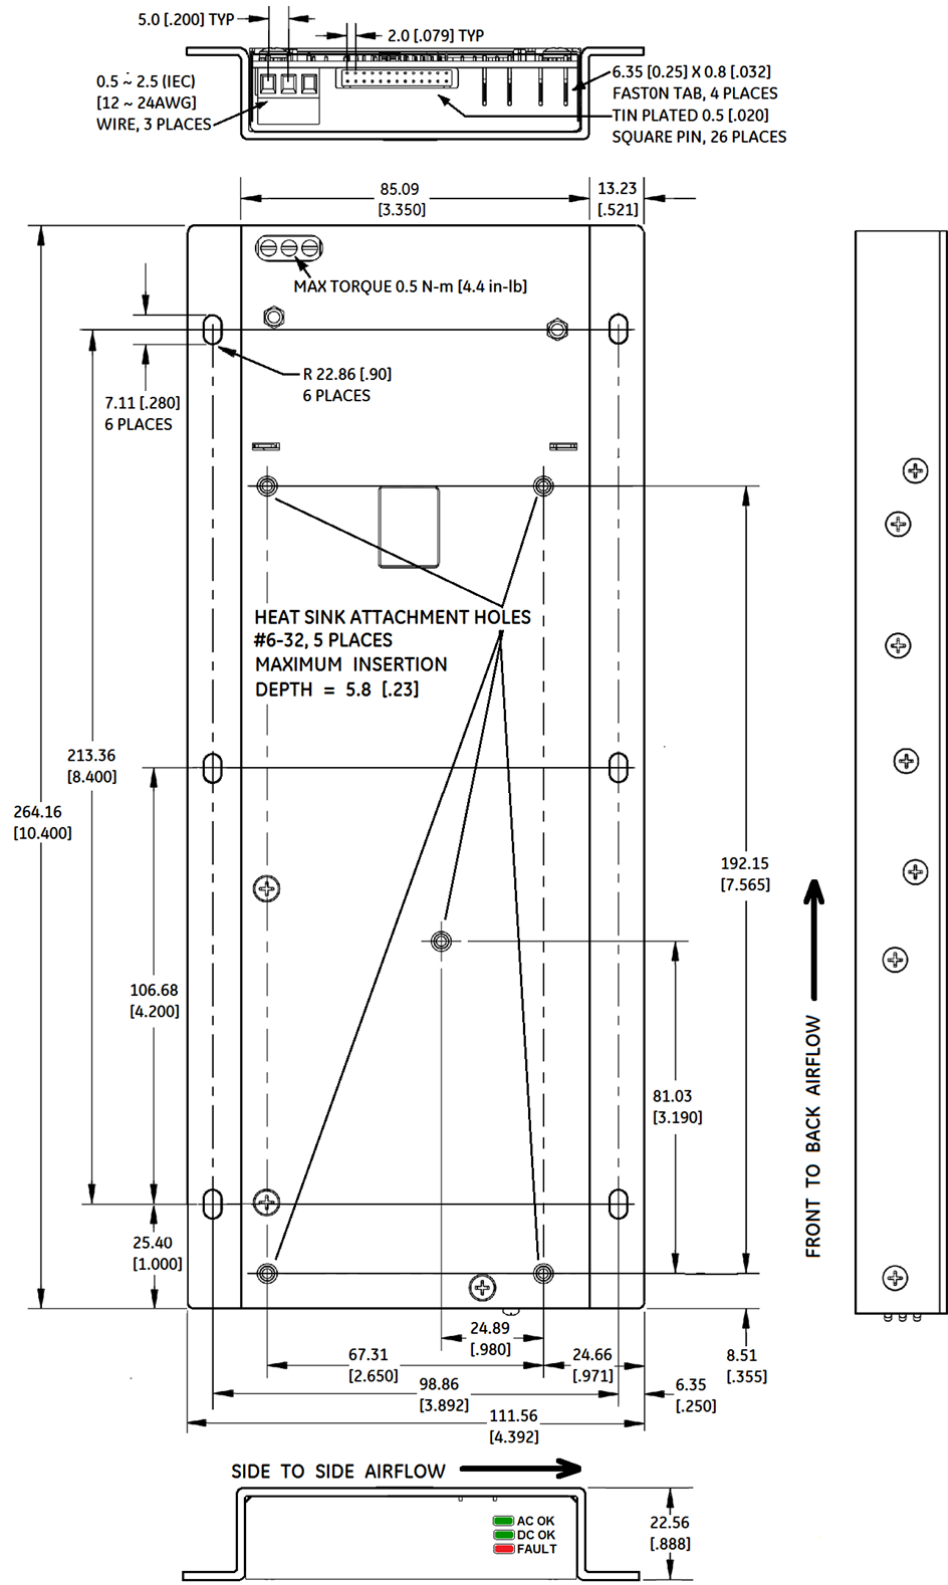

# CCR0512FP Power Supply

90 - 264V<sub>ac</sub> Input; 12V<sub>dc</sub>, 500W Output




## Ordering Information

Please contact your GE Power Electronics' Sales Representative for pricing, availability and optional features.

### Device Codes

| Product Code     | Input Voltage         | Output Power | Output Ratings                                   | Mounting    | Comcode          |
|------------------|-----------------------|--------------|--|-------------|------------------|
| CCR0512FPXXXZ01A | 90-264V <sub>ac</sub> | 500W         | 12V <sub>dc</sub> /42A, 3.3V <sub>dc</sub> /2.0A | Shelf       | CCR0512FPXXXZ01A |
| CCR0512FPSXXZ01A | 90-264V <sub>ac</sub> | 500W         | 12V <sub>dc</sub> /42A, 3.3V <sub>dc</sub> /2.0A | Stand alone | CCR0512FPSXXZ01A |

### Accessories

| Item   | Description   | Product Code/Comcode | Source |
|--|---|----------------------|--------|
|   | Horizontal 0.6 in. Heatsink plus screws (5)                 | CCR0512FPKITZ01A     | GE     |
|   | Vertical 0.6 in. Heatsink plus screws (5)                   | CCR0512FPKITZ02A     | GE     |
|  | Interface Card<br>(for use with shelf mounted version only) | 150036347            | GE     |

## Contact Us

For more information, call us at

USA/Canada:

**+1 877 546 3243**, or +1 972 244 9288

Asia-Pacific:

+86.021.54279977\*808

Europe, Middle-East and Africa:

+49.89.878067-280

[www.gecriticalpower.com](http://www.gecriticalpower.com)



GE Critical Power reserves the right to make changes to the product(s) or information contained herein without notice, and no liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)