

## Line Regulator Controller

### Features

- Low Dropout Voltage: 100mV @ 650mA with FZT749 PNP Transistor
- 2.7V to 8V Supply Range
- Low Operating Current: 50µA Operating, 0.2µA Shutdown
- Low True Chip Enable
- Output Accuracy <math>\lt; \pm 2\%</math>
- Small Package: 5-Pin SOT-23A

### Applications


- Battery Operated Systems
- Portable Instruments
- High-Efficiency Linear Regulator
- Post-Regulator for SMPS
- Power Supply or Battery Back-Up Supply for Memory

### Device Selection Table

| Part Number | Output Voltage | Package       | Temperature Range |
|-------------|----------------|---------------|-------------------|
| TC572502ECT | 2.5V           | 5-Pin SOT-23A | -40°C to +85°C    |
| TC573002ECT | 3.0V           | 5-Pin SOT-23A | -40°C to +85°C    |
| TC573302ECT | 3.3V           | 5-Pin SOT-23A | -40°C to +85°C    |

Other output voltages and package options are available. Please contact Microchip Technology Inc. for details.

### Package Type

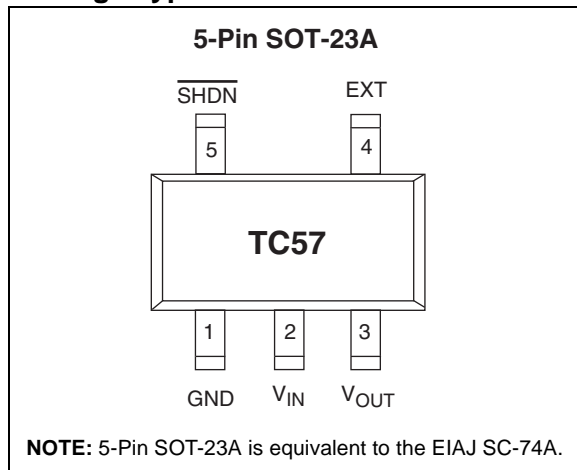


### General Description

The TC57 is a low dropout regulator controller that operates with an external PNP pass transistor, allowing the user to tailor the LDO characteristics to suit the application at hand. This results in lower dropout operation (and often lower cost) compared with traditional linear regulators with on-board pass transistors. The maximum output current of a TC57-based regulator circuit is limited only by the characteristics of the external pass transistor. For example, a maximum output current of 650mA (with a dropout voltage of 100mV) results when an FZT749 pass transistor is used, while a Darlington configuration can deliver up to 4A.

Flexibility, and superior performance make this family of regulator controllers the ideal choice in applications where low dropout voltage and low installed cost are key.

### Functional Block Diagram

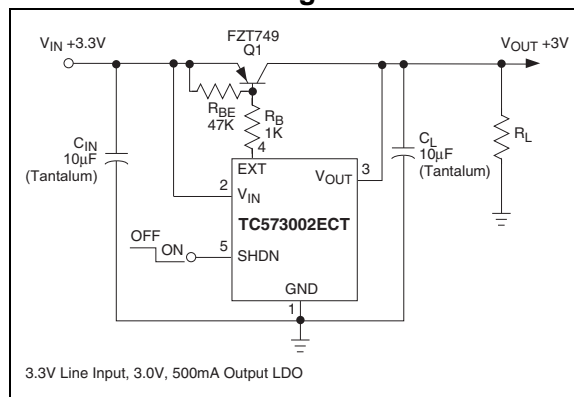

# TC57

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings\*

|                                  |                                   |
|----------------------------------|-----------------------------------|
| Input Voltage .....              | +12V                              |
| Output Current .....             | 50mA                              |
| Output Voltage.....              | -0.3V to (V <sub>IN</sub> + 0.3V) |
| Power Dissipation.....           | 150mW                             |
| Operating Temperature Range..... | -40°C to +85°C                    |
| Storage Temperature Range .....  | -40°C to +150°C                   |

\*Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operation sections of the specifications is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

### TC55 ELECTRICAL SPECIFICATIONS

| TC57EP3002 Electrical Characteristics: $\overline{\text{SHDN}} = \text{GND}$ , $V_{\text{IN}} = V_{\text{OUT}} + 1\text{V}$ , $V_{\text{OUT}} = 3\text{V to } 5\text{V}$ , $I_{\text{OUT}} = 0$ , $T_{\text{A}} = 25^{\circ}\text{C}$ , Test Circuit of Figure 3-1, unless otherwise noted. (Note 2) |  |                       |                      |                       |        |  |
|--|--|-----------------------|----------------------|-----------------------|--------|--|
| Symbol   | Parameter                                | Min                   | Typ                  | Max                   | Units  | Test Conditions  |
| V <sub>IN</sub>  | Input Voltage                            | —                     | —                    | 8                     | V      |  |
| V <sub>EXT</sub>   | Voltage on EXT Output                    | —                     | —                    | 8                     | V      |  |
| V <sub>OUT</sub>   | Output Voltage                           | 0.98 × V <sub>R</sub> | V <sub>R</sub> ±0.5% | 1.02 × V <sub>R</sub> | V      | I <sub>OUT</sub> = 50mA (Note 1)                                 |
| ΔV <sub>OUT</sub>  | Load Regulation                          | -60                   | —                    | 60                    | mV     | 1mA ≤ I <sub>OUT</sub> ≤ 100mA (Note 3)                          |
| V <sub>IN</sub> - V <sub>OUT</sub>   | Dropout Voltage                          | —                     | 100                  | —                     | mV     | I <sub>OUT</sub> = 100mA (Note 2)                                |
| I <sub>DD</sub>  | Supply Current                           | —                     | 50                   | 80                    | μA     | $\overline{\text{VSHDN}} = V_{\text{IN}} = 5\text{V}$            |
| I <sub>SHDN</sub>  | Shutdown Supply Current                  | —                     | —                    | 0.6                   | μA     | $\overline{\text{VSHDN}} = \text{GND}$                           |
| ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | Line Regulation                          | —                     | 0.1                  | 0.3                   | %/V    | I <sub>OUT</sub> = 50mA, 4V ≤ V <sub>IN</sub> ≤ 8V (Note 3)      |
| ΔV <sub>OUT</sub> /ΔT  | V <sub>OUT</sub> Temperature Coefficient | —                     | ±100                 | —                     | ppm/°C | I <sub>OUT</sub> = 10mA, -40°C < T <sub>J</sub> < +85°C (Note 3) |
| I <sub>LEXT</sub>  | EXT Pin Leakage Current                  | —                     | —                    | 0.5                   | μA     |  |
| I <sub>EXT</sub>   | EXT Sink Current                         | —                     | —                    | 25                    | mA     | Note 4   |
| V <sub>IH</sub>  | SHDN Input High Logic Threshold          | 1.5                   | —                    | —                     | V      |  |
| V <sub>IL</sub>  | SHDN Input Low Logic Threshold           | —                     | —                    | 0.25                  | V      |  |
| I <sub>IH</sub>  | SHDN Input Current @ V <sub>IH</sub>     | —                     | —                    | 0.1                   | μA     | $\overline{\text{VSHDN}} = V_{\text{IN}} = 5\text{V}$            |
| I <sub>IL</sub>  | SHDN Input Current @ V <sub>IL</sub>     | -0.2                  | -0.05                | 0                     | μA     | $\overline{\text{VSHDN}} = \text{GND}$                           |

- Note**
- 1: V<sub>R</sub> is the regulator output voltage setting.
  - 2: Dropout voltage is defined as the input to output differential at which the output voltage drops 2% below its nominal value measured at a 1V differential.
  - 3: Varies with type of pass transistor used. Numbers shown are for the test circuit of Figure 3-1.
  - 4: The product of I<sub>EXT</sub> × V<sub>EXT</sub> must be less than the maximum allowable power dissipation.

## 2.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in Table 2-1.


**TABLE 2-1: PIN FUNCTION TABLE**

| Pin No.<br>(5-Pin SOT-23A) | Symbol    | Description  |
|----------------------------|-----------|--|
| 1                          | GND       | Ground terminal.   |
| 2                          | $V_{IN}$  | Supply voltage input. Positive input voltage of 2.7V to 8.0V.  |
| 3                          | $V_{OUT}$ | Regulator voltage sense input. Connects to the collector of the external PNP pass transistor.  |
| 4                          | EXT       | Base Drive for the external PNP pass transistor.   |
| 5                          | SHDN      | Shutdown Input. The device is enabled when $SHDN \leq V_{IL}$ . The device enters a low power shutdown state when $SHDN \geq V_{IH}$ . During shutdown, the output is disabled, and supply current falls to less than 1 $\mu$ A. |

## 3.0 DETAILED DESCRIPTION

The TC57 series of precision low dropout regulator controllers use an external PNP transistor to accommodate a wide range of output currents. A series resistor ( $R_B$ ) limits the maximum base current drawn from the PNP transistor. Limiting the base drive both determines the regulator's output current capability, as well as limits ground current when the device is operated in dropout. The PNP transistor's  $V_{CE(SAT)}$  is the only factor limiting dropout voltage.

**FIGURE 3-1: TEST CIRCUIT**

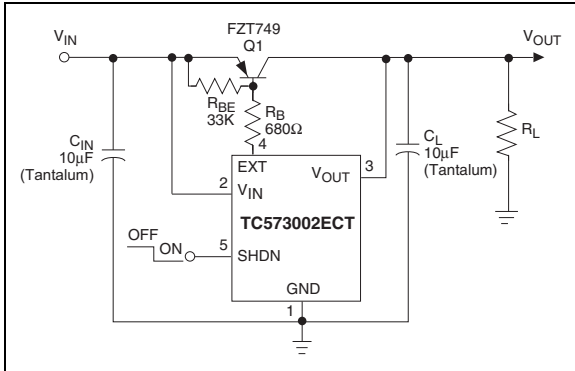

### 3.1 Transistor Selection

The PNP pass transistor must have satisfactory power dissipation, current gain, and collector current specifications to suit the application at hand. The maximum output current the circuit can deliver is influenced by  $h_{FE}$ . The highest guaranteed output current is given by:

**EQUATION 3-1:**

$$I_{LOAD(MAX)} = 25 \text{ mA} \times h_{FE(MIN)}$$

The transistor's actual power dissipation (PD) is equal to the maximum load current times the maximum input/output voltage differential, or:

**EQUATION 3-2:**

$$P_D \approx I_{LOAD(MAX)} \times (V_{IN(MAX)} - V_{OUT(MIN)})$$

The ideal transistor has a minimum  $h_{FE}$  of 100, and a  $V_{CE(SAT)}$  of less than 0.6V at full output current. For example, the Zetex FZT749 has an  $h_{FE}$  of 170 at a collector current of 1A, and a guaranteed  $V_{CE(SAT)}$  of 0.3V at a base current of 100mA. It is packaged in a SOT-223 and is recommended for use with the TC57. Other transistors are also suitable, depending on the required input and output voltages and output current (Table 3-1).

### 3.2 Base-Current Limiting Resistor

Base current limiting resistor  $R_B$  can be estimated using:

**EQUATION 3-3:**

$$R_B = \frac{h_{FE} (V_{IN} - V_{BE})}{I_{OUT}}$$

Where:

$h_{FE}$  is the current gain of the pass transistor

$V_{IN}$  is the input voltage (in volts)

$V_{BE}$  is the base-emitter voltage at the desired output current (in volts)


$I_{OUT}$  is the output current (in Amps)

For example, assume a desired continuous output current of 1.0A, an input voltage of 5V, and an FZT749 pass transistor. The FZT749 has a typical  $h_{FE}$  of 170, and a  $V_{BE}$  of 0.8V; both specified at a collector current of 1.0A. Substituting these values into the equation above results in an  $R_B$  value of 704Ω (closest standard value = 680Ω).

### 3.3 Pull-Up Resistor and Output Capacitor

A pull-up resistor ( $R_{BE}$ , installed between the base and emitter of the pass transistor) facilitates rapid turn-off of the pass transistor in the event of a sudden decrease in load (Figure 3-2). Recommended values for this resistor are between 20KΩ and 47KΩ. A Tantalum output capacitor of at least 10μF must be used to guarantee stability. Higher values decrease output noise and eliminate power-on overshoot, but extend power-up times. Table 3-1 lists several capacitor choices.

**FIGURE 3-2: 3.3V, 1A REGULATOR USING 5V SUPPLY INPUT**

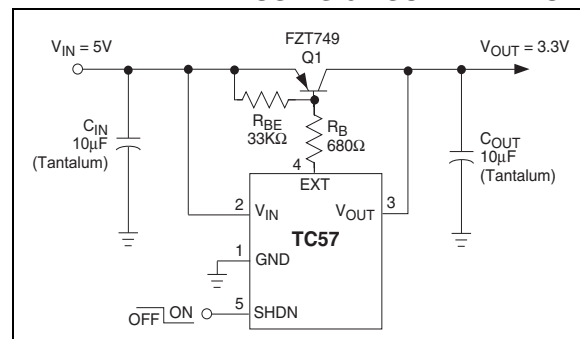

### 3.4 Input Capacitor

The addition of an input capacitor further reduces output noise, and negates the effects of power supply input impedance. A 10 $\mu$ F (min) Tantalum capacitor is recommended.

### 3.5 Shutdown Mode

The TC57 enters a low power shutdown mode when the shutdown input (SHDN) is high. During shutdown, the regulator is disabled, the output capacitor is discharged through the load, and supply current to the TC57 decreases to less than 1 $\mu$ A. Normal operation resumes when SHDN is brought low. If the shutdown mode is not used, SHDN should be tied to  $V_{IN}$ .




**TABLE 3-1: COMPONENT SUPPLIERS**

| Device              | Mounting Method | Manufacturer     | Website   |
|---------------------|-----------------|------------------|---|
| <b>CAPACITORS</b>   |                 |                  |   |
| 267 Series          | Surface Mount   | Matsuo           | <a href="http://www.matsuoelectronics.com">http://www.matsuoelectronics.com</a>         |
| F95 Tantalum Series | Surface Mount   | Nichicon         | <a href="http://www.nichicon-us.com">http://www.nichicon-us.com</a>                     |
| 595 Tantalum Series | Surface Mount   | Sprague          | <a href="http://www.vishay.com/brands/sprague">http://www.vishay.com/brands/sprague</a> |
| OS-CON Series       | Through-Hole    | Sanyo            | <a href="http://www.sanyovideo.com">http://www.sanyovideo.com</a>                       |
| LXF Series          | Through-Hole    | United Chemi-Con | <a href="http://chemi-con.com">http://chemi-con.com</a>                                 |
| <b>TRANSISTORS</b>  |                 |                  |   |
| ZTX749              | Through-Hole    | Zetex            | <a href="http://www.zetex.com">http://www.zetex.com</a>                                 |
| 2N4403              | Through-Hole    | ON SEMI          | <a href="http://www.onsemi.com/home">http://www.onsemi.com/home</a>                     |
| 2N2907A             | Through-Hole    | ON SEMI          | <a href="http://www.onsemi.com/home">http://www.onsemi.com/home</a>                     |
| FZT749              | Surface Mount   | Zetex            | <a href="http://www.zetex.com">http://www.zetex.com</a>                                 |







## 4.0 TYPICAL CHARACTERISTICS

**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.




### 1. OUTPUT VOLTAGE vs. OUTPUT CURRENT

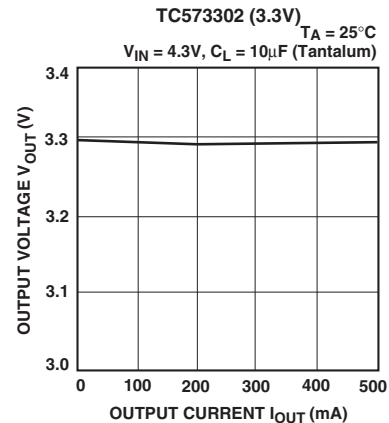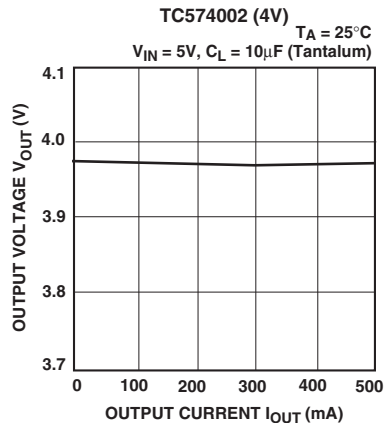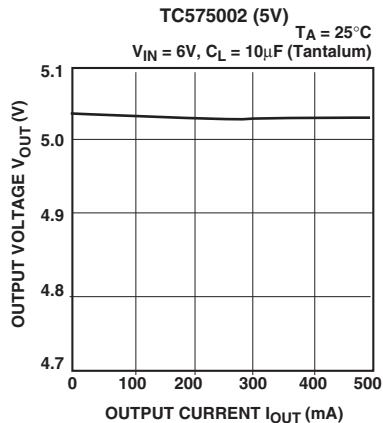

### 2. OUTPUT VOLTAGE vs. INPUT VOLTAGE

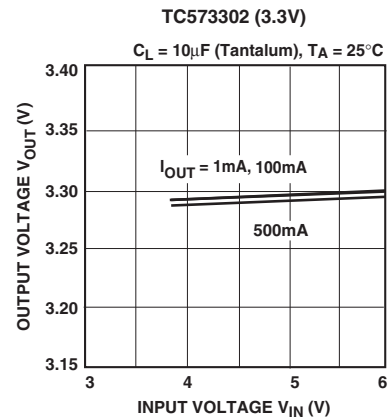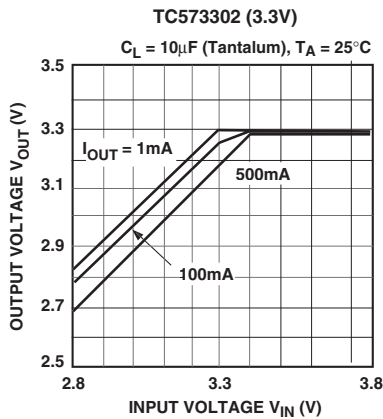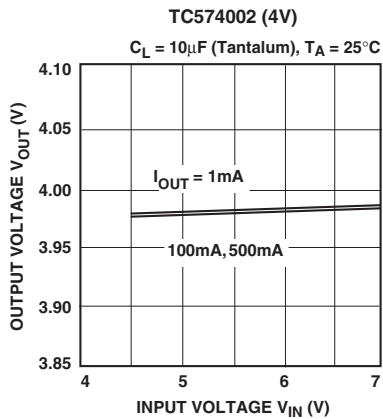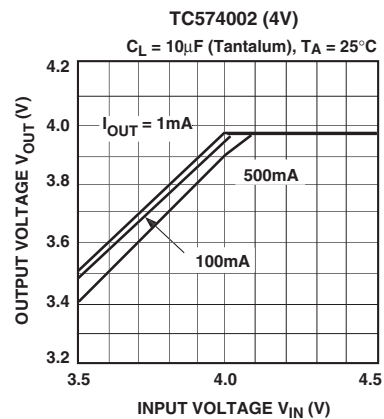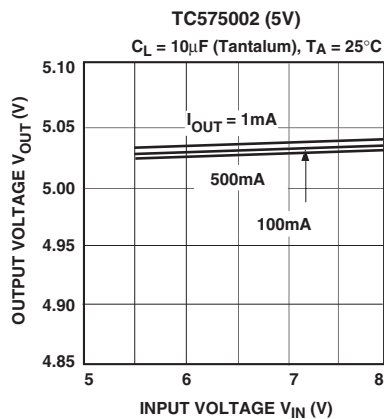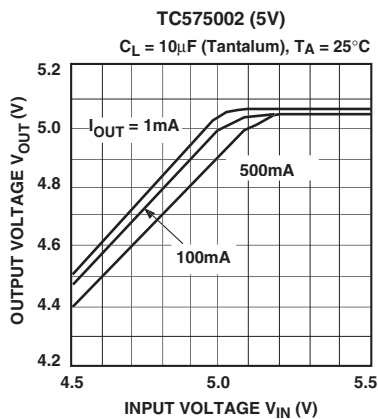


## 4.0 TYPICAL CHARACTERISTICS (CONTINUED)

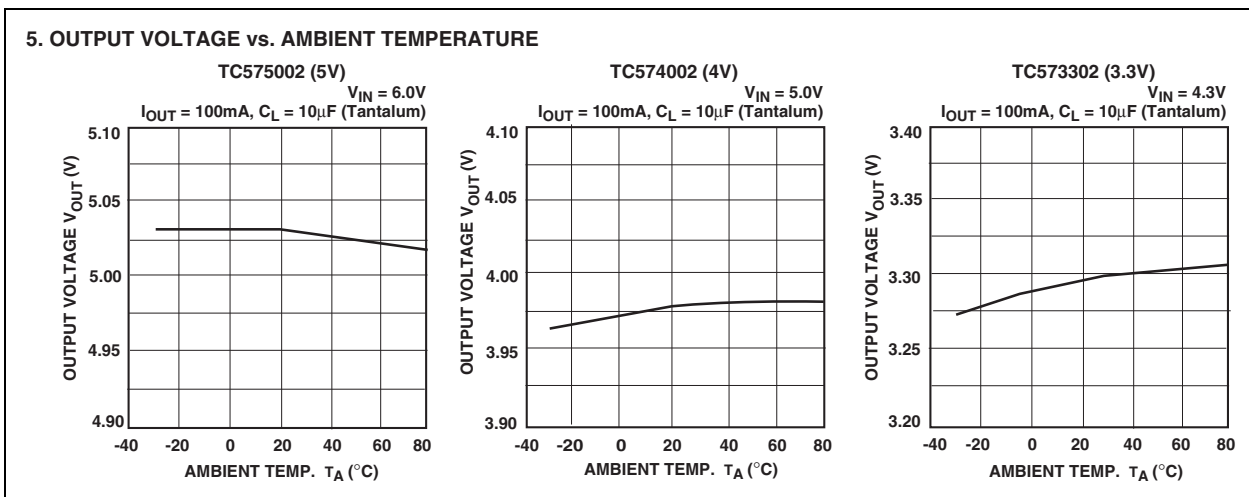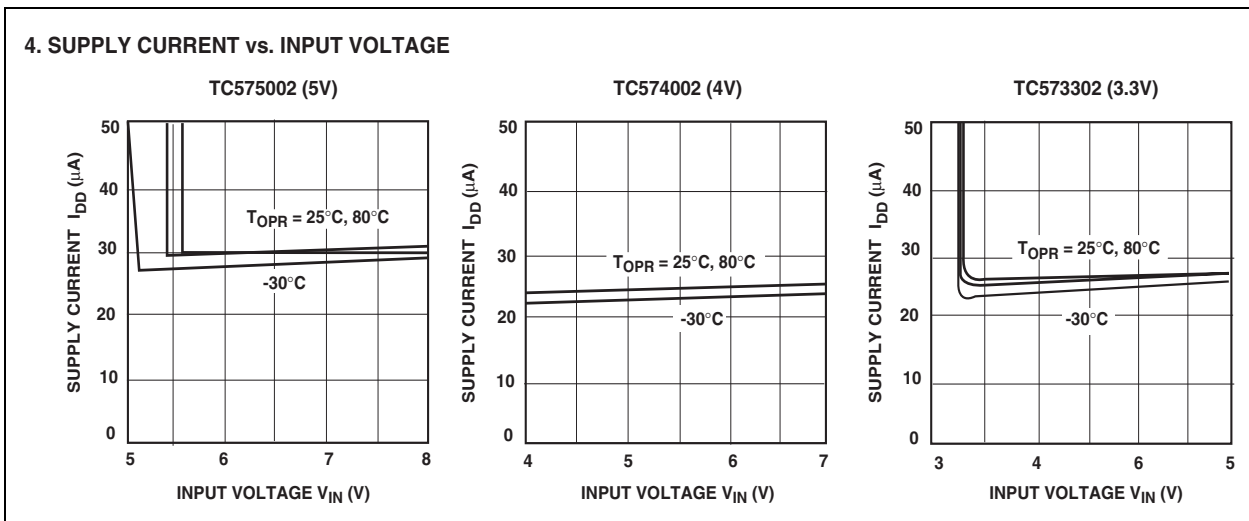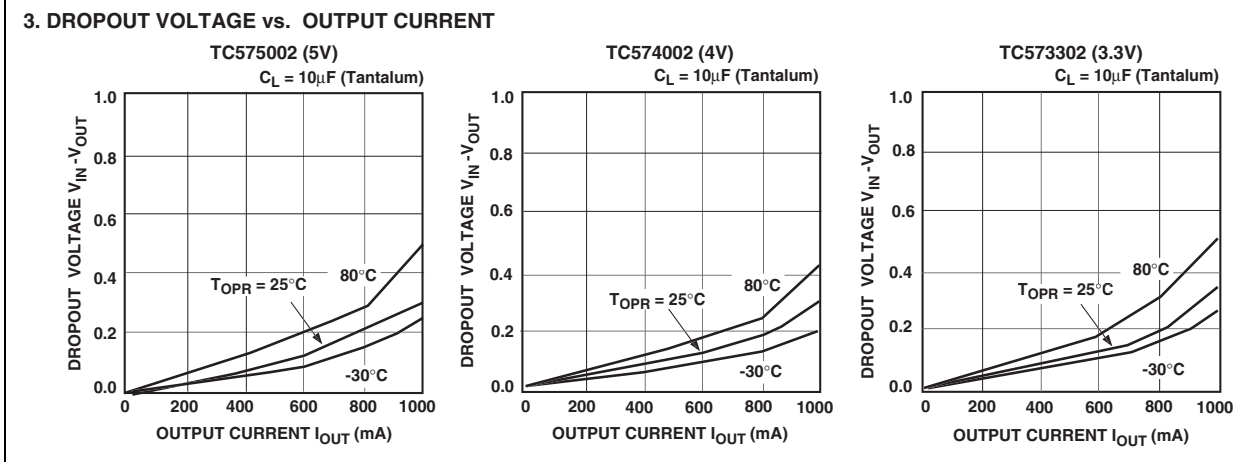


## 4.0 TYPICAL CHARACTERISTICS (CONTINUED)

### 6. SUPPLY CURRENT vs. AMBIENT TEMPERATURE

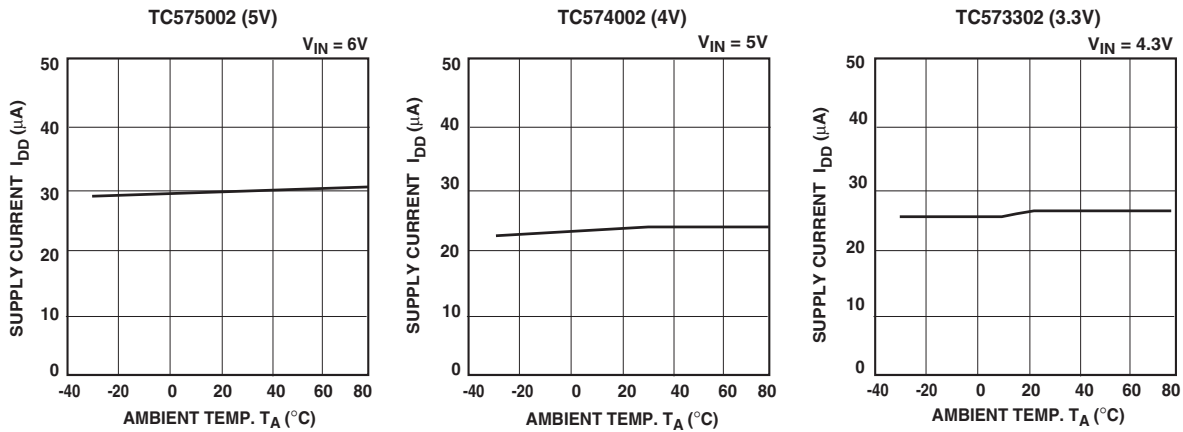



### 7. INPUT TRANSIENT RESPONSE

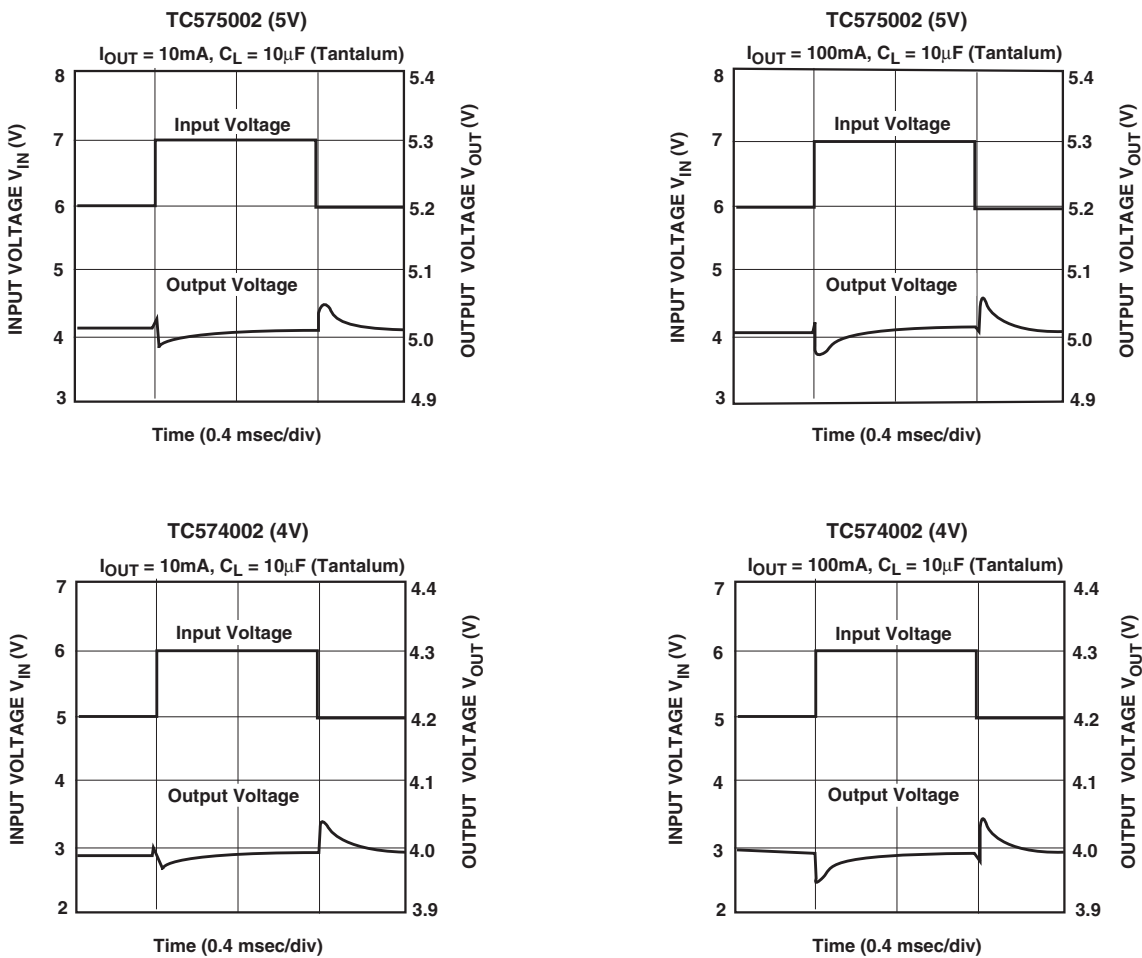






## 4.0 TYPICAL CHARACTERISTICS (CONTINUED)

### 7. INPUT TRANSIENT RESPONSE (CONT.)

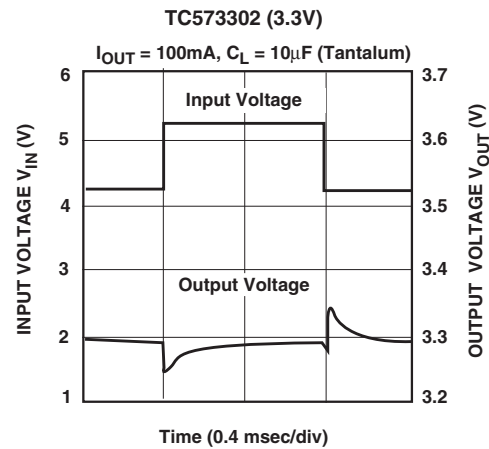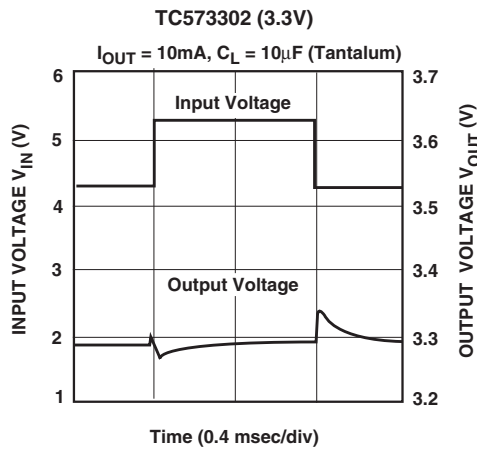


### 8. LOAD TRANSIENT RESPONSE

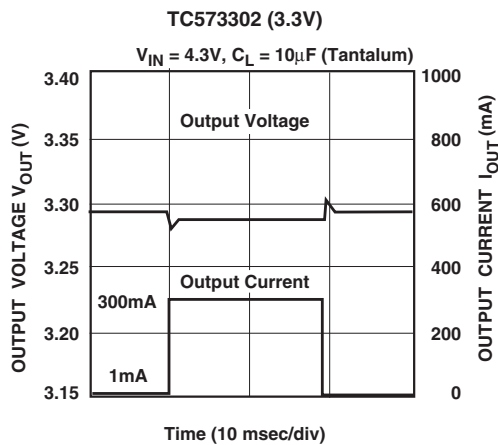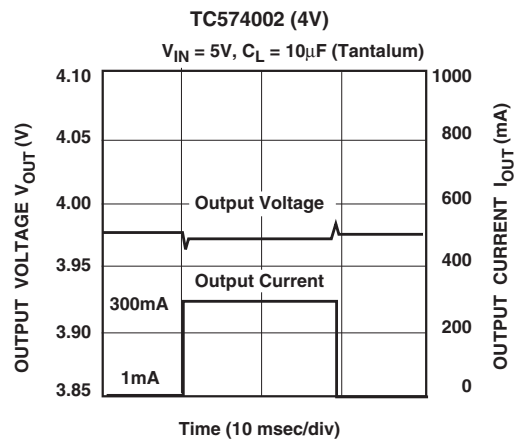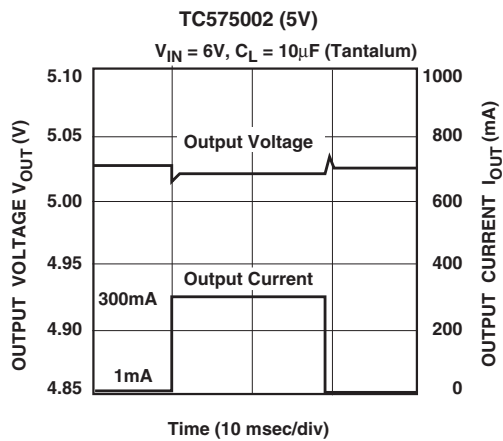

# TC57

## 5.0 PACKAGING INFORMATION

### 5.1 Package Marking Information

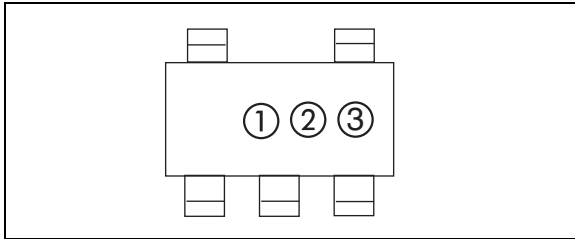

① represents integer part of output voltage

| Symbol | Voltage |
|--------|---------|
| 2      | 2.      |
| 3      | 3.      |
| 4      | 4.      |
| 5      | 5.      |
| 6      | 6.      |


② represents first decimal of output voltage

| Symbol | Voltage | Symbol | Voltage |
|--------|---------|--------|---------|
| 0      | .0      | 5      | .5      |
| 1      | .1      | 6      | .6      |
| 2      | .2      | 7      | .7      |
| 3      | .3      | 8      | .8      |
| 4      | .4      | 9      | .9      |

③ represents production lot ID code

### 5.2 Taping Form

#### Component Taping Orientation for 5-Pin SOT-23A (EIAJ SC-74A) Devices

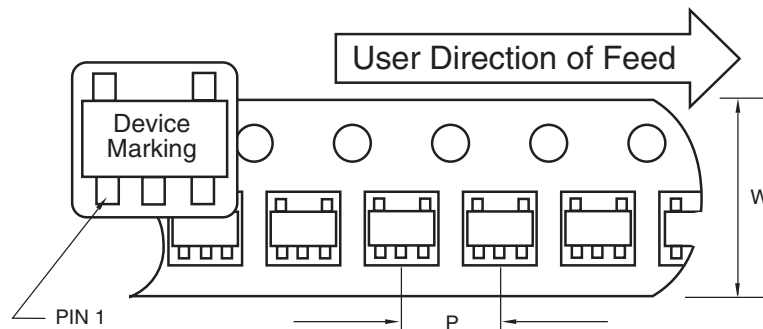

Standard Reel Component Orientation  
TR Suffix Device  
(Mark Right Side Up)


#### Carrier Tape, Number of Components Per Reel and Reel Size

| Package       | Carrier Width (W) | Pitch (P) | Part Per Full Reel | Reel Size |
|---------------|-------------------|-----------|--------------------|-----------|
| 5-Pin SOT-23A | 8 mm              | 4 mm      | 3000               | 7 in      |

## 5.3 Package Dimensions

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

### SOT-23A-5

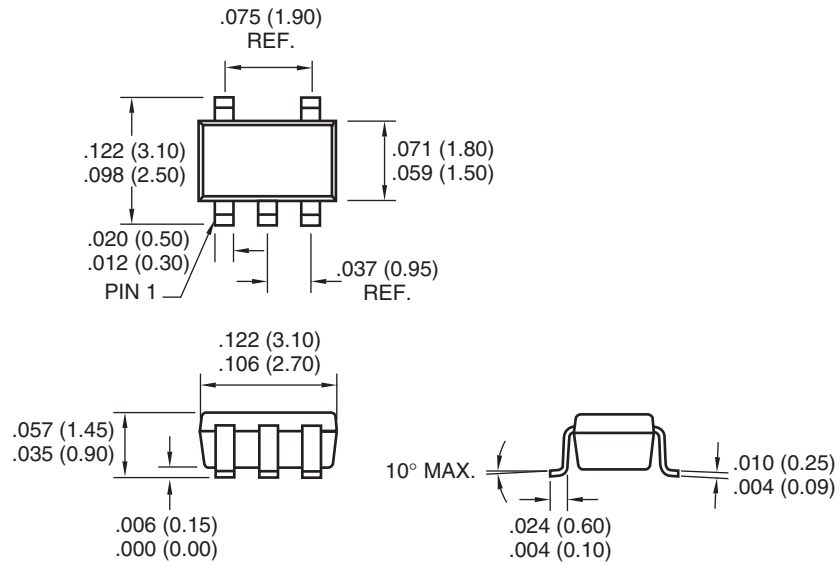

Dimensions: inches (mm)


## 6.0 REVISION HISTORY

### Revision C (November 2012)

Added a note to the package outline drawing.

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

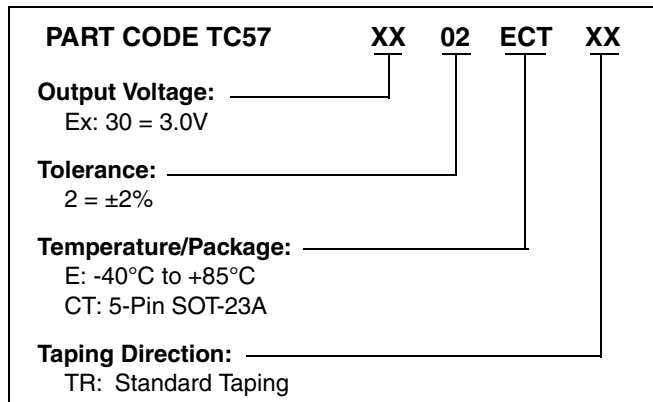

### Sales and Support

#### **Data Sheets**

Products supported by a preliminary Data Sheet may have an errata sheet describing minor operational differences and recommended workarounds. To determine if an errata sheet exists for a particular device, please contact one of the following:

1. Your local Microchip sales office
2. The Microchip Worldwide Site ([www.microchip.com](http://www.microchip.com))

Please specify which device, revision of silicon and Data Sheet (include Literature #) you are using.

#### **New Customer Notification System**

Register on our web site ([www.microchip.com/cn](http://www.microchip.com/cn)) to receive the most current information on our products.

# TC57

---

---

NOTES:

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as “unbreakable.”

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, PIC<sup>32</sup> logo, rPIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Hampshire, HI-TECH C, Linear Active Thermistor, MTP, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

Analog-for-the-Digital Age, Application Maestro, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, HI-TIDE, In-Circuit Serial Programming, ICSP, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mTouch, Omniclient Code Generation, PICC, PICC-18, PICDEM, PICDEM.net, PICkit, PICtail, REAL ICE, rLAB, Select Mode, SQI, Serial Quad I/O, Total Endurance, TSHARC, UniWinDriver, WiperLock, ZENA and Z-Scale are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

GestIC and ULPP are registered trademarks of Microchip Technology Germany II GmbH & Co. & KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2001-2012, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

ISBN: 9781620767436

**QUALITY MANAGEMENT SYSTEM**  
**CERTIFIED BY DNV**  
**== ISO/TS 16949 ==**

*Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC<sup>®</sup> MCUs and dsPIC<sup>®</sup> DSCs, KEELOQ<sup>®</sup> code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*



# MICROCHIP

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Cleveland**  
Independence, OH  
Tel: 216-447-0464  
Fax: 216-447-0643

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Farmington Hills, MI  
Tel: 248-538-2250  
Fax: 248-538-2260

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608

**Santa Clara**  
Santa Clara, CA  
Tel: 408-961-6444  
Fax: 408-961-6445

**Toronto**  
Mississauga, Ontario,  
Canada  
Tel: 905-673-0699  
Fax: 905-673-6509

### ASIA/PACIFIC

**Asia Pacific Office**  
Suites 3707-14, 37th Floor  
Tower 6, The Gateway  
Harbour City, Kowloon  
Hong Kong  
Tel: 852-2401-1200  
Fax: 852-2401-3431

**Australia - Sydney**  
Tel: 61-2-9868-6733  
Fax: 61-2-9868-6755

**China - Beijing**  
Tel: 86-10-8569-7000  
Fax: 86-10-8528-2104

**China - Chengdu**  
Tel: 86-28-8665-5511  
Fax: 86-28-8665-7889

**China - Chongqing**  
Tel: 86-23-8980-9588  
Fax: 86-23-8980-9500

**China - Hangzhou**  
Tel: 86-571-2819-3187  
Fax: 86-571-2819-3189

**China - Hong Kong SAR**  
Tel: 852-2401-1200  
Fax: 852-2401-3431

**China - Nanjing**  
Tel: 86-25-8473-2460  
Fax: 86-25-8473-2470

**China - Qingdao**  
Tel: 86-532-8502-7355  
Fax: 86-532-8502-7205

**China - Shanghai**  
Tel: 86-21-5407-5533  
Fax: 86-21-5407-5066

**China - Shenyang**  
Tel: 86-24-2334-2829  
Fax: 86-24-2334-2393

**China - Shenzhen**  
Tel: 86-755-8203-2660  
Fax: 86-755-8203-1760

**China - Wuhan**  
Tel: 86-27-5980-5300  
Fax: 86-27-5980-5118

**China - Xian**  
Tel: 86-29-8833-7252  
Fax: 86-29-8833-7256

**China - Xiamen**  
Tel: 86-592-2388138  
Fax: 86-592-2388130

**China - Zhuhai**  
Tel: 86-756-3210040  
Fax: 86-756-3210049

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444  
Fax: 91-80-3090-4123

**India - New Delhi**  
Tel: 91-11-4160-8631  
Fax: 91-11-4160-8632

**India - Pune**  
Tel: 91-20-2566-1512  
Fax: 91-20-2566-1513

**Japan - Osaka**  
Tel: 81-66-152-7160  
Fax: 81-66-152-9310

**Japan - Yokohama**  
Tel: 81-45-471-6166  
Fax: 81-45-471-6122

**Korea - Daegu**  
Tel: 82-53-744-4301  
Fax: 82-53-744-4302

**Korea - Seoul**  
Tel: 82-2-554-7200  
Fax: 82-2-558-5932 or  
82-2-558-5934

**Malaysia - Kuala Lumpur**  
Tel: 60-3-6201-9857  
Fax: 60-3-6201-9859

**Malaysia - Penang**  
Tel: 60-4-227-8870  
Fax: 60-4-227-4068

**Philippines - Manila**  
Tel: 63-2-634-9065  
Fax: 63-2-634-9069

**Singapore**  
Tel: 65-6334-8870  
Fax: 65-6334-8850

**Taiwan - Hsin Chu**  
Tel: 886-3-5778-366  
Fax: 886-3-5770-955

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7828  
Fax: 886-7-330-9305

**Taiwan - Taipei**  
Tel: 886-2-2508-8600  
Fax: 886-2-2508-0102

**Thailand - Bangkok**  
Tel: 66-2-694-1351  
Fax: 66-2-694-1350

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4450-2828  
Fax: 45-4485-2829

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**UK - Wokingham**  
Tel: 44-118-921-5869  
Fax: 44-118-921-5820

10/26/12



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)