


Surface Mount Optically Coupled Isolator



HCC240, HCC242 (TX, TXV, ESA-XN)

Features:

- Surface mountable on ceramic or printed circuit board
- Miniature package saves circuit board area
- Electrical performance similar to 4N22A and 4N24A
- Hermetically sealed
- Screened per MIL-PRF-19500 TX and TXV equivalent levels or per ESA 5000

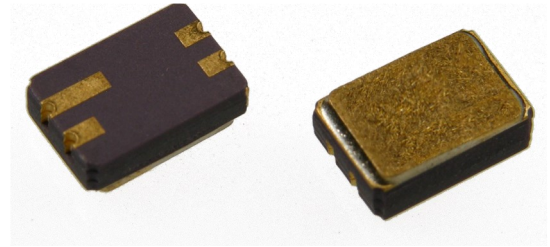

Description:

The HCC240 and HCC242 are optically coupled isolators, consisting of a gallium aluminum arsenide LED and a silicon phototransistor mounted and coupled in a miniature surface mount hermetic leadless chip carrier. The HCC240 and HCC242 are identical except for the DC current transfer ratio. Electrical parameters are similar to the JEDEC registered 4N22A and 4N24A. These solid state couplers are ideal for designs where board space and device weight are important design considerations. Typical screening and lot acceptance tests are provided on page 13-4. The burn-in condition is VCE = 9 V, PD = 275 mW, IF = 20-50 mA (adjusted to achieve PD). No HTRB is performed on this device.

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Input-to-Output Isolation Voltage	$\pm 1.0\text{ kVDC}^{(1)}$
Operating Temperature	-55°C to $+125^\circ\text{C}$
Storage Temperature	-65°C to $+150^\circ\text{C}$
Soldering Temperature (vapor phase reflow for 30 sec.)	215°C
Soldering Temperature (heated collet for 5 sec.)	260°C
Input Diode	
Forward DC Current (65°C below)	40 mA
Reverse Voltage	2.0 V
Power Dissipation	60 mW ⁽²⁾
Output Phototransistor	
Continuous Collector Current	50 mA
Collector-Emitter Voltage	30 V ⁽³⁾
Emitter-Collector Voltage	5.0 V ⁽⁴⁾
Power Dissipation	300 mW ⁽⁵⁾

Notes:

- (1) Measured with inputs shorted together and outputs shorted together.
- (2) Derate linearly $1.0\text{ mW}/^\circ\text{C}$ above 65°C .
- (3) HCC240HV and HCC242HV are available rated at 55 V minimum.
- (4) HCC240HV and HCC242HV are available rated at 7.0 V minimum.
- (5) Derate linearly $3.0\text{ mW}/^\circ\text{C}$ above 25°C .
- (6) Some deviations from ESA 5000 apply. See page 13-4 for details.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 214-323-2200
www.ttelectronics.com | sensors@ttelectronics.com


Surface Mount Optically Coupled Isolator



Performance

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS	
Input Diode							
V_F	Forward Voltage	0.80		1.5	V	$I_F = 10.0\text{ mA}$	
		1.00		1.7	V	$I_F = 10.0\text{ mA}, T_A = -55^\circ\text{C}$	
		0.70		1.3	V	$I_F = 10.0\text{ mA}, T_A = 100^\circ\text{C}$	
I_R	Reverse Current			100	μA	$V_R = 2.0\text{ V}$	
Output Phototransistor							
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ⁽³⁾	30			V	$I_C = 1.0\text{ mA}, I_F = 0$	
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage ⁽⁴⁾	5.0			V	$I_E = 100\ \mu\text{A}, I_F = 0$	
$I_{C(OFF)}$	Collector-Emitter Dark Current			100	nA	$V_{CE} = 20\text{ V}, I_F = 0$	
				100	μA	$V_{CE} = 20\text{ V}, I_F = 0, T_A = 100^\circ\text{C}$	
Coupled							
$I_{C(ON)}$	On-State Collector Current	HCC240	0.15			mA	$V_{CE} = 5.0\text{ V}, I_F = 2.0\text{ mA}$
			2.5	6.0		mA	$V_{CE} = 5.0\text{ V}, I_F = 10.0\text{ mA}$
			1.0			mA	$V_{CE} = 5.0\text{ V}, I_F = 10.0\text{ mA}, T_A = -55^\circ\text{C}$
			1.0			mA	$V_{CE} = 5.0\text{ V}, I_F = 10.0\text{ mA}, T_A = 100^\circ\text{C}$
	HCC242	0.40			mA	$V_{CE} = 5.0\text{ V}, I_F = 2.0\text{ mA}$	
		10.0	15.0		mA	$V_{CE} = 5.0\text{ V}, I_F = 10.0\text{ mA}$	
		4.0			mA	$V_{CE} = 5.0\text{ V}, I_F = 10.0\text{ mA}, T_A = -55^\circ\text{C}$	
		4.0			mA	$V_{CE} = 5.0\text{ V}, I_F = 10.0\text{ mA}, T_A = 100^\circ\text{C}$	
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage	HCC240		0.30	V	$I_C = 2.5\text{ mA}, I_F = 20.0\text{ mA}$	
		HCC242		0.30	V	$I_C = 10.0\text{ mA}, I_F = 20.0\text{ mA}$	
R_{I-O}	Resistance (Input to Output)	10^{11}			Ω	$V_{I-O} = \pm 1000\text{ VDC}^{(1)}$	
C_{I-O}	Capacitance (Input to Output)			5.0	pF	$V_{I-O} = 0.0\text{ V}, f = 1.0\text{ MHz}^{(1)}$	
t_r	Output Rise Time	HCC240		15.0	μs	$V_{CC} = 10.0\text{ V}, I_F = 10.0\text{ mA}, R_L = 100\ \Omega$	
		HCC242		20.0	μs		
t_f	Output Fall Time	HCC240		15.0	μs	$V_{CC} = 10.0\text{ V}, I_F = 10.0\text{ mA}, R_L = 100\ \Omega$	
		HCC242		20.0	μs		

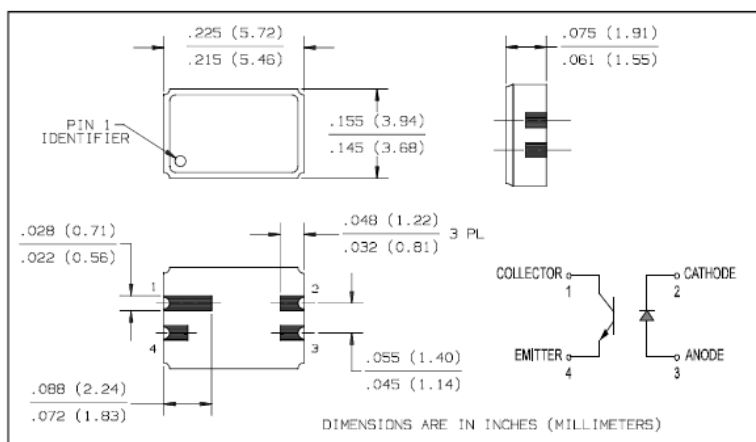

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
 1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 214-323-2200
www.ttelectronics.com | sensors@ttelectronics.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru