

A3D

Lighted Pushbutton Switch (Cylindrical 8-dia.)


CSM_A3D_DS_E_2_1

Lighted Pushbutton Switch with Cylindrical 18-mm × 8-dia. Body




- Excellent illumination with even surface brightness.
- Cylindrical body means panel cutouts can be made easily.
- Combines miniature design with excellent operating sensitivity.



RoHS Compliant

 Refer to *Safety Precautions for All Pushbutton Switches* and *Safety Precautions* on page 8.

List of Models

| Appearance | Model |
|------------------------------------------------------------------------------------------------|-------|
| Rectangular  | A3DJ |
| Square  | A3DA |
| Round  | A3DT |

Model Number Legend..... The model numbers used to order sets of Units are illustrated below. One set comprises the Pushbutton (LED lamp built-in) and Switch.
For information on combinations, refer to *Ordering Information*.

A 3 D ⁽¹⁾ J - 9 0 ⁽²⁾ A 1 - 0 0 E ⁽³⁾ R

(1) Shape of Pushbutton

| Symbol | Shape |
|--------|-------------|
| J | Rectangular |
| A | Square |
| T | Round |

(2) Switch Specifications Microload (30 VDC, 0.1 A)

| Symbol | Terminals | Operation | Contact |
|--------|-----------|-----------|---------|
| A | Solder | Momentary | SPST-NO |
| B | | Alternate | |

- Minimum applicable load: 1 mA at 5 VDC
 - Standard load models are not available.
 - If PCB terminals are required, use the Socket given under Accessories on page 3.
- Momentary operation: Self-resetting
Alternate operation: Self-holding

(3) Color of Pushbutton




| Symbol | Color |
|--------|--------|
| R | Red |
| Y | Yellow |
| G | Green |
| W | White |

- All models are illumination only. Colored-illumination models are not available.
- Non-lighted models are not available.
- An external resistor is required. (Refer to page 8.)

■ Specifications: Refer to page 3. ■ Dimensions: Refer to page 6. ■ Accessories: Refer to page 3.
■ Precautions for correct use and safety precautions: Refer to page 8.

Ordering Information





Ordering as a Set The model numbers used to order sets of Units are given in the following table. One set comprises the Pushbutton (LED lamp built-in), and Switch.

| Appearance | Degree of protection | Operation | Model number | Color symbol for Pushbutton |
|----------------------------------------------------------------------------------------------------------------|----------------------|-----------|------------------------|-----------------------------|
| A3DJ (Rectangular)  | IP40 | Momentary | A3DJ-90A1-00E □ | R, Y, G, W |
| | | Alternate | A3DJ-90B1-00E □ | |
| A3DA (Square)  | | Momentary | A3DA-90A1-00E □ | |
| | | Alternate | A3DA-90B1-00E □ | |
| A3DT (Round)  | | Momentary | A3DT-90A1-00E □ | |
| | | Alternate | A3DT-90B1-00E □ | |





Note: 1. Enter the desired color symbol for the Pushbutton in □.
 2. All the above are solder-terminal, microload, SPST-NO, LED lamp-lighted models.

Ordering Individually Pushbuttons and Switches can be ordered separately. Combinations that are not available as sets can be created using individual Units.

Ordering: Specify a model number from the following table.

| Pushbutton (LED built-in) | Appearance | Rectangular | Square | Round |
|------------------------------------------------------------------------------------|---------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  | Color of pushbutton |  |  |  |
| | Red | A3DJ-500R | A3DA-500R | A3DT-500R |
| | Yellow | A3DJ-500Y | A3DA-500Y | A3DT-500Y |
| | Green | A3DJ-500GY | A3DA-500GY | A3DT-500GY |
| | White | A3DJ-500W | A3DA-500W | A3DT-500W |



| Switch | Sealing | | IP40 | | | | | |
|-------------------------------------------------------------------------------------|---------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|-------------------------------|------------------|------------------|
| | Appearance | Rectangle | Square | Round | | | | |
|  | Contact type Operating action Terminal type |  |  |  | | | | |
| | | | | | SPST-NO | Momentary Solder terminals | A3DJ-7111 | A3DA-7111 |
| | | | | | Alternative Solder terminals | A3DJ-7121 | A3DA-7121 | A3DT-7121 |

Ordering set combinations: Refer to this page.

■ Specifications: Refer to page 3. ■ Dimensions: Refer to page 6.
 ■ Accessories: Refer to page 3.

Ordering Information Accessories (Order Separately)

| Name | Appearance | Classification | Model | Remarks |
|------------------|-----------------------------------------------------------------------------------|--------------------|-----------|------------------------------------------------------------------|
| Socket |  | Wire-wrap terminal | A3D-4101 | Cannot be used together with Insulation Cover. |
| | | PCB terminal | A3D-4102 | |
| | | Solder terminal | A3D-4103 | |
| Insulation Cover |  | -- | A3D-3002 | Cannot be used together with the Socket. |
| Tightening Tool |  | -- | A3D-3004 | Do not tighten to a torque exceeding 0.29 N·m. |
| Legend Plate |  | Rectangular | A3DJ-5201 | One milky-white Legend Plate is included with standard products. |
| | | Square | A3DA-5201 | |
| | | Round | A3DT-5201 | |

Specifications

Ratings

Contact Rating: 30 VDC, 0.1 A (Minimum Applicable Load: 5 VDC, 1 mA)

The rated values are from testing conducted under the following conditions.

1. Load: Resistive load
2. Mounting conditions: No vibration or shock
3. Ambient temperature: $20 \pm 2^\circ\text{C}$
4. Operating frequency: 20 times/min.

Built-in LED Lamp

($T_a=25^\circ\text{C}$)

| Color of LED Lamp | | Red | Yellow (White) *2 | Green |
|-----------------------------|-----------------------------|-----|-------------------|-------|
| Forward voltage, V_F | Reference value (V) *1 | 1.7 | 2.2 | 2.1 |
| | Maximum value (V) | 2.0 | 2.5 | 2.5 |
| Forward current, I_F | Reference value (mA) | 20 | 20 | 20 |
| | Absolute maximum value (mA) | 50 | 50 | 50 |
| Permissible dissipation, PD | Absolute maximum value (mW) | 100 | 125 | 122 |
| | Absolute maximum value (V) | 4 | 4 | 4 |

Note: The built-in LED lamp has no limiting resistor and so it is necessary to connect an external resistor within the range shown in the above table. (For details of calculation formulas, refer to page 8.)

*1. Refer to Engineering Data on page 4.

*2. The same LED lamp is used for both yellow illumination and white illumination and so the ratings are the same.

Characteristics

| | | |
|---------------------------------|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Operating frequency | Mechanical | Momentary operation models: 120 operations/minute max. Alternate operation models: 60 operations/minute max. *1 |
| | Electrical | 20 operations/minute max. |
| Contact Resistance | 100mΩ max. | |
| Insulation resistance | 100 MΩ min. (at 500 VDC) | |
| Dielectric strength | Between terminals of same polarity | 1,000 VAC, 50/60 Hz for 1 min |
| | Between terminals of different polarity | 2,000 VAC, 50/60 Hz for 1 min |
| | Between each terminal and ground | 2,000 VAC, 50/60 Hz for 1 min |
| | Between lamp terminals | 1,000 VAC, 50/60 Hz for 1 min *2 |
| Vibration resistance | Malfunction | 10 to 55 Hz, 1.5 mm double amplitude *3 |
| Shock resistance | Destruction | 500 m/s ² |
| | Malfunction | 150 m/s ² *3 |
| Durability | Mechanical | Momentary operation models: 1,000,000 operations min. Alternate operation models: 100,000 operations min. *1 |
| | Electrical | 100,000 operations min. |
| Ambient operating temperature | -10°C to +55°C (with no icing or condensation) | |
| Ambient operating humidity | 35% to 85%RH | |
| Ambient storage temperature | -25°C to +65°C (with no icing or condensation) | |
| Degree of protection | IP40 | |
| Weight | Approx. 3 g | |
| Electric shock protection class | Class II | |
| PTI (proof tracking index) | 175 | |
| Pollution degree | 3 (IEC60947-5-1) | |

*1. With alternate operation models, one operation cycle consists of set and reset operations.

*2. The figure is for when the LED lamp is not mounted.

*3. Indicates malfunctions of less than 1 ms.


Specifications

Operating Characteristics

| | | |
|------------------------|----------|-----------------|
| Operating force | OF max. | 2.45 N {250 gf} |
| Release force | RF min. | 0.196 N {20 gf} |
| Total travel | TT | Approx. 3.5 mm |
| Locktravel alternate * | LTA min. | 0.5 mm |
| Pretravel | PT max. | 2.5 mm |

* Alternate operation models only.


Contact Form

| Contact name | Contact form |
|--------------|--------------------------------------------------------------------------------------------|
| SPST-NO | COM  NO |


Engineering Data

LED Characteristics (VF -IF Characteristics)


Red LED

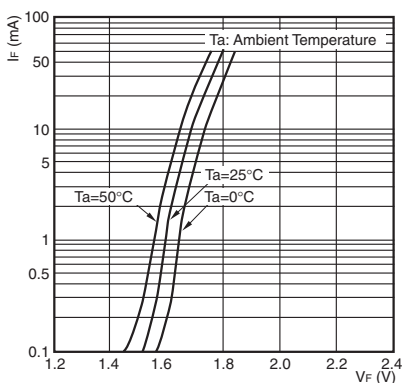


Yellow or White LED

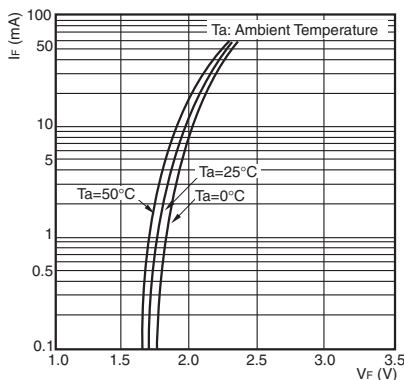


Green LED

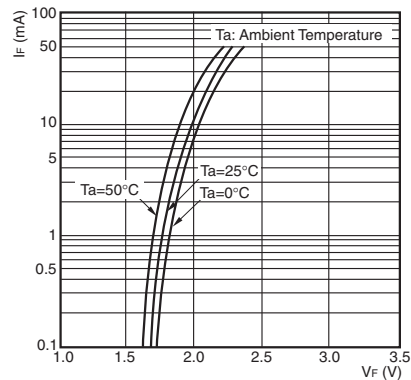

Forward Current Reduction Curve

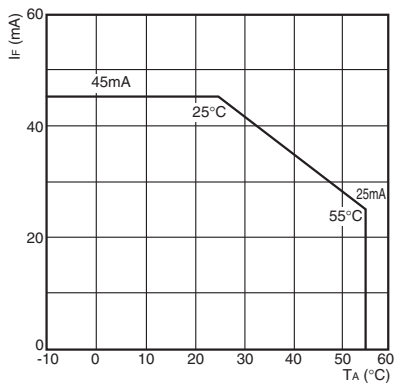

**Nomenclature
Model Structure**



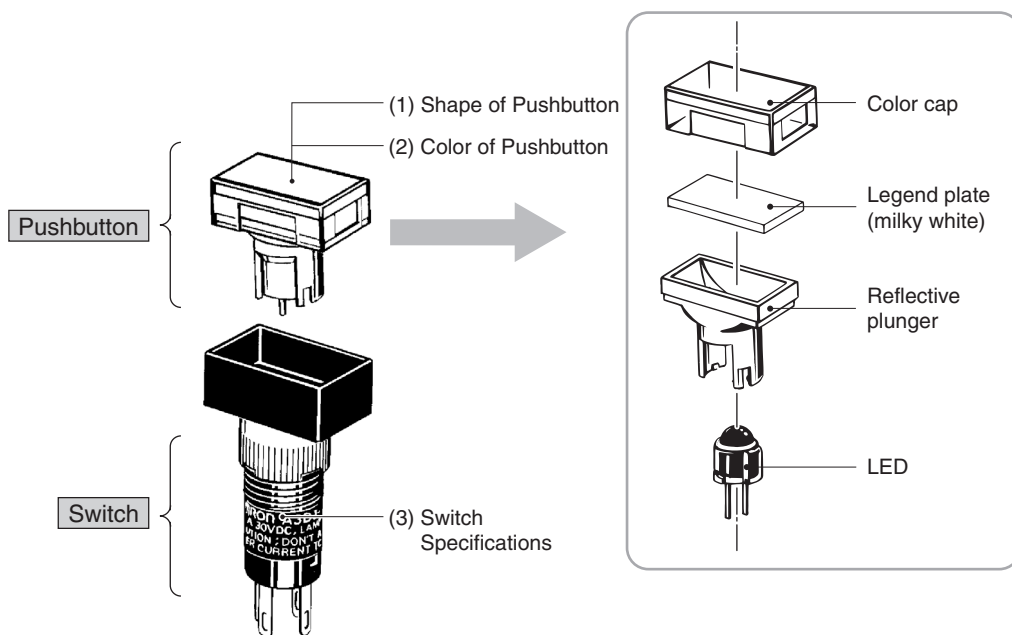


Note: The A3DJ model is shown here as a representative example.

| | Type | Specifications |
|-----|--------------------------------------------------------------------------------|-------------------------------------------------------------|
| (1) | Shape of Pushbutton Rectangular (A3DJ) Square (A3DA) Round (A3DT) | ----- |
| (2) | LED-lighted Red, Yellow, Green, White | The LED lamp is built into the Pushbutton. |
| (3) | Microload | 0.1 A at 30 VDC (Minimum applicable load: 1 mA at 5 VDC) |




Dimensions

Rectangular Models A3DJ

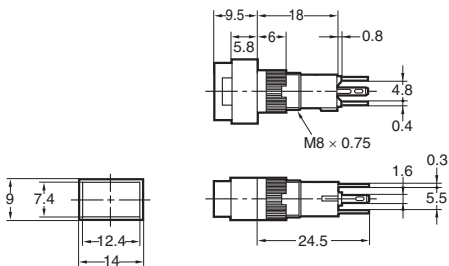




Note: Recommended panel thickness: 1.0 to 3.2 mm.

Square Models A3DA

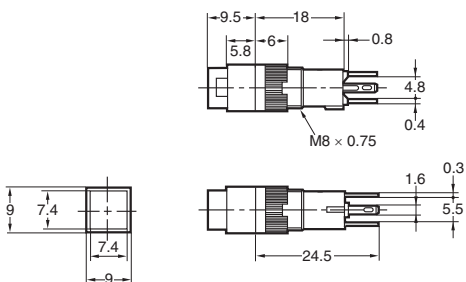

Note: Recommended panel thickness: 1.0 to 3.2 mm.

Round Models A3DT

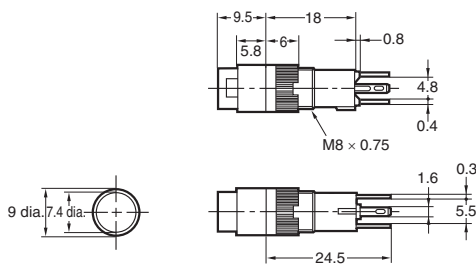

Note: Recommended panel thickness: 1.0 to 3.2 mm.

Terminals


| Terminals | Type | SPST-NO Lighted Models |
|------------------|------|------------------------|
| Solder Terminals | | |

If the panel is to be finished (e.g., coated), make sure that the panel meets the specified dimensions after the coating.


Dimensions

Accessory Mounting Dimensions Socket Mounting Dimensions


Wire-wrap Terminal/A3D-4101

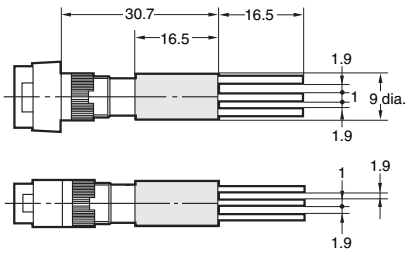


PCB Terminal/A3D-4102

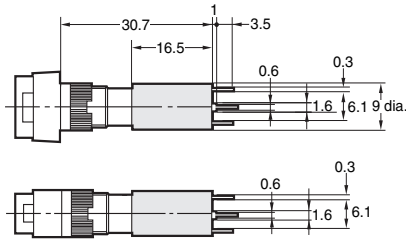

PCB Cutout
(BOTTOM VIEW)




Solder Terminal/A3D-4103

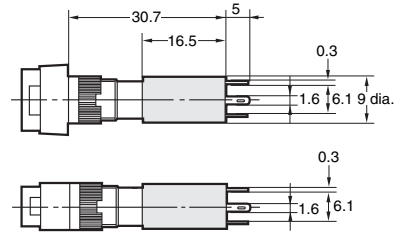

Insulation Cover Mounting Dimensions (The illustration shows the rectangular model as a representative example.)

A3D-3002




- After securing the Switch to the panel using the mounting nut, pass the lead wires through the holes in the Insulation Cover before performing wiring. Hold the Insulation Cover so that the cylindrical hole is facing the Switch, and insert the lead wires from the end with the barriers.
- After wiring is completed, mount the Insulation Cover by pushing it into the Switch.


Note: Unless specified, there is a tolerance of ± 0.4 mm for dimensions.

Legend Plate Mounting Dimensions


Rectangular/A3DJ-5201



Square/A3DA-5201



Round/A3DT-5201



- Note: 1. The thickness is 0.8 mm.
2. Since the legend plate is made of polycarbonate, use alcohol-based paints such as melanin, phthalic acid, or acrylic paint when marking the legend.

Safety Precautions

Refer to **Safety Precautions for All Pushbutton Switches**.

Precautions for Correct Use

Mounting

- Always make sure that the power is turned OFF before mounting, removing, or wiring the Switch, or performing maintenance. Electric shock or fire may occur.
- Do not tighten the mounting ring excessively using pliers or a similar tool. Excessive tightening may damage the mounting ring. (Tightening torque: 0.20 to 0.29 N·m)

Wiring

- When wiring, use wires of a size appropriate for the applied voltage and carry current. Perform soldering correctly under the conditions given below. Using the Switch with the wires soldered incorrectly may cause the terminals to become abnormally hot and cause a fire.

1. Hand soldering:

Soldering iron tip temperature: 350°C max. within 3 seconds.

2. Dip soldering: At 350°C within 3 seconds.

Wait for one minute after soldering before exerting any external force on the solder.

- Use a non-corrosive rosin liquid for the flux.
- Perform wiring so that the wire sheaths do not come into contact with the Switch. If this is unavoidable, use wires that can withstand temperatures of 100°C min. After wiring to the Switch has been completed, ensure an appropriate insulation distance.

LED

- The polarity of the LED is indicated on the back of the Switch. Wire the LED correctly according to the polarity.
- The built-in LED does not have a limiting resistor. Connect a limiting resistor.
- Make sure that the limiting resistor satisfies the characteristics of the built-in LED. The forward current of the built-in LED must be 8 mA minimum.
- The resistance can be calculated by using the following expression.

$$R = \frac{E - V_F}{I_F} (\Omega)$$

E : Operating voltage (V)

V_F : LED forward voltage (V)

I_F : LED forward current (A)

Recommended Values for Limiting Resistance

| Voltage | Red | Yellow (White) | Green |
|---------|---------|----------------|---------|
| 5 VDC | 165 Ω | 140 Ω | 145 Ω |
| 12 VDC | 515 Ω | 490 Ω | 495 Ω |
| 24 VDC | 1,100 Ω | 1,090 Ω | 1,095 Ω |

Note: The above values are calculated values that can be used as reference.

Calculation Example for Limiting Resistance

LED lamp illuminating color: Red

E = 24V

I_F = 20mA

The VF-IF characteristics (for red) on page 4 yield the following:

V_F = 1.7 V when I_F = 20 mA.

Therefore, inserting the values into the formula above (R = E - V_F/I_F(Ω)):

R = 24 (V) - 1.7 (V)/0.02 (A) ≅ 1100 (Ω).

The recommended resistance is 1.1 kΩ at 1 W (2 × I_F²R).

Note: Approximately twice this value is appropriate to provide a margin in the capacity of the resistor.


Operating Environment

- Ensure that dust, metal powder, or oil do not enter the interior of the Switch.

Using Microloads

- Using a standard load switch for opening and closing a microload circuit may cause wear on the contacts. Use the switch within the operating range. (Refer to the diagram below.) Even when using microload models within the operating range shown below, if inrush current occurs when the contact is opened or closed, it may cause the contact surface to become rough, and so decrease life expectancy. Therefore, insert a contact protection circuit where necessary.


The minimum applicable load is the N-level reference value. This value indicates the malfunction reference level for the reliability level of 60% (λ 60) (conforming to JIS C5003). The equation, λ 60 = 0.5 × 10⁻⁶/times indicates that the estimated malfunction rate is less than 1/2,000,000 with a reliability level of 60%.

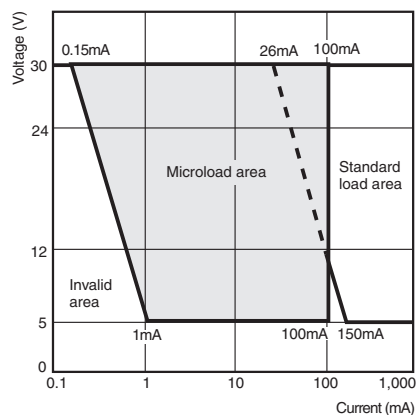

Application


Mounting and Replacing the Pushbutton

(1) Mounting Direction for the Pushbutton and Switch

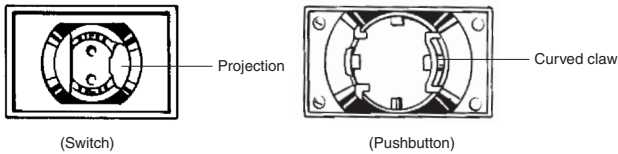

- Align the curved claw on the outside of the protruding part of the Pushbutton with the projection on the upper part of the Switch and insert.
- Apply a pressure between 9.8 and 24.5 N.
- If the terminals of the LED lamp become bent, it may be impossible to fit them into the LED lamp terminal holes. Ensure that the terminals are straight when they are inserted. Be sure to insert the lamp terminals for round models (A3DT or M2DT) with the correct orientation. Inserting the terminals with the reverse orientation will result in damage.

(2) Removing the Pushbutton

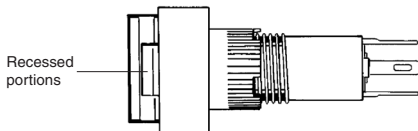


- Hold the recessed portions on the cap of the Pushbutton and pull.
- Do not use tools such as pliers to remove the Pushbutton as this may damage the cap.

Panel Mounting


Using the Mounting Nut

- Insert the Switch from the front of the panel. Mount the mounting nut from the terminal end of the Switch and tighten it.
- Tighten the nut to a torque 0.20 to 0.29 N·m.
- If soldering is used, mount the mounting nut first. Lead wires and mounds of solder may make it impossible to mount the nut after soldering.

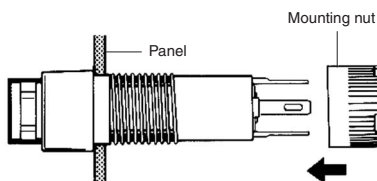

Socket Mounting

- After securing the Switch to the panel using the mounting nut, insert the Socket into the Switch.
- When inserting the Socket, align the positioning groove of the Socket with the projecting part of the Switch.

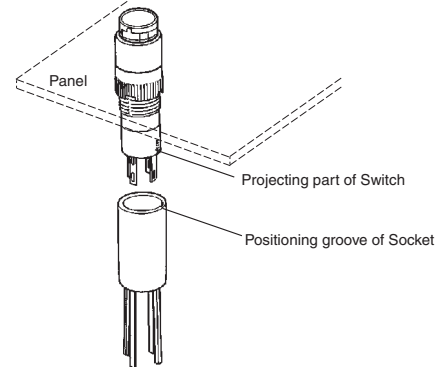

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: www.omron.com/ecb

Cat. No. A031-E1-06
0812(0207)(O)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru