

## TABLE of CONTENTS

|                                                             |       |
|-------------------------------------------------------------|-------|
| <b>01 - Mini-Line EE20 - 0.08VA-0.5VA</b>                   |       |
| EE20 / 4 - 0.08VA                                           | 2     |
| EE20 / 6.1 - 0.35VA                                         | 3     |
| EE20 / 10 - 0.50VA                                          | 4     |
| <b>02 - Print-Line EI30 - 0.5VA-2.8 VA</b>                  |       |
| EI30 / 5 - 0.5VA                                            | 5     |
| EI30 / 10.5 - 1VA                                           | 6     |
| EI30 / 12.5 - 1.2VA                                         | 7     |
| EI30 / 12.5 - 1.5VA                                         | 8     |
| EI30 / 15.5 - 2VA                                           | 9     |
| EI30 / 18 - 2.3VA                                           | 10    |
| EI30 / 23 - 2.8VA                                           | 11    |
| <b>03 - Print-Line EI38 - 3.2VA-4VA</b>                     |       |
| EI38 / 13.6 - 3.2VA                                         | 12    |
| EI38 / 13.6 - 4VA                                           | 13    |
| <b>04 - Print-Line EI42-EI54 - 5VA-16VA</b>                 |       |
| EI42 / 14.8 - 5VA                                           | 14    |
| EI48 / 16.8 - 10VA                                          | 15    |
| EI54 / 18.8 - 16VA                                          | 16    |
| <b>05 - Transformers with mounting brackets - 5VA-16VA</b>  |       |
| EI42 / 14.8 - 5VA                                           | 17    |
| EI48 / 16.8 - 10VA                                          | 18    |
| EI54 / 18.8 - 16VA                                          | 19    |
| <b>06 - Low Profile Transformers - 2VA-10VA</b>             |       |
| UI30 / 5.5 - 2VA                                            | 20    |
| UI30 / 7.5 - 4VA                                            | 21    |
| UI30 / 10.5 - 6VA                                           | 22    |
| UI30 / 16.5 - 10VA                                          | 23    |
| <b>07 - Compact Power Supplies</b>                          |       |
| EI48 / 16.8 (AC)                                            | 24    |
| EI48 / 16.8 (DC)                                            | 24    |
| <b>08 - Low Frequency Open-Style Laminated Transformers</b> |       |
| Low Profile Plug-In Series                                  | 25    |
| Chassis-Tran Series                                         | 26    |
| International PC Plug-In Series                             | 27    |
| International High Power Series                             | 28    |
| Split Bobbin, Horizontal Plug-In Series                     | 29    |
| Concentric Vertical Profile PC Plug-In Series               | 30    |
| <b>Parts Index</b>                                          | 31-32 |

# LAMINATED TRANSFORMERS OVERVIEW



With the addition of **era**'s encapsulated 50/60Hz transformers to the existing line of Pulse open frame transformers, Pulse now offers a complete line of laminated transformers for all your low power, linear transformer needs. With power ratings from 0.08VA to 175VA, fully encapsulated transformers, split bobbin designs, and a wide variety of domestic and international agency approvals, Pulse is truly the one stop shop for all your 50/60Hz needs.

## Advantages of Encapsulated Transformers:

- Better heat dissipation achieved through vacuum encapsulation, resulting in more output power from a smaller, more compact design.
- Vacuum encapsulation provides protection against external influences (e.g. wash operations) and mechanical stress (e.g. vibration). It also reduces the potential of noise through vibration.
- Dimensional accuracy of each transformer guaranteed by stable and controlled manufacturing processes, allowing for automatic pick and place operations.

This catalog serves as an overview for the Pulse Laminated Transformer product line. Please contact Pulse Power Applications Engineering for more information. For Pulse's complete line of Power Inductors, Transformers, Chokes and Current Sense Magnetics, please see the Switching Power Magnetics catalog.

**NOTE:** For additional listings of Pulse Power magnetics, see other Power data sheets at this URL: <http://www.pulseeng.com/products/dataSheets.aspx>

## OVERVIEW: LAMINATED TRANSFORMERS



### Mini-Line THT\* (EE20)

- Up to 0.5VA
- Temperature class  $t_a$  70°C/B



### Print-Line THT\* (EI30-EI54)

- Up to 16VA
- Temperature class  $t_a$  70°C/B (EI 30 / EI 42)
- Temperature class  $t_a$  40°C/B (EI 48 / EI 54)



### Low Profile THT\* (UI30)

- Up to 10VA
- Temperature class  $t_a$  40°C/B

### With Mounting Brackets\* (EI42-EI54)

- Up to 16VA
- Temperature class  $t_a$  70°C/B (EI 42)
- Temperature class  $t_a$  40°C/B (EI 48 / EI 54)



### Compact Power Supplies

- Vdc or Vac secondary
- Temperature class  $t_a$  40°C/B
- Din-rail Mounting



### Printed Circuit Mount


- International
- Split bobbin: single (ST) and dual primary (DST)
- Low profile
- Concentric vertical profile single (PC) and dual primary (DPC)



### Chassis Mount

- International
- Split bobbin: single (241) and dual primary (DP241)

\*Potted under vacuum, two-chamber bobbin, custom designs available upon request, THT = Through Hole.




For all other Pulse Inductors and Transformers, check out Pulse's SWITCHING POWER MAGNETICS catalog. To order, see our website:

[www.pulseeng.com](http://www.pulseeng.com)

Go to Products/Literature Request and ask for **SPM2007** catalog

# LAMINATED TRANSFORMERS

## Low Frequency, Open-Style Laminated, Split Bobbin, Horizontal Plug-In Series

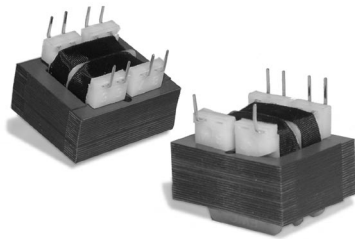

### AGENCY APPROVALS


- UL, 506, File E73539
- UL 1446, File E179499
- UL 1585, File E169010
- Class 2 Component Recognition
- CSA 22.2#66, File LR68051-2
- UL Recognized Class B



- ⚙ High (2500V) isolation; 2500V<sub>RMS</sub> HIPOT
- ⚙ Non-concentric design - eliminates ESS
- ⚙ No crossover between primary/secondary winding leads
- ⚙ Vacuum impregnated - withstands board washing systems and reduces audible noise
- ⚙ Baked resin provides an environmentally-resistant finish
- ⚙ Rugged construction - no additional mounting hardware
- ⚙ Universal design, fits industry-standard footprints
- ⚙ Available in single or dual primary

### Mechanicals

### Schematics

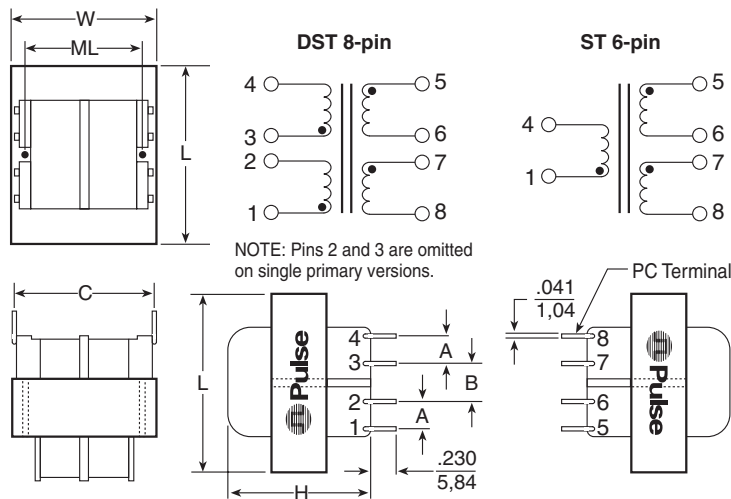

### Dimensions (inches)

| Size | VA  | L    | W    | H    | A    | B    | C    | ML   | Wt. (lb.) |
|------|-----|------|------|------|------|------|------|------|-----------|
| 2    | 1.1 | 1.13 | 1.13 | 0.94 | 0.25 | 0.25 | 1.20 | ---- | 0.17      |
| 3    | 2.4 | 1.38 | 1.13 | 1.19 | 0.25 | 0.25 | 1.20 | ---- | 0.25      |
| 4    | 6.0 | 1.63 | 1.31 | 1.31 | 0.25 | 0.35 | 1.28 | 1.06 | 0.44      |
| 5    | 12  | 1.86 | 1.56 | 1.44 | 0.30 | 0.40 | 1.41 | 1.25 | 0.70      |
| 6    | 20  | 2.25 | 1.86 | 1.44 | 0.30 | 0.40 | 1.60 | 1.50 | 0.80      |
| 7*   | 36  | 2.63 | 2.19 | 1.56 | 0.40 | 0.40 | 1.80 | ---- | 1.10      |

\*Size 7 has 4 MTG. holes on 2.188" x 1.75" centers.



| Part No.<br>115V-6Pin  | Part No.<br>115/230V-8Pin | Secondary RMS Rating |              |
|------------------------|---------------------------|----------------------|--------------|
|                        |                           | Series               | Parallel     |
| ST2-10B41 <sup>1</sup> | DST2-10B41 <sup>1</sup>   | 10V C.T. @ 0.11A     | 5V @ 0.22A   |
| ST3-10B1 <sup>1</sup>  | DST3-10B1 <sup>1</sup>    | 10V C.T. @ 0.25A     | 5V @ 0.5A    |
| ST4-10B2               | DST4-10B2                 | 10V C.T. @ 0.6A      | 5V @ 1.2A    |
| ST5-10B3               | DST5-10B3                 | 10V C.T. @ 1.2A      | 5V @ 2.4A    |
| ST6-10B4               | DST6-10B4                 | 10V C.T. @ 2A        | 5V @ 4A      |
| ST7-10B51              | DST7-10B51                | 10V C.T. @ 3.6A      | 5V @ 7.2A    |
| ST2-12B42 <sup>1</sup> | DST2-12B42 <sup>1</sup>   | 12.6V C.T. @ 0.09A   | 6.3V @ 0.18A |
| ST3-12B5 <sup>1</sup>  | DST3-12B5 <sup>1</sup>    | 12.6V C.T. @ 0.2A    | 6.3V @ 0.4A  |
| ST4-12B6               | DST4-12B6                 | 12.6V C.T. @ 0.5A    | 6.3V @ 1.0A  |
| ST5-12B7               | DST5-12B7                 | 12.6V C.T. @ 1.0A    | 6.3V @ 2.0A  |
| ST6-12B8               | DST6-12B8                 | 12.6V C.T. @ 1.6A    | 6.3V @ 3.2A  |
| ST7-12B52              | DST7-12B52                | 12.6V C.T. @ 2.85A   | 6.3V @ 5.7A  |
| ST2-16B43 <sup>1</sup> | DST2-16B43 <sup>1</sup>   | 16V C.T. @ 0.07A     | 8V @ 0.14A   |
| ST3-16B9 <sup>1</sup>  | DST3-16B9 <sup>1</sup>    | 16V C.T. @ 0.15A     | 8V @ 0.3A    |
| ST4-16B10              | DST4-16B10                | 16V C.T. @ 0.4A      | 8V @ 0.8A    |
| ST5-16B11              | DST5-16B11                | 16V C.T. @ 0.8A      | 8V @ 1.6A    |
| ST6-16B12              | DST6-16B12                | 16V C.T. @ 1.25A     | 8V @ 2.5A    |
| ST7-16B53              | DST7-16B53                | 16V C.T. @ 2.25A     | 8V @ 4.5A    |
| ST2-20B44 <sup>1</sup> | DST2-20B44 <sup>1</sup>   | 20V C.T. @ 0.055A    | 10V @ 0.11A  |
| ST3-20B13 <sup>1</sup> | DST3-20B13 <sup>1</sup>   | 20V C.T. @ 0.12A     | 10V @ 0.24A  |
| ST4-20B14              | DST4-20B14                | 20V C.T. @ 0.3A      | 10V @ 0.6A   |
| ST5-20B15              | DST5-20B15                | 20V C.T. @ 0.6A      | 10V @ 1.2A   |
| ST6-20B16              | DST6-20B16                | 20V C.T. @ 1A        | 10V @ 2A     |
| ST7-20B54              | DST7-20B54                | 20V C.T. @ 1.8A      | 10V @ 3.6A   |
| ST2-24B45 <sup>1</sup> | DST2-24B45 <sup>1</sup>   | 24V C.T. @ 0.045A    | 12V @ 0.09A  |
| ST3-24B17 <sup>1</sup> | DST3-24B17 <sup>1</sup>   | 24V C.T. @ 0.1A      | 12V @ 0.2A   |
| ST4-24B18              | DST4-24B18                | 24V C.T. @ 0.25A     | 12V @ 0.5A   |
| ST5-24B19              | DST5-24B19                | 24V C.T. @ 0.5A      | 12V @ 1.0A   |
| ST6-24B20              | DST6-24B20                | 24V C.T. @ 0.8A      | 12V @ 1.6A   |
| ST7-24B55              | DST7-24B55                | 24V C.T. @ 1.5A      | 12V @ 3.0A   |
| ST2-28B46              | DST2-28B46                | 28V C.T. @ 0.04A     | 14V @ 0.08A  |
| ST3-28B21              | DST3-28B21                | 28V C.T. @ 0.085A    | 14V @ 0.17A  |
| ST4-28B22              | DST4-28B22                | 28V C.T. @ 0.2A      | 14V @ 0.4A   |
| ST5-28B23              | DST5-28B23                | 28V C.T. @ 0.42A     | 14V @ 0.84A  |
| ST6-28B24              | DST6-28B24                | 28V C.T. @ 0.7A      | 14V @ 1.4A   |
| ST7-28B56              | DST7-28B56                | 28V C.T. @ 1.3A      | 14V @ 2.6A   |
| ST2-36B47              | DST2-36B47                | 36V C.T. @ 0.03A     | 18V @ 0.06A  |
| ST3-36B25              | DST3-36B25                | 36V C.T. @ 0.065A    | 18V @ 0.13A  |
| ST4-36B26              | DST4-36B26                | 36V C.T. @ 0.17A     | 18V @ 0.34A  |
| ST5-36B27              | DST5-36B27                | 36V C.T. @ 0.35A     | 18V @ 0.7A   |
| ST6-36B28              | DST6-36B28                | 36V C.T. @ 0.55A     | 18V @ 1.1A   |
| ST7-36B57              | DST7-36B57                | 36V C.T. @ 1.0A      | 18V @ 2.0A   |
| ST2-48B48              | DST2-48B48                | 48V C.T. @ 0.023A    | 24V @ .046A  |
| ST3-48B29              | DST3-48B29                | 48V C.T. @ 0.05A     | 24V @ 0.1A   |
| ST4-48B30              | DST4-48B30                | 48V C.T. @ 0.125A    | 24V @ 0.25A  |
| ST5-48B31              | DST5-48B31                | 48V C.T. @ 0.25A     | 24V @ 0.5A   |
| ST6-48B32              | DST6-48B32                | 48V C.T. @ 0.4A      | 24V @ 0.8A   |
| ST7-48B58              | DST7-48B58                | 48V C.T. @ 0.75A     | 24V @ 1.5A   |
| ST2-56B49              | DST2-56B49                | 56V C.T. @ 0.02A     | 28V @ 0.04A  |
| ST3-56B33              | DST3-56B33                | 56V C.T. @ 0.045A    | 28V @ 0.09A  |
| ST4-56B34              | DST4-56B34                | 56V C.T. @ 0.11A     | 28V @ 0.22A  |
| ST5-56B35              | DST5-56B35                | 56V C.T. @ 0.22A     | 28V @ 0.44A  |
| ST6-56B36              | DST6-56B36                | 56V C.T. @ 0.35A     | 28V @ 0.7A   |
| ST7-56B59              | DST7-56B59                | 56V C.T. @ 0.65A     | 28V @ 1.3A   |
| ST2-120B50             | DST2-120B50               | 120V C.T. @ 0.01A    | 60V @ 0.02A  |
| ST3-120B37             | DST3-120B37               | 120V C.T. @ 0.02A    | 60V @ 0.04A  |
| ST4-120B38             | DST4-120B38               | 120V C.T. @ 0.05A    | 60V @ 0.1A   |
| ST5-120B39             | DST5-120B39               | 120V C.T. @ 0.1A     | 60V @ 0.2A   |
| ST6-120B40             | DST6-120B40               | 120V C.T. @ 0.16A    | 60V @ 0.32A  |
| ST7-120B60             | DST7-120B60               | 120V C.T. @ 0.3A     | 60V @ 0.6A   |

<sup>1</sup> UL 1585 approved, Class 2 - Not Wet, Class 3 - Wet

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)