

Headphone Amplifier for Portable Audio

■ GENERAL DESCRIPTION

The **NJM2776** is a low voltage headphone amplifier for portable audio applications.

The **NJM2776** operates directly for one battery supply with independent power supply terminals (V^{+1} and V^{+2}).

Also it provides shock-noise less standby mode.

The **NJM2776** is suitable for portable MD, portable CD and others.

■ PACKAGE OUTLINE




NJM2776RB2
MSOP10 (TVSP10)

■ FEATURES

- Operating Voltage V^{+1} (from step-up converter) = 1.8 to 4.5V (however, $V^{+1} > V^{+2}$)
 V^{+2} (from battery) = 0.9 to 4.5V (however, $V^{+1} > V^{+2}$)
- Low Operating Current $I_{CC4}(V^{+1} \text{ side}) = 200\mu\text{A typ.}$ ($V^{+1} = 2.3\text{V}$, $V^{+2} = 1.2\text{V}$, No signal)
 $I_{CC3}(V^{+2} \text{ side}) = 350\mu\text{A typ.}$ ($V^{+1} = 2.3\text{V}$, $V^{+2} = 1.2\text{V}$, No signal)
- Supply Current in Standby mode $I_{CC2}(V^{+1} \text{ side}) = 25\mu\text{A typ.}$ ($V^{+1} = 2.3\text{V}$, $V^{+2} = 1.2\text{V}$)
 $I_{CC1}(V^{+2} \text{ side}) = 6\mu\text{A typ.}$ ($V^{+1} = 2.3\text{V}$, $V^{+2} = 1.2\text{V}$)
 $P_O = 8.5\text{mW typ.}$ ($R_L = 16\Omega$, THD = 10%)
- Output Power Exceeds
- Shock-noise less Standby mode
- Bipolar Technology
- Package Outline MSOP10 (TVSP10)*

*MEET JEDEC MO-187-DA / THIN TYPE

■ PIN CONFIGURATION AND BLOCK DIAGRAM

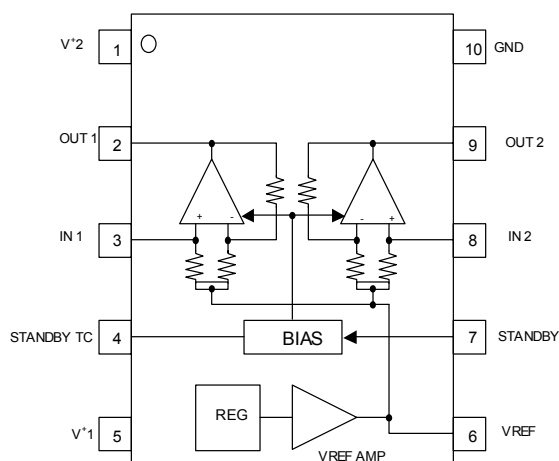

1. V^{+2}
2. OUT1
3. IN1
4. STADBY_TC
5. V^{+1}
6. VREF
7. STANDBY
8. IN2
9. OUT2
10. GND

NJM2776

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	5	V
Power Dissipation	P _D	320 ^(note)	mW
Operating Temperature range	T _{opr}	-20 to +75	°C
Storage Temperature Range	T _{stg}	-40 to +125	°C

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage Range	V ⁺ 1	-	1.8	2.3	4.5	V
	V ⁺ 2	-	0.9	1.2	4.5	

■ ELECTRICAL CHARACTERISTICS (Ta=25°C, V⁺1=2.3V, V⁺2=1.2V, V_{IN}=-30dBV (31.6mVrms), f=1kHz, R_L=16Ω, Active mode, unless otherwise specified)

● Power Supply

PARAMETER	SYMBOL	TEST CONDITION	pin	MIN.	TYP.	MAX.	UNIT
Operating Current	I _{CC0}	V ⁺ 1=0V	V ⁺ 2	-	-	1.0	μA
	I _{CC1}	Standby mode	V ⁺ 2	-	6.0	10.0	
	I _{CC2}		V ⁺ 1	-	25	35	
	I _{CC3}	No signal	V ⁺ 2	-	350	750	
	I _{CC4}		V ⁺ 1	-	200	400	mA
	I _{CC5}	P _O =0.1mW+0.1mW	V ⁺ 2	-	2.5	-	
	I _{CC6}		V ⁺ 1	-	200	-	
Reference Voltage	V _{REF}	No signal		0.50	0.60	0.65	V

● Amplifier

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Closed loop Gain	G _V		10.0	11.5	12.5	dB
Output Power	P _O	THD=10%	5.0	8.5	-	mW
Total Harmonic Distortion	THD	P _O =1mW	-	0.20	0.50	%
Output Noise Voltage	V _{NO}	A-Weighted	-	-100 (10.0)	-96 (15.8)	dBV (μV)
Channel Separation	CS		44	55	-	dB
Mute Level	MUTE	Standby mode 1kHz Band Pass	-	-100	-80	dB
Supply Voltage Rejection Ratio	PSRR1	V ⁺ 1=1.8V + 0.1Vrms V ⁺ 2=0.9V	46	52	-	dB
	PSRR2	V ⁺ 1=1.8V V ⁺ 2=0.9V + 0.1Vrms	70	77	-	

● Mode Control

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
High Level Input Voltage	V _{IH}	V _{IN} =High Level	1.2	-	V ⁺ 1	V
Low Level Input Voltage	V _{IL}	V _{IN} =Low Level	0.0	-	0.3	

■ MODE SWITCHCH FUNCTION


● STANDBY (7PIN)

PARAMETER	CONTROL SIGNAL	STATUS
Standby	L, open	IC is non-active.
Active	H	IC is active.

■ TERMINAL DESCRIPTION

PIN No.	SYMBOL	EQUIVALENT CIRCUIT	VOLTAGE	NOTE
2,9	OUT1, OUT2		0.6V	
3,8	IN1, IN2		0.6V	
4	STANDBY_TC		1.2V	
6	VREF		0.6V	

NJM2776

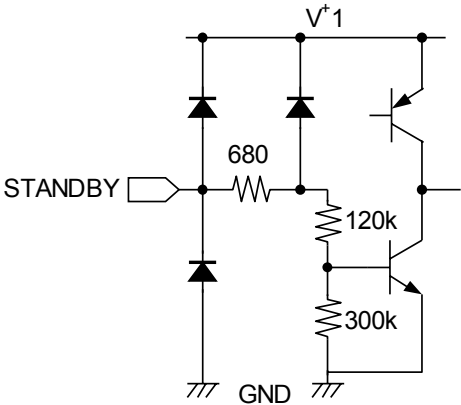PIN No.	SYMBOL	EQUIVALENT CIRCUIT	VOLTAGE	NOTE
7	STANDBY		-	

■ APPLICATION NOTE

1. Procedure for Supplying Power

Supply the power to first $V^{+}2$ (Battery side) and then $V^{+}1$ (Step-up Converter side).

2. Input Dynamic Voltage Range

The reference voltage is fixed at 0.6V. Therefore input dynamic voltage range is not proportion to the power supply voltage.

The input signal over dynamic range makes distortion. For prevent the distortion, adjust the maximum input signal level.


3. Charge Sequence

Pop noise may not be happened with mode switch operation once output voltage becomes reference voltage. The "Charge Sequence" may shorter the time for power up initialization.


Charge Sequence: To set mode switch from standby to active during power up initialization, activate rapid charge circuit for stabilizing the output voltage.

■ TYPICAL CHARACTERISTICS


Operating Current vs. Operating Voltage

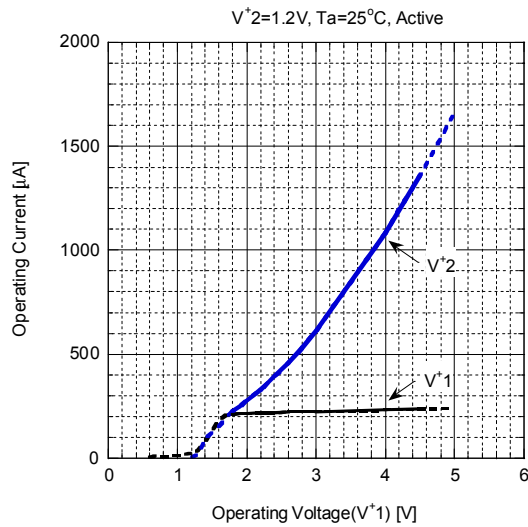


Operating Current vs. Operating Voltage

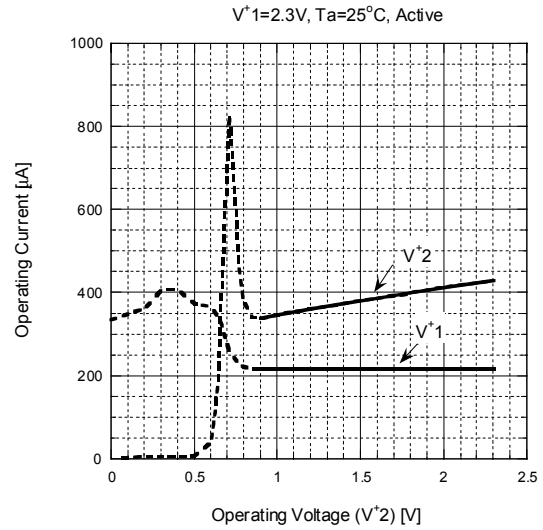


Operating Current vs. Operating Voltage

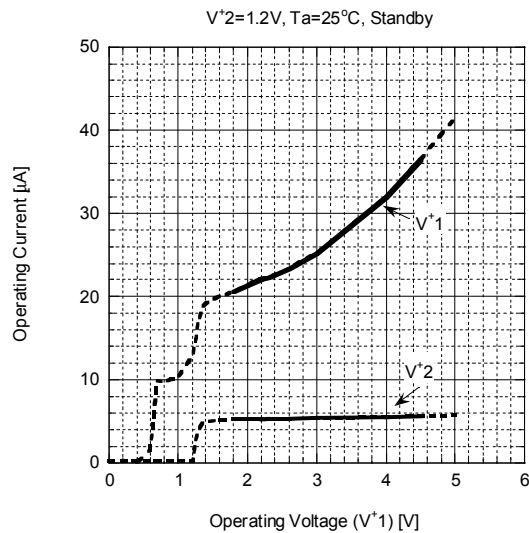


Operating Current vs. Operating Voltage

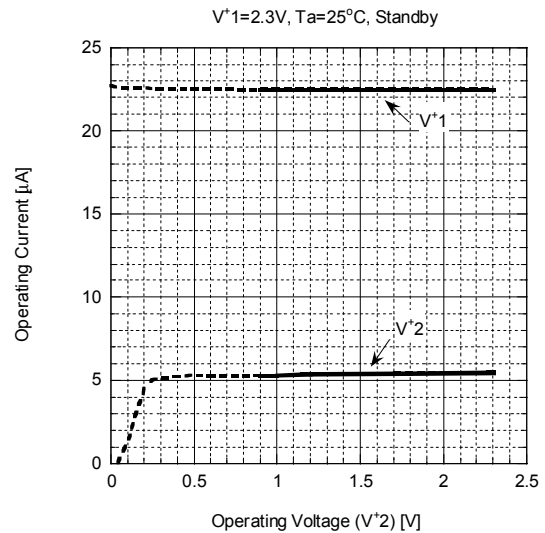

Operating Current vs. Temperature

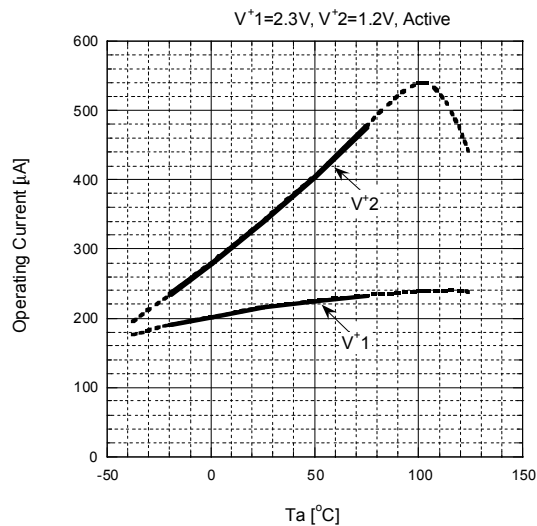


Operating Current vs. Temperature

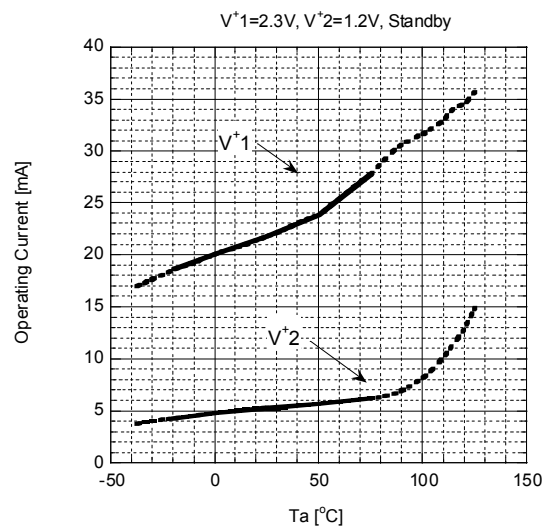


■ TYPICAL CHARACTERISTICS


Reference Voltage vs. Operating Voltage

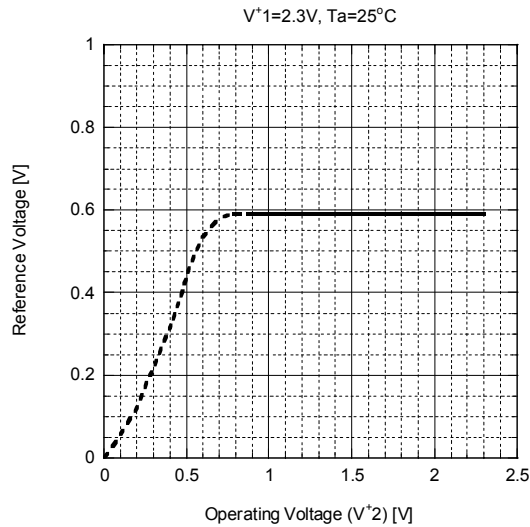


Reference Voltage vs. Temperature

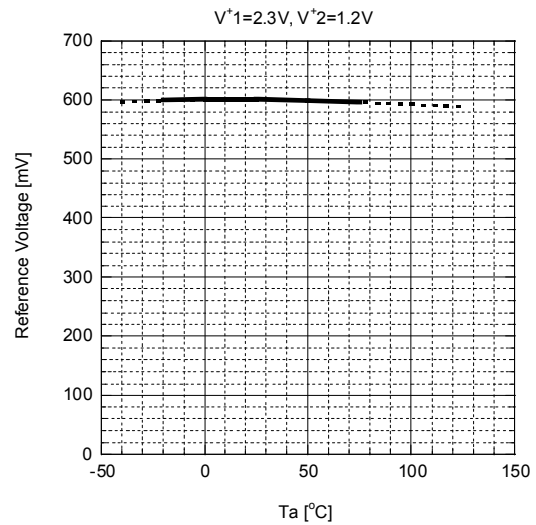


Total Harmonic Distortion vs. Output Power

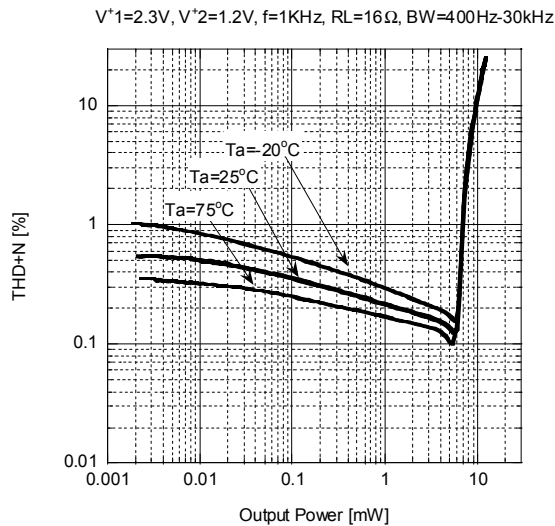


Total Harmonic Distortion vs. Output Power

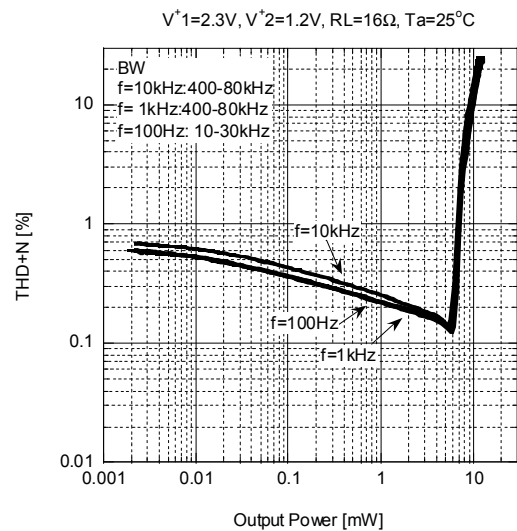

Output Power vs. Operating Voltage

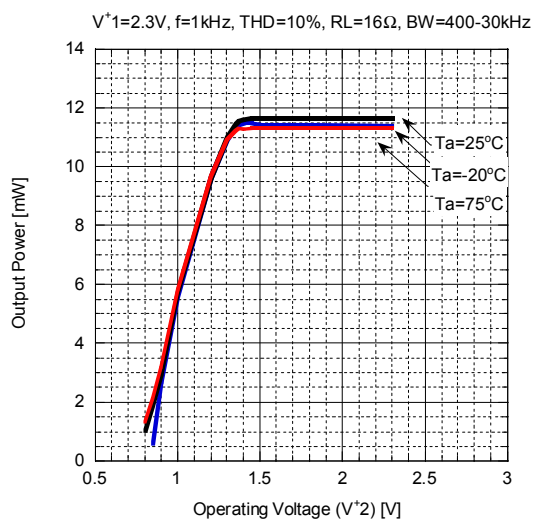


Power Dissipation vs. Output Power

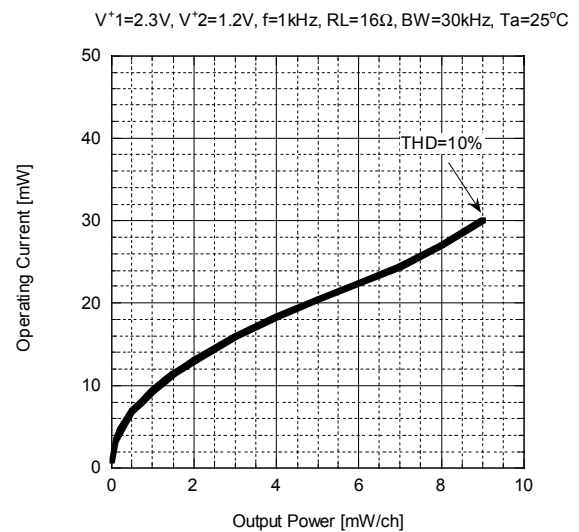


■ TYPICAL CHARACTERISTICS


Output Noise Voltage vs. Temperature

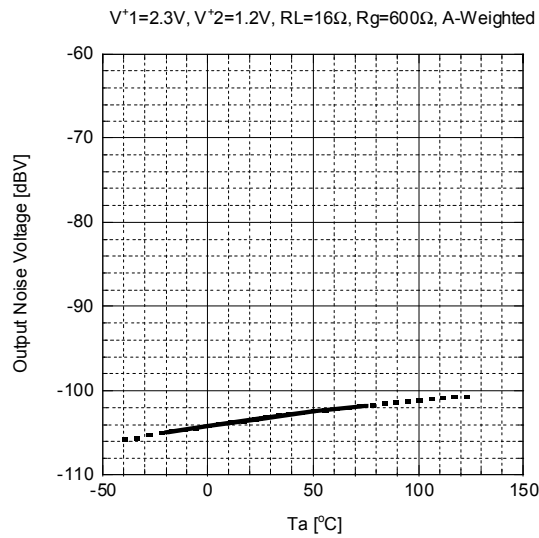


Channel Separation vs. Frequency

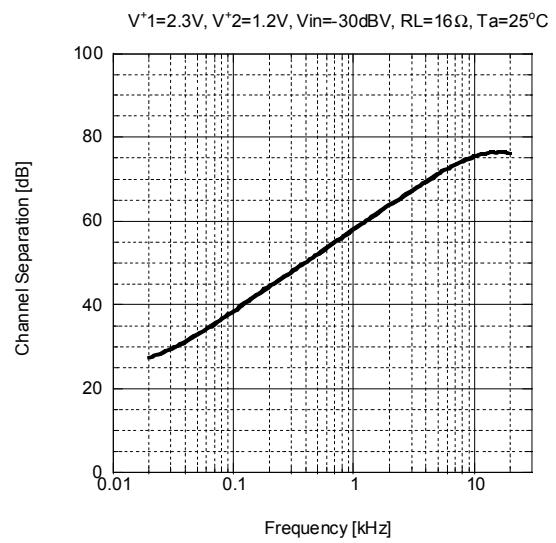


Mute Level vs. Frequency

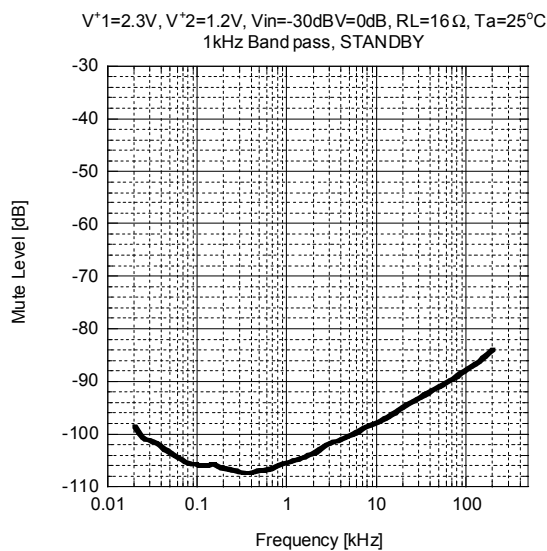


Mute Level vs. Temperature

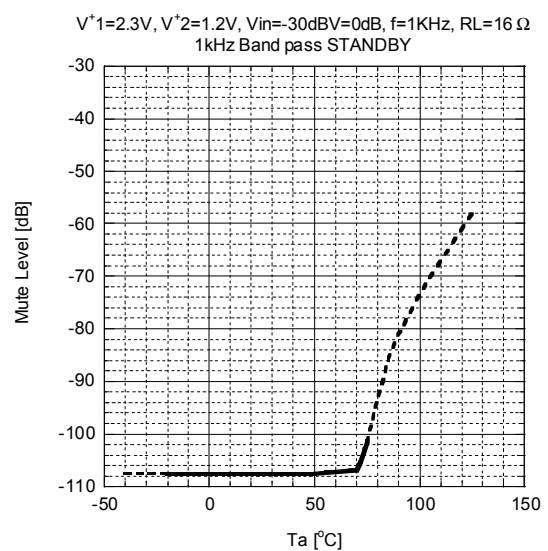


PSRR vs. frequency (V^+1)

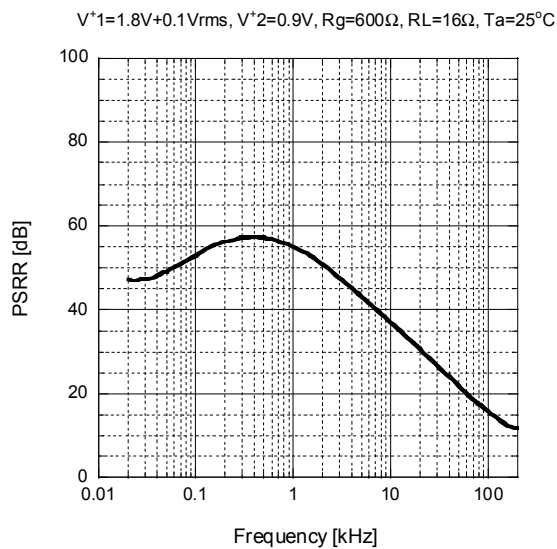

PSRR vs. frequency (V^+2)

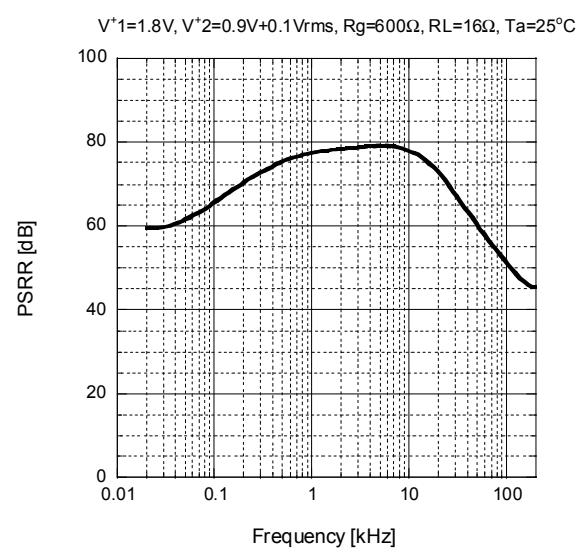

■ TYPICAL CHARACTERISTICS

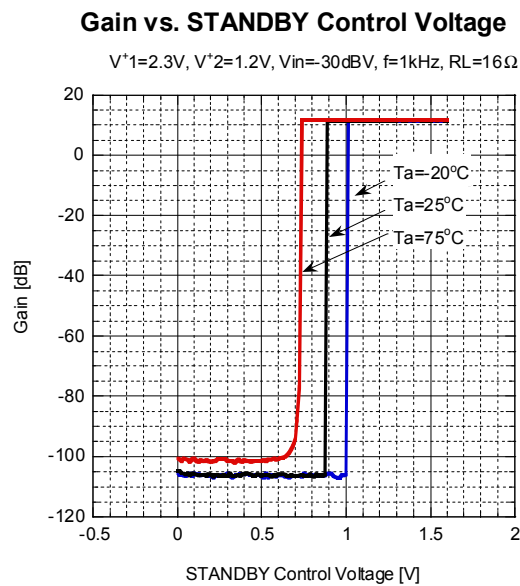

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2776RB2-TE2](#) [NJM2776RB2-TE1](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru