

Conforms to International Standards ISO/IEC 18000-3 (ISO/IEC 15693)

# OMRON

## V680 RFID

### DeviceNet ID Slave

V680-HAM42-DRT

### ID Flag Sensors

V680-HAM91/HAM81



# DeviceNet™

## RFID with Open Network Compatibility!

### V680-HAM42-DRT

Read and write up to 58 bytes.

Use the DeviceNet open network for easier, more-flexible information management on factory sites.

## The RFID System Can Be Used Just Like a Sensor.

### V680-HAM91/HAM81

Read or write 16 bits at a time with one unit.

Useful in applications from simple line sorting or product identification to managing work progress or inspection data.



realizing

## V680 DeviceNet ID Slave

# V680-HAM42-DRT


### V680-series DeviceNet-compatible Slaves for RFID Systems.

#### Read and Write Up To 58 Bytes.

- V680-series DeviceNet-compatible Slaves for RFID systems.
- Includes a built-in Amplifier, yet has a compact size of 65 × 65 × 65 mm. Compatible with V680-series ID Tags and Antennas.
- Read and write 4, 26, or 58 bytes of data.
- Includes an Access Mode compatible with the V600-HAM42-DRT to enable the use of existing programs.
- Complies with international standards, including CE, UL/CSA, and radio wave regulations. Radio wave regulation compliance is applicable to Japan, Europe, the U.S.A., and Canada. Radio wave regulation compliance for China and South Korea is pending. Approval for UL/CSA is pending.



## System Configuration

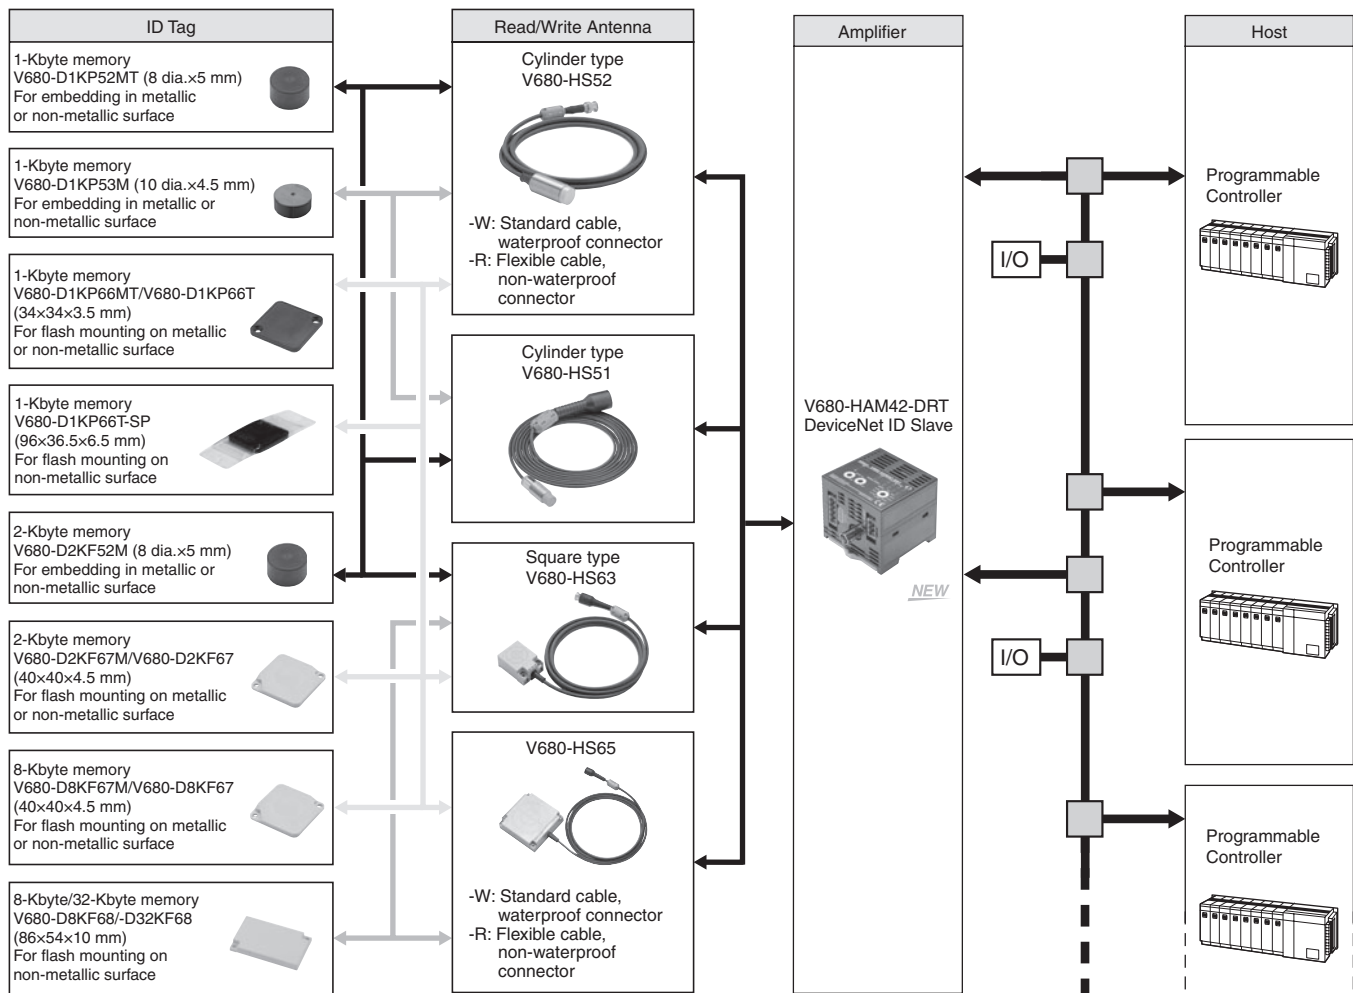

- Note 1.** Attach an Antenna to the V680-HAM42-DRT DeviceNet ID Slave to read and write V680 ID Tag data.
- 2.** The DeviceNet ID Slave can communicate with ID Tags that comply with ISO/IEC 18000-3 (ISO/IEC 15693) in addition to V680-series ID Tags. Communications with ID Tags other than V680-series ID Tags, however, may not be stable. Always check compatibility completely before using other ID Tags.
- 3.** Use a V680-HS51/-HS52 Antenna if the V680-D1KP52MT or V680-D2KF52M is to be embedded in metal. Communications cannot be performed if a V680-HS63 Antenna is used in combination with the V680-D1KP52MT or V680-D2KF52M. The V680-HS65 Antenna cannot communicate with V680-D1KP52MT or V680-D2KF52M ID Tags if they are embedded in metal.

## V680 ID Flag Sensors

# V680-HAM91/-HAM81

**Easy Setup! The RFID System Can Be Used Just Like a Sensor.**

**Read and Write 16 Bits of Data with 1 Unit.**


**Useful in Applications from Simple Product Identification to Managing Work Progress**

- Read or write 16 bits of data (for up to 64,000 IDs) with one Unit despite its compact size.
- Read or write up to 128 bits by using the address shift function.
- With NPN and PNP outputs
- Equipped with a V600-HAM/HAR-compatible Access Mode, allowing use of existing programs.
- Complies with international standards, including CE, UL/CSA, and radio wave regulations.

Radio wave regulation compliance is applicable to Japan, Europe, the U.S.A., and Canada. Radio wave regulation compliance for China and South Korea is pending.





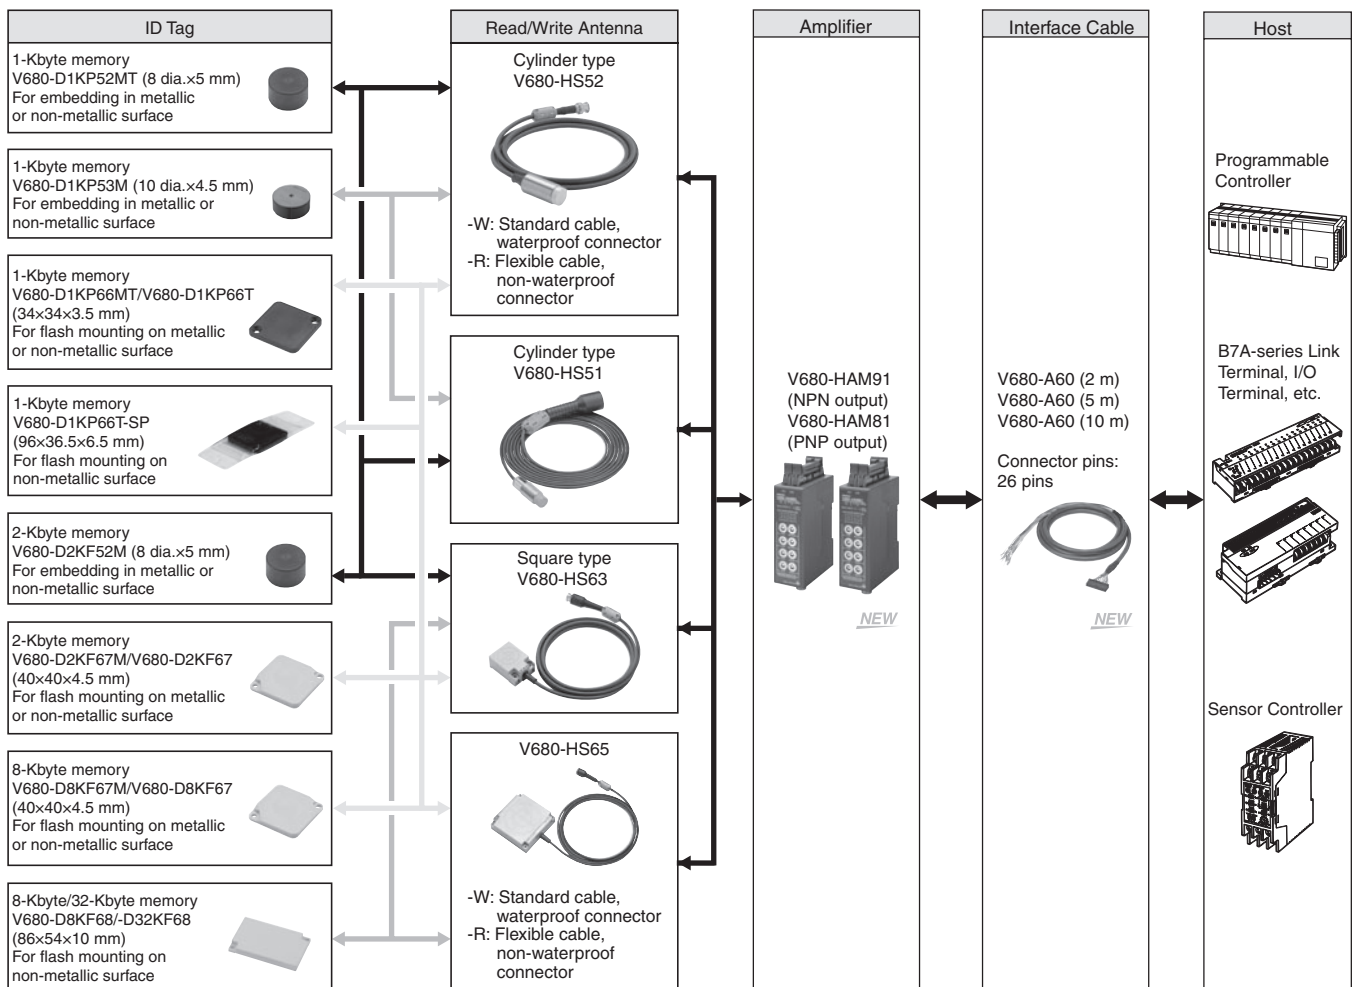



## System Configuration






- Note 1.** Attach an Antenna to the V680-HAM91/-HAM81 ID Flag Sensor to read and write V680 ID Tag data.
- Note 2.** The DeviceNet ID Slave can communicate with ID Tags that comply with ISO/IEC 18000-3 (ISO/IEC 15693) in addition to V680-series ID Tags. Communications with ID Tags other than V680-series ID Tags, however, may not be stable. Always check compatibility completely before using other ID Tags.
- Note 3.** Use a V680-HS51/-HS52 Antenna if the V680-D1KP52MT or V680-D2KF52M is to be embedded in metal. Communications cannot be performed if a V680-HS63 Antenna is used in combination with the V680-D1KP52MT or V680-D2KF52M. The V680-HS65 Antenna cannot communicate with V680-D1KP52MT or V680-D2KF52M ID Tags if they are embedded in metal.

# Ordering Information


## ID Tag

| Type                                       | Memory capacity   | Appearance  | Size  | Metallic compatibility  | Model                      |
|--|---|---|---|---|----------------------------|
| Battery-less                               | 1 Kbyte   |  | Cylindrical, ultra-compact<br>8 dia. × 5 mm | For embedding in metallic or non-metallic surface                                 | V680-D1KP52MT              |
|  |   |  | Square<br>34 × 34 × 3.5 mm                  | For flush mounting on metallic surface  | V680-D1KP66MT              |
|  |   |   |   | For flush mounting on non-metallic surface  | V680-D1KP66T               |
|  |  | Square PFA package<br>95 × 36.5 × 6.5 mm  | For flush mounting on non-metallic surface  | V680-D1KP66T-SP   |                            |
|  | 2 Kbytes  |  | Cylindrical, ultra-compact<br>8 dia. × 5 mm | For embedding in metallic or non-metallic surface                                 | V680-D2KF52M               |
|  |   |   |   |  | Square<br>40 × 40 × 4.5 mm |
| For flush mounting on non-metallic surface |   | V680-D2KF67   |   |   |                            |
| 8 Kbytes                                   |  | 86 × 54 × 10 mm   | For flush mounting on non-metallic surface  | V680-D8KF68   |                            |
| 32 Kbytes                                  |   |   |   | V680-D32KF68  |                            |


## Read/Write Antenna (Detachable Amplifier Unit Type)

| Type                                     | Appearance  | Size              | Cable length | Model             |
|--|---|-------------------|--------------|-------------------|
| Cylindrical                              |   | M22 × 65 mm       | 2 m          | V680-HS52-W 2M    |
|  |   |                   | 12.5 m       | V680-HS52-W 12.5M |
|  | Flexible cable, non-waterproof connector  | M12 × 35 mm       | 2 m          | V680-HS52-R 2M    |
|  |   |                   | 12.5 m       | V680-HS52-R 12.5M |
| Standard cable, non-waterproof connector |  | M12 × 35 mm       | 2 m          | V680-HS51 2M      |
| Square                                   |  | 40 × 53 × 23 mm   | 2 m          | V680-HS63-W 2M    |
|  |   |                   | 12.5 m       | V680-HS63-W 12.5M |
|  | Flexible cable, non-waterproof connector  | 100 × 100 × 30 mm | 2 m          | V680-HS63-R 2M    |
|  |   |                   | 12.5 m       | V680-HS63-R 12.5M |
|  | Standard cable, waterproof connector  | 100 × 100 × 30 mm | 2 m          | V680-HS65-W 2M    |
|  |   |                   | 12.5 m       | V680-HS65-W 12.5M |
|  | Flexible cable, non-waterproof connector  | 100 × 100 × 30 mm | 2 m          | V680-HS65-R 2M    |
|  |   |                   | 12.5 m       | V680-HS65-R 12.5M |

## Amplifier: ID Slave for DeviceNet



| Appearance  | Size            | Model                     |
|---|-----------------|---------------------------|
|  | 65 × 65 × 65 mm | V680-HAM42-DRT <b>NEW</b> |

## Interface Cable (for V680-HAM91/81)



| Cable length | Model                   | Appearance  |
|--------------|-------------------------|---|
| 2 m          | V680-A60 2M <b>NEW</b>  |  |
| 5 m          | V680-A60 5M <b>NEW</b>  |   |
| 10 m         | V680-A60 10M <b>NEW</b> |   |

- Note**
1. The connectors are not water resistant.
  2. The cables can be extended to a maximum length of 10 m.
  3. Normally two Interface Cables are required for 1 Unit. If you do not need to write to ID Tags, or use the address shift or noise check functions, then one Interface Cable is sufficient.

## Amplifier: ID Flag Sensor

| Type       | Appearance  | Size            | Model                 |
|------------|---|-----------------|-----------------------|
| NPN output |  | 90 × 30 × 65 mm | V680-HAM91 <b>NEW</b> |
| PNP output |  |                 | V680-HAM81 <b>NEW</b> |

## Accessories (Order Separately) ID Tag Attachment

| Type                 | Appearance  | Model    |
|----------------------|---|----------|
| For the V680-D1KP66T |  | V600-A86 |
| For the V680-D□KF68  |  | V680-A81 |

# Ratings and Performance

## ID Tag (1-Kbyte Memory)

| Item  | Model | V680-D1KP52MT   | V680-D1KP66T       | V680-D1KP66MT | V680-D1KP66T-SP                            |
|---|-------|---|--------------------|---------------|--|
| Memory capacity   |       | 1,000 byte (user area)  |                    |               |  |
| Memory type   |       | EEPROM  |                    |               |  |
| Data backup time (See note 1.)                          |       | 10 years after writing (85°C max.)  |                    |               |  |
| Memory longevity  |       | 100,000 times per block (at 25°C)   |                    |               |  |
| Ambient operating temperature (during transmission)     |       | -25 to 85°C (with no icing)   |                    |               | -25 to 70°C (with no icing)                |
| Ambient operating temperature (not during transmission) |       | -40 to 125°C (with no icing)<br>Heat resistance: 1,000 thermal cycles each of 30 minutes at -10°C/150°C, High-temperature storage: 1,000 hours at 150°C (See note 2.)<br>200 thermal cycles each of 30 minutes at -10°C/180°C, High-temperature storage: 200 hours at 180°C (See note 3.) |                    |               | -40 to 110°C (with no icing)               |
| Ambient storage temperature                             |       | -40 to 125°C (with no icing)  |                    |               | -40 to 110°C (with no icing)               |
| Ambient operating humidity                              |       | 35 to 95%   |                    |               |  |
| Degree of protection                                    |       | IEC 60529, IP68<br>In-house standard for antenna oil resistance (former JEM standard equivalent to IP67g) (See note 4.)   |                    |               | IP67                                       |
| Vibration resistance                                    |       | 10 to 2,000 Hz, 1.5-mm double amplitude at 150 m/s <sup>2</sup> acceleration with 10 sweeps in X, Y, and Z directions for 15 minutes each   |                    |               |  |
| Shock resistance  |       | 500 m/s <sup>2</sup> in X, Y, and Z directions 3 times each (18 times in total)   |                    |               |  |
| Appearance  |       | 8 dia. × 5 mm   | 34 × 34 × 3.5 mm   |               | 95 × 36.5 × 6.5 mm (excluding protrusions) |
| Materials   |       | Case: PPS resin<br>Filling: Epoxy resin   | Molding: PPS resin |               | External resin: PFA<br>Tag body: PPS resin |
| Weight  |       | Approx. 0.5 g   | Approx. 6 g        | Approx. 7.5 g | Approx. 20 g                               |
| Metallic compatibility                                  |       | Yes   | No                 | Yes           | No   |

**Note 1.** Refer to the *User's Manual* (Cat. No. Z278 or Z279) for data backup time for temperatures of 85°C or higher. If the V680 has been stored at 125°C or higher, write the data again even if the data does not need to be changed.

- 150°C heat resistance: The heat resistance has been checked at 150°C for up to 1,000 hours, and thermal shock has been checked through testing 1,000 thermal cycles each of 30 minutes at -10/150°C. (Test samples: 22, defects: 0)
- 180°C heat resistance: The heat resistance has been checked at 180°C for up to 200 hours, and thermal shock has been checked through testing 200 thermal cycles each of 30 minutes at -10°C/180°C. (Test samples: 22, defects: 0)
- This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.
- For details, refer to the *User's Manual* (Cat. No. Z278 or Z279).

## ID Tag (2-Kbyte Memory)

| Item                           | Model | V680-D2KF52M  | V680-D2KF67                                | V680-D1KF67M |
|--------------------------------|-------|---|--|--------------|
| Memory capacity                |       | 2,000 bytes (user area)   |  |              |
| Memory type                    |       | FRAM  |  |              |
| Data backup time (See note 1.) |       | 10 years after writing (55°C or less)   |  |              |
| Memory longevity               |       | 10 billion times per block. Access frequency (See note 2.): 10 billion times  |  |              |
| Ambient operating temperature  |       | -25 to 85°C (with no icing)   |  |              |
| Ambient storage temperature    |       | -40 to 85°C (with no icing)   |  |              |
| Ambient operating humidity     |       | 35 to 95%   | 35 to 85%                                  |              |
| Degree of protection           |       | IEC 60529, IP67<br>In-house standard for antenna oil resistance (former JEM standard equivalent to IP67g) (See note 3.)                   |  |              |
| Vibration resistance           |       | 10 to 2,000 Hz, 1.5-mm double amplitude at 150 m/s <sup>2</sup> acceleration with 10 sweeps in X, Y, and Z directions for 15 minutes each |  |              |
| Shock resistance               |       | 500 m/s <sup>2</sup> in X, Y, and Z directions 3 times each (18 times in total)   |  |              |
| Appearance                     |       | 8 dia. × 5 mm   | 40 × 40 × 4.5 mm                           |              |
| Materials                      |       | Case: PPS resin<br>Filling: Epoxy resin   | Molding: ABS resin<br>Filling: Epoxy resin |              |
| Weight                         |       | Approx. 0.5 g   | Approx. 6.5 g                              | Approx. 7 g  |
| Metallic compatibility         |       | Yes   | No   | Yes          |

**Note 1.** Refer to the *User's Manual* (Cat. No. Z278 or Z279) for data backup time for temperatures of 55°C or higher.

- The total Read or Write communication frequency is called the access frequency.
- This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.
- For details, refer to the *User's Manual* (Cat. No. Z278 or Z279).

## ID Tag with 8-/32-Kbyte Memory

| Item                           | Model | V680-D8KF68   | V680-D32KF68             |
|--------------------------------|-------|---|--------------------------|
| Memory capacity                |       | 8,192 bytes (user area)   | 32,744 bytes (user area) |
| Memory type                    |       | FRAM  |                          |
| Data backup time (See note 1.) |       | 10 years (at 70°C max.) after data is written   |                          |
| Memory longevity               |       | 10 billion times per block at 85°C max. Access frequency (See note): 10 billion times   |                          |
| Ambient operating temperature  |       | -20 to 85°C (with no icing)   |                          |
| Ambient storage temperature    |       | -40 to 85°C (with no icing)   |                          |
| Ambient operating humidity     |       | 35 to 85%   |                          |
| Degree of protection           |       | IEC 60529, IP67<br>In-house standard for antenna oil resistance (former JEM standard equivalent to IP67g) (See note 2.)                 |                          |
| Vibration resistance           |       | 10 to 500 Hz, 1.5-mm double amplitude at 100 m/s <sup>2</sup> acceleration with 10 sweeps in X, Y, and Z directions for 11 minutes each |                          |
| Shock resistance               |       | 500 m/s <sup>2</sup> in X, Y, and Z directions 3 times each (18 times in total)   |                          |
| Dimensions                     |       | 86 × 54 × 10 mm   |                          |
| Materials                      |       | Case: PBT resin<br>Filling: Epoxy resin   |                          |
| Weight                         |       | Approx. 50 g  |                          |
| Metallic compatibility         |       | No  |                          |

**Note 1.** Refer to the *User's Manual* (Cat. No. Z278 or Z279) for data backup time for temperatures of 70°C or higher.

- The total Read or Write communication frequency is called the access frequency.
- This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.
- For details, refer to the *User's Manual* (Cat. No. Z278 or Z279).

## Cylindrical Read/Write Antenna (Detachable Amplifier Unit Type)

| Item                          | Model | V680-HS52-W<br>(Standard Cable, Waterproof Connector)  | V680-HS52-R<br>(Flexible Cable, Non-waterproof Connector)  | V680-HS51<br>(Standard Cable, Non-waterproof Connector)   |
|-------------------------------|-------|--|--|---|
| Ambient operating temperature |       | -10 to 60°C (with no icing)  |  |   |
| Ambient storage temperature   |       | -25 to 75°C (with no icing)  |  |   |
| Ambient operating humidity    |       | 35% to 95% (with no condensation)  |  |   |
| Insulation resistance         |       | 20 MΩ min. (at 500 VDC) between the cable terminals and the case   |  |   |
| Dielectric strength           |       | 1,000 VAC (50/60 Hz) for 1 minute between the cable terminals and the case with a current leakage of 5 mA max.   |  |   |
| Degree of protection          |       | IP67 (IEC60529)<br>In-house standard for antenna oil resistance (former JEM standard equivalent to IP67g) (Read/Write Antenna portion) (See note 1.)       | IP67 (IEC60529)<br>In-house standard for antenna oil resistance (former JEM standard equivalent to IP67g) (Read/Write Antenna portion) (See note 2.) |   |
| Vibration resistance          |       | 10 to 500 Hz variable vibration, 1.5-mm double amplitude at 100 m/s <sup>2</sup> acceleration, with 10 sweeps in X, Y, and Z directions for 8 minutes each |  | 10 to 2,000 Hz variable vibration, 1.5-mm double amplitude at 150 m/s <sup>2</sup> acceleration, with 10 sweeps in X, Y, and Z directions for 15 minutes each |
| Shock resistance              |       | 500 m/s <sup>2</sup> in X, Y, and Z directions 3 times each (18 times in total)  |  | 1,000 m/s <sup>2</sup> in X, Y, and Z directions 3 times each (18 times in total)   |
| Appearance                    |       | M22 × 65 mm  |  | M12 × 35 mm   |
| Materials                     |       | ABS, brass, epoxy resin filling  |  |   |
| Weight                        |       | Approx. 850 g (with 12.5-m cable)  |  | Approx. 55 g (with 2-m cable)   |

**Note 1.** The degree of protection for the Connector is IP67/IP65. This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.

- The Connector is not waterproof. This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.
- For details, refer to the *User's Manual* (Cat. No. Z278 or Z279).

### Square Read/Write Antenna (Detachable Amplifier Unit Type)

| Item                          | Model | V680-HS63-W<br>(Standard Cable, Waterproof Connector)   | V680-HS63-R<br>(Flexible Cable, Non-waterproof Connector)  |
|-------------------------------|-------|---|--|
| Ambient operating temperature |       | -10 to 60°C (with no icing)   |  |
| Ambient storage temperature   |       | -25 to 75°C (with no icing)   |  |
| Ambient operating humidity    |       | 35% to 95% (with no condensation)   |  |
| Insulation resistance         |       | 20 MΩ min. (at 500 VDC) between the cable terminals and the case  |  |
| Dielectric strength           |       | 1,000 VAC (50/60 Hz) for 1 minute between the cable terminals and the case with a current leakage of 5 mA max.  |  |
| Degree of protection          |       | IP67 (IEC60529)<br>In-house standard for antenna oil resistance (former JEM standard equivalent to IP67g) (Read/Write Antenna portion) (See note 1.)        | IP67 (IEC60529)<br>In-house standard for antenna oil resistance (former JEM standard equivalent to IP67g) (Read/Write Antenna portion) (See note 2.) |
| Vibration resistance          |       | 10 to 500 Hz variable vibration, 1.5-mm double amplitude at 100 m/s <sup>2</sup> acceleration, with 10 sweeps in X, Y, and Z directions for 11 minutes each |  |
| Shock resistance              |       | 500 m/s <sup>2</sup> in X, Y, and Z directions 3 times each (18 times in total)   |  |
| Appearance                    |       | 40 × 53 × 23 mm   |  |
| Materials                     |       | ABS, epoxy resin filling  |  |
| Weight                        |       | Approx. 850 g (with 12.5-m cable)   |  |

| Item                          | Model | V680-HS65-W<br>(Standard Cable, Waterproof Connector)   | V680-HS65-R<br>(Flexible Cable, Non-waterproof Connector)   |
|-------------------------------|-------|---|---|
| Ambient operating temperature |       | -25 to 70°C (with no icing)   |   |
| Ambient storage temperature   |       | -40 to 85°C (with no icing)   |   |
| Ambient operating humidity    |       | 35% to 95% (with no condensation)   |   |
| Insulation resistance         |       | 20 MΩ min. (at 500 VDC) between the cable terminals and the case  |   |
| Dielectric strength           |       | 1,000 VAC (50/60 Hz) for 1 minute between the cable terminals and the case with a current leakage of 5 mA max.  |   |
| Degree of protection          |       | In-house standard for antenna oil resistance (former JEM standard equivalent to IP67g) (Read/Write Antenna portion) (See note 1.)                           | In-house standard for antenna oil resistance (former JEM standard equivalent to IP67g) (Read/Write Antenna portion) (See note 2.) |
| Vibration resistance          |       | 10 to 500 Hz variable vibration, 1.5-mm double amplitude at 100 m/s <sup>2</sup> acceleration, with 10 sweeps in X, Y, and Z directions for 11 minutes each |   |
| Shock resistance              |       | 500 m/s <sup>2</sup> in X, Y, and Z directions 3 times each (18 times in total)   |   |
| Appearance                    |       | 100 × 100 × 30 mm   |   |
| Materials                     |       | ABS, epoxy resin filling  |   |
| Weight                        |       | Approx. 1,100 g (with 12.5-m cable)   |   |

- Note 1.** The degree of protection for the Connector is IP67/IP65. This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.
- 2.** The Connector is not waterproof. This OMRON in-house standard confirms resistance to cutting and other oils. It is equivalent to the former JEM standard.
- 3.** For details, refer to the *User's Manual* (Cat. No. Z278 or Z279).

### Amplifier (DeviceNet ID Slave)

| Item                          | Model | V680-HAM42-DRT   |
|-------------------------------|-------|--|
| Connectable Antennas          |       | One channel (V680-HS□□)  |
| Rated voltage                 |       | 24 VDC (-15% to 10%) including 10% ripple (p-p)  |
| Power consumption             |       | 4 W max. (Current consumption of 200 mA max. at power supply voltage of 24 VDC)  |
| Ambient operating temperature |       | -10 to 55°C (with no icing)  |
| Ambient storage temperature   |       | -25 to 65°C (with no icing)  |
| Ambient operating humidity    |       | 25% to 85% (with no condensation; ambient operating temperature is 40°C max. at humidity of 85%)                                     |
| Insulation resistance         |       | 20 MΩ min. (at 500 VDC) between all terminals excluding the ground terminal and the case   |
| Dielectric strength           |       | 1,000 VAC (50/60 Hz) for 1 minute between all terminals excluding the ground terminal and the case                                   |
| Vibration resistance          |       | 10 to 150 Hz, 0.2-mm double amplitude at 15 m/s <sup>2</sup> acceleration with 10 sweeps in X, Y and Z directions for 8 minutes each |
| Shock resistance              |       | 150 m/s <sup>2</sup> in X, Y, and Z directions 3 times each (18 times in total)  |
| Appearance                    |       | 65 × 65 × 65 mm (excluding protrusions)  |
| Degree of protection          |       | IEC 60529, IP20  |
| Materials                     |       | Polycarbonate (PC) resin, ABS resin  |
| Weight                        |       | Approx. 150 g  |
| Mounting                      |       | DIN Track  |

- Note 1.** For details, refer to the *User's Manual* (Cat. No. Z278).
- 2.** The number of words allocated in the master depends on the Access Mode. Refer to page 9 for information on *Part Names and Operating Modes*.

## Amplifier: ID Flag Sensor

| Item                          | Model | V680-HAM91/V680-HAM81  |
|-------------------------------|-------|--|
| Rated voltage                 |       | 24 VDC (-15% to +10%) including 10% ripple (p-p)   |
| Power consumption             |       | 3.5 W (24 VDC, 150 mA max. except external I/O line current)   |
| Ambient operating temperature |       | -10 to 55°C (with no icing)  |
| Ambient storage temperature   |       | -25 to 65°C (with no icing)  |
| Ambient operating humidity    |       | 25% to 85% (with no condensation; ambient operating temperature is 40°C max. at humidity of 85%)                                     |
| Insulation resistance         |       | 20 MΩ min. (at 500 VDC) between all terminals excluding the FG terminal and the case   |
| Dielectric strength           |       | 1,000 VAC (50/60 Hz) applied for 1 minute between all terminals excluding the FG terminal and the case                               |
| Vibration resistance          |       | 10 to 150 Hz, 0.2-mm double amplitude at 15 m/s <sup>2</sup> acceleration with 10 sweeps in X, Y and Z directions for 8 minutes each |
| Shock resistance              |       | 150 m/s <sup>2</sup> in X, Y, and Z directions 3 times each (18 times in total)  |
| Appearance                    |       | 90 × 30 × 65 mm (excluding protrusions)  |
| Degree of protection          |       | IEC 60529, IP40  |
| Materials                     |       | Polycarbonate (PC) resin, ABS resin  |
| Weight                        |       | Approx. 130 g  |
| Mounting                      |       | DIN Track  |

**Note 1.** For details, refer to the *User's Manual* (Cat. No. Z278).


**2.** The connectors are not water resistant. If there is a possibility that water will be splashed onto the ID Sensor Unit, mount it inside of a control box. Also, be sure to use the V680 as a set with the V680-A60 Interface Cable (sold separately).

## I/O Specifications


| Item                  | Model | V680-HAM91   | V680-HAM81   |
|-----------------------|-------|--|--|
| Input specifications  |       | Transistor output<br>Short-circuit current: 3 mA (TYP) (input terminal and 0-V terminal shorted)<br>OFF voltage: 15 to 30 VDC, ON voltage: 0 to 5 VDC<br>Input impedance: 8.2 kΩ<br>Applied voltage: 30 VDC max. |  |
| Output specifications |       | NPN open-collector output<br>30 VDC, 20 mA max<br>Residual voltage: 2 V max.   | PNP open-collector output<br>30 VDC, 20 mA max<br>Residual voltage: 2 V max. |

## I/O Circuit Diagrams

### V680-HAM91

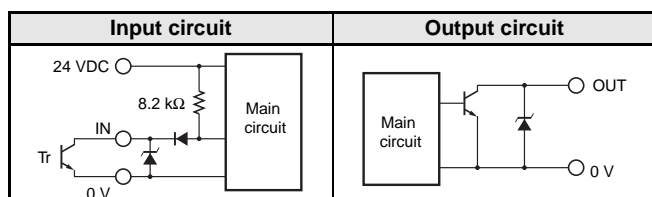

### V680-HAM81

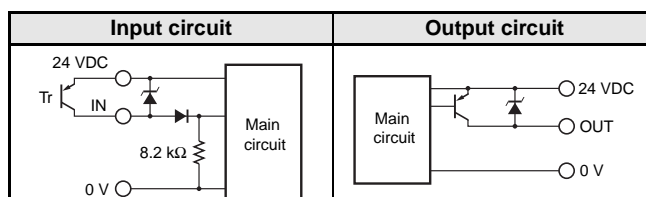




# Part Names and Operating Modes

## V680-HAM42-DRT

### Part Names

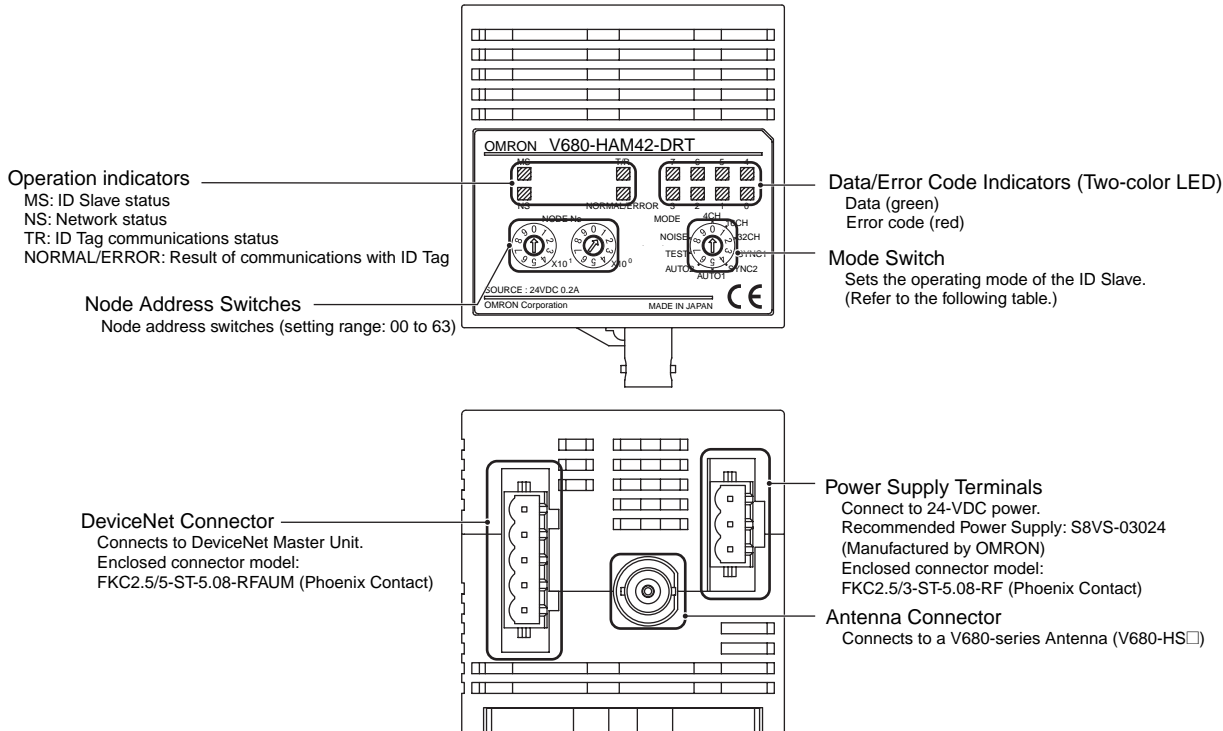

### Operating Modes

| Mode | Symbol | Description  | Maximum number of bytes accessible in ID Tag | Words allocated in Master Unit   |
|------|--------|--|--|--|
| 0    | 4CH    | 4-byte Access Mode   | Read: 4 bytes<br>Write: 4 bytes              | IN: 4 words<br>OUT: 4 words<br>(PLC inputs: 64 points, PLC outputs: 64 points)     |
| 1    | 16CH   | 26-byte Access Mode  | Read: 26 bytes<br>Write: 26 bytes            | IN: 16 words<br>OUT: 16 words<br>(PLC inputs: 256 points, PLC outputs: 256 points) |
| 2    | 32CH   | 58-byte Access Mode  | Read: 58 bytes<br>Write: 58 bytes            | IN: 32 words<br>OUT: 32 words<br>(PLC inputs: 512 points, PLC outputs: 512 points) |
| 3    | SYNC1  | V600-compatible Trigger Mode, 100-ms output time                           | Read: 3 bytes<br>Write: 2 bytes              | IN: 2 words<br>OUT: 2 words  |
| 4    | SYNC2  | V600-compatible Trigger Mode, 500-ms output time                           |  |  |
| 5    | AUTO1  | V600-compatible Auto Mode, 100-ms output time                              |  |  |
| 6    | AUTO2  | V600-compatible Auto Mode, 500-ms output time                              |  |  |
| 7    | TEST   | ID Tag Communications Test Mode (Checks standalone operation of ID Slave.) | ---  | ---  |
| 8    | NOISE  | Noise Measurement Mode (Measures the noise around the Antenna.)            |  |  |
| 9    | ---    | Setting prohibited   |  |  |

**Note 1.** The V600-compatible Trigger and Auto Modes can be used with the same I/O settings and control methods that are used with the V600-HAM42-DRT.

**2.** Communications with the host device will be offline while the Communications Test Mode or Noise Measurement Mode is being used.

### Commands (4-byte, 26-byte, 58-byte Access Mode)

|                |                |   |
|----------------|----------------|---|
| <b>Reading</b> | READ           | Data in the ID Tag memory is read by specifying the memory address and the number of bytes to process. (The number of bytes can be specified using the Access Mode.)    |
|                | <b>Writing</b> |   |
|                | WRITE          | Data is written to the ID Tag by specifying the memory address, number of bytes to process, and the data. (The number of bytes can be specified using the Access Mode.) |
|                | BIT SET        | Previously specified bits (i.e., bits that are turned ON) are turned ON in the ID Tag address specified for BIT SET.  |
|                | BIT CLEAR      | Previously specified bits (i.e., bits that are turned ON) are turned OFF in the ID Tag address specified for BIT CLEAR.   |
|                | DATA FILL      | The specified continuous memory addresses in the ID Tag are filled with the same data.  |


V680-HAM91/-HAM81

Parts Names

I/O connector CN2  
Connects to a PLC or other host using an Interface Cable (V680-A60). This connector is not required if data will not be written to ID Tags or the address shift function and noise check function will not be used.

I/O connector CN1  
Connects to a PLC or other host using an Interface Cable (V680-A60).

Access Address Mode Setting Switch  
Sets the memory address in the ID Tag that will be accessed.

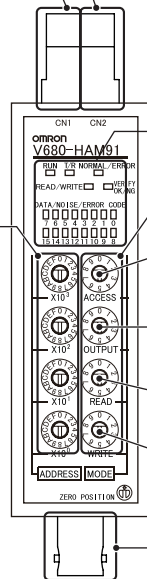

Indicators  
Indicates the ID Flag Sensor status and ID Tag communications status.

Mode Setting Switches

Access Mode Setting  
Sets the operating mode (SYNC or AUTO) for communications with the ID Tag, and sets the Noise Measurement Mode. (Refer to the following table.)

Output Mode Setting  
Sets the Output Mode (10-ms, 50-ms, or 500-ms OFF-delay), and output time setting (10-ms, 50-ms, 500-ms, or Continuous output).

Read Mode Setting  
Sets the mode for reading from an ID Tag DATA READ, VERIFY, or Wire-saving Mode.

Write Mode Setting  
Sets the mode used when writing (16-bit write/8-bit write, BIT SET/BIT CLEAR).

Antenna Connector  
Connects to a V680-series Antenna (V680-HS□).

Main Functions

|                |                  |  |
|----------------|------------------|--|
| <b>Reading</b> | Data Read        | Reads 16 bits of data from the set address in the ID Tag and outputs the data to the data output lines.                    |
|                | Verify           | Compares the code set in advance with the code read from the ID Tag and outputs the match/mismatch result.                 |
|                | Wire-saving Mode | The wire-saving mode enables reading and writing 16-bit data using one 16-point Input Unit for a PLC or other host device. |
| <b>Writing</b> | Data Write       | Writes the data specified in the data input lines. (The user can select to batch-write 16 bits or 8 bits.)                 |
|                | Bit Set          | Sets specified bits.   |
|                | Bit Clear        | Clears specified bits.   |

Other Functions

|                         |   |
|-------------------------|---|
| <b>Address Shift</b>    | When reading or writing more than 16 bits (2 bytes), an address shift can be specified to enable reading or writing up to 128 bits (16 addresses). The address shift can be set from the host, eliminating the need to change the address set on the front panel. |
| <b>Noise Check</b>      | Measures the noise around the Antenna.  |
| <b>Write Protection</b> | Prevents data stored in the ID Tag from being overwritten.  |

Operating Modes

| Function                          |  | Mode | Standard modes                | V600-HAR91/81 and HAM91/81-compatible modes | V600-HAR92-compatible modes   |
|-----------------------------------|--|------|-------------------------------|---|-------------------------------|
|                                   |  |      | AUTO MODE 1<br>TRIGGER MODE 1 | AUTO MODE 2<br>TRIGGER MODE 2               | AUTO MODE 3<br>TRIGGER MODE 3 |
| Reading                           | 16 bits                                | ●    | ●                             | (●) (See note 1.)                           | ●                             |
|                                   | Verification Check                     | ●    | ●                             | ●   |                               |
|                                   | Wire-saving Mode (See note 2.)         | ●    |                               |   | ●                             |
| Writing                           | 8 bits (1 byte)                        | ●    | ●                             | ●   |                               |
|                                   | 16 bits (2 bytes)                      | ●    | ●                             | ●   |                               |
|                                   | Individual bits (BIT SET or BIT CLEAR) | ●    | ●                             | ●   |                               |
| Parity check output (See note 3.) |  | ●    |                               |   | ●                             |
| Noise check function              |  | ●    |                               |   |                               |
| Address shift function            |  | ●    |                               |   |                               |

**Note 1.** If an error occurs, the error code will not be output to the data output lines (OD0 to OD15).





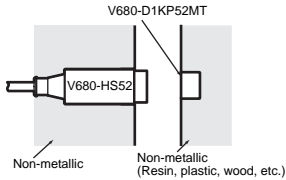




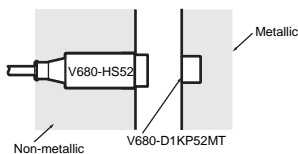



**2.** If an error occurs, the data output lines will all turn ON.

**3.** The parity is also output when the error code is output.

**4.** The V600-compatible modes are for compatibility with the previous V600 Series. Not all functions are supported in these modes.
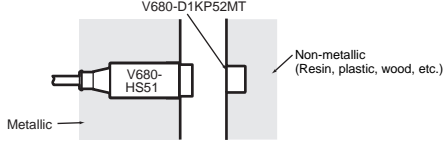
## ■ Performance Specifications

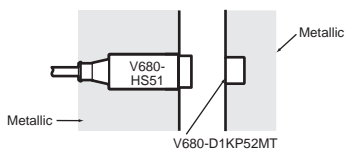

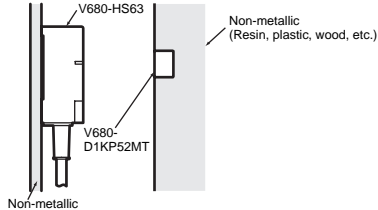

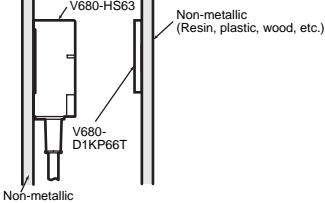









### ID Tag (1-kbyte Memory) Transmission



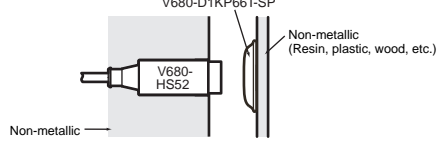

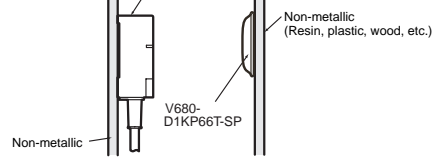

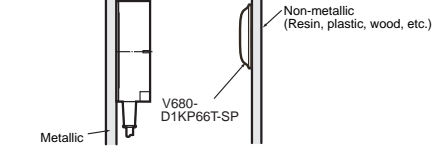
| Recommended combination   |   | Function       | Transmission distance<br>(unit: mm)    | ID Tag and Read/Write Antenna mounting conditions                                     |
|---|---|----------------|--|---|
| ID Tag  | Read/Write Antenna  |                |  |   |
|    |    | Read distance  | 0.5 to 6.5 mm<br>(axial deviation ±2)  |    |
|   |   | Write distance | 0.5 to 6.0 mm<br>(axial deviation ±2)  |   |
|   |    | Read distance  | 0.5 to 9.0 mm<br>(axial deviation ±2)  |    |
|   |   | Write distance | 0.5 to 8.5 mm<br>(axial deviation ±2)  |   |
|    |    | Read distance  | 0.5 to 3.5 mm<br>(axial deviation ±2)  |    |
|   |   | Write distance | 0.5 to 3.0 mm<br>(axial deviation ±2)  |   |
|   |   | Read distance  | 0.5 to 4.5 mm<br>(axial deviation ±2)  |   |
|   |   | Write distance | 0.5 to 4.0 mm<br>(axial deviation ±2)  |   |
|  |  | Read distance  | 0.5 to 12.0 mm<br>(axial deviation ±2) |  |
|   |   | Write distance | 0.5 to 9.5 mm<br>(axial deviation ±2)  |   |

**Note 1.** When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna.

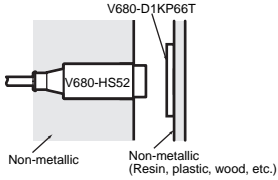The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm).  
For details, refer to the *User's Manual* (Cat. No. Z248 or Z262).










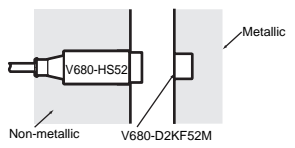







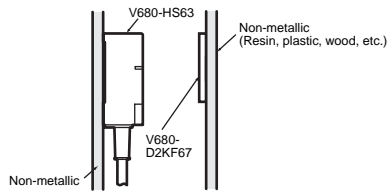

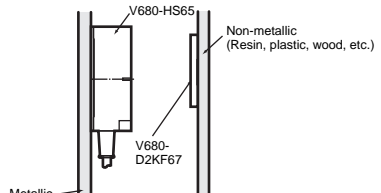
**2.** The transmission distance may be reduced if the V680-D1KP66T or V680-D1KP58HT is mounted onto a metallic surface. Refer to the *User's Manual* (V680-D1KP□□: Cat. No. Z262, V680-D1KP58HT: Cat. No. Z221) for details.


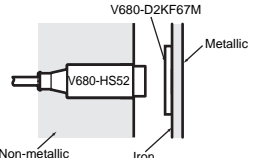

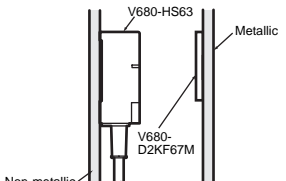

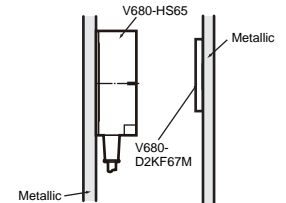
| Recommended combination   |   | Function       | Transmission distance<br>(unit: mm)                            | ID Tag and Read/Write Antenna mounting conditions                                     |
|---|---|----------------|--|---|
| ID Tag  | Read/Write Antenna  |                |  |   |
|    |    | Read distance  | 1.0 to 17.0 mm<br>(axial deviation $\pm 2$ )<br>(See note 2.)  |    |
|   |   | Write distance | 1.0 to 17.0 mm<br>(axial deviation $\pm 2$ )<br>(See note 2.)  |   |
|   |    | Read distance  | 5.0 to 30.0 mm<br>(axial deviation $\pm 10$ )<br>(See note 2.) |    |
|   |   | Write distance | 5.0 to 25.0 mm<br>(axial deviation $\pm 10$ )<br>(See note 2.) |   |
|   |    | Read distance  | 5.0 to 47.0 mm<br>(axial deviation $\pm 10$ )<br>(See note 2.) |    |
|   |   | Write distance | 5.0 to 42.0 mm<br>(axial deviation $\pm 10$ )<br>(See note 2.) |   |
|  |   | Read distance  | 1.0 to 16.0 mm<br>(axial deviation $\pm 2$ )                   |   |
|   |   | Write distance | 1.0 to 14.0 mm<br>(axial deviation $\pm 2$ )                   |   |
|   |  | Read distance  | 5.0 to 25.0 mm<br>(axial deviation $\pm 10$ )                  |  |
|   |   | Write distance | 5.0 to 20.0 mm<br>(axial deviation $\pm 10$ )                  |   |
|   |  | Read distance  | 5.0 to 25.0 mm<br>(axial deviation $\pm 10$ )                  |  |
|   |   | Write distance | 5.0 to 20.0 mm<br>(axial deviation $\pm 10$ )                  |   |
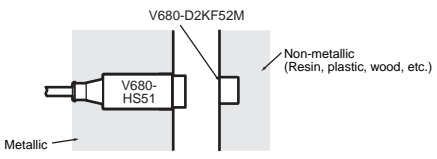
| Recommended combination   |   | Function       | Transmission distance<br>(unit: mm)     | ID Tag and Read/Write Antenna mounting conditions                                   |
|---|---|----------------|---|---|
| ID Tag  | Read/Write Antenna  |                |   |   |
|  |  | Read distance  | 1.0 to 15.0 mm<br>(axial deviation ±2)  |  |
|   |   | Write distance | 1.0 to 15.0 mm<br>(axial deviation ±2)  |   |
|   |  | Read distance  | 5.0 to 25.0 mm<br>(axial deviation ±10) |  |
|   |   | Write distance | 5.0 to 20.0 mm<br>(axial deviation ±10) |   |
|   |  | Read distance  | 5.0 to 42.0 mm<br>(axial deviation ±10) |  |
|   |   | Write distance | 5.0 to 37.0 mm<br>(axial deviation ±10) |   |

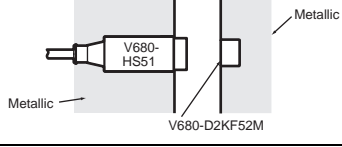
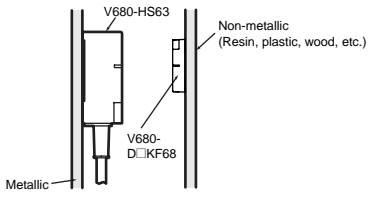

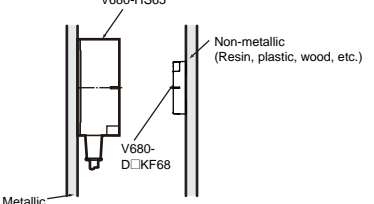

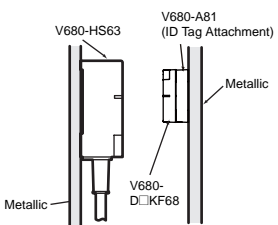

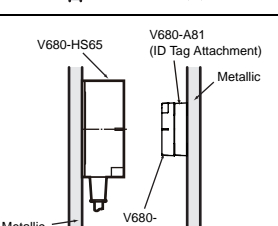
- Note 1.** When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna.  
 The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm).  
 For details, refer to the *User's Manual* (Cat. No. Z248 or Z262).
- 2.** Refer to the *User's Manual* (V680-D1KP□□: Cat. No. Z262, V680-D1KP58HT: Cat. No. Z221) for details.

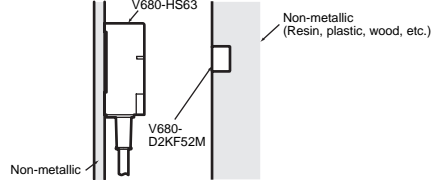**ID Tag (2-kbyte Memory) Transmission**
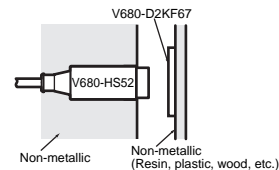
| Recommended combination  |   | Function       | Transmission distance<br>(unit: mm)                          | ID Tag and Read/Write Antenna mounting conditions                                     |
|--|---|----------------|--|---|
| ID Tag   | Read/Write Antenna  |                |  |   |
|   |    | Read distance  | 0.5 to 5.5 mm<br>(axial deviation $\pm 2$ )                  |    |
|  |   | Write distance | 0.5 to 5.5 mm<br>(axial deviation $\pm 2$ )                  |   |
|  |    | Read distance  | 0.5 to 8.0 mm<br>(axial deviation $\pm 2$ )                  |    |
|  |   | Write distance | 0.5 to 8.0 mm<br>(axial deviation $\pm 2$ )                  |   |
| V680-D2KF52M<br>(embedded in metallic surface: steel)<br><br> |    | Read distance  | 0.5 to 3.5 mm<br>(axial deviation $\pm 2$ )                  |    |
|  |   | Write distance | 0.5 to 3.5 mm<br>(axial deviation $\pm 2$ )                  |   |
|  |    | Read distance  | 0.5 to 3.0 mm<br>(axial deviation $\pm 2$ )                  |    |
|  |   | Write distance | 0.5 to 3.0 mm<br>(axial deviation $\pm 2$ )                  |   |
|    |   | Read distance  | 0.5 to 9.5 mm<br>(axial deviation $\pm 2$ )                  |   |
|  |   | Write distance | 0.5 to 9.5 mm<br>(axial deviation $\pm 2$ )                  |   |
|   |  | Read distance  | 1.0 to 17.0 mm<br>(axial deviation $\pm 2$ )<br>(See note.)  |  |
|  |   | Write distance | 1.0 to 17.0 mm<br>(axial deviation $\pm 2$ )<br>(See note.)  |   |
|  |  | Read distance  | 7.0 to 30.0 mm<br>(axial deviation $\pm 10$ )<br>(See note.) |  |
|  |   | Write distance | 7.0 to 30.0 mm<br>(axial deviation $\pm 10$ )<br>(See note.) |   |
|  |  | Read distance  | 5.0 to 42.0 mm<br>(axial deviation $\pm 10$ )<br>(See note.) |  |
|  |   | Write distance | 5.0 to 42.0 mm<br>(axial deviation $\pm 10$ )<br>(See note.) |   |

| Recommended combination                                 |   | Function       | Transmission distance<br>(unit: mm)  | ID Tag and Read/Write Antenna mounting conditions                                   |
|---|---|----------------|--------------------------------------|---|
| ID Tag  | Read/Write Antenna  |                |                                      |   |
| V680-D2KF67M (flush-mounted on metallic surface: steel) |  | Read distance  | 1.0 to 16.0 mm (axial deviation ±2)  |  |
|   |   | Write distance | 1.0 to 16.0 mm (axial deviation ±2)  |   |
|   |  | Read distance  | 6.0 to 25.0 mm (axial deviation ±10) |  |
|   |   | Write distance | 6.0 to 25.0 mm (axial deviation ±10) |   |
|   |  | Read distance  | 5.0 to 25.0 mm (axial deviation ±10) |  |
|   |   | Write distance | 5.0 to 25.0 mm (axial deviation ±10) |   |

### ID Tag (8-/32-Kbyte Memory) Transmission

| Recommended combination   |   | Function       | Transmission distance<br>(unit: mm)              | ID Tag and Read/Write Antenna mounting conditions                                     |
|---|---|----------------|--|---|
| ID Tag  | Read/Write Antenna  |                |  |   |
| V680-D8KF68/<br>-D32KF68  |   | Read distance  | 5.0 to 45.0 mm (axial deviation ±10) (See note.) |   |
|   |   | Write distance | 5.0 to 45.0 mm (axial deviation ±10) (See note.) |   |
|   |  | Read distance  | 5.0 to 75.0 mm (axial deviation ±10) (See note.) |  |
|   |   | Write distance | 5.0 to 75.0 mm (axial deviation ±10) (See note.) |   |
| V680-D8KF68/<br>-D32KF68<br>(Special attachment provided; flush-mounted on metallic surface: steel) |  | Read distance  | 5.0 to 35.0 mm (axial deviation ±10)             |  |
|   |   | Write distance | 5.0 to 35.0 mm (axial deviation ±10)             |   |
|   |  | Read distance  | 5.0 to 55.0 mm (axial deviation ±10)             |  |
|   |   | Write distance | 5.0 to 55.0 mm (axial deviation ±10)             |   |

**Note:** When mounting the V680-HS65, be sure to attach the Mounting Brackets at the base of the Antenna. The enclosed Mounting Brackets do not need to be used, however, if the mounting brackets on the Antenna are metal plates and their dimensions are larger than the dimensions of the Antenna (100 × 100 mm). For details, refer to the *User's Manual* (Cat. No. Z248 or Z262).

**Note:** The transmission distance may be reduced if the V680-D1KP66T or V680-D1KP58HT is mounted onto a metallic surface. Refer to the *User's Manual* (V680-D1KP□□: Cat. No. Z262, V680-D1KP58HT: Cat. No. Z221) for details.

# Characteristic Data (Typical)


## Transmission Range

(unit: mm)


### 1-kbyte Memory ID Tag

The values given for communications ranges are reference values. Refer to pages 11 to 13 for communications distance specifications. The communications distance will depend on the ID Tags, ambient temperature, surrounding metal, noise, and other factors. Test operation completely when installing a system.


**V680-HS52 (embedded in non-metallic material) & V680-D1KP52MT**

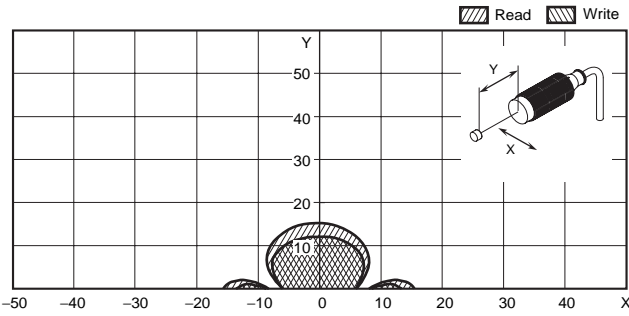


**V680-HS52 (embedded in non-metallic material) & V680-D1KP52MT (embedded in metallic surface: steel)**

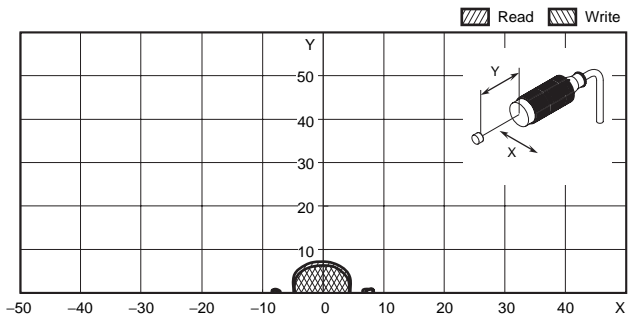


**V680-HS51 (embedded in metallic material) & V680-D1KP52MT**

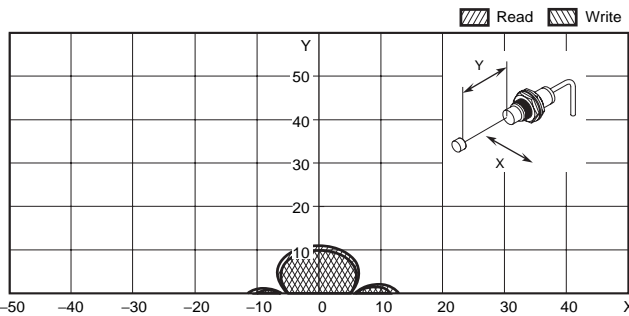


**V680-HS51 (embedded in metallic material) & V680-D1KP52MT (embedded in metallic surface: steel)**

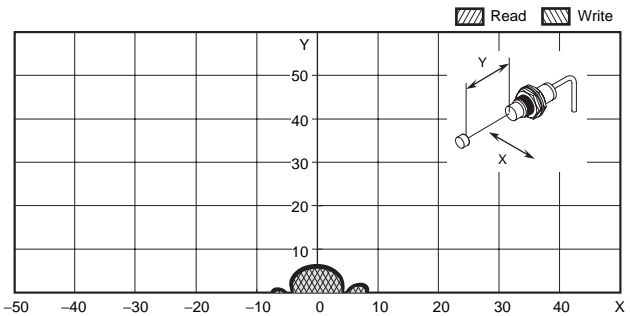


**V680-HS63 (mounted on non-metallic material) & V680-D1KP52MT**

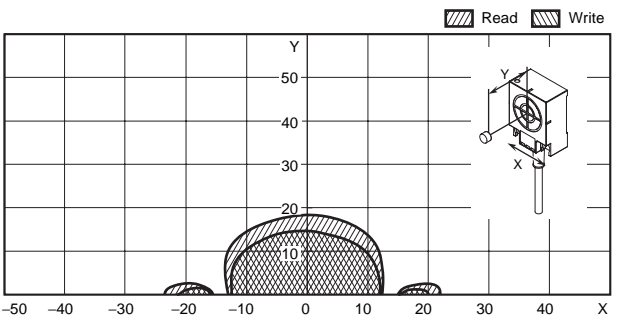


**V680-HS52 (embedded in non-metallic material) & V680-D1KP66T**

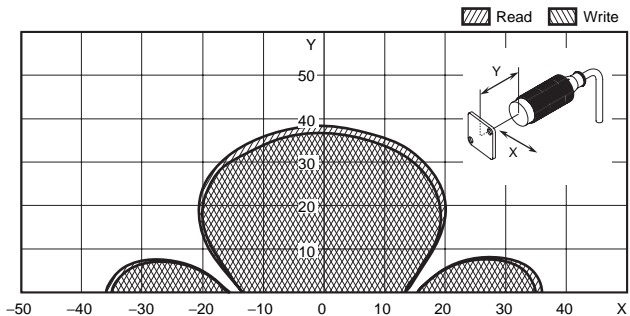

**V680-HS63 (mounted on non-metallic material) & V680-D1KP66T**

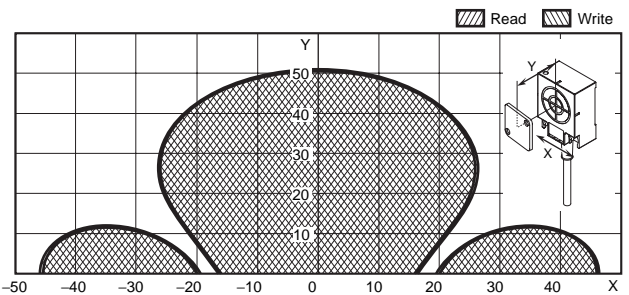


**V680-HS65 (mounted on metallic material) & V680-D1KP66T**

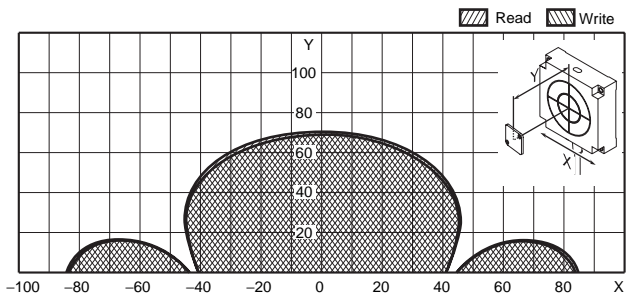





**V680-HS52 (embedded in non-metallic material) & V680-D1KP66T-SP**

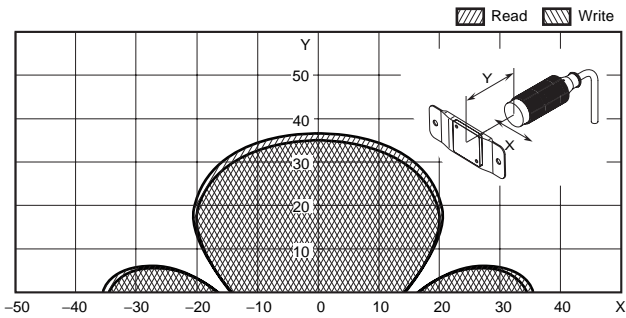


**V680-HS63 (mounted on non-metallic material) & V680-D1KP66T-SP**

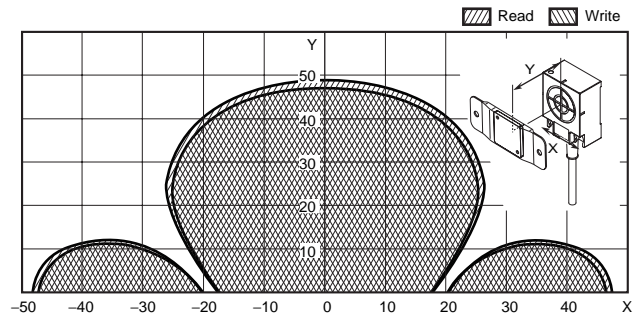

**V680-HS65 (mounted on metallic material) & V680-D1KP66T-SP**


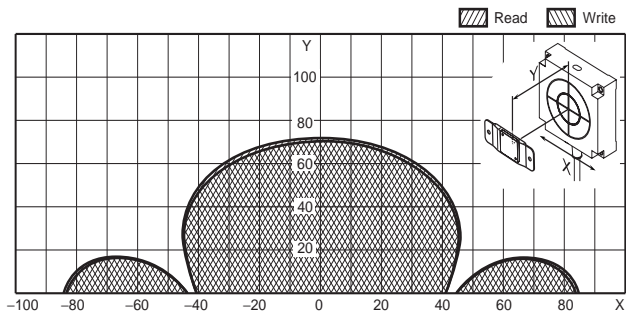


**V680-HS52 (embedded in non-metallic material) & V680-D1KP66MT (flush-mounted on metallic surface: steel)**

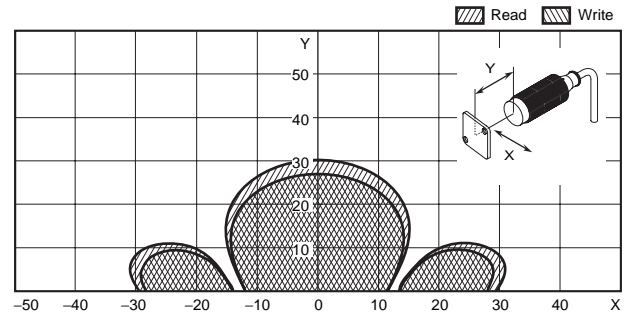

**V680-HS63 (mounted on non-metallic material) & V680-D1KP66MT (flush-mounted on metallic surface: steel)**


**V680-HS65 (mounted on metallic material) & V680-D1K66MT (flush-mounted on metallic surface: steel)**

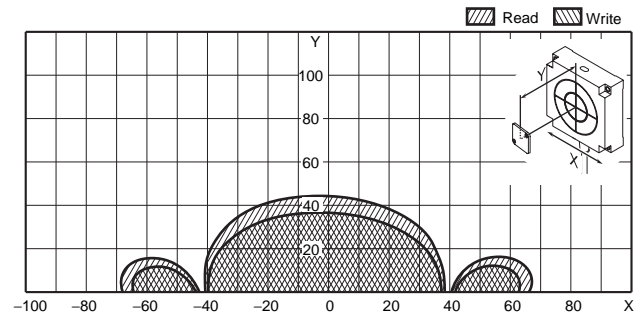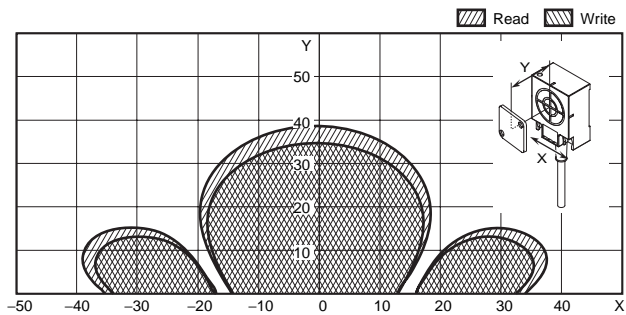


## 2-kbyte Memory ID Tag

The values given for communications ranges are reference values. Refer to pages 14 to 15 for communications distance specifications. The communications distance will depend on the ID Tags, ambient temperature, surrounding metal, noise, and other factors. Test operation completely when installing a system.


**V680-HS52 (embedded in non-metallic material) & V680-D2KF52M**

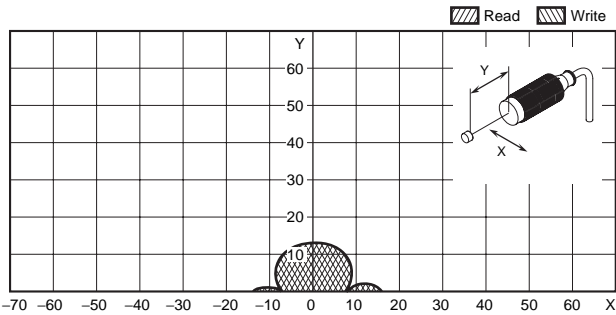


**V680-HS52 (embedded in non-metallic material) & V680-D2KF52M (embedded in metallic surface: steel)**

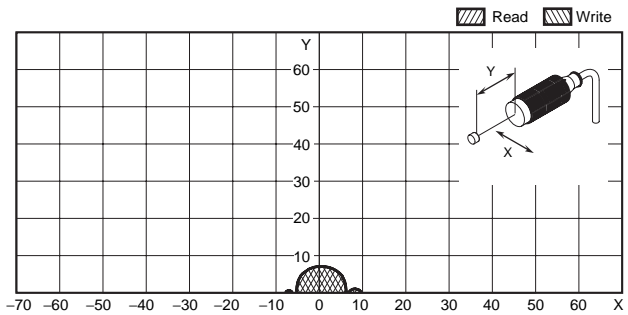


**V680-HS51 (embedded in metallic material) & V680-D2KF52M**

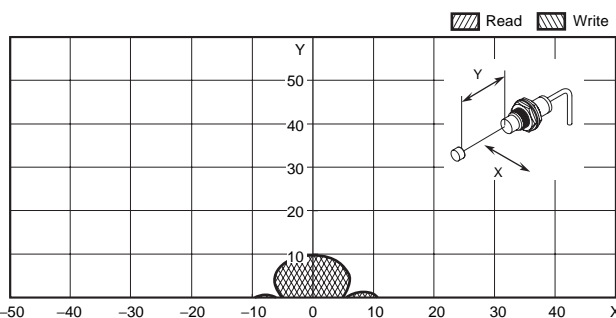


**V680-HS51 (embedded in metallic material) & V680-D2KF52M (embedded in metallic surface: steel)**

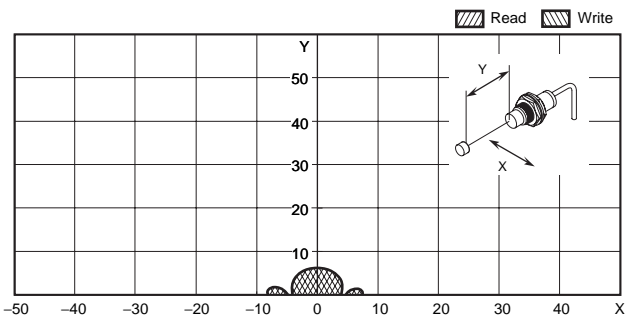


**V680-HS63 (mounted on non-metallic material) & V680-D2KF52M**

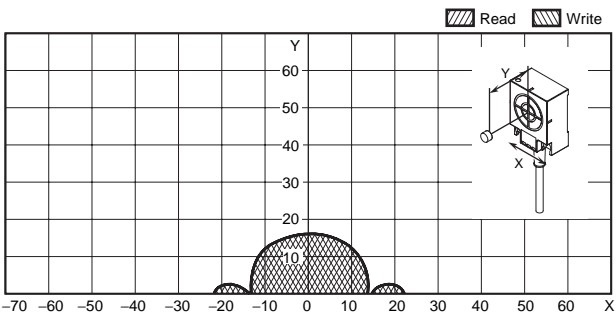


**V680-HS52 (embedded in metallic material) & V680-D2KF67**

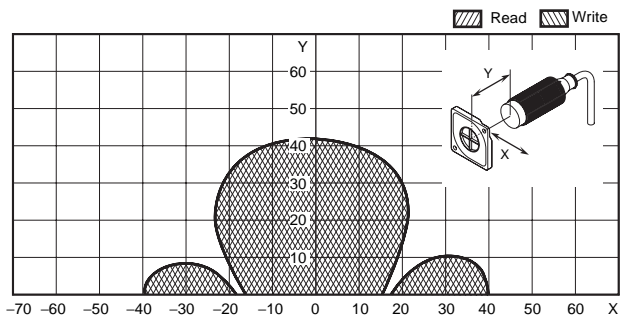


**V680-HS63 (mounted on non-metallic material) & V680-D2KF67**

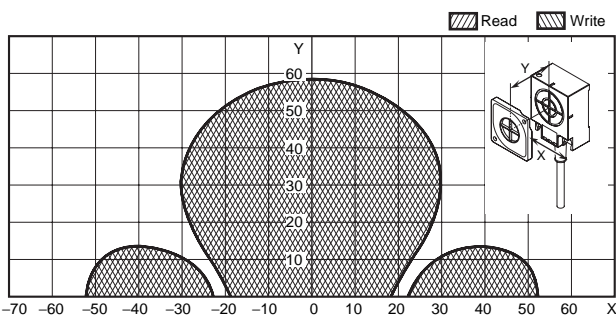


**V680-HS65 (mounted on metallic material) & V680-D2KF67**

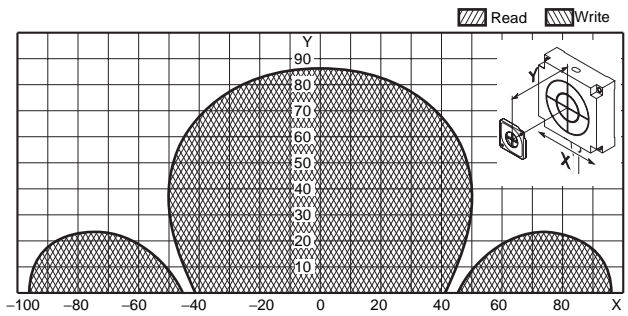


**V680-HS52 (embedded in non-metallic material) & V680-D2KF67M (flush-mounted on metallic surface: steel)**

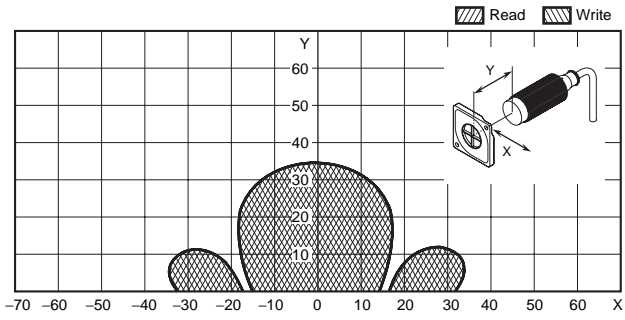

**V680-HS63 (mounted on non-metallic material) & V680-D2KF67M (flush-mounted on metallic surface: steel)**

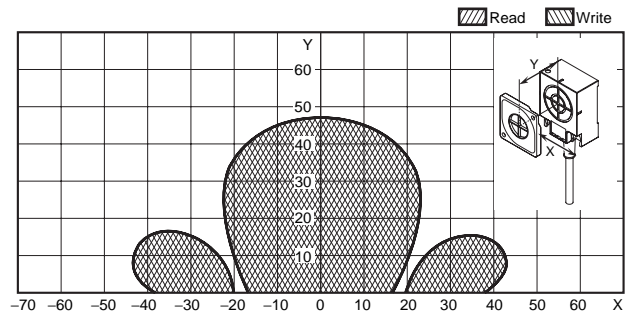


**V680-HS65 (mounted on metallic material) & V680-D2KF67M (flush-mounted on metallic surface: steel)**

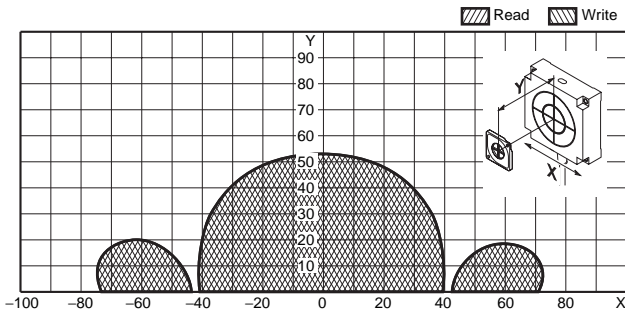


### 8-/32-Kbyte Memory ID Tag

The values given for communications ranges are reference values. Refer to pages 15 for communications distance specifications. The communications distance will depend on the ID Tags, ambient temperature, surrounding metal, noise, and other factors. Test operation completely when installing a system.


**V680-HS63 (mounted on metallic material) & V680-D8KF68/-D32KF68 (Horizontal-facing ID Tag)**

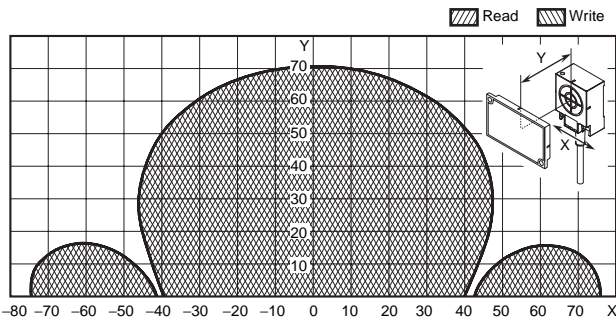


**V680-HS63 (mounted on metallic material) & V680-D8KF68/-D32KF68 (Vertical-facing ID Tag)**

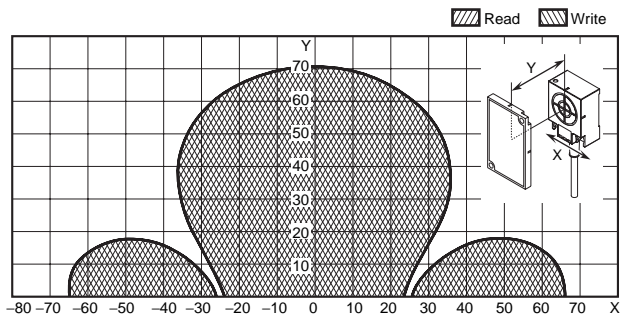


**V680-HS63 (mounted on metallic material) & V680-D8KF68/-D32KF68 Flush-mounted on metallic surface: steel (Horizontal-facing ID Tag) When the V680-A81 ID Tag Attachment is mounted.**

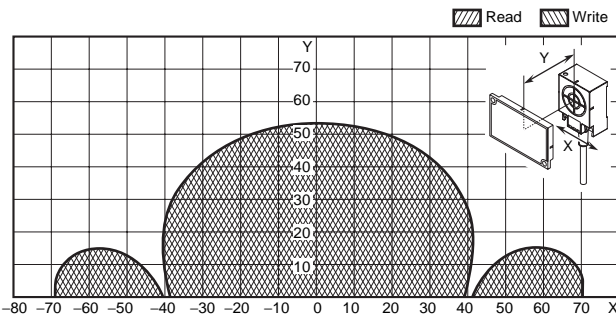


**V680-HS63 (mounted on metallic material) & V680-D8KF68/-D32KF68 Flush-mounted on metallic surface: steel (Vertical-facing ID Tag) When the V680-A81 ID Tag Attachment is mounted.**

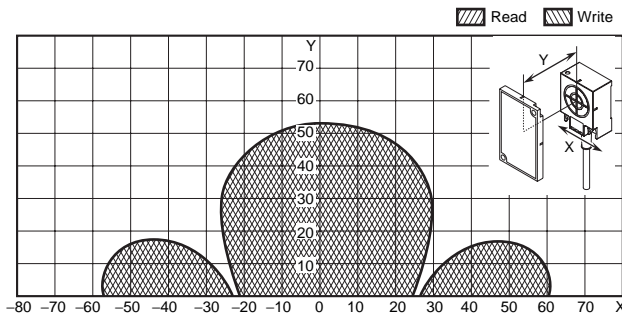


**V680-HS65 (mounted on metallic material) & V680-D8KF68/-D32KF68 (Horizontal-facing ID Tag)**

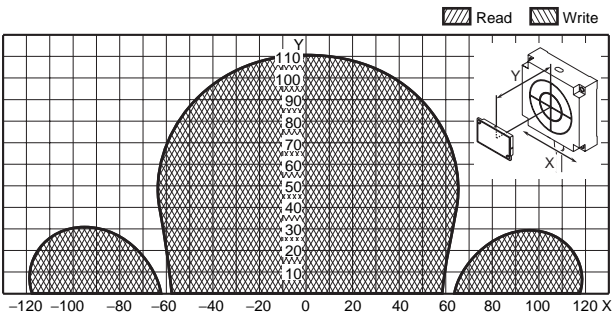


**V680-HS65 (mounted on metallic material) & V680-D8KF68/-D32KF68 (Vertical-facing ID Tag)**

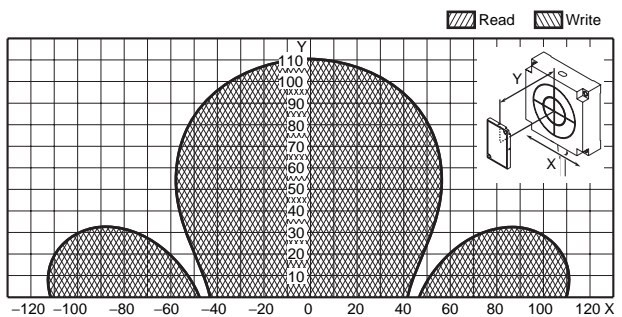

**V680-HS65 (mounted on metallic material) & V680-D8KF68/-D32KF68 Flush-mounted on metallic surface: steel (Horizontal-facing ID Tag) When the V680-A81 ID Tag Attachment is mounted.**

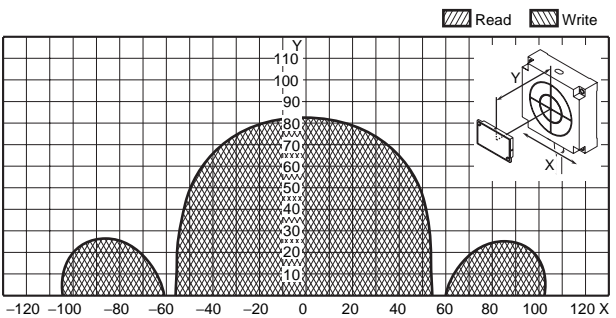

**V680-HS65 (mounted on metallic material) & V680-D8KF68/-D32KF68 Flush-mounted on metallic surface: steel (Vertical-facing ID Tag) When the V680-A81 ID Tag Attachment is mounted.**

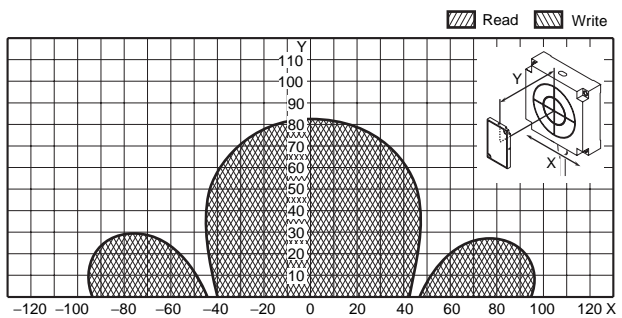

## Processing Times (for reference purposes only)

Communications times between the Antenna and ID Tag, plus the processing time for the Amplifier.

### V680-HAM42-DRT (DeviceNet ID Slave)

#### 1-Kb Memory Tag

V680-D1KP□ (V680-HS□□ Antenna)

| Communications speed setting | Command                   | Communications time (ms)                 |                     |                     |                      |
|------------------------------|---------------------------|--|---------------------|---------------------|----------------------|
|                              |                           | 4-byte Access Mode                       | 26-byte Access Mode | 58-byte Access Mode | V600-compatible Mode |
| Normal mode                  | Read                      | 67                                       | 95                  | 137                 | 67                   |
|                              | Write (with verification) | 105                                      | 143                 | 210                 | 105                  |
|                              | Data Fill                 | 17.5 × number of processed blocks + 89.2 |                     |                     | ---                  |
| High-speed mode              | Read                      | 63                                       | 85                  | 117                 | ---                  |
|                              | Write (with verification) | 89                                       | 128                 | 186                 | ---                  |
|                              | Data Fill                 | 14.8 × number of processed blocks + 71.7 |                     |                     | ---                  |

#### 2-Kb Memory Tag

V680-D2KF□ (V680-HS□□ Antenna)

| Communications speed setting | Command                   | Communications time (ms)                 |                     |                     |                      |
|------------------------------|---------------------------|--|---------------------|---------------------|----------------------|
|                              |                           | 4-byte Access Mode                       | 26-byte Access Mode | 58-byte Access Mode | V600-compatible Mode |
| Normal mode                  | Read                      | 65                                       | 92                  | 130                 | 65                   |
|                              | Write (with verification) | 105                                      | 142                 | 219                 | 105                  |
|                              | Data Fill                 | 17.5 × number of processed blocks + 89.2 |                     |                     | ---                  |
| High-speed mode              | Read                      | 61                                       | 81                  | 110                 | ---                  |
|                              | Write (with verification) | 86                                       | 124                 | 178                 | ---                  |
|                              | Data Fill                 | 14.8 × number of processed blocks + 71.7 |                     |                     | ---                  |

#### 8 and 32-Kb Memory Tag


V680-D8KF68, V680-D32KF68 (V680-HS□□ Antenna)

| Communications speed setting | Command                   | Communications time (ms)                 |                     |                     |                      |
|------------------------------|---------------------------|--|---------------------|---------------------|----------------------|
|                              |                           | 4-byte Access Mode                       | 26-byte Access Mode | 58-byte Access Mode | V600-compatible Mode |
| Normal mode                  | Read                      | 66                                       | 94                  | 136                 | 66                   |
|                              | Write (with verification) | 96                                       | 131                 | 182                 | 96                   |
|                              | Data Fill                 | 17.5 × number of processed blocks + 89.2 |                     |                     | ---                  |
| High-speed mode              | Read                      | 59                                       | 76                  | 102                 | ---                  |
|                              | Write (with verification) | 76                                       | 100                 | 135                 | ---                  |
|                              | Data Fill                 | 14.8 × number of processed blocks + 71.7 |                     |                     | ---                  |

### V680-HAM91/-HAM81 (ID Flag Sensor)


| Model                  | V680-HAM91/V680-HAM81    |                               |
|------------------------|--------------------------|-------------------------------|
|                        | Read                     | Write                         |
|                        | Data Read<br>Verify Read | Write<br>BIT SET<br>BIT CLEAR |
| 1-Kb, 2-Kb Memory Tag  | 43 ms                    | 87 ms                         |
| 8-Kb, 32-Kb Memory Tag | 50 ms                    | 84 ms                         |

$$\text{ID Tag travel speed (i.e., conveyor speed)} = \frac{\text{Travel distance (D) in communications area}}{\text{Communications time (T)}}$$

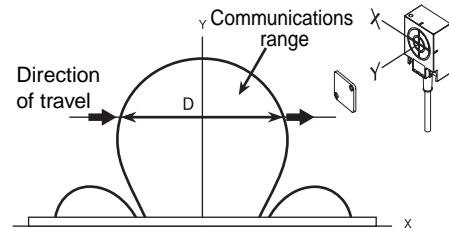

### Calculation Example:

In this example, the V680-D1KP66T and V680-HS63 are combined and read together.

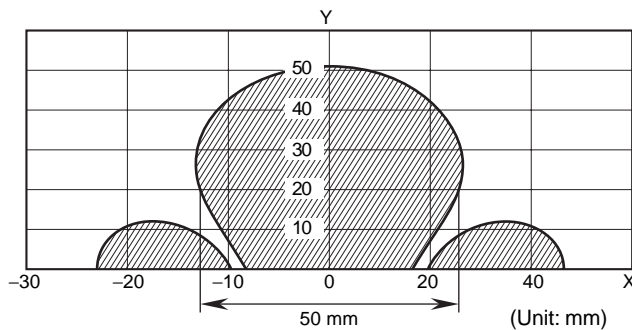

$$\text{ID Tag travel speed (m/min.)} = \frac{50 \text{ (mm)}}{43 \text{ (ms)}} \doteq 69 \text{ (m/min)}$$

- Note 1.** The travel speed depends on communications distance Y and axis offset. It is recommended to refer to the communications area diagram and use the part with the widest area.
- 2.** These values are guidelines. Perform testing with the actual device before operation.
- 3.** Processing for communications errors is not included in this formula.

# Safety Precautions

## ⚠ WARNING

Do not use this product as a detection device to protect people.



**Note:** This catalog is intended only to help select the appropriate product. Be sure to read the User's Manual for usage precautions prior to using the product.

### Precautions for Safe Use

To ensure safety, be sure to follow the following precautions:

1. Do not operate this product in any flammable, explosive, or corrosive gas environment.
2. Do not disassemble, repair, or remodel this product.
3. If any cable has a locking mechanism, be sure to check that it has been locked before using it.
4. The DC power supply must be within the specified rating (24 VDC +10%/–15%).
5. Do not reverse the power supply connection.
6. Do not insert water, wire, etc., into any of the gaps in the case. Doing so may cause fire or electric shock.
7. Make sure that the Unit is provided with sufficient ventilation space.
8. Do not install the Products near any equipment that generates a large amount of heat (such as heaters, transformers, and large-capacity resistors).
9. Turn OFF the Controller or ID Sensor Unit power before attaching or removing the Read/Write Antenna.
10. In the event that the product exhibits any abnormal condition, immediately stop using the system, turn OFF the power, and contact your OMRON sales representative.
11. Dispose of this product as industrial waste.
12. Do not clean the Products with paint thinner, benzene, acetone, or kerosene.
13. If multiple Antennas are mounted near each other, communications performance may decrease due to mutual interference. Refer to the *User's Manual* (Cat. No. Z278 or Z279) and check to make sure there is no mutual interference between the Antennas.
14. To remove the Unit, catch a tool on the hook and gently remove the Unit.
15. Do not perform wiring incorrectly or short-circuit the load. Doing so may result in rupture or damage from burning.
16. Do not use the product in environments subject to oil.
17. Do not use the product with an AC power supply.

### Precautions for Correct Use

Please observe the following precautions to prevent failure to operate, malfunctions, or undesirable effects on product performance.

### Installation Site

Install the product at a location where:

- It is not exposed to corrosive gases, dust, metal chips, or salt.
- The ambient operating temperature is within the range stipulated in the specifications.
- There are no sudden variations in temperature (no condensation).
- The ambient operating humidity is within the range stipulated in the specifications.
- No vibration or shock exceeding the values stipulated in the specifications is transmitted directly to the body of the product.
- It is not subject to splashing water, oil, or chemical substances.

### Installation

- The product uses the 13.56-MHz frequency band to communicate with ID Tags. Some devices, such as some motors, inverters, and switching power supplies, generate electromagnetic waves (i.e., noise) that can affect communications with ID Tags. If any of these devices are nearby, communications with ID Tags may be affected or ID Tags may be destroyed. If the product is to be used near such devices, check the effects on communications before using the product.
- To minimize the general influence of noise, observe the following precautions:
  1. Ground any metallic material located around this device to 100 Ω or less.
  2. Keep the product away from high voltage and heavy current.
- Always bundle the cables connected to the power supply terminals and the ground terminal and connect the enclosed ferrite core (ZCAT2032-0930 manufactured by TDK) (V680-HAM42-DRT only).
- Do not pull on the cables with excessive strength.
- Do not use products that are not waterproof in misty environments.
- Do not subject the products to chemicals that adversely affect product materials.
- When installing the product, tighten screws to the following torque:
  - V680-HS51 Read/Write Antenna: 6 N-m
  - V680-HS52 Read/Write Antenna: 40 N-m
  - V680-HS63 Read/Write Antenna: 1.2 N-m
  - V680-HS65 Read/Write Antenna: 0.7 to 1.2 N-m
- When Read/Write Antennas are mounted side-by-side, mutual interference may reduce the transmission performance. Refer to the *RFID System Amplifier and Antennas/ID Tags User's Manual* to mount them in a way that will prevent mutual interference.

### Host Communications (V680-HAM91/-HAM81)

When the Product is started, unstable signals may be output from the host interface.

Begin performing controls with the Product only after it has been started for at least 1 second.

### Storage

Store the product at a location where:

- It is not exposed to corrosive gases, dust, metal chips, or salt.
- The ambient storage temperature is within the range stipulated in the specifications.
- There are no sudden variations in temperature (no condensation).
- The ambient storage humidity is within the range stipulated in the specifications.
- No vibration or shock exceeding the values stipulated in the specifications is transmitted directly to the body of the product.
- It is not subject to splashing water, oil, or chemical substances.

### Cleaning


Do not use thinner, benzene, acetone, or kerosene for cleaning. Using these substances may dissolve the resin material and the case.

# Dimensions

Note: All units are in millimeters unless otherwise indicated.


## ID Tag

### V680-D1KP52MT/-D2KF52M

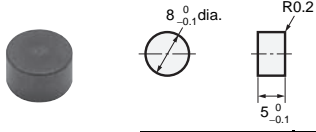


|               |             |
|---------------|-------------|
| Case material | PPS resin   |
| Filling       | Epoxy resin |

### V680-D1KP66T/-D1KP66MT

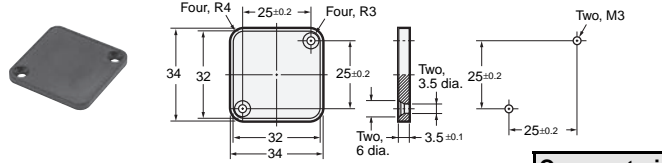


|               |           |
|---------------|-----------|
| Case material | PPS resin |
|---------------|-----------|

### V680-D1KP66T-SP

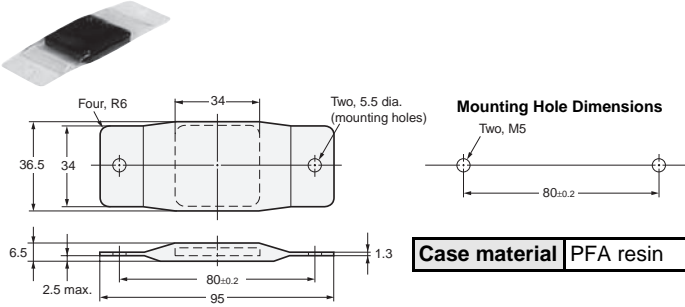


|               |           |
|---------------|-----------|
| Case material | PFA resin |
|---------------|-----------|

### V680-D2KF67/-D2KF67M

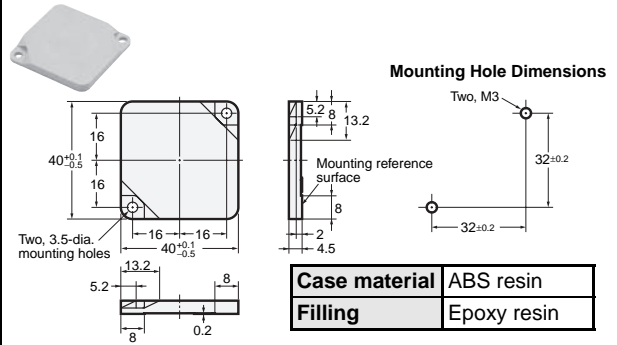

|               |             |
|---------------|-------------|
| Case material | ABS resin   |
| Filling       | Epoxy resin |


### V680-D8KF68/-D32KF68

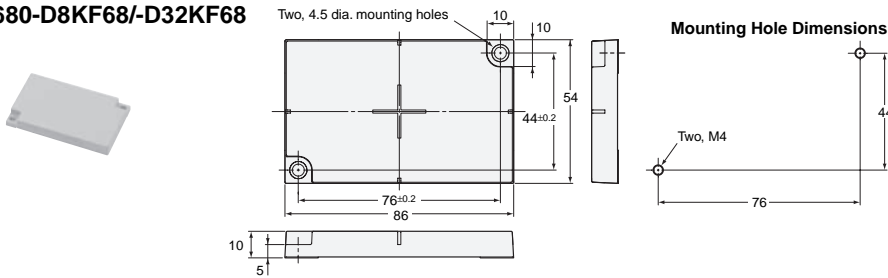

|               |             |
|---------------|-------------|
| Case material | PBT resin   |
| Filling       | Epoxy resin |


## Read/Write Antenna with Detachable Amplifier Unit

### V680-HS52-W

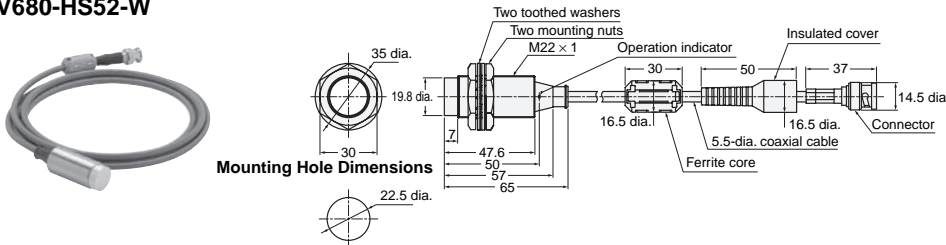


|                      |             |
|----------------------|-------------|
| Case material        | Brass       |
| Transmission surface | PBT resin   |
| Filling              | Epoxy resin |
| Cable                | PVC         |

### V680-HS52-R

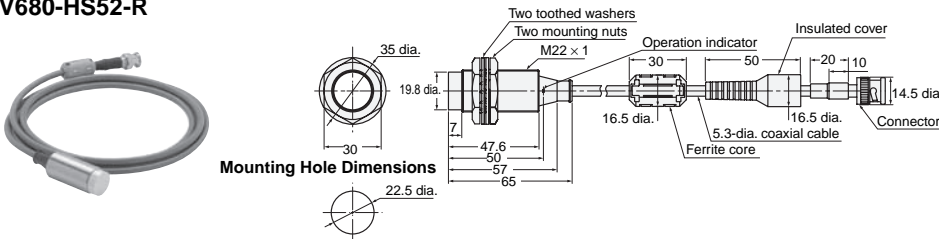

|                      |             |
|----------------------|-------------|
| Case material        | Brass       |
| Transmission surface | PBT resin   |
| Filling              | Epoxy resin |
| Cable                | PVC         |


### V680-HS51

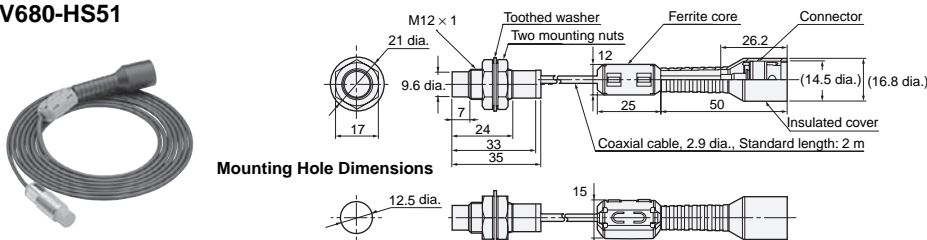

|                      |             |
|----------------------|-------------|
| Case material        | Brass       |
| Transmission surface | ABS resin   |
| Filling              | Epoxy resin |
| Cable                | PVC         |




**V680-HS63-W**

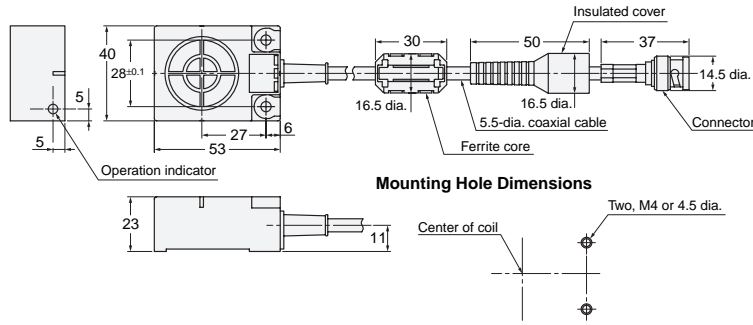


|                      |             |
|----------------------|-------------|
| <b>Case material</b> | ABS resin   |
| <b>Filling</b>       | Epoxy resin |
| <b>Cable</b>         | PVC         |

**V680-HS63-R**

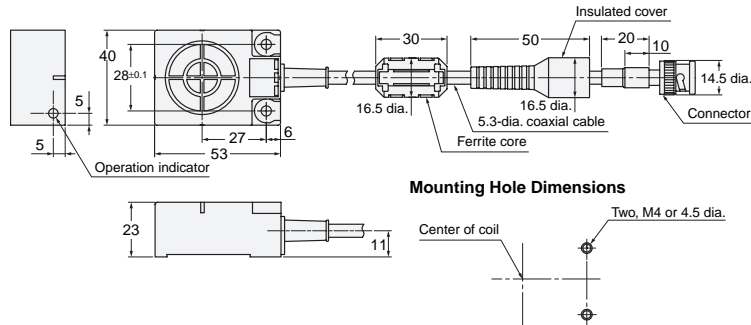


|                      |             |
|----------------------|-------------|
| <b>Case material</b> | ABS resin   |
| <b>Filling</b>       | Epoxy resin |
| <b>Cable</b>         | PVC         |

**V680-HS65-W**

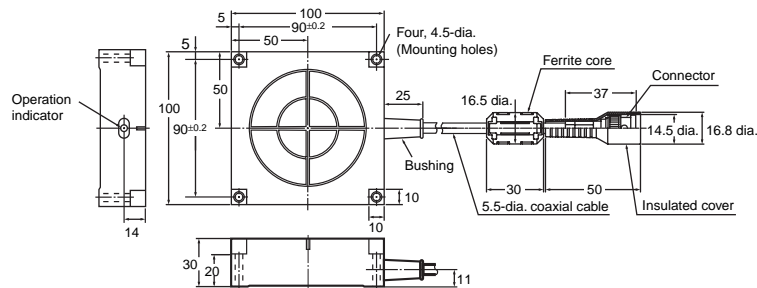

|                      |             |
|----------------------|-------------|
| <b>Case material</b> | ABS resin   |
| <b>Filling</b>       | Epoxy resin |
| <b>Cable</b>         | PVC (gray)  |


**V680-HS65-R**

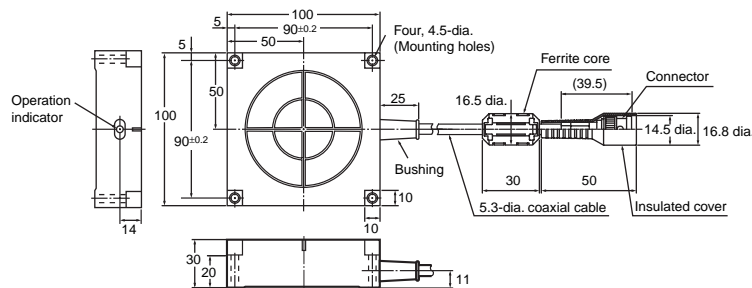

|                      |             |
|----------------------|-------------|
| <b>Case material</b> | ABS resin   |
| <b>Filling</b>       | Epoxy resin |
| <b>Cable</b>         | PVC (black) |

**Amplifier: DeviceNet ID Slave**


**V680-HAM42-DRT**

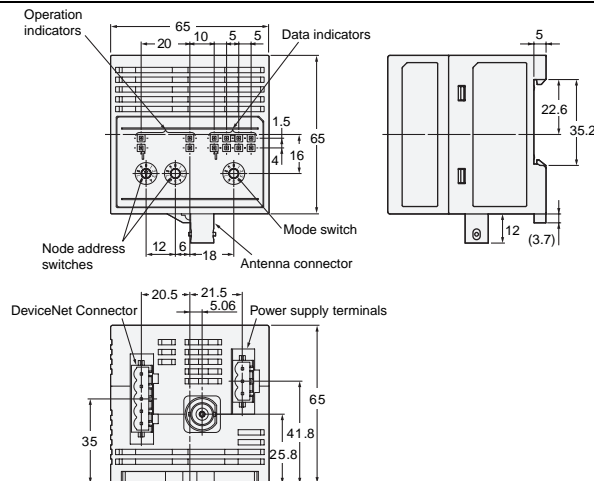

|                      |              |
|----------------------|--------------|
| <b>Case material</b> | PC+ABS resin |
|----------------------|--------------|


**Amplifier: ID Flag Sensor**

V680-HAM91/-HAM81

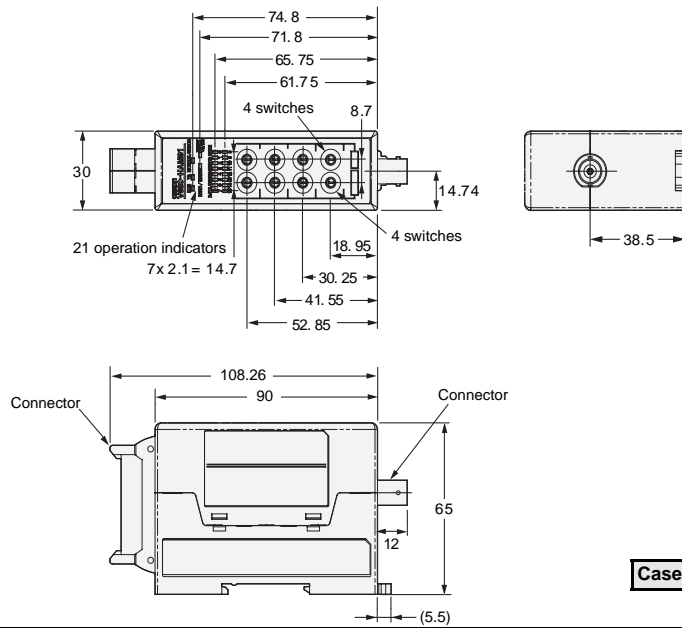

**Interface Cable (Order Separately)**

V680-A60 2M/5M/10M


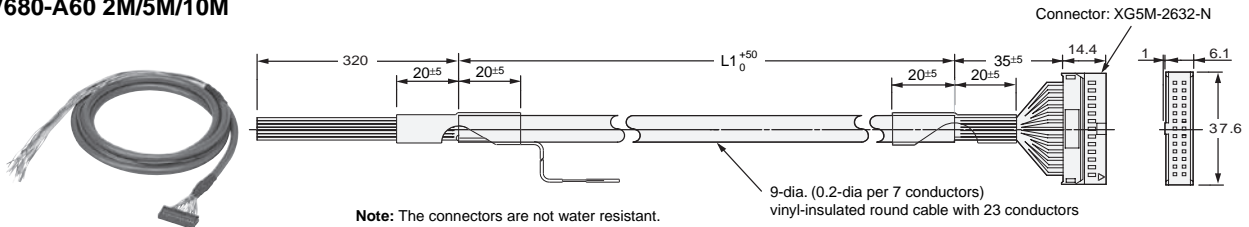


| Model        | Length L1 (mm) |
|--------------|----------------|
| V680-A60 2M  | 2,000 mm       |
| V680-A60 5M  | 5,000 mm       |
| V680-A60 10M | 10,000 mm      |

**Accessory**

**V680-D1KP66T Attachments**


V600-A86 Holder

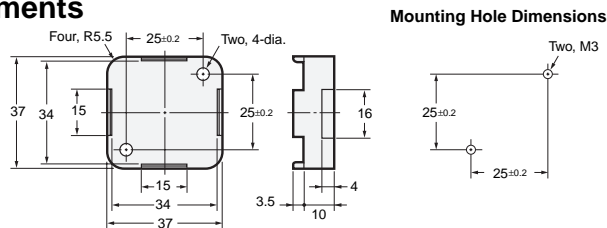

|               |           |
|---------------|-----------|
| Case material | PPS resin |
|---------------|-----------|

**V680-D8KF68/-D32KF68 Attachments**

V600-A81 Holder

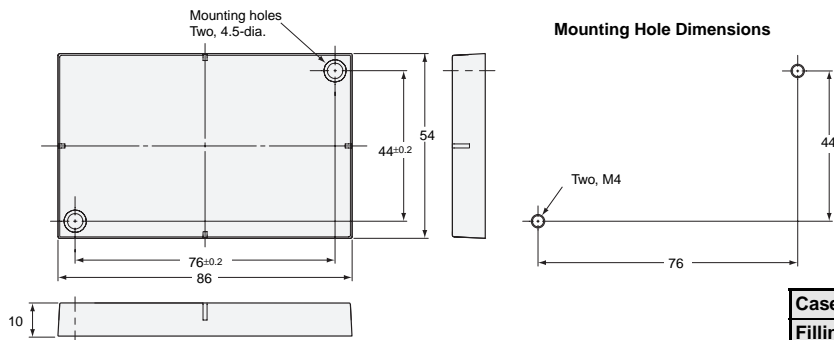

|               |             |
|---------------|-------------|
| Case material | PBT resin   |
| Filling       | Epoxy resin |



## **READ AND UNDERSTAND THIS DOCUMENT**

Please read and understand this document before using the products. Please consult your OMRON representative if you have any questions or comments.

## **WARRANTY**

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

## **LIMITATIONS OF LIABILITY**

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## **SUITABILITY FOR USE**

THE PRODUCTS CONTAINED IN THIS DOCUMENT ARE NOT SAFETY RATED. THEY ARE NOT DESIGNED OR RATED FOR ENSURING SAFETY OF PERSONS, AND SHOULD NOT BE RELIED UPON AS A SAFETY COMPONENT OR PROTECTIVE DEVICE FOR SUCH PURPOSES. Please refer to separate catalogs for OMRON's safety rated products.

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## **PERFORMANCE DATA**

Performance data given in this document is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

## **CHANGE IN SPECIFICATIONS**

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

## **DIMENSIONS AND WEIGHTS**

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

## **ERRORS AND OMISSIONS**

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

## **PROGRAMMABLE PRODUCTS**

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

## **COPYRIGHT AND COPY PERMISSION**

This document shall not be copied for sales or promotions without permission.

This document is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this document in any manner, for any other purpose. If copying or transmitting this document to another, please copy or transmit it in its entirety.

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

### **OMRON Corporation Industrial Automation Company**

Tokyo, JAPAN

Contact: [www.ia.omron.com](http://www.ia.omron.com)

#### ***Regional Headquarters***

#### **OMRON EUROPE B.V.**

#### **Sensor Business Unit**

Carl-Benz-Str. 4, D-71154 Nufringen, Germany

Tel: (49) 7032-811-0/Fax: (49) 7032-811-199

#### **OMRON ELECTRONICS LLC**

One Commerce Drive Schaumburg,

IL 60173-5302 U.S.A.

Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

#### **OMRON ASIA PACIFIC PTE. LTD.**

No. 438A Alexandra Road # 05-05/08 (Lobby 2),

Alexandra Technopark,

Singapore 119967

Tel: (65) 6835-3011/Fax: (65) 6835-2711

#### **OMRON (CHINA) CO., LTD.**

Room 2211, Bank of China Tower,

200 Yin Cheng Zhong Road,

PuDong New Area, Shanghai, 200120, China

Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

#### **Authorized Distributor:**

© OMRON Corporation 2009 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.

**Cat. No. Q160-E1-01A**

Printed in Japan  
0308 (0308) (C)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[V680-D1KP52MT](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)