

Safety Relay Unit

- Four kinds of 45-mm wide units are available:
A 3-pole model, a 5-pole model, and models with 3 poles and 2 OFF-delay poles, as well as a two-hand controller.
Also available are 17.5 mm wide expansion units with 3 poles and 3 OFF-delay poles.
- Simple expansion connection
- OFF-delay models have 15-step OFF-delay settings
- Conforms to EN standards (BG approval)
- Both DIN track mounting and screw mounting are possible



Specifications

Ratings

Power Input

| | G9SA-301/TH301 | G9SA-501 | G9SA-321-T□ |
|-------------------------|---|--|--|
| Power supply voltage | 24 VAC/VDC: 24 VAC, 50/60 Hz, or 24 VDC 100 to 240 VAC: 100 to 240 VAC, 50/60 Hz | | |
| Operating voltage range | 85% to 110% of rated power supply voltage | | |
| Power consumption * | 24 VAC/VDC: 1.8 VA/ 1.7 W max. 100 to 240 VAC: 9 VA max. | 24 VAC/VDC: 2.8 VA/ 2.6 W max. 100 to 240 VAC: 11 VA max. | 24 VAC/VDC: 3.5 VA/ 3.3 W max. 100 to 240 VAC: 12.5 VA max. |

*When an Expansion Unit is connected, the power consumption is increased by 2 VA/2 W max.

Inputs

| | G9SA-301/321-T□/TH301 | G9SA-501 |
|-----------------|-----------------------|------------|
| Input current * | 40 mA max. | 60 mA max. |

* When an Expansion Unit is connected, the input current is increased by 30 mA max.

Contacts

| | G9SA-301/501/321-T□/TH301/EX301/EX031-T□ |
|---------------------|--|
| | Resistive load |
| Rated load | 250 VAC, 5 A 30 VDC, 5 A |
| Rated carry current | 5 A |

Specifications (continued)

Characteristics

| | | G9SA-301/TH301 | G9SA-501/321-T□ | G9SA-EX301/EX031-T□ |
|--|--|---|-----------------|---------------------|
| Contact resistance *1 | | 100 mΩW | | |
| Operating time *2 | | 30 ms max. | | |
| Response time *3 | | 10 ms max. | | |
| Insulation resistance *4 | | 100 MΩ min. (at 500 VDC) | | |
| Dielectric strength | Between different outputs | 2,500 VAC, 50/60 Hz for 1 min | | |
| | Between inputs and outputs | | | |
| | Between power inputs and outputs | | | |
| | Between power inputs and other inputs (only for 100 to 240-V models) | | | |
| Vibration resistance | | 10 to 55 to 10 Hz, 0.375 mm single amplitude (0.75 mm double amplitude) | | |
| Shock resistance | Destruction | 300 m/s ² | | |
| | Malfunction | 100 m/s ² | | |
| Durability *5 | Mechanical | 5,000,000 operations min. (at approx. 7,200 operations/hr) | | |
| | Electrical | 100,000 operations min. (at approx. 1,800 operations/hr) | | |
| Failure rate (P Level) (reference value) | | 5 VDC, 1 mA | | |
| Ambient operating temperature | | -25 to 55°C (with no icing or condensation) | | |
| Ambient operating humidity | | 35% to 85% | | |
| Terminal tightening torque | | 0.98 N·m | | |
| Weight *6 | | Approx. 210 g | Approx. 270 g | Approx. 130 g |

*1. The contact resistance was measured with 1 A at 5 VDC using the voltage-drop method.

*2. Not including bounce time.

*3. The response time is the time it takes for the main contact to open after the input is turned OFF. Includes bounce time.


*4. The insulation resistance was measured with 500 VDC at the same places that the dielectric strength was checked.

*5. The durability is for an ambient temperature of 15 to 35°C and an ambient humidity of 25% to 75%.


*6. Weight shown is for 24-VAC/VDC type. For 100 to 240 VAC type, add approximately 20 g.

Applications

G9SA-TH301 (24 VDC) with 2-hand Inputs

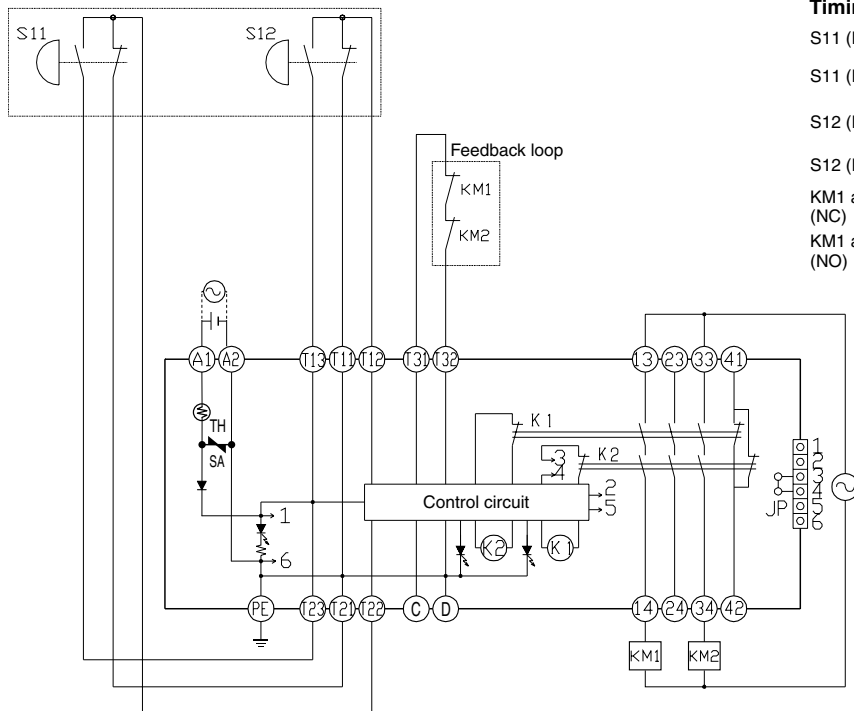

Timing Chart

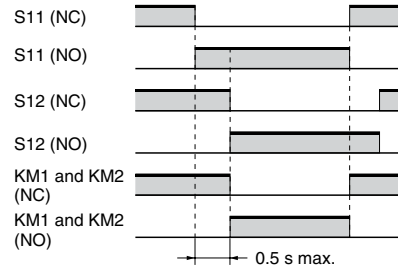

Input time difference operates only when the difference is 0.5 s max.


S11, S12: Two-hand pushbutton switches
KM1 and KM2: Magnetic Contactor

Note: 1. Use a 1NC+1NO switch for S11 and S12.


2. This circuit achieves Safety Category 4.

Applications (continued)

G9SA-301 (24 VAC/VDC) with 2-channel Safety Sensor/Manual Reset

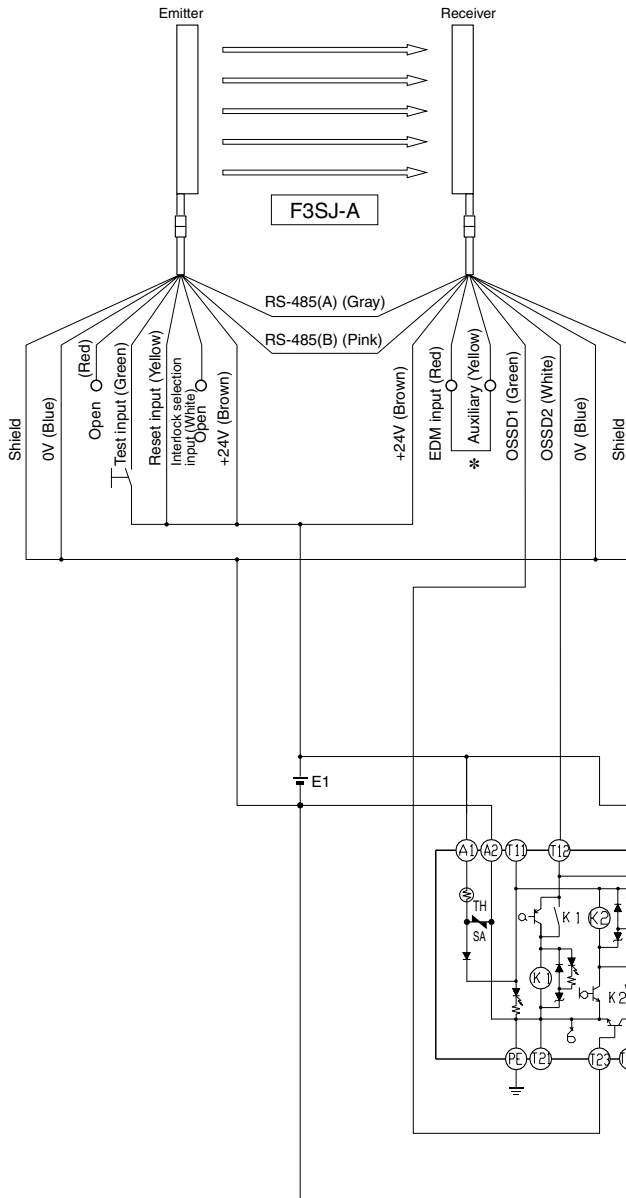

Timing Chart

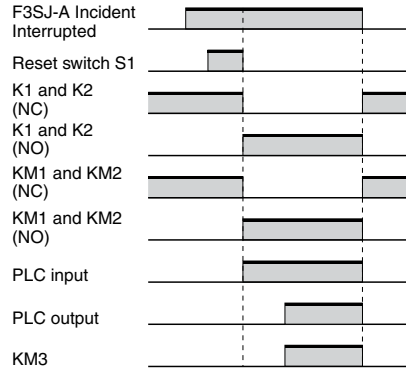


- F3SJ-A: Safety sensor
- S1: Reset switch
- KM1 and KM2: Magnetic Contactor
- KM3: G3J Solid-state Contactor (G3J)
- M: 3-phase motor
- E1: 24-VDC Power Supply (S82K)

Note: This circuit achieves Safety Category 4.

* The F3SJ-A auxiliary output wiring is shown for dark-ON operation.



Applications (continued)

G9SA-501 (24 VAC/VDC) and G9SA-EX301 with 2-channel Limit Switch Input/Manual Reset

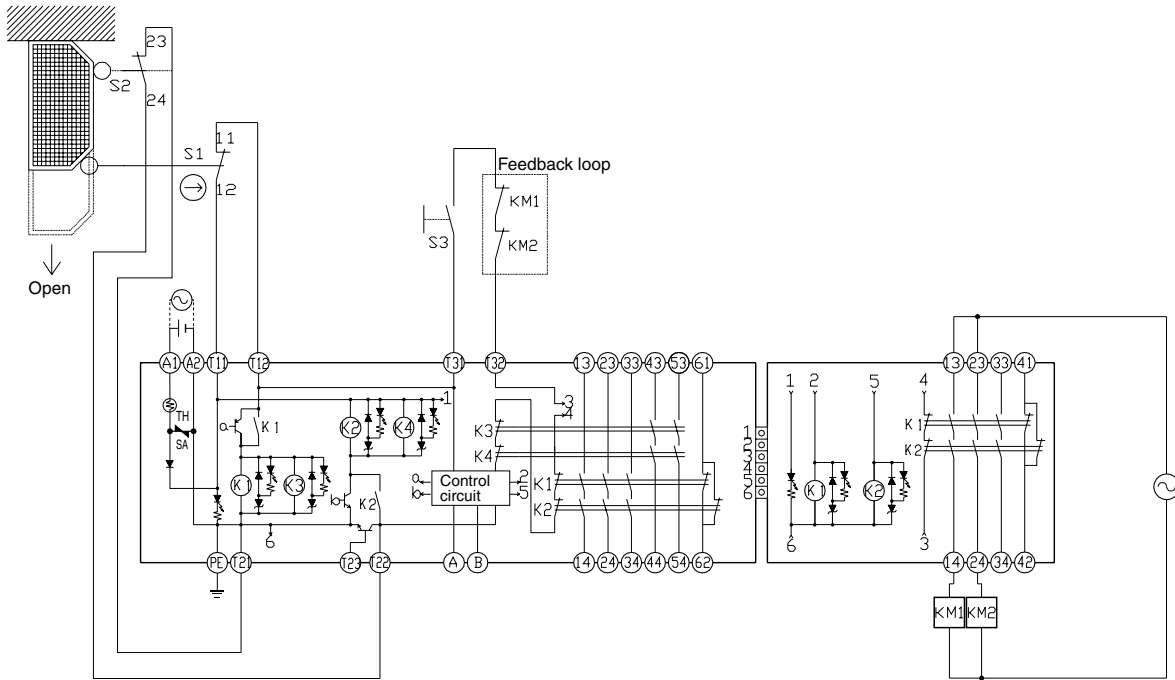

- S1: Safety Limit Switch with direct opening mechanism (NC) (D4B-N, D4N, D4F) ⊖
- S2: Limit switch (NO)
- S3: Reset switch
- KM1 and KM2: Magnetic Contactor
- M: 3-phase motor

Timing Chart


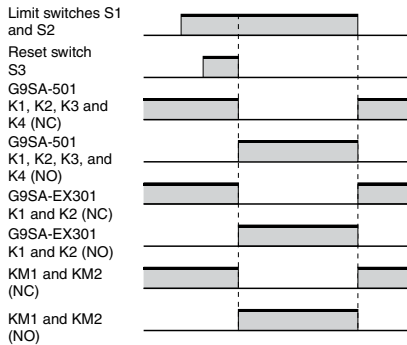


Note: This circuit achieves Safety Category 4.

Dimensions and Terminal Arrangement


(mm)

G9SA-301
G9SA-501
G9SA-321-T□
G9SA-TH301

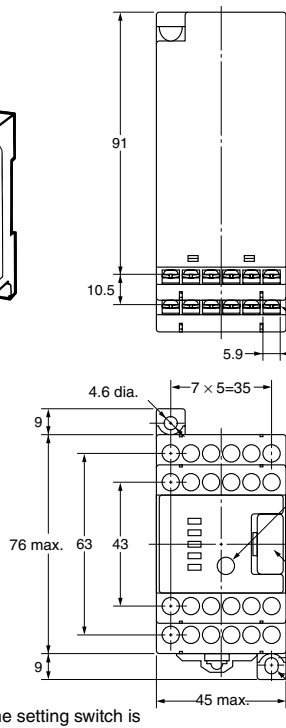


G9SA-301: Twenty, M3
G9SA-501: Twenty-four, M3
G9SA-321-T□: Twenty-four, M3
G9SA-TH301: Twenty-one, M3

Terminal Arrangement


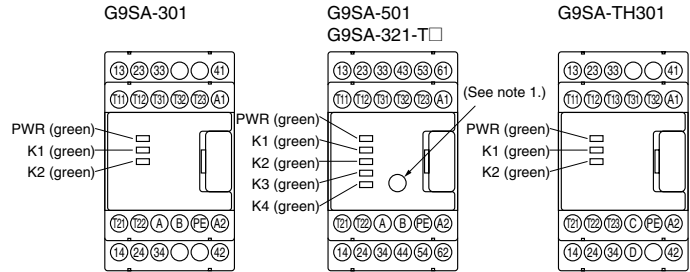


Mounting Holes

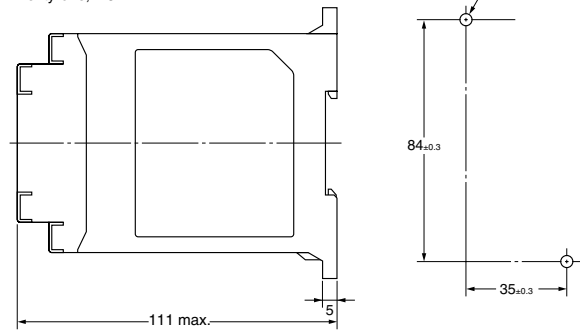


- Note 1:** The OFF-delay time setting switch is found on the G9SA-321-T□ only.
2: The K1 to K4 indicators light when the NO contacts of internal relays K1 to K4 close.
 * Do not remove unless an Expansion Unit is being used.


G9SA-EX301
G9SA-EX031-T□

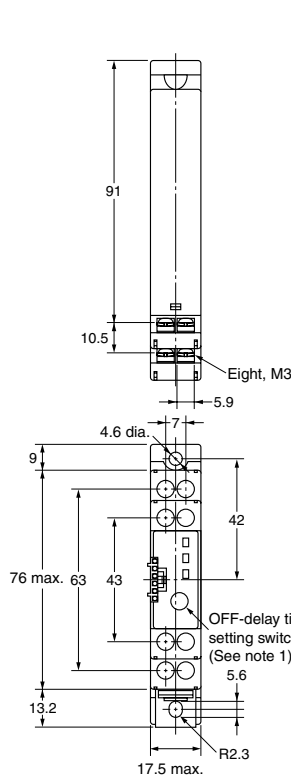


Mounting Holes



Terminal Arrangement



- Note 1:** The OFF-delay time setting switch is found on the G9SA-EX031-T□ only.
2: The K1 and K2 indicators light when the NO contacts of internal relays K1 and K2 close.

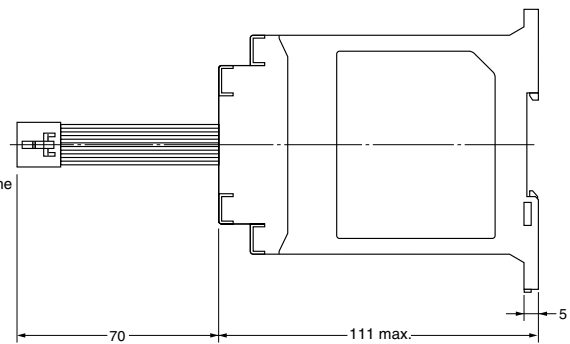

Ordering

Model Number Legend

G9SA - □ □ □ □ □ - □ □ □ □
 ① ② ③ ④ ⑤ ⑥

- | | |
|---|---|
| <p>① Function None: Emergency stop EX: Expansion Unit TH: Two-hand Controller</p> <p>② Contact Configuration (Safety Output) 0: None 3: 3PST-NO 5: 5PST-NO</p> <p>③ Contact Configuration (OFF-delay Output) 0: None 2: DPST-NO 3: 3PST-NO</p> | <p>④ Contact Configuration (Auxiliary Output) 0: None 1: SPST-NC</p> <p>⑤ Input Configuration None: 1-channel or 2-channel input possible</p> <p>⑥ OFF-delay Time (Max. setting time) None: No OFF-delay T075: 7.5 seconds T15: 15 seconds T30: 30 seconds</p> <p>Note: Call the factory for G9SA models designed for positive ground system. These are available for 24 VDC only.</p> |
|---|---|

Specific Models

Emergency-stop Units

| Main contacts | Auxiliary contact | Number of input channels | Rated voltage | Model |
|---------------|-------------------|----------------------------------|----------------|----------|
| 3PST-NO | SPST-NC | 1 channel or 2 channels possible | 24 VAC/VDC | G9SA-301 |
| | | | 100 to 240 VAC | |
| 5PST-NO | | | 24 VAC/VDC | G9SA-501 |
| | | | 100 to 240 VAC | |

Emergency-stop OFF-delay Units

| Main contacts | OFF-delay contacts | Auxiliary contact | Number of input channels | OFF-delay time | Rated voltage | Model |
|---------------|--------------------|-------------------|----------------------------------|----------------|----------------|---------------|
| 3PST-NO | DPST-NO | SPST-NC | 1 channel or 2 channels possible | 7.5 s | 24 VAC/VDC | G9SA-321-T075 |
| | | | | | 100 to 240 VAC | |
| | | | | 15 s | 24 VAC/VDC | G9SA-321-T15 |
| | | | | | 100 to 240 VAC | |
| | | | | 30 s | 24 VAC/VDC | G9SA-321-T30 |
| | | | | | 100 to 240 VAC | |

Note: Set to maximum values in the factory.

- * The following 15-step OFF-delay time settings are available:
 T075: 0.5, 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, and 7.5 s
 T15: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, and 15 s
 T30: 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, and 30 s

Two-hand Controller

| Main contacts | Auxiliary contact | Number of input channels | Rated voltage | Model |
|---------------|-------------------|--------------------------|----------------|------------|
| 3PST-NO | SPST-NC | 2 channels | 24 VAC/VDC | G9SA-TH301 |
| | | | 100 to 240 VAC | |

Expansion Unit

The Expansion Unit connects to a G9SA-301, G9SA-501, G9SA-321, or G9SA-TH301.

| Main contacts | Auxiliary contact | Model |
|---------------|-------------------|------------|
| 3PST-NO | SPST-NC | G9SA-EX301 |

Expansion Units with OFF-delay Outputs

The Expansion Unit connects to a G9SA-301, G9SA-501, G9SA-321, or G9SA-TH301.

| Main contact form | Auxiliary contact | OFF-delay time | Model |
|-------------------|-------------------|----------------|-----------------|
| 3PST-NO | SPST-NC | 7.5 s | G9SA-EX031-T075 |
| | | 15 s | G9SA-EX031-T15 |
| | | 30 s | G9SA-EX031-T30 |

Note: Set to maximum values in the factory.

- * The following 15-step OFF-delay time settings are available:
 T075: 0.5, 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, and 7.5 s
 T15: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, and 15 s
 T30: 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, and 30 s

 = Highlighted **Rapid Delivery** products are available for shipment today or within **FIVE** days.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru