

## MMIC VCO w/ HALF FREQUENCY OUTPUT 14.5 - 15.0 GHz



### Typical Applications


The HMC736LP4(E) is ideal for:

- Point to Point/Multipoint Radio
- Test Equipment & Industrial Controls
- SATCOM
- Military End-Use

### Features

- Dual Output:  $F_o = 14.5 - 15.0$  GHz  
 $F_o/2 = 7.25 - 7.5$  GHz
- Pout: +9 dBm
- Phase Noise: -105 dBc/Hz @ 100 kHz
- No External Resonator Needed
- 24 Lead 4x4mm SMT Package: 16mm<sup>2</sup>

### Functional Diagram

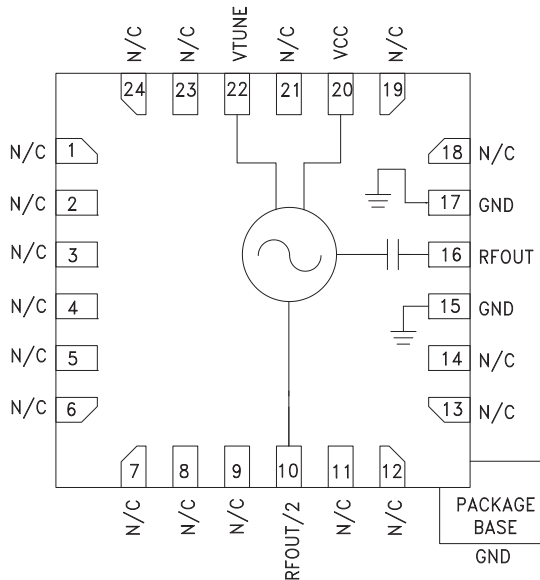

### General Description

The HMC736LP4(E) is a GaAs InGaP Heterojunction Bipolar Transistor (HBT) MMIC VCO. The HMC736LP4(E) integrates a resonator, negative resistance device, varactor diode and feature half frequency output. The VCO's phase noise performance is excellent over temperature, shock, and process due to the oscillator's monolithic structure. Power output is +9 dBm typical from a +4.2V supply voltage. The voltage controlled oscillator is packaged in a leadless QFN 4x4 mm surface mount package, and requires no external matching components.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ , $V_{CC} = +4.2\text{V}$

| Parameter   | Min.             | Typ.                      | Max.       | Units      |                       |
|---|------------------|---------------------------|------------|------------|-----------------------|
| Frequency Range   | $F_o$<br>$F_o/2$ | 14.5 - 15.0<br>7.25 - 7.5 |            | GHz<br>GHz |                       |
| Power Output  | RFOUT<br>RFOUT/2 | 6<br>-8                   | 9<br>-3    | 13<br>2    | dBm<br>dBm            |
| SSB Phase Noise @ 100 kHz Offset,<br>Vtune= +5V @ RFOUT |                  | -105                      |            | dBc/Hz     |                       |
| Tune Voltage  | Vtune            | 1                         |            | 13         | V                     |
| Supply Current  |                  | 120                       | 150        | 180        | mA                    |
| Tune Port Leakage Current (Vtune= 13V)                  |                  |                           |            | 10         | $\mu\text{A}$         |
| Output Return Loss                                      |                  | 2.5                       |            |            | dB                    |
| Harmonics/Subharmonics                                  | 1/2<br>3/2       |                           | -45<br>-42 |            | dBc<br>dBc            |
| Pulling (into a 2.0:1 VSWR)                             |                  | 12                        |            |            | MHz pp                |
| Pushing @ Vtune= 5V                                     |                  | 24                        |            |            | MHz/V                 |
| Frequency Drift Rate                                    |                  | 1.2                       |            |            | MHz/ $^\circ\text{C}$ |


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
Application Support: Phone: 1-800-ANALOG-D




**MMIC VCO w/ HALF FREQUENCY OUTPUT  
14.5 - 15.0 GHz**


**Frequency vs. Tuning Voltage, Vcc = +4.2V**

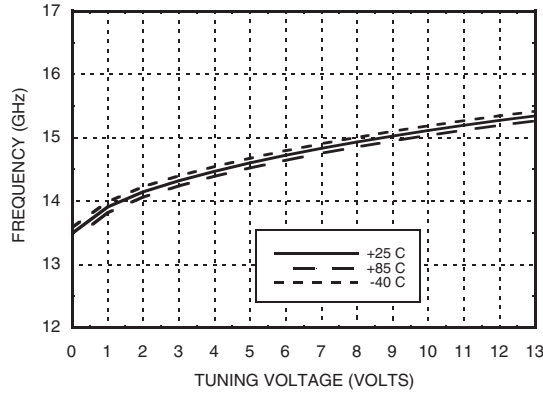


**Frequency vs. Tuning Voltage, T = 25°C**

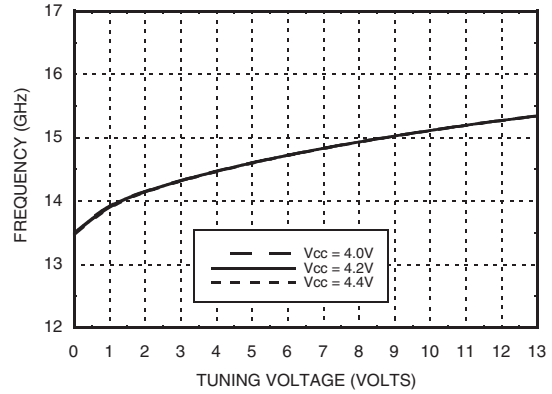


**Sensitivity vs. Tuning Voltage, Vcc = +4.2V**

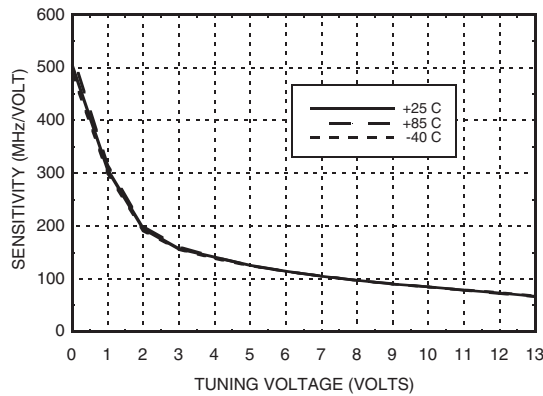


**Output Power vs. Tuning Voltage, Vcc = +4.2V**

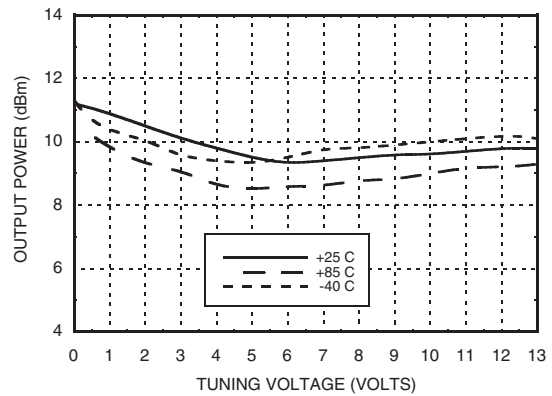

**SSB Phase Noise vs. Tuning Voltage**

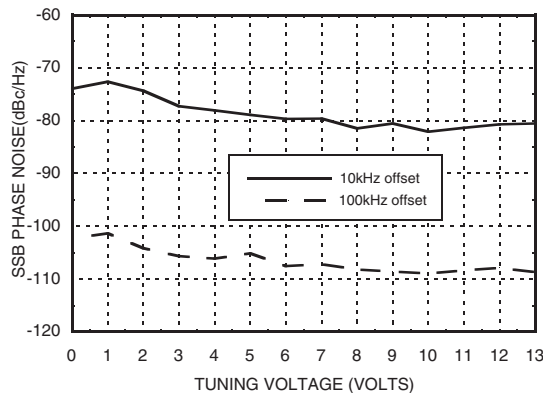

**SSB Phase Noise @ Vtune = +5V**

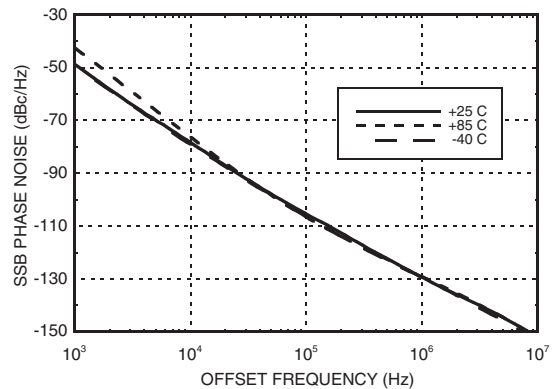


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D


## MMIC VCO w/ HALF FREQUENCY OUTPUT 14.5 - 15.0 GHz



**RFOUT/2 Frequency vs. Tuning Voltage, Vcc = +4.2V**

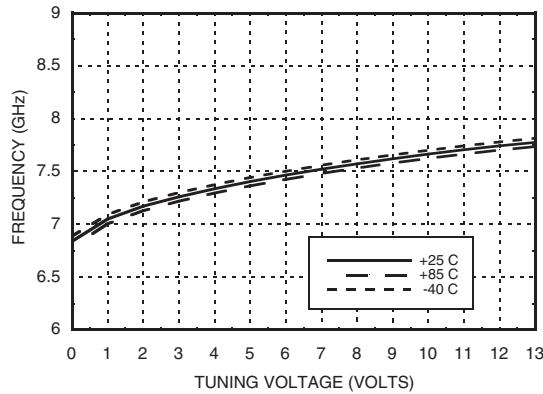

**RFOUT/2 Output Power vs. Tuning Voltage, Vcc = +4.2V**

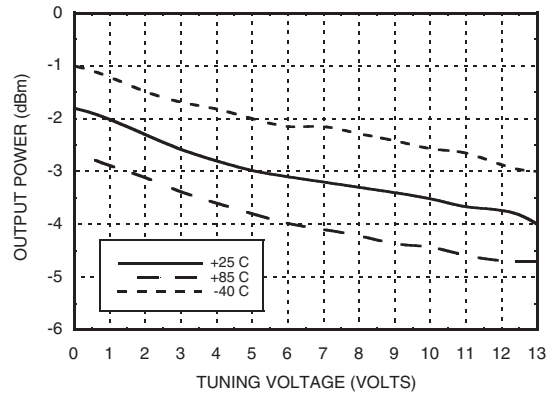

### Absolute Maximum Ratings

|  |                |
|--|----------------|
| Vcc  | +5.5V          |
| Vtune  | 0 to 15V       |
| Junction Temperature   | 135 °C         |
| Continuous P <sub>diss</sub> (T=85 °C)<br>(derate 19.6 mW/C above 85 °C) | 1 W            |
| Thermal Resistance<br>(junction to ground paddle)                        | 51 °C/W        |
| Storage Temperature  | -65 to +150 °C |
| Operating Temperature  | -40 to +85 °C  |

### Typical Supply Current vs. Vcc

| Vcc (V) | I <sub>cc</sub> (mA) |
|---------|----------------------|
| 4.0     | 140                  |
| 4.2     | 150                  |
| 4.4     | 160                  |

Note: VCO will operate over full voltage range shown above.



**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

### Package Information

| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[3]</sup> |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC736LP4   | Low Stress Injection Molded Plastic                | Sn/Pb Solder  | MSL1 <sup>[1]</sup> | H736<br>XXXX                   |
| HMC736LP4E  | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | H736<br>XXXX                   |

[1] Max peak reflow temperature of 235 °C


[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX


**MMIC VCO w/ HALF FREQUENCY OUTPUT  
14.5 - 15.0 GHz**



**Outline Drawing**

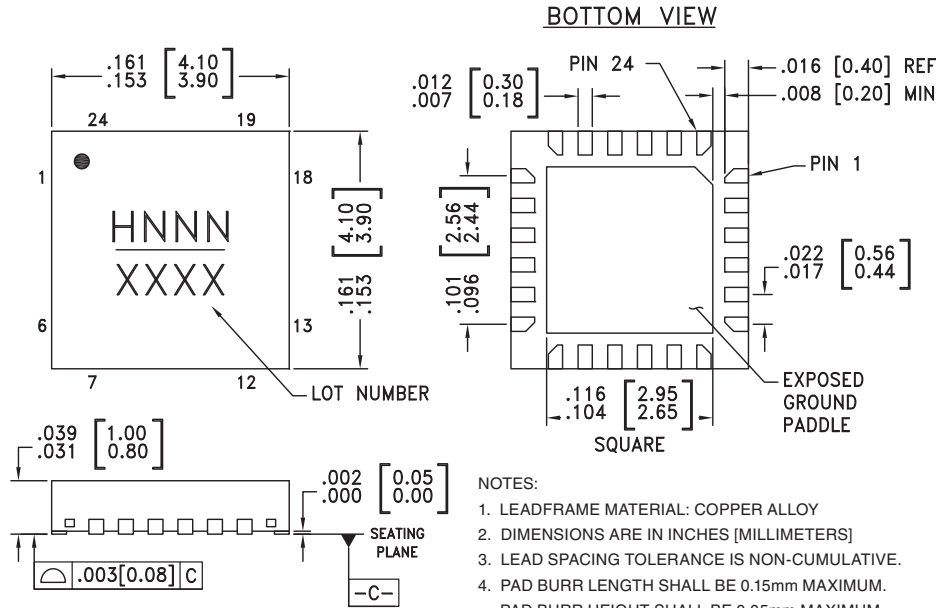






**Application Circuit**

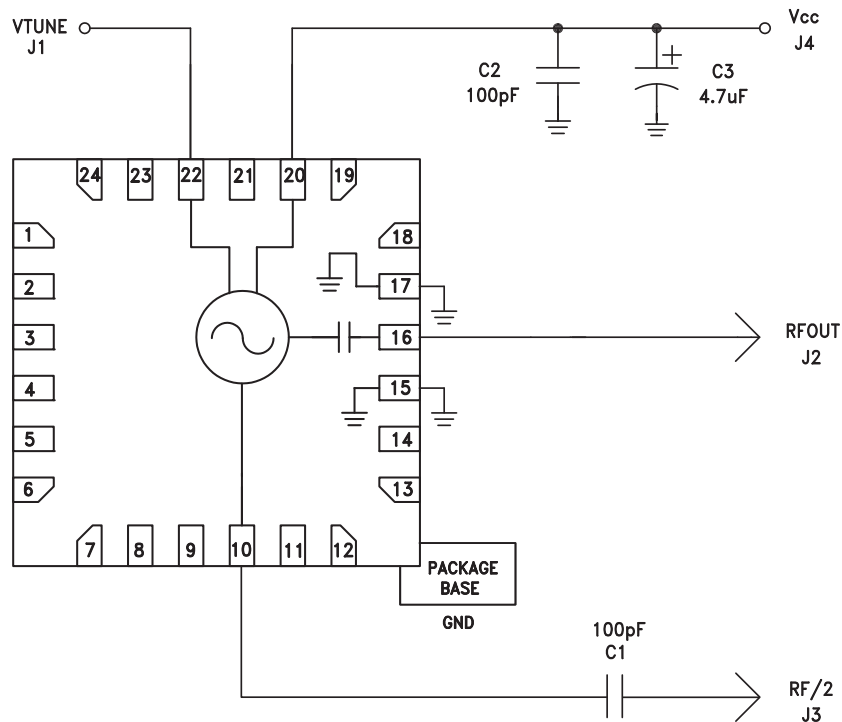


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D


**MMIC VCO w/ HALF FREQUENCY OUTPUT  
14.5 - 15.0 GHz**
**Pin Descriptions**

| Pin Number                         | Function | Description   | Interface Schematic   |
|------------------------------------|----------|---|---|
| 1 - 9, 11 - 14, 18, 19, 21, 23, 24 | N/C      | No Connection. These pins may be connected to RF/DC ground. Performance will not be affected.   |   |
| 10                                 | RFOUT/2  | Half frequency output (AC coupled). Requires external AC coupling capacitor.  |    |
| 16                                 | RFOUT    | RF output (AC coupled).   |    |
| 20                                 | Vcc      | Supply Voltage, +4.2V   |    |
| 22                                 | VTUNE    | Control voltage and modulation input. Modulation bandwidth dependent on drive source impedance. See "Determining the FM Bandwidth of a Wideband Varactor Tuned VCO" application note. |   |
| 15, 17, Paddle                     | GND      | Package bottom has an exposed metal paddle that must be connected to RF/DC ground.  |  |

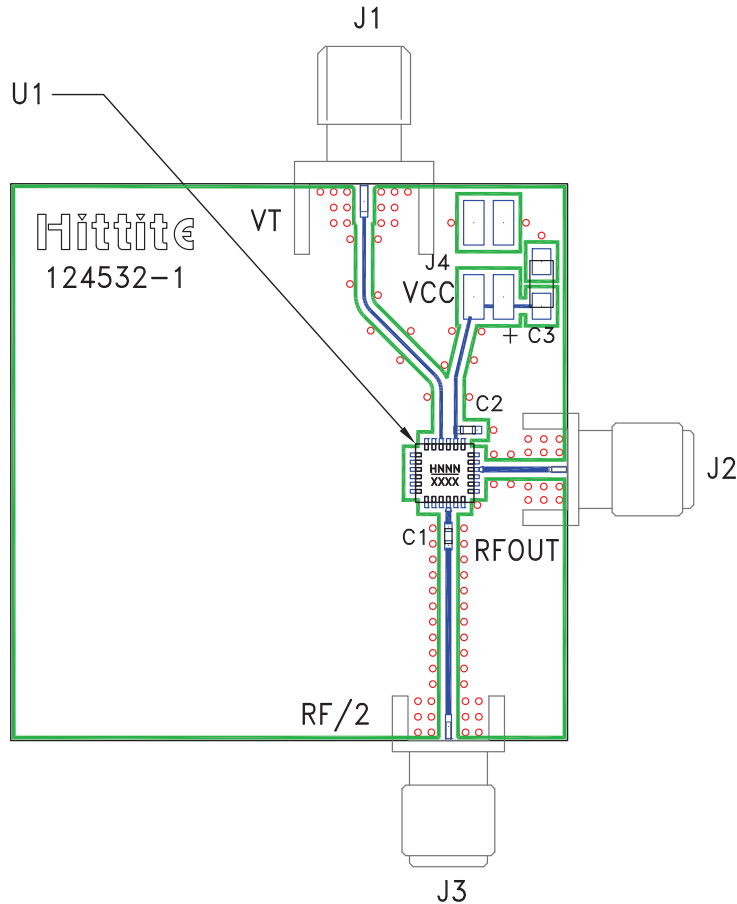
**Evaluation PCB**

**List of Materials for Evaluation PCB 123987 [1]**

| Item    | Description                    |
|---------|--------------------------------|
| J1 - J3 | PCB Mount SMA RF Connector     |
| J4      | 2 mm DC Header                 |
| C1, C2  | 100 pF Capacitor, 0402 Pkg.    |
| C3      | 4.7 $\mu$ F Tantalum Capacitor |
| U1      | HMC736LP4(E) VCO               |
| PCB [2] | 124532 Eval Board              |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Arlon 25FR or Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and backside ground paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)