

2000 Series Digital Panel Meters MODUTEC

**BEST OF
CLASS**



2100 Series with DIP switch selections and multiple power options.

Backlighting Options

- Positive Green Black on Green Background
- Negative Green Green on Black Background
- Positive Red Black on Red Background
- Negative Red Red on Black Background
- Non-Backlit LCD Black on Grey Background

Customize for features that are important to you and rely on industry standards for routine digital PM elements.

You need flexibility. We provide it. We customize our meters to meet your specifications.

- Scalable in engineering units
- Custom labels for special readouts
- User Selectable functions, decimal point, offset, span, process voltage or current, DC voltage
- Red or green backlit display

You need reliability. The MODUTEC 2000 Series operates in the harshest environments.

- Splash and hose proof meeting NEMA 4, NEMA 12, and IPC 55 standards
- Resistant to damage with a high impact polycarbonate case
- Wide operating temperature ranging from -4°F to +140°F (-20°C to +60°C)


You need standards. The MODUTEC 2000 Series gives you industry standards designed in.

- 1/8 DIN industry standard cut-out and 1 inch depth
- Screw terminals
- Over range indication
- Low cost
- The MODUTEC 2100 includes user-friendly dipswitch selection features

Applications

- ▶ Telecommunications
- ▶ Water Purification
- ▶ Sewage Treatment
- ▶ Flow
- ▶ Process
- ▶ Desalinization
- ▶ Temperature
- ▶ AC & DC Amps
- ▶ AC & DC Volts


2000 & 2100 Series Dimensional Drawings (mm/in)

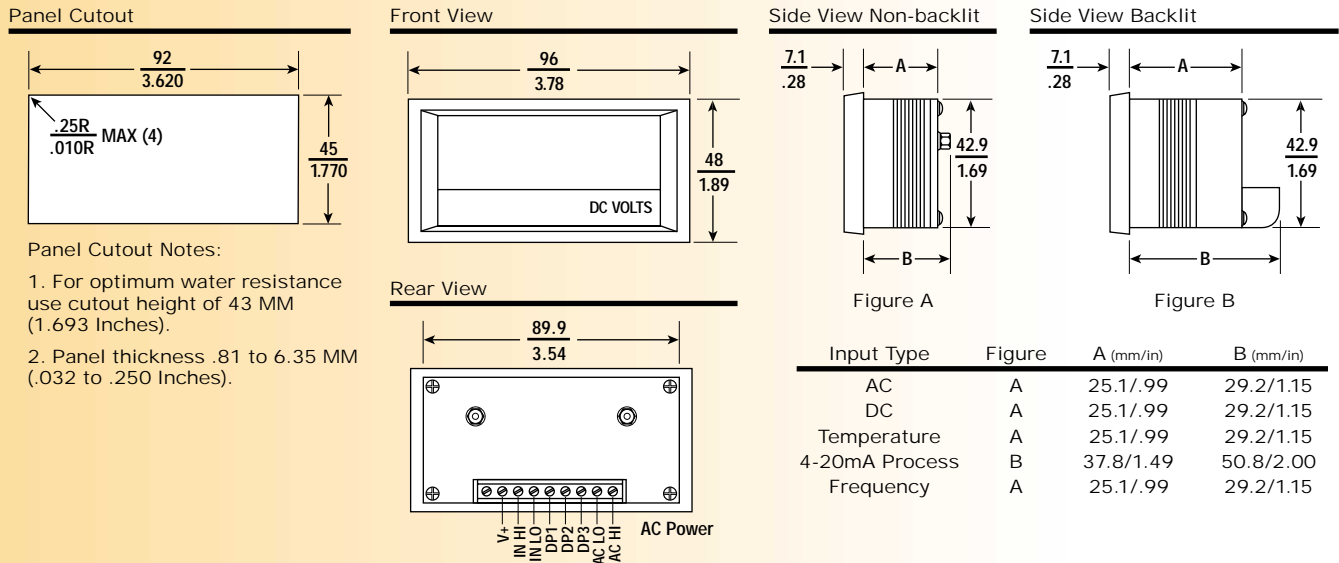

Panel Cutout Notes:

1. For optimum water resistance use cutout height of 43 MM (1.693 Inches).
2. Panel thickness .81 to 6.35 MM (.032 to .250 Inches).

Connection for High Current Measurement

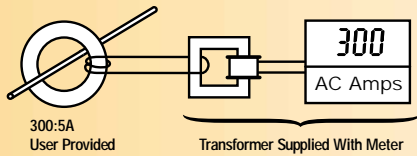

2000 and 2100 Series Specifications

Display

Digits: 3 1/2 digits, 7 segments Backlit LCD (1999)
Polarity: Automatic (-) displayed
Overload: Three lower digits blank for readings greater than 1999

Digit Height: 0.5" (12.7 mm)

Decimal Point: Three positions, external selection

Performance

Conversion Rate: 2.5 per second
Common Mode Rejection: ≥ 100db 50 Hz-60 Hz¹
Tempco: ±200 PPM/°C typical²

Normal Mode Rejection: ≥ 40 db 50Hz-60Hz

Zero Adjust: Automatic

Warmup: 10 minutes

Environment

Operating Range: -4°F to 140°F (-20°C to + 60°C) **Storage Range:** -22°F to 158°F (-30°C to + 70°C)

Power Options

115V +10%, -15% 50Hz to 400Hz at 2VA
230V +10%, -15% 50Hz to 400Hz at 2VA
10 to 28VDC 150 mA (including backlighting)
10 to 15VDC or 20 to 32VDC 150mA (including backlighting)

Weight

2 oz.

FCC Compliance

Complies with the class B Limits of FCC rules and regulations, part 15, sub part J for conducted and radiated emissions.


¹ except isolated DC powered which is ≥ 80 db 50 Hz-60Hz

² except thermocouple inputs which are .1°/ degree zero tempco for selectable process ranges is only ±.2 count/°C


Specifications continued on back page.

2000 & 2100 Series Connection Drawings

Universal Switchable — Model 2100




Terminal	Description
IN+ IN-	Signal Input
AC Power Low AC Power HI	AC Power Input, 115VAC or 230VAC depending on model selected




12VDC Power GND	12VDC power input } (optional)
24VDC Power GND	

Frequency Input



Terminal	Description
AC LO AC HI Earth GND	Signal input and power, 115VAC or 230VAC depending on model selected.
12VDC Power GND	12VDC power input } (optional)
24VDC Power GND	


DC Inputs (Non-Isolated DC Power)




Terminal	Description
V+ V-	10-28VDC power input
IN HI IN LO	Signal Input
BL+ BL-	Backlight power input

DP1, DP2, DP3 — Decimal point selection, connect to V+ as follows: DP1=XXX.X, DP2=XX.XX, DP3=X.XXX

AC and DC Inputs (AC and Isolated DC power)




Terminal	Description
V+	10-28VDC power input
IN HI IN LO	Signal Input
DP1, DP2, DP3	Decimal point selection, connect to V+ as follows: DP1=XXX.X, DP2=XX.XX, DP3=X.XXX
AC Power LO AC Power HI	AC Power Input, 115VAC or 230VAC depending on model selected




12V Power GND	12VDC power input } (optional)
24V Power GND	

4-20mA Process & Flow Inputs



Terminal	Description
IN+ IN-	Signal Input
DP1, DP2, DP3	Decimal point selection, connect to V+ as follows: DP1= XXX.X, DP2= XX.XX, DP3= X.XXX
V+	DC voltage output to select decimal points

Temperature Inputs



Terminal	Description
TC+ TC-	Thermocouple Inputs
AC Power Low AC Power HI	AC Power Input, 115VAC or 230VAC depending on model selected
1 2 3	RTD inputs

2000 Series Scaling Chart

Model 2100, of the 2000 Series, provide the unique ability to switch-select a range and then scale and offset that range. Input will be displayed in engineering units. For example, by changing switch positions and recalibrating, a 2133-3419-04 may be set-up for any of the following displays:

- 4 to 20mA input display -148°F to 932°F (-100°C to +500°C) temperature
- 1 to 5V input displaying - 60kPa to 300kPa differential pressure
- 0 to 10V input displaying +700°F to +950°F (+682°C to +932°C) temperature
- 0 to 50mV input displaying 0 to 300 amperes

Scaling Capability

Zero Range Adjustment

4mA to 20mA, 1V to 5V

0 to 200mV, 0 to 2V, 0 to 10V

Full Scale Span Adjustment

All ranges

Other ranges and scaling available.

-1000 counts to +1500 counts. Switch selectable in four ranges: a 25-turn potentiometer enables continuous adjustment.

-1500 counts to +1500 counts. Switch selectable in six ranges: a 25-turn potentiometer enables continuous adjustment.

0 to 2000 counts. Switch selectable in four ranges: a 25-turn potentiometer enables continuous adjustment.

How to Order

2

a	b
0	3

 3¹ - 3

c	d
4	6 1

 -

e	f
0 4	2

a	Configuration	
	0 = 1/8 DIN	1 = UPM
	2 = TRMS (Inst)	3 = TRMS (Power)

b	Display	
	1 = Non Bklit	3 = Pos Grn Bklit
	4 = Neg Grn Bklit	5 = Neg Red Bklit
	6 = Pos Red Bklit	

c	DPM Power ²	
	0 = loop power	1 = 9 VDC
	2 = ±5VDC	3 = +5 volts
	4 = 115VAC	5 = 230VAC
	6 = 10 to 28VDC	7 = 12 or 24VDC (Iso)
	8 = 12 VDC	9 = 24VDC

d	Input	
	00 = 100mVDC (1999 counts)	
	01 = 200mVDC scaled 0 to 199.9	
	02 = 2VDC scaled 0 to 1.999	
	03 = 20VDC	
	04 = 200VDC	
	05 = 1V to 5 VDC scaled 0 to 100.0	
	06 = 10VDC scaled 0 to 10.00	
	07 = 500VDC	
	10 = 200uADC	
	11 = 2mADC	
	12 = 20mADC	
	13 = 200mADC	
	18 = 4 to 20mADC Sq Rt ³	
	19 = 4 to 20mADC scaled 0 to 100.0 ³	
	21 = 200.0mVAC RMS	
	22 = 2.000VAC RMS	
	23 = 20.00VAC RMS	
	24 = 200.0VAC RMS	
	25 = 500VAC RMS	
	27 = 500VAC Avg	
	28 = 80.0 - 130.0VAC Avg	
	29 = 80 - 260VAC Avg	
	30 = 250VAC RMS	
	31 = 2.000mAAC RMS	
	32 = 20.00mAAC RMS	
	33 = 200.0mAAC RMS	
	34 = 2.000AAC RMS	
	36 = 5.00AAC ⁴ RMS	
	37 = 50.0AAC ⁴ RMS	
	38 = 0 - 5AAC ⁴ AVG	
	39 = 0 - 50AAC ⁴ AVG	
	60 = 40 to 440Hz	
	61 = 40.0 to 199.9Hz	
	70 = 100 Ohms Pt 1 [°] Resolution	
	71 = 100 Ohms Pt .1 [°] Resolution	
	80 = Type J Thermocouple	
	81 = Type K Thermocouple	
	82 = Type T Thermocouple	

e	Backlit Power ²	
	00 = No Backlight	01 = 5VDC
	02 = 12VDC	03 = 24VDC
	04 = 115VAC	05 = 230VAC
	06 = 10 to 28VDC	07 = 12 or 24VDC

f	Display ⁵		
	1 = 2000	2 = 1500	3 = 1000
	4 = 600	5 = 500	6 = 300
	7 = 200	8 = 100	

2000 and 2100 Series Specifications (continued)

DC Inputs	Accuracy	Input Resistance	Overload Protection
200mVDC & 2VDC	±(.1% +1 count) typical ±(.2% +1 count) max.	≥ 100 Meg Ohms	200V continuous 300V intermittent
20VDC & 200VDC	±(.1% +1 count) typical ±(.2% +1 count) max.	1 Meg Ohm	350V continuous 500V intermittent
DC Current	±(.1% +1 count) typical ±(.2% +1 count) max.	200mV drop full scale	3 times f.s. current
Universal Selectable Process	±(.1% +2 counts)	4 to 20mA, 10 Ohms ≥ 200mV, ≥ 200K Ohms 2V and up, ≥ 1Meg Ohm	4 to 20 mA, ±100mA Voltage Inputs, 200V continuous 300V intermittent
AC Inputs	Accuracy	Input Resistance	Overload Protection
AC Voltage	±(.5% + 1 count)	1 Meg Ohm	350V continuous 500V intermittent
5A AC Current	±(.5% +1 count)	Current transformer	3 times f.s. current
50A AC Current	±(.5% +5 counts)	Current transformer	3 times f.s. current
Frequency Inputs	Accuracy	Distortion	
40.0 to 199.9Hz	±.2Hz (40 to 70Hz) ±.5Hz (above 70Hz)	≤ .1 Hz for up to 20% third harmonic distortion	
40 to 440Hz	±1Hz	≤ .1 Hz for up to 20% third harmonic distortion	
Temperature Inputs	Accuracy	Input Characteristic	Overload Protection
Type J thermocouple			
-10°F to +1200°F (-23°C to +649°C)	±(.1% +1 count) accuracy ±1.3°C (2.8°F) conformity error	45 uV max per 100 Ohms thermocouple lead resistance	200V continuous
Type K thermocouple			
-40°F to +1500°F (-40°C to +815°C)	±(.1% +1 count) accuracy ±1.2°C (2.5°F) conformity error	45 uV max per 100 Ohms thermocouple lead resistance	200V continuous
Type T thermocouple			
-100°F to +600°F (-73°C to +315°C)	±(.1% +1 count) accuracy ±1.5°C (3.5°F) conformity error	45 uV max per 100 Ohms thermocouple lead resistance	200V continuous
100 Ω Pt. α =.00385			
-200°F to +600° F (-129°C to +315°C)	±(.2% + 1 count) max	1mA RTD current	±5V
100 Ω Pt. α =.00385			
-100.0°F to +199.9°F (-73°C to +98°C)	±(.2% + 1 count) max	1mA RTD current	±5V

¹ Change Order Number to "4" for 200 VDC Input

² Backlit power must be the same as the selected DPM power.

³ Available on Non-Backlit meters only.

⁴ Rated for use with 5A or 50A external current transformer supplied with DPM. See high current connection on inside page.

⁵ For 5A current transformer inputs only.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru