

FEATURES

Latch-up proof
3 pF off source capacitance
26 pF off drain capacitance
-0.6 pC charge injection
Low leakage: 0.4 nA maximum at 85°C
±9 V to ±22 V dual-supply operation
9 V to 40 V single-supply operation
48 V supply maximum ratings
Fully specified at ±15 V, ±20 V, +12 V, and +36 V
 V_{SS} to V_{DD} analog signal range

APPLICATIONS

Automatic test equipment
Data acquisition
Instrumentation
Avionics
Audio and video switching
Communication systems

GENERAL DESCRIPTION

The ADG5204 is a complementary metal oxide semiconductor (CMOS) analog multiplexer, comprising four single channels.

The ultralow capacitance and charge injection of these switches make them ideal solutions for data acquisition and sample-and-hold applications, where low glitch and fast settling are required. Fast switching speed together with high signal bandwidth make the ADG5204 suitable for video signal switching.

The ADG5204 is designed on a trench process, which guards against latch-up. A dielectric trench separates the P and N channel transistors, thereby preventing latch-up even under severe overvoltage conditions.

The ADG5204 switches one of four inputs to a common output, D, as determined by the 3-bit binary address lines, A0, A1, and EN. Logic 0 on the EN pin disables the device. Each switch conducts equally well in both directions when on, and each switch has an input signal range that extends to the supplies. In the off condition, signal levels up to the supplies are blocked. All switches exhibit break-before-make switching action.

FUNCTIONAL BLOCK DIAGRAM




Figure 1.

PRODUCT HIGHLIGHTS

1. Trench Isolation Guards Against Latch-Up.
A dielectric trench separates the P and N channel transistors, thereby preventing latch-up even under severe overvoltage conditions.
2. Ultralow Capacitance and <1 pC Charge Injection.
3. Dual-Supply Operation.
For applications where the analog signal is bipolar, the ADG5204 can be operated from dual supplies up to ±22 V.
4. Single-Supply Operation.
For applications where the analog signal is unipolar, the ADG5204 can be operated from a single rail power supply up to 40 V.
5. 3 V Logic-Compatible Digital Inputs.
 $V_{INH} = 2.0$ V, $V_{INL} = 0.8$ V.
6. No V_L Logic Power Supply Required.

Rev. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

Features	1	Absolute Maximum Ratings	8
Applications	1	ESD Caution.....	8
Functional Block Diagram	1	Pin Configurations and Function Descriptions	9
General Description	1	Truth Table	9
Product Highlights	1	Typical Performance Characteristics	10
Revision History	2	Test Circuits.....	14
Specifications.....	3	Terminology	16
±15 V Dual Supply	3	Trench Isolation	17
±20 V Dual Supply	4	Applications Information	18
12 V Single Supply.....	5	Outline Dimensions	19
36 V Single Supply.....	6	Ordering Guide	19
Continuous Current per Channel, Sx or D	7		

REVISION HISTORY

5/11—Revision 0: Initial Version

SPECIFICATIONS

±15 V DUAL SUPPLY

$V_{DD} = 15\text{ V} \pm 10\%$, $V_{SS} = -15\text{ V} \pm 10\%$, GND = 0 V, unless otherwise noted.

Table 1.

Parameter	25°C	−40°C to +85°C	−40°C to +125°C	Unit	Test Conditions/Comments		
ANALOG SWITCH							
Analog Signal Range			V_{DD} to V_{SS}	V max	$V_S = \pm 10\text{ V}$, $I_S = -1\text{ mA}$, see Figure 24 $V_{DD} = +13.5\text{ V}$, $V_{SS} = -13.5\text{ V}$ $V_S = \pm 10\text{ V}$, $I_S = -1\text{ mA}$		
On Resistance, R_{ON}	160	250	280	Ω typ			
	200			Ω max			
On-Resistance Match Between Channels, ΔR_{ON}	4.5	Ω typ					
	8	9	10	Ω max	$V_S = \pm 10\text{ V}$, $I_S = -1\text{ mA}$		
On-Resistance Flatness, $R_{FLAT(ON)}$	38			Ω typ			
	50	65	70	Ω max			
LEAKAGE CURRENTS							
Source Off Leakage, I_S (Off)	0.01	0.2	0.4	nA typ	$V_{DD} = +16.5\text{ V}$, $V_{SS} = -16.5\text{ V}$ $V_S = V_S = \pm 10\text{ V}$, $V_D = \mp 10\text{ V}$, see Figure 23		
	0.1			nA max			
Drain Off Leakage, I_D (Off)	0.01	0.4	1.2	nA typ	$V_S = V_S = \pm 10\text{ V}$, $V_D = \mp 10\text{ V}$, see Figure 23		
	0.1			nA max			
Channel On Leakage, I_D , I_S (On)	0.02	0.5	1.2	nA typ	$V_S = V_D = \pm 10\text{ V}$, see Figure 26		
	0.2			nA max			
DIGITAL INPUTS							
Input High Voltage, V_{INH}	0.002		2.0	V min	$V_{IN} = V_{GND}$ or V_{DD}		
Input Low Voltage, V_{INL}			0.8	V max			
Input Current, I_{INL} or I_{INH}			± 0.1	μA typ			
				μA max			
Digital Input Capacitance, C_{IN}	3		pF typ				
DYNAMIC CHARACTERISTICS ¹							
Transition Time, $t_{TRANSITION}$	175	285	320	ns typ	$R_L = 300\ \Omega$, $C_L = 35\text{ pF}$ $V_S = 10\text{ V}$, see Figure 29		
	230			ns max			
t_{ON} (EN)	155	255	285	ns typ	$R_L = 300\ \Omega$, $C_L = 35\text{ pF}$ $V_S = 10\text{ V}$, see Figure 31		
	205			ns max			
t_{OFF} (EN)	150	200	215	ns typ	$R_L = 300\ \Omega$, $C_L = 35\text{ pF}$ $V_S = 10\text{ V}$, see Figure 31		
	175			ns max			
Break-Before-Make Time Delay, t_D	80		30	ns typ	$R_L = 300\ \Omega$, $C_L = 35\text{ pF}$ $V_{S1} = V_{S2} = 10\text{ V}$, see Figure 30		
				ns min			
Charge Injection, Q_{INJ}	−0.6			pC typ	$V_S = 0\text{ V}$, $R_S = 0\ \Omega$, $C_L = 1\text{ nF}$, see Figure 32		
Off Isolation	−80			dB typ	$R_L = 50\ \Omega$, $C_L = 5\text{ pF}$, $f = 100\text{ kHz}$, see Figure 25		
Channel-to-Channel Crosstalk	−80			dB typ	$R_L = 50\ \Omega$, $C_L = 5\text{ pF}$, $f = 1\text{ MHz}$, see Figure 28		
−3 dB Bandwidth	136			MHz typ	$R_L = 50\ \Omega$, $C_L = 5\text{ pF}$, see Figure 27		
Insertion Loss	−6.8			dB typ	$R_L = 50\ \Omega$, $C_L = 5\text{ pF}$, $f = 1\text{ MHz}$, see Figure 27		
C_S (Off)	3			pF typ	$V_S = 0\text{ V}$, $f = 1\text{ MHz}$		
C_D (Off)	26			pF typ	$V_S = 0\text{ V}$, $f = 1\text{ MHz}$		
C_D , C_S (On)	30			pF typ	$V_S = 0\text{ V}$, $f = 1\text{ MHz}$		
POWER REQUIREMENTS							
I_{DD}	45		70	μA typ	$V_{DD} = +16.5\text{ V}$, $V_{SS} = -16.5\text{ V}$ Digital inputs = 0 V or V_{DD}		
	55			μA max			
I_{SS}	0.001			μA typ	1	μA max	Digital inputs = 0 V or V_{DD}
				μA max			
V_{DD}/V_{SS}			$\pm 9/\pm 22$	V min/max	GND = 0 V		

¹ Guaranteed by design; not subject to production test.

ADG5204

±20 V DUAL SUPPLY

$V_{DD} = +20\text{ V} \pm 10\%$, $V_{SS} = -20\text{ V} \pm 10\%$, GND = 0 V, unless otherwise noted.

Table 2.

Parameter	25°C	−40°C to +85°C	−40°C to +125°C	Unit	Test Conditions/Comments	
ANALOG SWITCH						
Analog Signal Range			V _{DD} to V _{SS}	V max	V _S = ±15 V, I _S = −1 mA, see Figure 24 V _{DD} = +18 V, V _{SS} = −18 V V _S = ±15 V, I _S = −1 mA	
On Resistance, R _{ON}	140 160	200	230	Ω typ Ω max		
On-Resistance Match Between Channels, ΔR _{ON}	4.5			Ω typ		
On-Resistance Flatness, R _{FLAT(ON)}	8	9	10	Ω max	V _S = ±15 V, I _S = −1 mA	
	33			Ω typ		
	45			Ω max		
LEAKAGE CURRENTS						
Source Off Leakage, I _S (Off)	0.01	0.2	0.4	nA typ	V _{DD} = +22 V, V _{SS} = −22 V V _S = ±15 V, V _O = ∓15 V, see Figure 23	
Drain Off Leakage, I _D (Off)	0.1 0.01			nA max nA typ		
Channel On Leakage, I _D , I _S (On)	0.1	0.4	1.2	nA max	V _S = ±15 V, V _O = ∓15 V, see Figure 23 V _S = V _O = ±15 V, see Figure 26	
	0.02			nA typ		
	0.2			nA max		
DIGITAL INPUTS						
Input High Voltage, V _{INH}	0.002		2.0	V min	V _{IN} = V _{GND} or V _{DD}	
Input Low Voltage, V _{INL}			0.8	V max		
Input Current, I _{INL} or I _{INH}			±0.1	μA typ		
Digital Input Capacitance, C _{IN}				μA max pF typ		
DYNAMIC CHARACTERISTICS ¹						
Transition Time, t _{TRANSITION}	160 215	260	290	ns typ ns max	R _L = 300 Ω, C _L = 35 pF V _S = 10 V, see Figure 29	
t _{ON} (EN)	150			ns typ		R _L = 300 Ω, C _L = 35 pF
t _{OFF} (EN)	185	225	255	ns max	V _S = 10 V, see Figure 31	
	150			ns typ		R _L = 300 Ω, C _L = 35 pF
Break-Before-Make Time Delay, t _D	175	195	210	ns max	V _S = 10 V, see Figure 31	
	75			ns typ		R _L = 300 Ω, C _L = 35 pF
Charge Injection, Q _{INJ}	−0.6 −80		30	ns min	V _{S1} = V _{S2} = 10 V, see Figure 30	
				pC typ		V _S = 0 V, R _S = 0 Ω, C _L = 1 nF, see Figure 32
dB typ	R _L = 50 Ω, C _L = 5 pF, f = 100 kHz, see Figure 25					
dB typ	R _L = 50 Ω, C _L = 5 pF, f = 1 MHz, see Figure 28					
MHz typ	R _L = 50 Ω, C _L = 5 pF, see Figure 27					
dB typ	R _L = 50 Ω, C _L = 5 pF, f = 1 MHz, see Figure 27					
pF typ	V _S = 0 V, f = 1 MHz					
pF typ	V _S = 0 V, f = 1 MHz					
pF typ	V _S = 0 V, f = 1 MHz					
POWER REQUIREMENTS						
I _{DD}	50 70		110	μA typ μA max	V _{DD} = +22 V, V _{SS} = −22 V Digital inputs = 0 V or V _{DD}	
I _{SS}	0.001			μA typ μA max		Digital inputs = 0 V or V _{DD}
V _{DD} /V _{SS}				±9/±22		V min/max

¹ Guaranteed by design; not subject to production test.

12 V SINGLE SUPPLY

$V_{DD} = 12\text{ V} \pm 10\%$, $V_{SS} = 0\text{ V}$, $GND = 0\text{ V}$, unless otherwise noted.

Table 3.

Parameter	25°C	−40°C to +85°C	−40°C to +125°C	Unit	Test Conditions/Comments
ANALOG SWITCH					
Analog Signal Range			0 V to V _{DD}	V max	V _S = 0 V to 10 V, I _S = −1 mA, see Figure 24 V _{DD} = 10.8 V, V _{SS} = 0 V V _S = 0 V to 10 V, I _S = −1 mA
On Resistance, R _{ON}	340	610	700	Ω typ	
	500			Ω max	
On-Resistance Match Between Channels, ΔR _{ON}	5			Ω typ	
	20	21	22	Ω max	
On-Resistance Flatness, R _{FLAT(ON)}	145			Ω typ	V _S = 0 V to 10 V, I _S = −1 mA
	280	335	370	Ω max	
LEAKAGE CURRENTS					
Source Off Leakage, I _S (Off)	0.01	0.2	0.4	nA typ	V _{DD} = 13.2 V, V _{SS} = 0 V V _S = 1 V/10 V, V _D = 10 V/1 V, see Figure 23
	0.1			nA max	
Drain Off Leakage, I _D (Off)	0.01	0.4	1.2	nA typ	V _S = 1 V/10 V, V _D = 10 V/1 V, see Figure 23
	0.1			nA max	
Channel On Leakage, I _D , I _S (On)	0.02	0.5	1.2	nA typ	V _S = V _D = 1 V/10 V, see Figure 26
	0.2			nA max	
DIGITAL INPUTS					
Input High Voltage, V _{INH}	0.002		2.0	V min	V _{IN} = V _{GND} or V _{DD}
Input Low Voltage, V _{INL}			0.8	V max	
Input Current, I _{INL} or I _{INH}			±0.1	μA typ	
				μA max	
Digital Input Capacitance, C _{IN}	3			pF typ	
DYNAMIC CHARACTERISTICS ¹					
Transition Time, t _{TRANSITION}	240	445	515	ns typ	R _L = 300 Ω, C _L = 35 pF V _S = 8 V, see Figure 29
	350			ns max	
t _{ON} (EN)	250	420	485	ns typ	R _L = 300 Ω, C _L = 35 pF V _S = 8 V, see Figure 31
	335			ns max	
t _{OFF} (EN)	160	220	240	ns typ	R _L = 300 Ω, C _L = 35 pF V _S = 8 V, see Figure 31
	195			ns max	
Break-Before-Make Time Delay, t _D	140		60	ns typ	R _L = 300 Ω, C _L = 35 pF V _{S1} = V _{S2} = 8 V, see Figure 30
				ns min	
Charge Injection, Q _{INJ}	−1.2			pC typ	V _S = 6 V, R _S = 0 Ω, C _L = 1 nF, see Figure 32
Off Isolation	−80			dB typ	
Channel-to-Channel Crosstalk	−80			dB typ	R _L = 50 Ω, C _L = 5 pF, f = 1 MHz, see Figure 25 R _L = 50 Ω, C _L = 5 pF, f = 1 MHz, see Figure 28
−3 dB Bandwidth	106			MHz typ	
Insertion Loss	−11			dB typ	R _L = 50 Ω, C _L = 5 pF, f = 1 MHz, see Figure 27 V _S = 6 V, f = 1 MHz
C _S (Off)	3.5			pF typ	
C _D (Off)	29			pF typ	V _S = 6 V, f = 1 MHz V _S = 6 V, f = 1 MHz
C _D , C _S (On)	33			pF typ	
POWER REQUIREMENTS					
I _{DD}	40		65	μA typ	V _{DD} = 13.2 V Digital inputs = 0 V or V _{DD}
			9/40	μA max	
V _{DD}				V min/max	GND = 0 V, V _{SS} = 0 V

¹ Guaranteed by design; not subject to production test.

ADG5204

36 V SINGLE SUPPLY

$V_{DD} = 36 \text{ V} \pm 10\%$, $V_{SS} = 0 \text{ V}$, $GND = 0 \text{ V}$, unless otherwise noted.

Table 4.

Parameter	25°C	−40°C to +85°C	−40°C to +125°C	Unit	Test Conditions/Comments
ANALOG SWITCH					
Analog Signal Range			0 V to V_{DD}	V max	$V_S = 0 \text{ V to } 30 \text{ V}$, $I_S = -1 \text{ mA}$, see Figure 24 $V_{DD} = 32.4 \text{ V}$, $V_{SS} = 0 \text{ V}$ $V_S = 0 \text{ V to } 30 \text{ V}$, $I_S = -1 \text{ mA}$
On Resistance, R_{ON}	150 170	215	245	Ω typ Ω max	
On-Resistance Match Between Channels, ΔR_{ON}	4.5			Ω typ	
On-Resistance Flatness, $R_{FLAT(ON)}$	8 35 50	9 60	10 65	Ω max Ω typ Ω max	$V_S = 0 \text{ V to } 30 \text{ V}$, $I_S = -1 \text{ mA}$
LEAKAGE CURRENTS					$V_{DD} = 39.6 \text{ V}$, $V_{SS} = 0 \text{ V}$
Source Off Leakage, I_S (Off)	0.01 0.1	0.2	0.4	nA typ nA max	$V_S = 1 \text{ V/30 V}$, $V_D = 30 \text{ V/1 V}$, see Figure 23
Drain Off Leakage, I_D (Off)	0.01 0.1			nA typ nA max	
Channel On Leakage, I_D , I_S (On)	0.02 0.2	0.4 0.5	1.2 1.2	nA typ nA max	$V_S = V_D = 1 \text{ V/30 V}$, see Figure 26
DIGITAL INPUTS					
Input High Voltage, V_{INH}	0.002		2.0	V min	$V_{IN} = V_{GND}$ or V_{DD}
Input Low Voltage, V_{INL}			0.8	V max	
Input Current, I_{INL} or I_{INH}			± 0.1	μA typ	
Digital Input Capacitance, C_{IN}				μA max pF typ	
DYNAMIC CHARACTERISTICS ¹					
Transition Time, $t_{TRANSITION}$	180 250	275	305	ns typ ns max	$R_L = 300 \Omega$, $C_L = 35 \text{ pF}$ $V_S = 18 \text{ V}$, see Figure 29
t_{ON} (EN)	170 220			ns typ ns max	
t_{OFF} (EN)	170 210	215	220	ns typ ns max	$R_L = 300 \Omega$, $C_L = 35 \text{ pF}$ $V_S = 18 \text{ V}$, see Figure 31
Break-Before-Make Time Delay, t_D	80			ns typ ns min	
Charge Injection, Q_{INJ}	−0.6		30	pC typ	$V_{S1} = V_{S2} = 18 \text{ V}$, see Figure 30
Off Isolation	−80			dB typ	$V_S = 18 \text{ V}$, $R_S = 0 \Omega$, $C_L = 1 \text{ nF}$, see Figure 32
Channel-to-Channel Crosstalk	−80			dB typ	$R_L = 50 \Omega$, $C_L = 5 \text{ pF}$, $f = 1 \text{ MHz}$, see Figure 25
−3 dB Bandwidth	136			MHz typ	$R_L = 50 \Omega$, $C_L = 5 \text{ pF}$, $f = 1 \text{ MHz}$, see Figure 28
Insertion Loss	−6.7			dB typ	$R_L = 50 \Omega$, $C_L = 5 \text{ pF}$, see Figure 27
C_S (Off)	3			pF typ	$R_L = 50 \Omega$, $C_L = 5 \text{ pF}$, $f = 1 \text{ MHz}$, see Figure 27
C_D (Off)	26			pF typ	$V_S = 18 \text{ V}$, $f = 1 \text{ MHz}$
C_D , C_S (On)	30			pF typ	$V_S = 18 \text{ V}$, $f = 1 \text{ MHz}$
POWER REQUIREMENTS					$V_{DD} = 39.6 \text{ V}$
I_{DD}	85 100		130	μA typ μA max	Digital inputs = 0 V or V_{DD}
V_{DD}			9/40	V min/max	$GND = 0 \text{ V}$, $V_{SS} = 0 \text{ V}$

¹ Guaranteed by design; not subject to production test.

CONTINUOUS CURRENT PER CHANNEL, Sx OR D

Table 5.

Parameter	25°C	85°C	125°C	Unit
CONTINUOUS CURRENT, Sx OR D PINS				
$V_{DD} = +15\text{ V}$, $V_{SS} = -15\text{ V}$				
TSSOP ($\theta_{JA} = 112.6^{\circ}\text{C/W}$)	24.5	7.5	2.8	mA max
LFCSP ($\theta_{JA} = 30.4^{\circ}\text{C/W}$)	35.7	7.7	2.8	mA max
$V_{DD} = +20\text{ V}$, $V_{SS} = -20\text{ V}$				
TSSOP ($\theta_{JA} = 112.6^{\circ}\text{C/W}$)	26	7.5	2.8	mA max
LFCSP ($\theta_{JA} = 30.4^{\circ}\text{C/W}$)	37	7.7	2.8	mA max
$V_{DD} = 12\text{ V}$, $V_{SS} = 0\text{ V}$				
TSSOP ($\theta_{JA} = 112.6^{\circ}\text{C/W}$)	18	7	2.8	mA max
LFCSP ($\theta_{JA} = 30.4^{\circ}\text{C/W}$)	28	7.7	2.8	mA max
$V_{DD} = 36\text{ V}$, $V_{SS} = 0\text{ V}$				
TSSOP ($\theta_{JA} = 112.6^{\circ}\text{C/W}$)	30	7.7	2.8	mA max
LFCSP ($\theta_{JA} = 30.4^{\circ}\text{C/W}$)	41	7.7	2.8	mA max

ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 6.

Parameter	Rating
V_{DD} to V_{SS}	48 V
V_{DD} to GND	–0.3 V to +48 V
V_{SS} to GND	+0.3 V to –48 V
Analog Inputs ¹	$V_{SS} - 0.3\text{ V}$ to $V_{DD} + 0.3\text{ V}$ or 30 mA, whichever occurs first
Digital Inputs ¹	$V_{SS} - 0.3\text{ V}$ to $V_{DD} + 0.3\text{ V}$ or 30 mA, whichever occurs first
Peak Current, Sx or D Pins	81 mA (pulsed at 1 ms, 10% duty cycle maximum)
Continuous Current, Sx or D ²	Data + 15%
Operating Temperature Range	–40°C to +125°C
Storage Temperature Range	–65°C to +150°C
Junction Temperature	150°C
Thermal Impedance, θ_{JA}	
16-Lead TSSOP, θ_{JA} Thermal Impedance (4-Layer Board)	112.6°C/W
16-Lead LFCSP, θ_{JA} Thermal Impedance (4-Layer Board)	30.4°C/W
Reflow Soldering Peak Temperature, Pb Free	260(+0/–5)°C

¹ Overvoltages at the Sx and D pins are clamped by internal diodes. Limit current to the maximum ratings given.

² See Table 5.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Only one absolute maximum rating can be applied at any one time.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS





Figure 2. TSSOP Pin Configuration

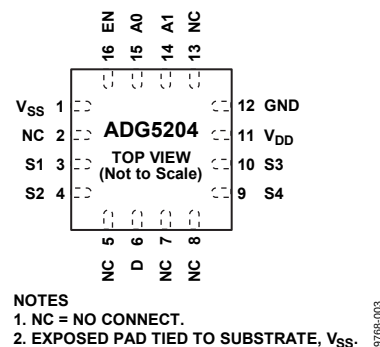

NOTES
 1. NC = NO CONNECT.
 2. EXPOSED PAD TIED TO SUBSTRATE, V_{SS} .

Figure 3. LFCSP Pin Configuration

Table 7. Pin Function Descriptions

Pin No.		Mnemonic	Description
TSSOP	LFCSP		
1	15	A0	Logic Control Input.
2	16	EN	Active High Digital Input. When this pin is low, the device is disabled and all switches are off. When this pin is high, the Ax logic inputs determine the on switches.
3	1	V_{SS}	Most Negative Power Supply Potential.
4	3	S1	Source Terminal. Can be an input or an output.
5	4	S2	Source Terminal. Can be an input or an output.
6	6	D	Drain Terminal. Can be an input or an output.
7 to 9	2, 5, 7, 8, 13	NC	No Connect. These pins are open.
10	9	S4	Source Terminal. Can be an input or an output.
11	10	S3	Source Terminal. Can be an input or an output.
12	11	V_{DD}	Most Positive Power Supply Potential.
13	12	GND	Ground (0 V) Reference.
14	14	A1	Logic Control Input.
N/A ¹	EP	Exposed Pad	Exposed Pad. The exposed pad is connected internally. For increased reliability of the solder joints and maximum thermal capability, it is recommended that the pad be soldered to the substrate, V_{SS} .

¹ N/A means not applicable.

TRUTH TABLE

Table 8.

EN	A1	A0	S1	S2	S3	S4
0	X ¹	X ¹	Off	Off	Off	Off
1	0	0	On	Off	Off	Off
1	0	1	Off	On	Off	Off
1	1	0	Off	Off	On	Off
1	1	1	Off	Off	Off	On

¹ X is don't care.

TYPICAL PERFORMANCE CHARACTERISTICS

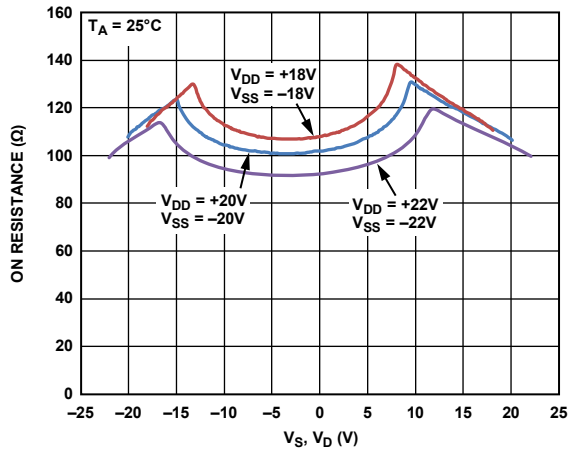


Figure 4. R_{ON} as a Function of V_D or V_S Dual Supply

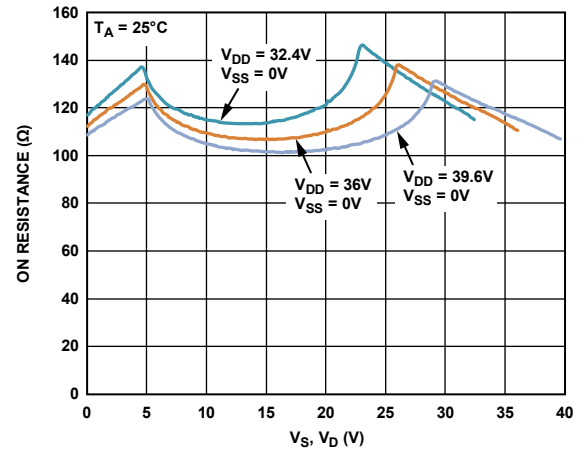


Figure 7. R_{ON} as a Function of V_D or V_S Single Supply

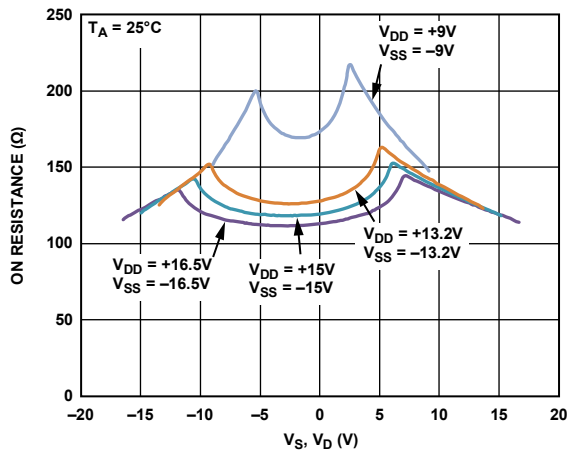


Figure 5. R_{ON} as a Function of V_D or V_S Dual Supply

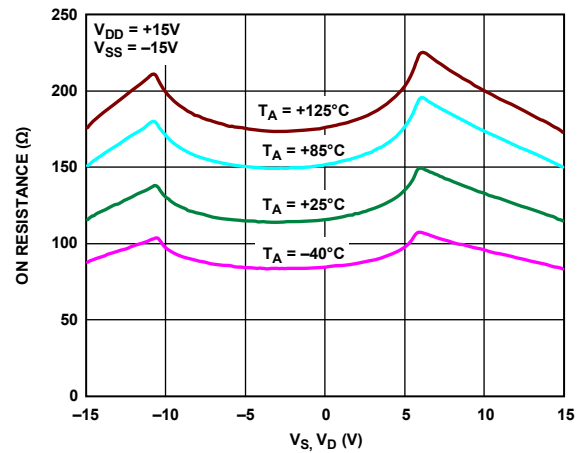


Figure 8. R_{ON} as a Function of V_D or V_S for Different Temperatures, ± 15 V Dual Supply

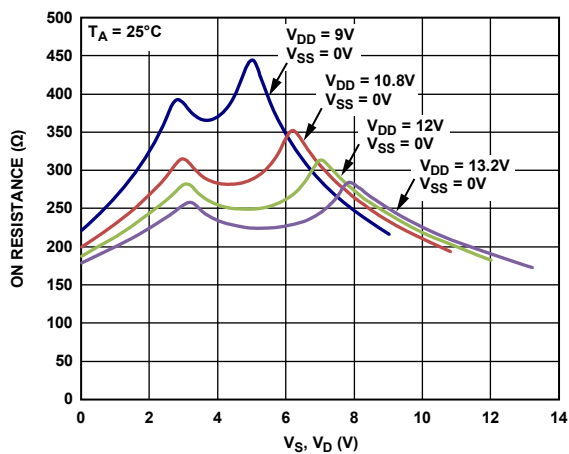


Figure 6. R_{ON} as a Function of V_D or V_S Single Supply

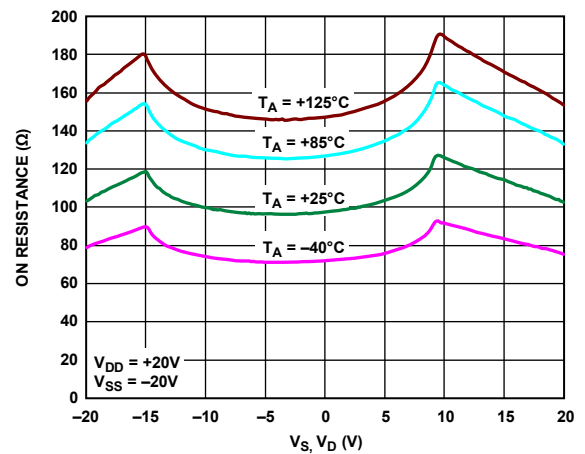


Figure 9. R_{ON} as a Function of V_D or V_S for Different Temperatures, ± 20 V Dual Supply

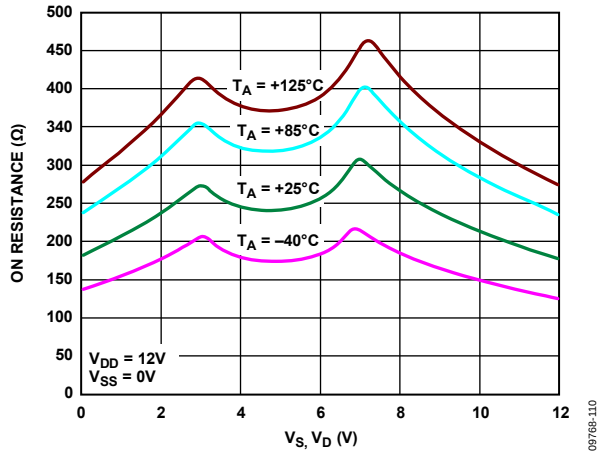


Figure 10. R_{ON} as a Function of V_D or V_S for Different Temperatures, 12 V Single Supply

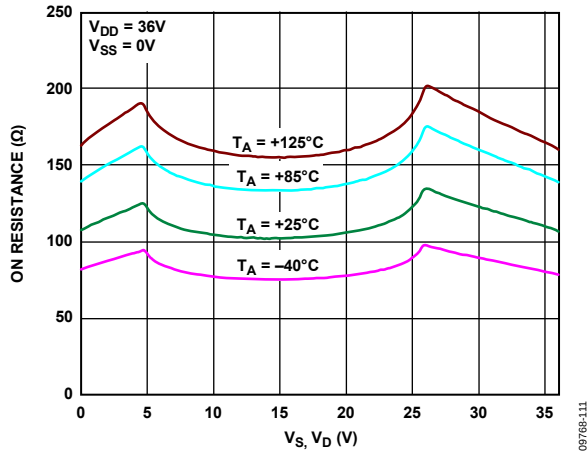


Figure 11. R_{ON} as a Function of V_D or V_S for Different Temperatures, 36 V Single Supply

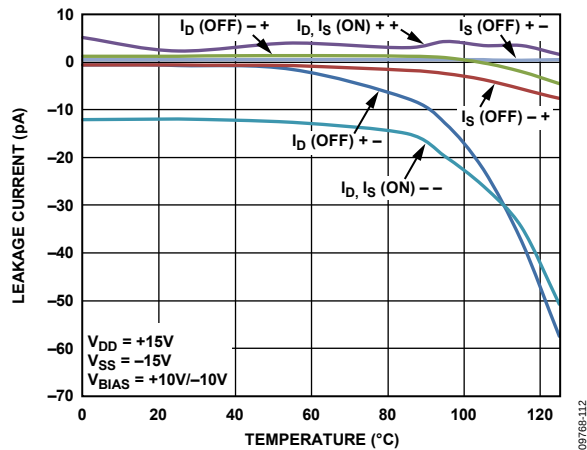


Figure 12. Leakage Current vs. Temperature, ± 15 V Dual Supply

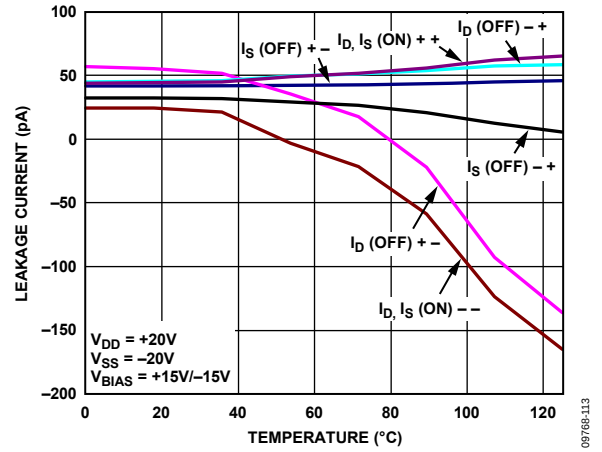


Figure 13. Leakage Current vs. Temperature, ± 20 V Dual Supply

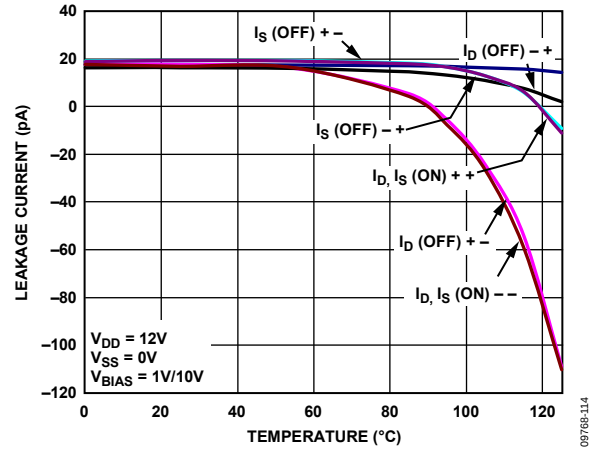


Figure 14. Leakage Current vs. Temperature, 12 V Single Supply

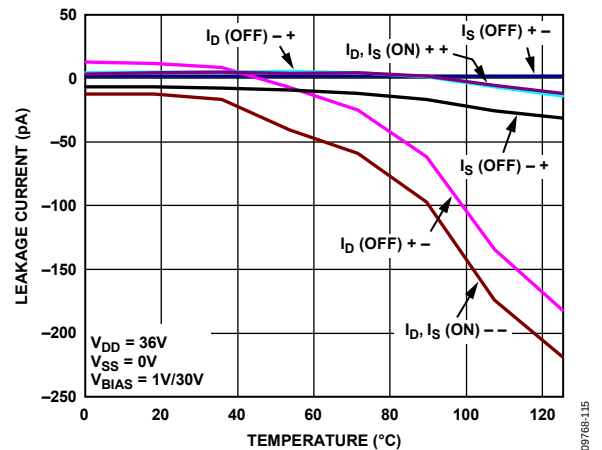


Figure 15. Leakage Current vs. Temperature, 36 V Single Supply

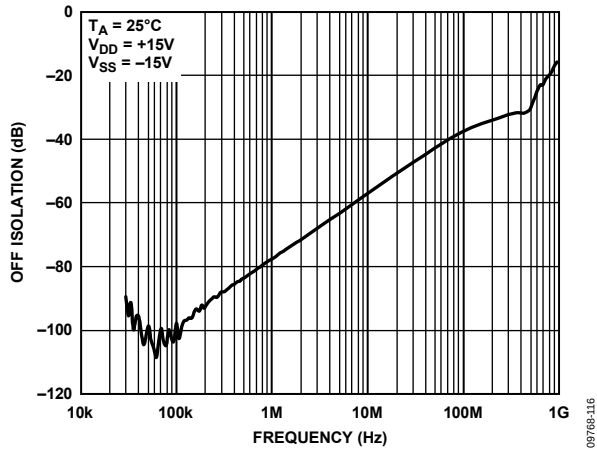


Figure 16. Off Isolation vs. Frequency, ±15 V Dual Supply

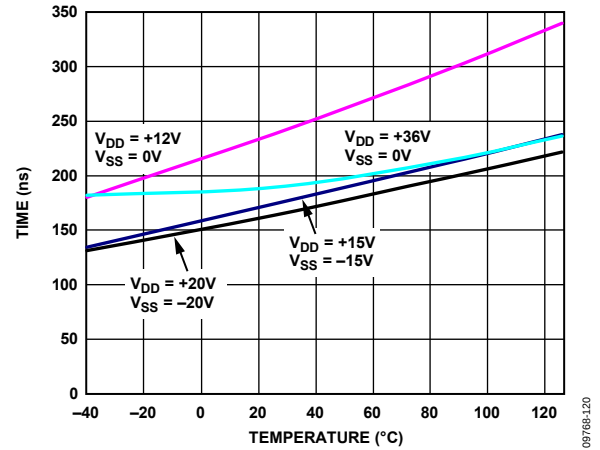


Figure 19. Transition Time vs. Temperature

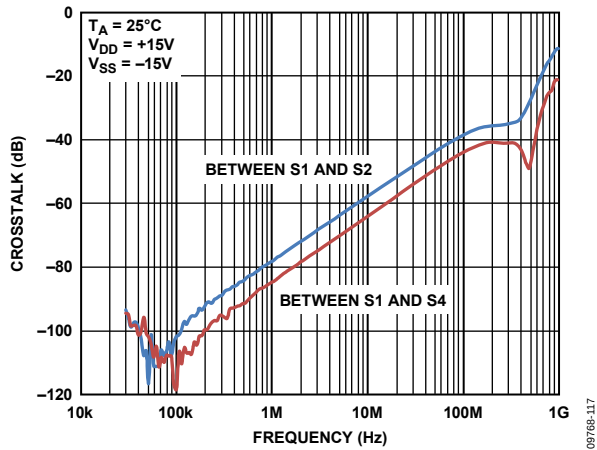


Figure 17. Crosstalk vs. Frequency, ±15 V Dual Supply

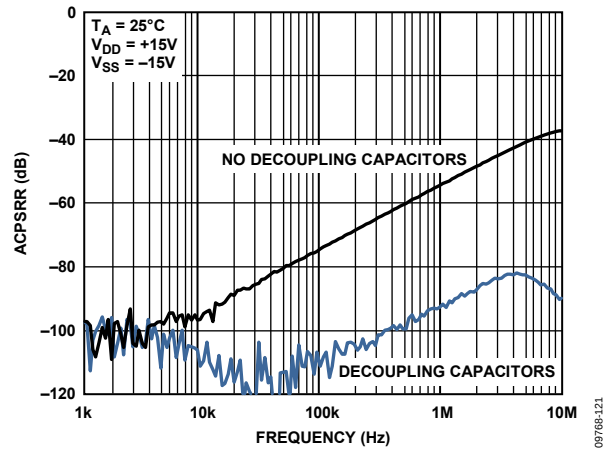


Figure 20. ACPSRR vs. Frequency, ±15 V Dual Supply

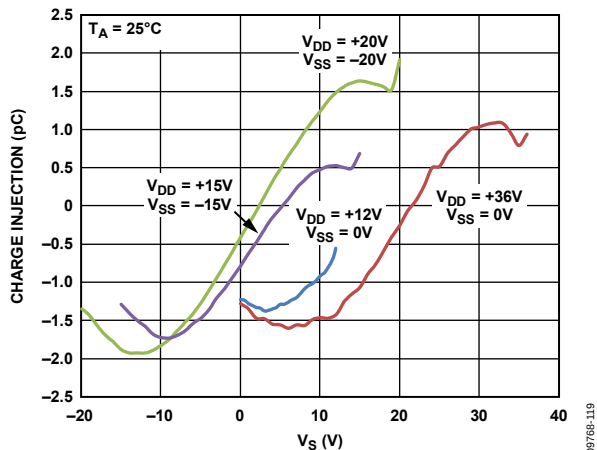


Figure 18. Charge Injection vs. Source Voltage

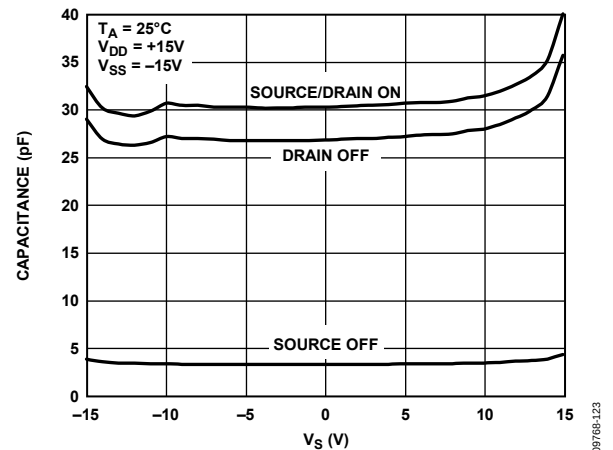


Figure 21. Capacitance vs. Source Voltage, Dual Supply

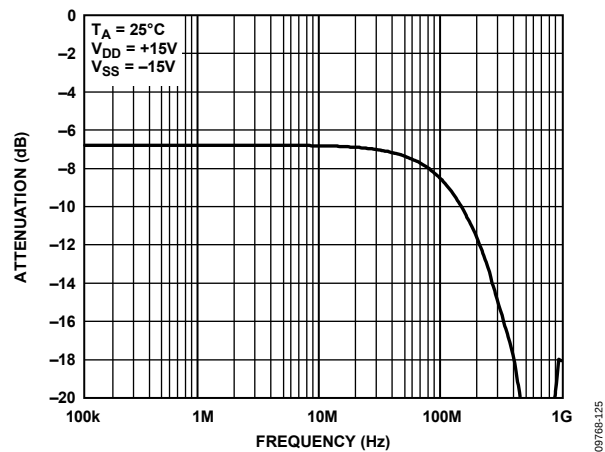


Figure 22. Bandwidth

TEST CIRCUITS

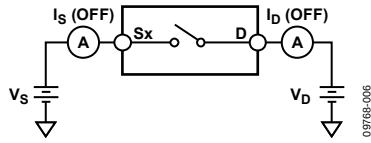


Figure 23. Off Leakage




Figure 26. On Leakage

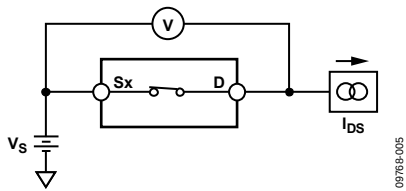


Figure 24. On Resistance

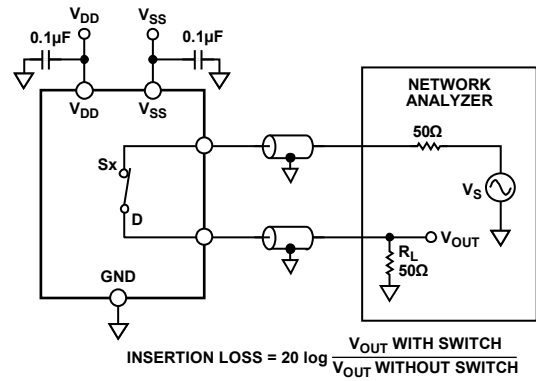


Figure 27. Bandwidth

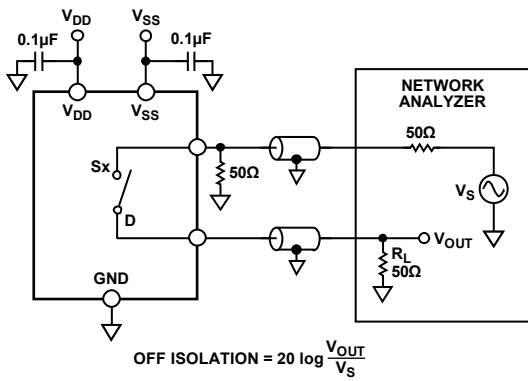


Figure 25. Off Isolation

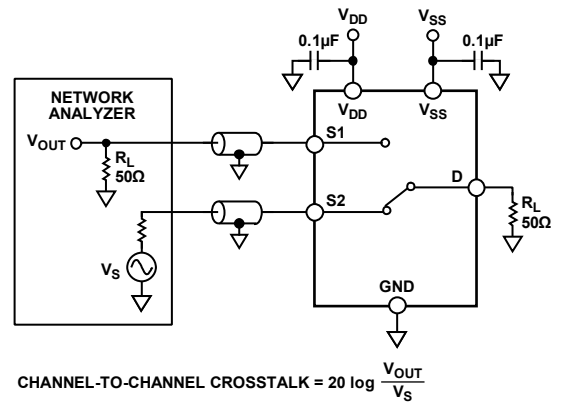


Figure 28. Channel-to-Channel Crosstalk

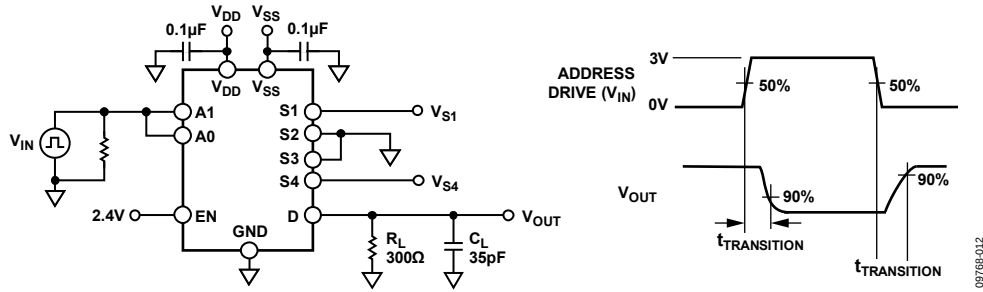


Figure 29. Address to Output Switching Times

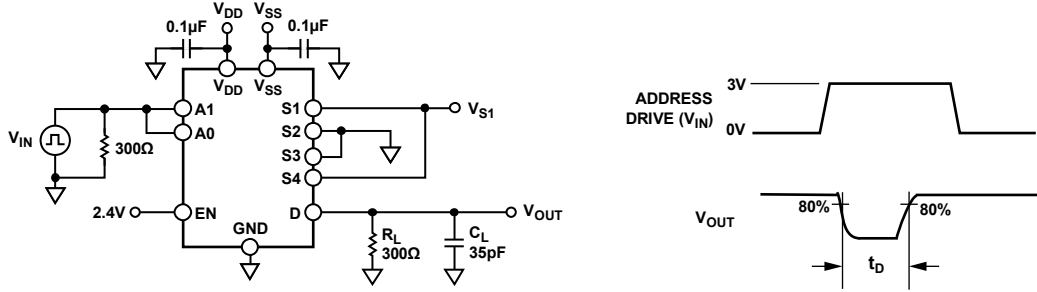


Figure 30. Break-Before-Make Time Delay, t_D

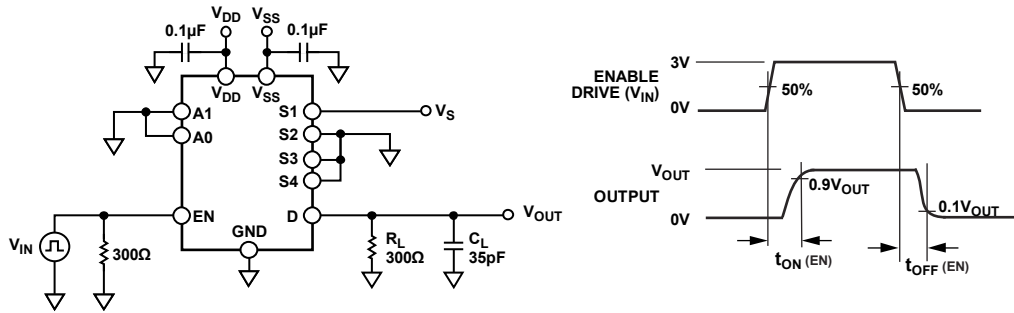


Figure 31. Enable-to-Output Switching Delay

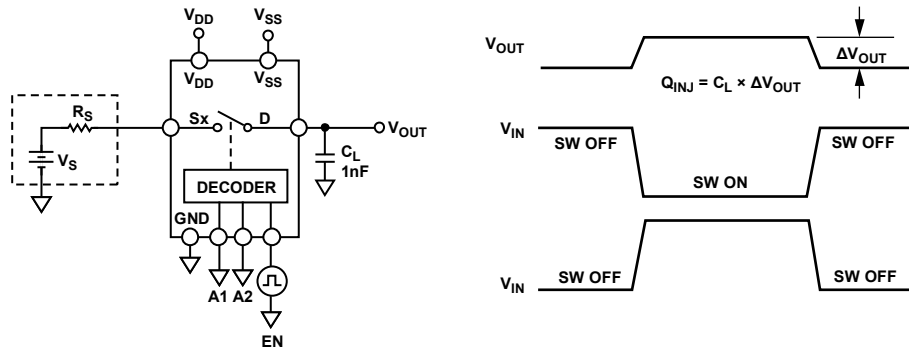


Figure 32. Charge Injection

TERMINOLOGY

I_{DD}

The positive supply current.

I_{SS}

The negative supply current.

V_D, V_S

The analog voltage on Terminal D and Terminal S.

R_{ON}

The ohmic resistance between Terminal D and Terminal S.

R_{FLAT(ON)}

Flatness that is defined as the difference between the maximum and minimum value of on resistance measured over the specified analog signal range.

I_S (Off)

The source leakage current with the switch off.

I_D (Off)

The drain leakage current with the switch off.

I_D, I_S (On)

The channel leakage current with the switch on.

V_{INL}

The maximum input voltage for Logic 0.

V_{INH}

The minimum input voltage for Logic 1.

I_{INL}, I_{INH}

The input current of the digital input.

C_S (Off)

The off switch source capacitance, which is measured with reference to ground.

C_D (Off)

The off switch drain capacitance, which is measured with reference to ground.

C_D (On), C_S (On)

The on switch capacitance, which is measured with reference to ground.

C_{IN}

The digital input capacitance.

t_{TRANSITION}

The delay time between the 50% and 90% points of the digital input and switch-on condition when switching from one address state to another.

t_{ON} (EN)

The delay between applying the digital control input and the output switching on. See Figure 31.

t_{OFF} (EN)

The delay between applying the digital control input and the output switching off. See Figure 31.

Charge Injection

A measure of the glitch impulse transferred from the digital input to the analog output during switching.

Off Isolation

A measure of unwanted signal coupling through an off switch.

Crosstalk

A measure of unwanted signal that is coupled through from one channel to another as a result of parasitic capacitance.

Bandwidth

The frequency at which the output is attenuated by 3 dB.

On Response

The frequency response of the on switch.

Insertion Loss

The loss due to the on resistance of the switch.

ACPSRR (AC Power Supply Rejection Ratio)

The ratio of the amplitude of signal on the output to the amplitude of the modulation. This is a measure of the ability of the device to avoid coupling noise and spurious signals that appear on the supply voltage pins to the output of the switch. The dc voltage on the device is modulated by a sine wave of 0.62 V p-p.

TRENCH ISOLATION

In the ADG5204, an insulating oxide layer (trench) is placed between the NMOS and the PMOS transistors of each CMOS switch. Parasitic junctions, which occur between the transistors in junction isolated switches, are eliminated, and the result is a completely latch-up proof switch.

In junction isolation, the N and P wells of the PMOS and NMOS transistors form a diode that is reverse-biased under normal operation. However, during overvoltage conditions, this diode can become forward-biased. A silicon controlled rectifier (SCR) type circuit is formed by the two transistors causing a significant amplification of the current that, in turn, leads to latch-up. By using trench isolation, this diode is removed, and the result is a latch-up proof switch.


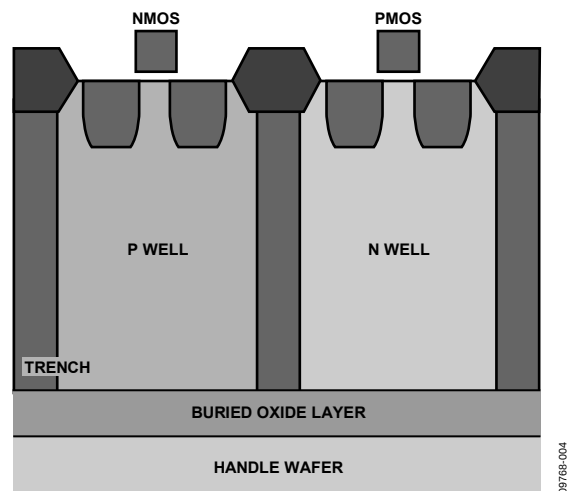


Figure 33. Trench Isolation

APPLICATIONS INFORMATION

The ADG52xx family of switches and multiplexers provide a robust solution for instrumentation, industrial, automotive, aerospace, and other harsh environments that are prone to latch-up, which is an undesirable high current state that can lead to device failure and persists until the power supply is turned off. The ADG5204 high voltage multiplexer allows single-supply operation from 9 V to 40 V and dual-supply operation from ± 9 V to ± 22 V.


OUTLINE DIMENSIONS

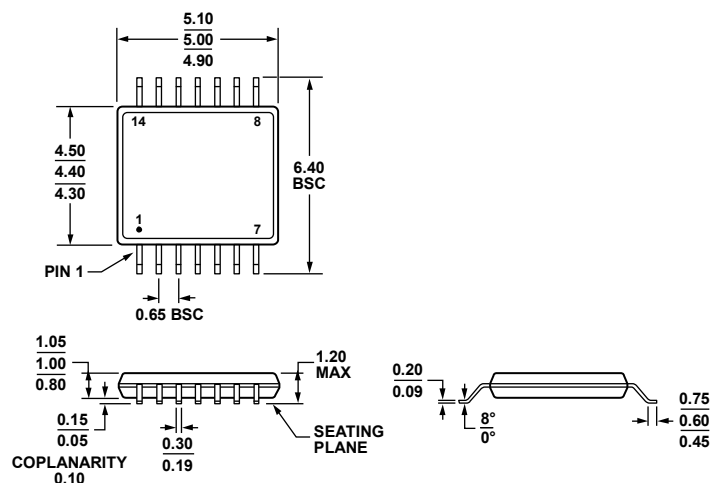

COMPLIANT TO JEDEC STANDARDS MO-153-AB-1

Figure 34. 14-Lead Thin Shrink Small Outline Package [TSSOP]
(RU-14)

Dimensions shown in millimeters

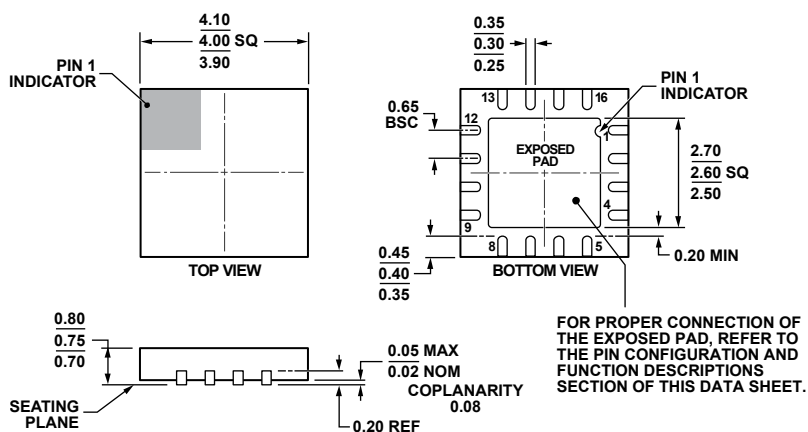

COMPLIANT TO JEDEC STANDARDS MO-220-WGGC.

Figure 35. 16-Lead Lead Frame Chip Scale Package [LFCSP_WQ]
4 mm x 4 mm Body, Very Very Thin Quad
(CP-16-17)

Dimensions shown in millimeters

ORDERING GUIDE

Model ¹	Temperature Range	Package Description	Package Option
ADG5204BRUZ	−40°C to +125°C	14-Lead Thin Shrink Small Outline Package [TSSOP]	RU-14
ADG5204BRUZ-RL7	−40°C to +125°C	14-Lead Thin Shrink Small Outline Package [TSSOP]	RU-14
ADG5204BCPZ-RL7	−40°C to +125°C	16-Lead Lead Frame Chip Scale Package [LFCSP_WQ]	CP-16-17

¹ Z = RoHS Compliant Part.

ADG5204

NOTES

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru