

## TECHNICAL DATA

# Fluke 1750 Three-Phase Power Recorder



### LONG-TERM ANALYSIS:

Uncover hard-to-find or intermittent issues; monitor critical equipment, capturing power quality events to correlate with equipment malfunction

### POWER QUALITY SURVEYS:

Quantify power quality throughout a facility, documenting results with professional reports.

### QUALITY OF SERVICE COMPLIANCE:

Validate incoming power quality at the service entrance.

### EQUIPMENT INSTALLATION/ COMMISSIONING:

Benchmark power system prior to install to insure quality of service.

## Never miss capturing a disturbance—with the exclusive threshold-free measurement system, it's automatic.

Capture every measurement, every event, on every cycle, all the time with the Fluke 1750 Power Recorder. Outstanding accuracy and resolution provide complete visibility into your installation or distribution system.

- **Power quality that meets the standard:** All measurements comply with IEC61000-4-30 standards for correct evaluation of all measured values including voltage, current, power, harmonics, flicker etc.
- **Ethernet interface:** Included Windows 10 tablet allows for quick setup and verification with waveform displays, meter screens, and phasor diagrams.
- **Quick and reliable configuration:** Windows 10 tablet “front panel interface” provides the ability to verify setup without a laptop along with a window into what the instrument is recording.
- **Threshold-free setup:** Apply thresholds after data is collected with Fluke Power Analyze Software so there is no need to worry about missed information due to incorrect set-up.
- **Captures everything:** Cross-channel and current triggering capture every measurement, on every channel, every time.
- **Intuitive PC software:** Easily analyze data and generate reports. Automated EN50160 reporting and compliance running directly on the supplied Windows 10 tablet.
- **Plug and play:** Set up in minutes with self-identifying current probes and single-lead voltage connections.
- **No need to reconnect wires:** Swap channels internally with the Windows 10 front panel or PC when connections are not correct.
- **Measure every parameter:** voltage and current on three phases, neutral, and ground.
- **5 MHz, 8000 Vpk waveform capture:** Get a detailed picture of even the shortest events.
- **Quickly retrieve data:** With included SD memory card or via the 100BaseT ethernet connection.




## Easy to use

The recorder automatically detects, scales, and powers current probes without needing batteries or external power supplies. Requiring only single-lead voltage connections enables safe and quick setups. Once power is applied the instrument automatically begins recording and LEDs give you assurance that the recorder is powered up and signals are within range—no more uncertainty that data is being recorded. The Fluke 1750 has an exclusive capture algorithm which makes certain all events are captured without the tedious setups and blind spots associated with threshold driven equipment.


The Windows tablet provided with /ET versions interfaces via Ethernet cable to the recorder, allowing quick setup and verification with waveform displays, meter screens, and phasor diagrams. Analysis can be performed in the field using the Fluke Power Analyze software running on the Windows tablet (laptops can also be used when desired).



View measurements real-time.

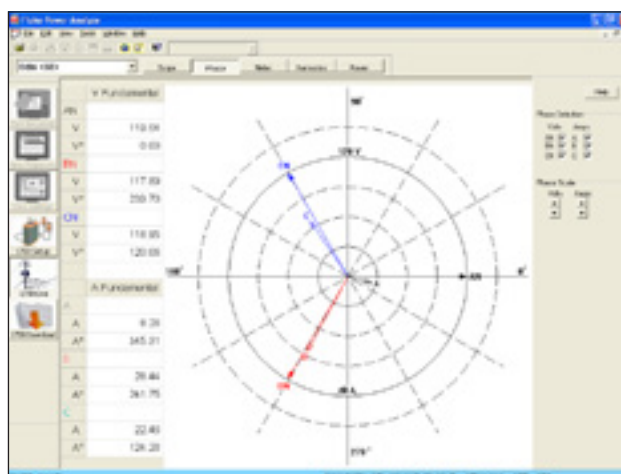


Configurations are simple with wiring diagrams to guide you.

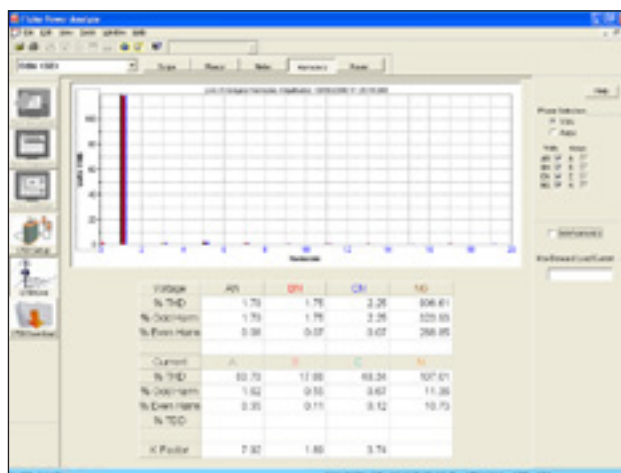


Analysis can be performed in the field using the Fluke Power Analyze software running on the Windows tablet.

## Comprehensive power system data


Every cycle on every channel is simultaneously sampled providing complete analysis of power quality, harmonics, power and energy. Cross-channel current and voltage triggering captures event data on all input channels simultaneously, no matter which channel triggered the event. When periodic analysis of the waveform may be needed, the Snapshot mode captures waveforms at user-defined intervals. Even dc signals can be recorded!

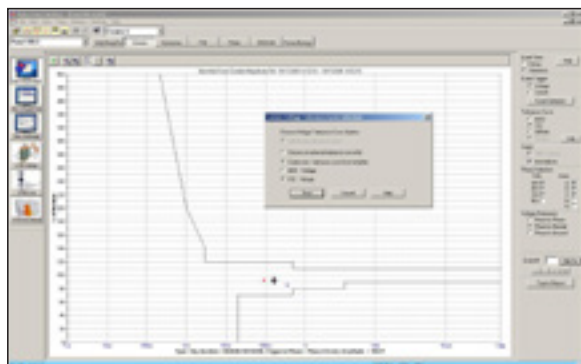


Events can be displayed against a variety of tolerance curves.

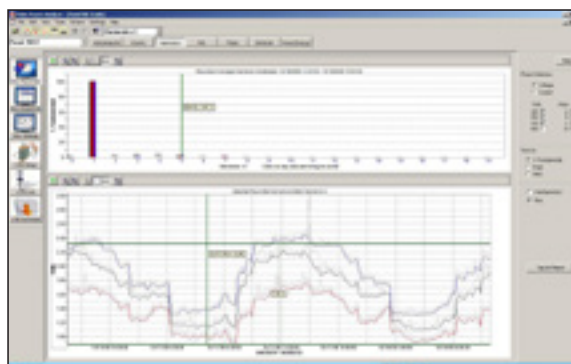


Full FFT on each channel to the 50th harmonic.

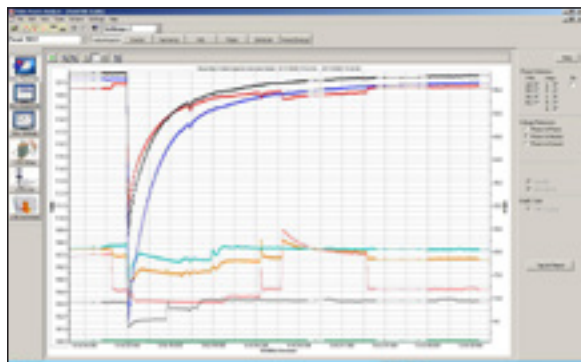


Display multiple parameters simultaneously on one graph.

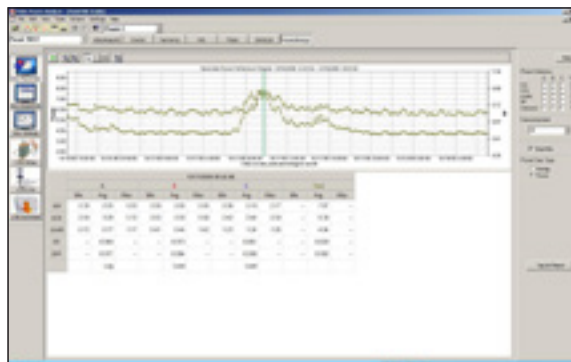

Full-featured power meter display for each channel and totals.

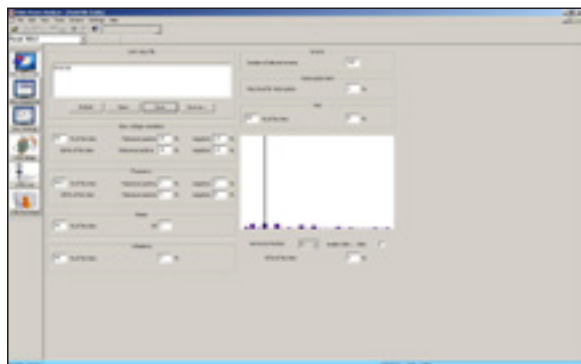

Thresholds for the EN50160 report are easily customized.

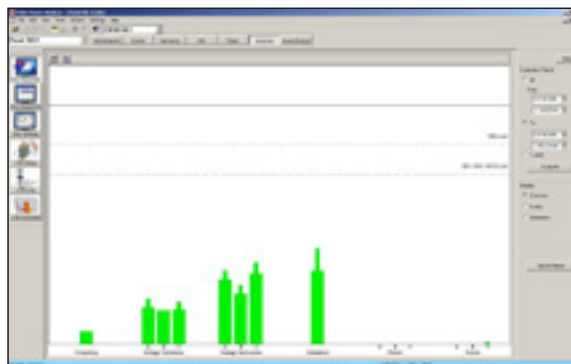

EN50160 report delivers an easy to read pass or fail chart along with drill down data.

## Powerful data management

Data is automatically stored on the internal flash memory that can store records for over a month without compression or overwriting. Data is retrieved via one of two quick and easy options: download the data onto the included SD memory card without using your laptop, or transfer directly to your computer via Ethernet, using TCP/IP protocol.

Voice, data, and picture annotations can be made via the tablet to flag important points in the data stream. Imagine being able to flag in your recorded data when a transfer switch was operated, or load changes were made.



## All the latest power quality standards are built-in

IEC 61000-4-30 compliant measurement systems provide the confidence that all parameters are measured and calculated consistently with international standards. Automated EN50160 compliance reporting for rapid Pass/Fail testing.


## 600 V CAT IV and 1000 V CAT III safety rating

Designed to help protect you and your equipment, the Fluke 1750 Three-Phase Power Recorder and accessories are all certified to meet the stringent safety standards for use in 600 V CAT IV and 1000 V CAT III environments. They are the first tools of their kind to carry the CAT IV rating and, therefore, can be used for most power connections and for all outlets in a low-voltage power distribution system.


## View data the way you want

The new Fluke Power Analyze software revolutionizes your ability to analyze data. No need to worry about thresholds—with Fluke Power Analyze, thresholds can be modified after the data is recorded! And the easy-to-use user interface will display voltage as a phase-to-phase or phase-to-neutral reading.

The Widows tablet supplied with /ET models runs the full Power Analyzer software for easy in-field analysis.

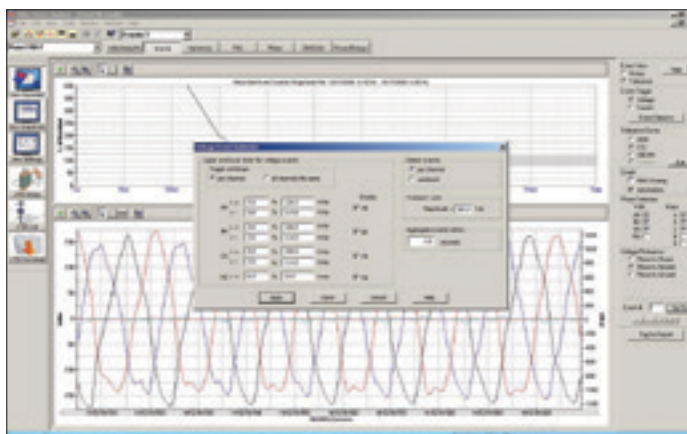

Apply thresholds to data after collection using a variety of standard or customized templates.

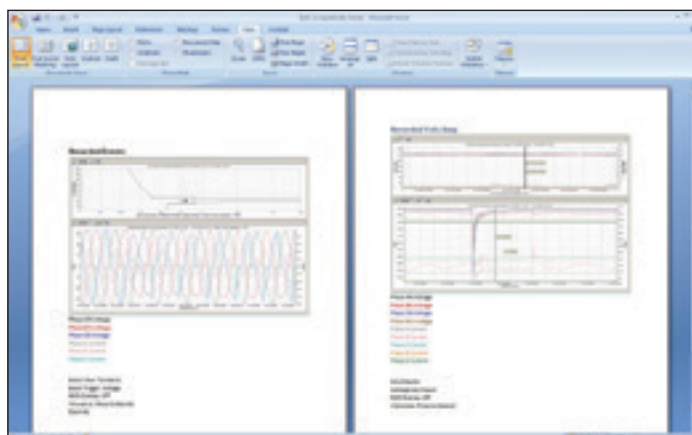

Simplified report writer feature included in Fluke Power Analyze.

# Specifications for the System: Recorder and Power Analyze Software

| General                                                      |                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power quality measurement standards                          |                                                                                                                                                                                                                                                                                         |
| Conformance                                                  | IEC 61999-1-4 Class 1, IEC 61000-4-30 (Class A or Class S depending on measurement function), IEEE519, IEEE1159, IEEE1459 and EN50160                                                                                                                                                   |
| Clock/calendar                                               | Leap years, 24-hour clock                                                                                                                                                                                                                                                               |
| Real-time clock accuracy                                     | Not more than $\pm 1$ s/day                                                                                                                                                                                                                                                             |
| Internal memory capacity for data                            | At least 2 GB                                                                                                                                                                                                                                                                           |
| Maximum recording period                                     | At least 31 days                                                                                                                                                                                                                                                                        |
| Measurement time control                                     | Automatic                                                                                                                                                                                                                                                                               |
| Maximum number of events                                     | Limited only by the size of the internal memory                                                                                                                                                                                                                                         |
| Power requirements                                           | 100 to 240 V rms $\pm 10$ %, 47-63 Hz, 40 W                                                                                                                                                                                                                                             |
| Operating time during interruptions (internal UPS operation) | 5 minutes per interruption, 60 minutes total operating time without recharging                                                                                                                                                                                                          |
| Dimensions                                                   | 215 mm x 310 mm x 35 mm (8.5 in x 12.2 in x 3.5 in)                                                                                                                                                                                                                                     |
| Mass (weight)                                                | 6.3 kg (14 lb)                                                                                                                                                                                                                                                                          |
| Input                                                        |                                                                                                                                                                                                                                                                                         |
| Measurement types                                            | One Phase Plus Neutral, One Phase IT No Neutral, One Phase Split Phase, Three Phase Wye, Three Phase Delta, Three Phase IT, Three Phase High Leg, Three Phase Open Leg, 2 Element Delta, 2 1/2 Element Wye                                                                              |
| Input channels                                               | Voltage: 4 channels, ac/dc<br>Current: 5 channels                                                                                                                                                                                                                                       |
| Voltage channels                                             | Input resistance: 2 M $\Omega$<br>Input capacitance: < 20 pF                                                                                                                                                                                                                            |
| Current input characteristics                                | 2 V rms = full scale, 1 M $\Omega$ Input Impedance for ferro CTs, low impedance for Flexi-CTs                                                                                                                                                                                           |
| Measuring method                                             | Simultaneous digital sampling of voltage and current. Digital PLL synchronized sampling, internal frequency reference used during voltage drops.                                                                                                                                        |
| Synchronization and sampling                                 |                                                                                                                                                                                                                                                                                         |
| PLL-synchronization source                                   | The PLL synchronizes to the A-N voltage for wye power types, and to the A-B voltage for delta power types. All listed power types can be characterized as either wye or delta.                                                                                                          |
| PLL lock range                                               | 42.5 to 69 Hz                                                                                                                                                                                                                                                                           |
| Sampling frequency                                           | Voltage and current: 256 samples/cycle<br>Inter-harmonics per IEC 61000-4-7: 2560 points/10 cycles (50 Hz),<br>3072 points/12 cycles (60 Hz)<br>Transient Voltage: 5 MHz                                                                                                                |
| A/D resolution                                               | Voltage and current: 24 bits<br>Transient voltage: 14 bits                                                                                                                                                                                                                              |
| Voltage and current measurements                             |                                                                                                                                                                                                                                                                                         |
| Voltage measurement range                                    | AC voltage: 1000 V rms $\pm 10$ % over range<br>DC voltage: $\pm 1000$ V + 10 % over range                                                                                                                                                                                              |
| Voltage crest factor                                         | 3 or less                                                                                                                                                                                                                                                                               |
| Current measurement range                                    | Depends on current probe used                                                                                                                                                                                                                                                           |
| Current crest factor                                         | 4 or less                                                                                                                                                                                                                                                                               |
| Voltage and current measurement accuracy                     |                                                                                                                                                                                                                                                                                         |
| RMS voltage                                                  |                                                                                                                                                                                                                                                                                         |
| Measurement type                                             | True-rms calculated continuously: every cycle, every 1/2 cycle, and every 10 or 12 cycles at 50 or 60 Hz respectively, as required by IEC 61000-4-30.                                                                                                                                   |
| Measurement uncertainty                                      | AC: $\pm 0.2$ % reading $\pm 0.1$ % full scale, above 50 V rms<br>DC: $\pm 0.5$ % reading $\pm 0.2$ % full scale, above 50 V dc                                                                                                                                                         |
| RMS current                                                  |                                                                                                                                                                                                                                                                                         |
| Measurement type                                             | True rms calculated continuously: every cycle, every 1/2 cycle, and every 10 or 12 cycles at 50 or 60 Hz respectively, as required by standards                                                                                                                                         |
| Measurement uncertainty                                      | Ferromagnetic Clamps: $\pm (0.1$ % full scale + 0.2 % reading + current sensor accuracy), valid for 5 % to 100 % of current sensor range<br>Flexible Current Probes: $\pm (0.1$ % full scale + 0.5 % reading + current sensor accuracy), valid for 5 % to 100 % of current sensor range |

| <b>Transient voltage (impulse)</b>                                             |                                                                                                                                                                                                                   |
|--------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Measurement type                                                               | Waveshape sampling                                                                                                                                                                                                |
| Full scale                                                                     | 8000 V pk                                                                                                                                                                                                         |
| Sample resolution                                                              | 200 nS                                                                                                                                                                                                            |
| Measurement uncertainty                                                        | $\pm 5\%$ reading $\pm 20$ V (test parameters: 1000 V dc, 1000 V rms, 100 kHz)                                                                                                                                    |
| <b>Dip (sag) and swell measurements</b>                                        |                                                                                                                                                                                                                   |
| <b>Voltage swell (rms swell)</b>                                               |                                                                                                                                                                                                                   |
| Measurement type                                                               | True rms (one cycle calculation by overlapping each half cycle—voltage between lines is measured for 3P3W lines and phase voltage is measured for 3P4W lines)                                                     |
| Displayed data                                                                 | Amplitude and duration of swell                                                                                                                                                                                   |
| Measurement uncertainty                                                        | Same as rms voltage                                                                                                                                                                                               |
| <b>Voltage dip (rms sag)</b>                                                   |                                                                                                                                                                                                                   |
| Measurement type                                                               | True rms (one cycle calculation by overlapping each half cycle—voltage between lines is measured for 3P3W lines and phase voltage is measured for 3P4W lines)                                                     |
| Displayed data                                                                 | Amplitude and duration of dip or interruption                                                                                                                                                                     |
| Measurement uncertainty                                                        | Same as rms voltage                                                                                                                                                                                               |
| <b>Voltage dropout (interruption)</b>                                          |                                                                                                                                                                                                                   |
| Measurement type                                                               | Same as voltage dip                                                                                                                                                                                               |
| <b>Power Measurements</b>                                                      |                                                                                                                                                                                                                   |
| <b>Calculated per IEEE1459 for best performance when distortion is present</b> |                                                                                                                                                                                                                   |
| Measurement type                                                               | True rms calculated continuously: every cycle, and every 10 or 12 cycles at 50 or 60 Hz respectively, as required by standards                                                                                    |
| Measurement accuracy                                                           | $\pm$ (voltage uncertainty + current uncertainty + current probe uncertainty)                                                                                                                                     |
| <b>Frequency</b>                                                               |                                                                                                                                                                                                                   |
| Measurement range                                                              | 42.5 Hz to 69 Hz                                                                                                                                                                                                  |
| Measurement source                                                             | Same as PLL synchronization source                                                                                                                                                                                |
| Measurement accuracy                                                           | $\pm 10$ mHz (10 % to 110 % of range, with sine wave)                                                                                                                                                             |
| <b>Power factor</b>                                                            |                                                                                                                                                                                                                   |
| Measurement range                                                              | 0.000 to 1.000                                                                                                                                                                                                    |
| Measurement accuracy                                                           | $\pm 1$ digit from the calculation of each measured value ( $\pm 3$ digits for total)                                                                                                                             |
| <b>Displacement power factor</b>                                               |                                                                                                                                                                                                                   |
| Measurement method                                                             | Calculated from the phase difference between voltage fundamental and current fundamental                                                                                                                          |
| Measurement range                                                              | - 1.000 (leading) to + 1.000 (lagging)                                                                                                                                                                            |
| Measurement accuracy                                                           | $\pm 0.5\%$ reading $\pm 2\%$ full scale $\pm 1$ digit                                                                                                                                                            |
| <b>Voltage unbalance and phase sequence</b>                                    |                                                                                                                                                                                                                   |
| Measurement method                                                             | Positive sequence voltage divided by negative sequence voltage, per IEC 61000-4-30                                                                                                                                |
| <b>Harmonic voltage and current</b>                                            |                                                                                                                                                                                                                   |
| Analysis window                                                                | rectangular                                                                                                                                                                                                       |
| Analysis order                                                                 | 1st to 50th order                                                                                                                                                                                                 |
| Measurement accuracy                                                           | Voltage / Current: 1st to 20th orders: $\pm 0.5\%$ reading $\pm 0.2\%$ full scale, 21st to 50th orders: $\pm 1\%$ reading $\pm 0.3\%$ full scale (current sensor accuracy must be included for current and power) |
| Measurement method                                                             | IEC 61000-4-7                                                                                                                                                                                                     |
| <b>Inter-harmonic voltage and current (intermediate harmonics)</b>             |                                                                                                                                                                                                                   |
| Analysis window                                                                | rectangular                                                                                                                                                                                                       |
| Analysis orders                                                                | 1.5 to 49.5th order                                                                                                                                                                                               |
| Measurement method                                                             | IEC 61000-4-7                                                                                                                                                                                                     |
| <b>Voltage flicker</b>                                                         |                                                                                                                                                                                                                   |
| Measurement method                                                             | as per EN 61000-4-15:2003: 10 min (Pst), 2 h (Plt)                                                                                                                                                                |
| <b>External interface specifications</b>                                       |                                                                                                                                                                                                                   |
| <b>LAN interface</b>                                                           |                                                                                                                                                                                                                   |
| Connector                                                                      | RJ-45                                                                                                                                                                                                             |
| Speed and type                                                                 | 10/100 Base-T, auto MDIX                                                                                                                                                                                          |
| Communications protocol                                                        | TCP/IP over ethernet                                                                                                                                                                                              |

## Environmental and safety specifications

|                                           |                                                                                                                                                                              |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating environment</b>              | Indoors or in covered area outdoors, up to 2000 m altitude (for compliance to IEC61010 standard)                                                                             |
| <b>Storage temperature and humidity</b>   | -20 °C to 50 °C, 80 % RH max, non-condensing                                                                                                                                 |
| <b>Operating temperature and humidity</b> | 0 °C to 40 °C, 80 % RH max, non-condensing                                                                                                                                   |
| <b>Maximum rated working voltage</b>      |                                                                                                                                                                              |
| <b>Voltage terminals</b>                  | 1100 V rms                                                                                                                                                                   |
| <b>Voltage durability</b>                 | 5550 V rms ac for 1 minute, between voltage input terminals, voltage input terminals and current probes, and voltage input terminals and case (50/60 Hz, 1 mA sense current) |
| <b>Enclosure protection</b>               | IP30 (per EN 60529)                                                                                                                                                          |
| <b>Standards conformance</b>              |                                                                                                                                                                              |
| <b>EMC</b>                                | EN 61326-1:1997+A1:1998 Class A<br>EN 61000-3-2:1995+A1:1998+A2:1998<br>EN 61000-3-3:1995                                                                                    |
| <b>Safety</b>                             | EN 61010-1 2nd Edition; 2000<br><b>Voltage input unit:</b> Contamination Level 2, Overvoltage Category 1000 V CAT III, 600 V CAT IV (anticipated overvoltage: 8000 V)        |

## Optional accessories

Fluke power quality current transformers and flexible current probes are specially designed to work seamlessly with Fluke power monitors (1750 and 1650). All clamp-on and flexi-CT's are matched to take full advantage of your instrument's ability to set scale factors for accurate readings.



### Cases

#### 1750/CASE Transit Case

Rugged water tight transit case with rollers

#### CS1750/1760

Soft carrying case for Fluke 1750 and 1760

### Miscellaneous

#### 1750/MC

Additional SD Memory Card for Fluke 1750

#### Fluke-1750 Tablet

Windows 10 controller

#### 1750/SEAT-L

- Fluke Power Analyze—Additional seat license
- One additional license for installation on one additional PC

#### 1750/SITE-L

- Fluke Power Analyze—Additional seat license
- Site license for installation on unlimited PCs

#### ST1760

Standard ethernet cable

| Model no. | CT type  | Current range | Accuracy           | Frequency response | Jaw opening           |
|-----------|----------|---------------|--------------------|--------------------|-----------------------|
| i5S-PR    | Clamp-On | 0.01 A to 5 A | 1 % RDG ± 0.5 % FS | 5 kHz              | 1.5 cm (0.6 in) dia.  |
| i40S-PR   | Clamp-On | 0.1 A to 40 A | 1 % RDG ± 0.1 % FS | 5 kHz              | 1.5 cm (0.6 in) dia.  |
| 3140R     | Clamp-On | 2 A to 400 A  | 2 % RDG ± 0.04 A   | 20 kHz             | 3.2 cm (1.25 in) dia. |



| Model no.      | CT type  | Current range   | Accuracy            | Frequency response | Probe length   |
|----------------|----------|-----------------|---------------------|--------------------|----------------|
| 3210-PR TF-II  | Flexi-CT | 20 A to 1000 A  | 1 % rdg ± 0.15 % FS | 7 kHz              | 60 cm (24 in)  |
| 3310-PR -TF-II | Flexi-CT | 100 A to 5000 A | 1 % rdg ± 0.15 % FS | 7 kHz              | 60 cm (24 in)  |
| 3312-PR TF-II  | Flexi-CT | 100 A to 5000 A | 1 % rdg ± 0.15 % FS | 7 kHz              | 120 cm (48 in) |

## Ordering information

### Fluke-1750-TF

Three-Phase Power Recorder

#### Included

1750 acquisition unit, Windows 10 tablet "front panel interface" and charger power plug adapters, 4 x 3210-PR-TF-II 1,000A Fluke 1750 Thin Flex-II 61cm (24in), 5 test leads and clips, SD memory card, Fluke Power Analyze software, Power cord with international plug set, Ethernet cable, Color localization set, Printed Getting Started manual, Product CD with software and users manual PDF, and Soft carrying case.

### Fluke-1750-TF/ET

Three-Phase Power Recorder

#### Included

4 x 3120 flexible current probes

### Fluke-1750/ET

Three-Phase Power Recorder

#### Included

Items above, excluding 4 x 3120 flexible current probes, but including 4 x 400A current clamps (type 3140R).

### Fluke-1750/B/ET

Three-Phase Basic Power Recorder

#### Included

Items above but excluding 4 x 3120 flexible current probes and 4 x 400A current clamps.

*Models not including the Windows 10 tablet:*

*Fluke-1750-TF/NT*

*Fluke-1750/NT*

*Fluke-1750/B/NT*



Fluke offers a full suite of power quality test tools to locate, predict, prevent and troubleshoot power problems.

- Handheld troubleshooters for instant analysis
- Ready-to-use power loggers
- Comprehensive power quality recorders
- Power calibrators and standards backed by Fluke metrology expertise

The Fluke power quality set of products offers the highest level of performance and maintains the Fluke promise of rugged and reliable test tools.

To learn more, contact Power Quality customer support, in Seattle, WA, USA at **1-888-257-9897** or e-mail **fpqsupport@fluke.com**.

**Fluke.** *Keeping your world up and running.®*

#### Fluke Corporation

PO Box 9090, Everett, WA 98206 U.S.A.

#### Fluke Europe B.V.

PO Box 1186, 5602 BD Eindhoven, The Netherlands

#### For more information call:

In the U.S.A. (800) 443-5853 or

Fax (425) 446-5116

In Europe/M-East/Africa +31 (0)40 267 5100 or

Fax +31 (0)40 267 5222

In Canada (800)-36-FLUKE or

Fax (905) 890-6866

From other countries +1 (425) 446-5500 or

Fax +1 (425) 446-5116

Web access: <http://www.fluke.com>

Modification of this document is not permitted without written permission from Fluke Corporation.

©2006-2017 Fluke Corporation.  
Specifications subject to change without notice.  
Printed in U.S.A. 3/2017 2428201h-en

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)