



## MS5837-02BA

### Ultra-small Gel Filled Pressure & Temperature Sensor, with Stainless Steel Cap

Take your devices to the next level with our MS5837-02BA pressure sensor module. This ultra-small gel filled pressure sensor is optimized for both altimeter and barometer applications.

Optimized for consumer devices such as wearables, multisport watches and fitness trackers the MS5837-02BA's robust sensor package enables it to withstand harsh environments often encountered in these applications.

This MEMS based sensor includes a high-linearity pressure sensor with an ultra-low power 24 bit digital output (I<sup>2</sup>C) and an altitude resolution at sea level of 13 cm. This enables high resolution measurements such as counting flights of stairs.

This ultra-compact micro altimeter allows for design flexibility and is one of the smallest gel filled watertight sensor in the market. The robust sensor package consists of ceramic and metal materials. A high-resolution temperature output allows the implementation of a thermometer ion without any additional sensor.

Expanding on TE Connectivity's (TE) MS5837 series of ultra-compact digital altimeters, our new generation 2 bar models offer options for improved endurance in chlorine environments and shielding for reduced signal noise and interference. This new generation of sensor modules was developed by TE with leading MEMS technology and our proven experience in design and manufacturing of altimeter modules.

### Applications

- Multisport watches
- Fitness trackers
- Swim watches
- Bike computers
- Mobile altimeter/barometer systems
- Personal navigation devices
- E-cigarettes
- Drones and other autonomous vehicles

### Features

- Ceramic - metal package, 3.3 x 3.3 x 2.75mm
- High resolution module, 13 cm
- Supply voltage: 1.5 to 3.6 V
- Low power, 0.6  $\mu$ A (standby  $\leq$  0.1  $\mu$ A at 25°C)
- Integrated digital pressure sensor (24 bit  $\Delta\Sigma$  ADC)
- Operating range: 300 to 1,200 mbar, -20 to +85 °C
- I<sup>2</sup>C interface
- No external components (internal oscillator)
- Watertight sealing with 1.8 x 0.8mm O-ring
- Chlorine resistant option
- Shielded option

**PERFORMANCE SPECIFICATIONS****ABSOLUTE MAXIMUM RATINGS**

| Parameter                                    | Symbol           | Conditions               | Min. | Typ. | Max  | Unit |
|----------------------------------------------|------------------|--------------------------|------|------|------|------|
| Supply voltage                               | V <sub>DD</sub>  |                          | -0.3 |      | +4   | V    |
| Storage temperature                          | T <sub>S</sub>   |                          | -40  |      | +85  | °C   |
| Overpressure                                 | P <sub>max</sub> | ISO 22810 <sup>(1)</sup> |      |      | 10   | bar  |
| Maximum Soldering Temperature <sup>(2)</sup> | T <sub>max</sub> | 40 sec. max              |      |      | 250  | °C   |
| ESD rating (lid to GND version)              |                  | Human Body Model         | -2   |      | +2   | kV   |
| Latch up                                     |                  | JEDEC JESD78 standard    | -100 |      | +100 | mA   |

<sup>(1)</sup> Pressure ramp up/down min 60s<sup>(2)</sup> Refer to application note 808**ELECTRICAL CHARACTERISTICS**

| Parameter                                               | Symbol          | Conditions                                        | Min. | Typ.                                           | Max | Unit |
|---------------------------------------------------------|-----------------|---------------------------------------------------|------|------------------------------------------------|-----|------|
| Operating Supply voltage                                | V <sub>DD</sub> |                                                   | 1.5  | 3.0                                            | 3.6 | V    |
| Operating Temperature                                   | T               |                                                   | -20  | +25                                            | +85 | °C   |
| Supply current<br>(1 sample per sec.)                   | I <sub>DD</sub> | OSR<br>8192<br>4096<br>2048<br>1024<br>512<br>256 |      | 20.09<br>10.05<br>5.02<br>2.51<br>1.26<br>0.63 |     | μA   |
| Peak supply current                                     |                 | during conversion                                 |      | 1.25                                           |     | mA   |
| Standby supply current                                  |                 | at 25°C<br>(V <sub>DD</sub> = 3.0 V)              |      | 0.01                                           | 0.1 | μA   |
| Power supply hold off for internal reset <sup>(3)</sup> |                 | V <sub>DD</sub> < 0.1V                            | 200  |                                                |     | ms   |
| VDD Capacitor                                           |                 | from VDD to GND                                   | 100  | 470                                            |     | nF   |
| Resistor value between the lid and the GND              |                 | Version 02BA2x only                               |      | 1000                                           |     | Ω    |

<sup>(3)</sup> Supply voltage power up must be continuous from GND to VDD without any step**ANALOG DIGITAL CONVERTER (ADC)**

| Parameter                          | Symbol         | Conditions                                        | Min. | Typ.                                          | Max                                          | Unit |
|------------------------------------|----------------|---------------------------------------------------|------|-----------------------------------------------|----------------------------------------------|------|
| Output Word                        |                |                                                   |      | 24                                            |                                              | bit  |
| ADC Conversion time <sup>(4)</sup> | t <sub>c</sub> | OSR<br>8192<br>4096<br>2048<br>1024<br>512<br>256 |      | 16.44<br>8.22<br>4.13<br>2.08<br>1.06<br>0.54 | 17.2<br>8.61<br>4.32<br>2.17<br>1.10<br>0.56 | ms   |

<sup>(4)</sup> Maximum values must be used to determine waiting times in I<sup>2</sup>C communication

## PERFORMANCE SPECIFICATIONS (Continued)

PRESSURE OUTPUT CHARACTERISTICS ( $V_{DD} = 3\text{ V}$ ,  $T = 25^\circ\text{C}$  UNLESS OTHERWISE NOTED)

| Parameter                                        | Conditions                                                |                     | Min. | Typ.    | Max  | Unit    |
|--------------------------------------------------|-----------------------------------------------------------|---------------------|------|---------|------|---------|
| Operating Pressure Range                         | $P_{\text{range}}$                                        |                     | 300  |         | 1200 | mbar    |
| Extended Pressure Range                          | $P_{\text{ext}}$                                          | Linear Range of ADC | 10   |         | 2000 | mbar    |
| Relative Accuracy <sup>(1) (4)</sup>             | 600...1000 mbar, at $20^\circ\text{C}$                    |                     | -0.5 |         | +0.5 | mbar    |
|                                                  | 300...1100 mbar, $0...60^\circ\text{C}$                   |                     | -2   |         | +2   |         |
|                                                  | 300...1100 mbar, $-20...85^\circ\text{C}$                 |                     | -4   |         | +4   |         |
| Resolution RMS                                   | OSR                                                       | 8192                |      | 0.016   |      | mbar    |
|                                                  |                                                           | 4096                |      | 0.021   |      |         |
|                                                  |                                                           | 2048                |      | 0.028   |      |         |
|                                                  |                                                           | 1024                |      | 0.039   |      |         |
|                                                  |                                                           | 512                 |      | 0.062   |      |         |
|                                                  |                                                           | 256                 |      | 0.11    |      |         |
| Maximum error with supply voltage <sup>(2)</sup> | $V_{DD} = 1.5\text{ V}...3.6\text{ V}$                    |                     |      | $\pm 2$ |      | mbar    |
| Long-term stability                              |                                                           |                     |      | $\pm 2$ |      | mbar/yr |
| Reflow soldering impact                          | IPC/JEDEC J-STD-020C<br>(Refer to application note AN808) |                     |      | $\pm 4$ |      | mbar    |
| Recovering time after reflow <sup>(3)</sup>      |                                                           |                     |      | 7       |      | days    |

<sup>(1)</sup> With autozero at one pressure point<sup>(2)</sup> With autozero at 3V point<sup>(3)</sup> Time to recover at least 66% of reflow impact<sup>(4)</sup> Wet/dry cycle: sensor must be dried typically once a dayTEMPERATURE OUTPUT CHARACTERISTICS ( $V_{DD} = 3\text{ V}$ ,  $T = 25^\circ\text{C}$  UNLESS OTHERWISE NOTED)

| Parameter                         | Conditions                                 |      | Min. | Typ.      | Max | Unit             |
|-----------------------------------|--------------------------------------------|------|------|-----------|-----|------------------|
| Relative Accuracy                 | $-20...85^\circ\text{C}$ , 300...1100 mbar |      | -2   |           | +2  | $^\circ\text{C}$ |
| Maximum error with supply voltage | $V_{DD} = 1.5\text{ V}...3.6\text{ V}$     |      |      | $\pm 0.3$ |     | $^\circ\text{C}$ |
| Resolution RMS                    | OSR                                        | 8192 |      | 0.002     |     | $^\circ\text{C}$ |
|                                   |                                            | 4096 |      | 0.003     |     |                  |
|                                   |                                            | 2048 |      | 0.004     |     |                  |
|                                   |                                            | 1024 |      | 0.006     |     |                  |
|                                   |                                            | 512  |      | 0.009     |     |                  |
|                                   |                                            | 256  |      | 0.012     |     |                  |

## DIGITAL INPUTS (SDA, SCL)




| Parameter             | Symbol     | Conditions             | Min.         | Typ. | Max           | Unit          |
|-----------------------|------------|------------------------|--------------|------|---------------|---------------|
| Serial data clock     | SCL        |                        |              |      | 400           | kHz           |
| Input high voltage    | $V_{IH}$   |                        | 80% $V_{DD}$ |      | 100% $V_{DD}$ | V             |
| Input low voltage     | $V_{IL}$   |                        | 0% $V_{DD}$  |      | 20% $V_{DD}$  | V             |
| Input leakage current | $I_{leak}$ | $T = 25^\circ\text{C}$ |              |      | 0.1           | $\mu\text{A}$ |

## DIGITAL OUTPUTS (SDA)

| Parameter           | Symbol   | Conditions                        | Min.         | Typ. | Max           | Unit |
|---------------------|----------|-----------------------------------|--------------|------|---------------|------|
| Output high voltage | $V_{OH}$ | $I_{\text{source}} = 1\text{ mA}$ | 80% $V_{DD}$ |      | 100% $V_{DD}$ | V    |
| Output low voltage  | $V_{OL}$ | $I_{\text{sink}} = 1\text{ mA}$   | 0% $V_{DD}$  |      | 20% $V_{DD}$  | V    |



## TYPICAL PERFORMANCE CHARACTERISTICS

### RELATIVE PRESSURE ERROR AND TEMPERATURE ERROR VS PRESSURE AND TEMPERATURE (TYPICAL VALUES)

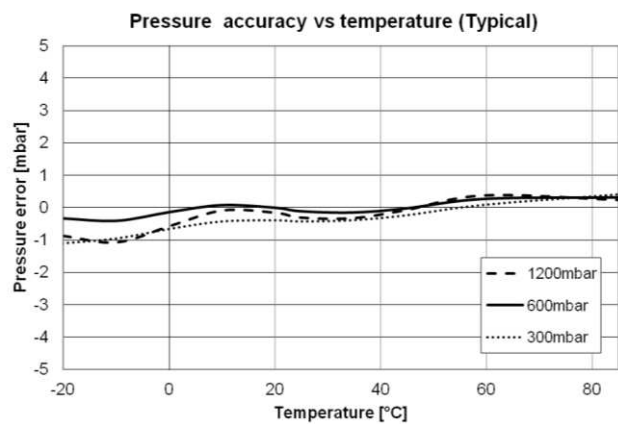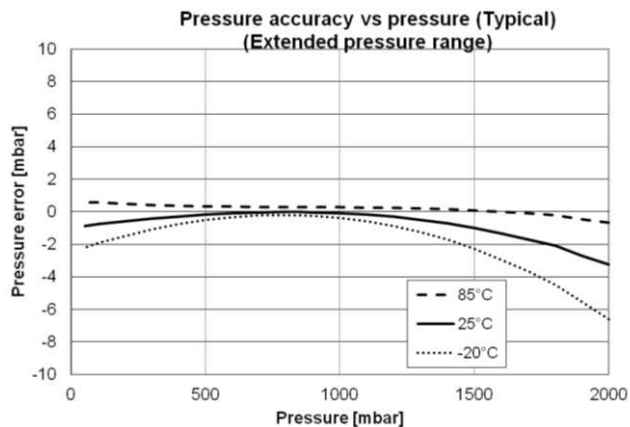
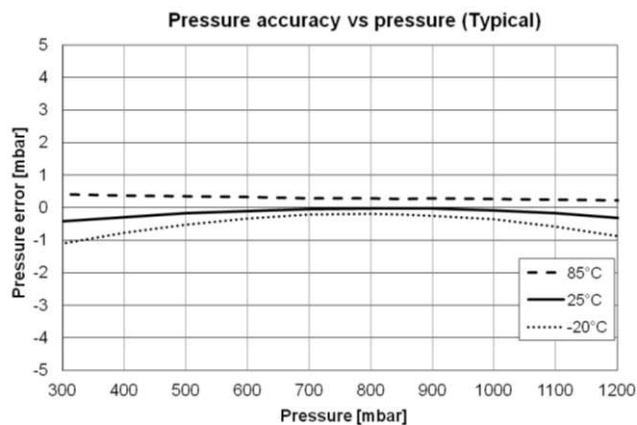


## TYPICAL PERFORMANCE CHARACTERISTICS

### RELATIVE PRESSURE AND TEMPERATURE ERROR VS TEMPERATURE (1<sup>ST</sup> ORDER AND 2<sup>ND</sup> ORDER ALGORITHM, TYPICAL VALUES)

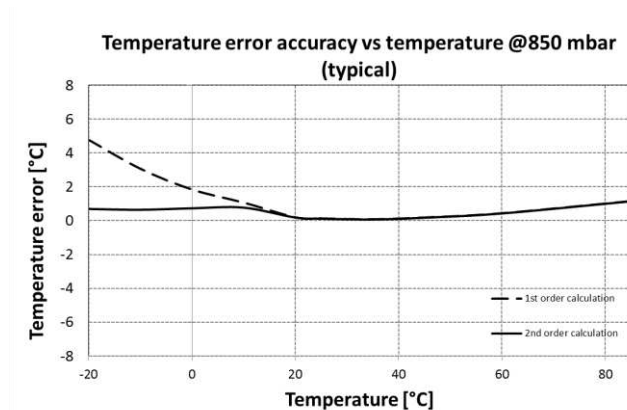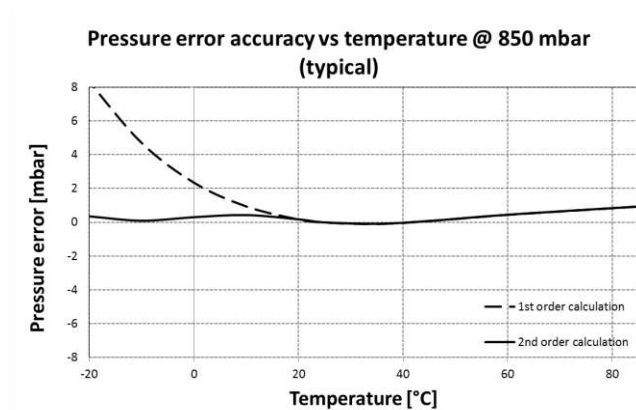

### RELATIVE PRESSURE AND TEMPERATURE ERROR VS POWER SUPPLY (TYPICAL VALUES)

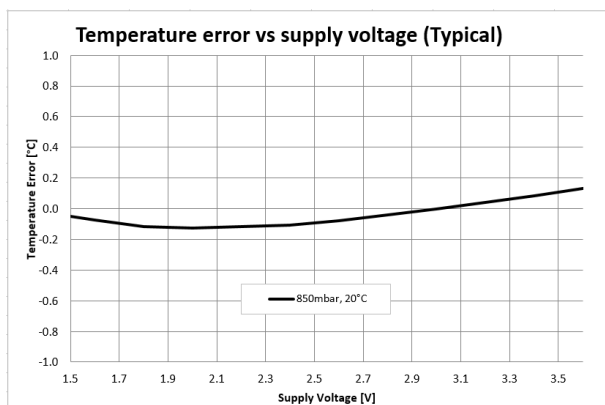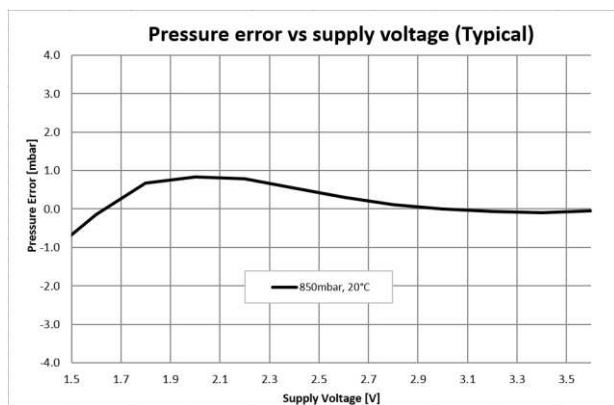

## PRESSURE AND TEMPERATURE CALCULATION

### GENERAL

The MS5837 consists of a piezo-resistive sensor and a sensor interface integrated circuit. The main function of the MS5837 is to convert the uncompensated analogue output voltage from the piezo-resistive pressure sensor to a 24-bit digital value, as well as providing a 24-bit digital value for the temperature of the sensor.

### FACTORY CALIBRATION

Every module is individually factory calibrated at two temperatures and two pressures. As a result, 6 coefficients necessary to compensate for process variations and temperature variations are calculated and stored in the 112-bit PROM of each module. These bits (partitioned into 6 coefficients) must be read by the microcontroller software and used in the program converting D1 and D2 into compensated pressure and temperature values.


### COMMUNICATION INTERFACE

The MS5837 has been built with I<sup>2</sup>C serial interface.

| Module ref    | Mode             | Pins used |
|---------------|------------------|-----------|
| MS5837-02BA01 | I <sup>2</sup> C | SDA, SCL  |

The external microcontroller clocks in the data through the input SCL (Serial CLock) and SDA (Serial DAta). The sensor responds on the same pin SDA which is bidirectional for the I<sup>2</sup>C bus interface. So this interface type uses only 2 signal lines and does not require a chip select.

## PRESSURE AND TEMPERATURE CALCULATION

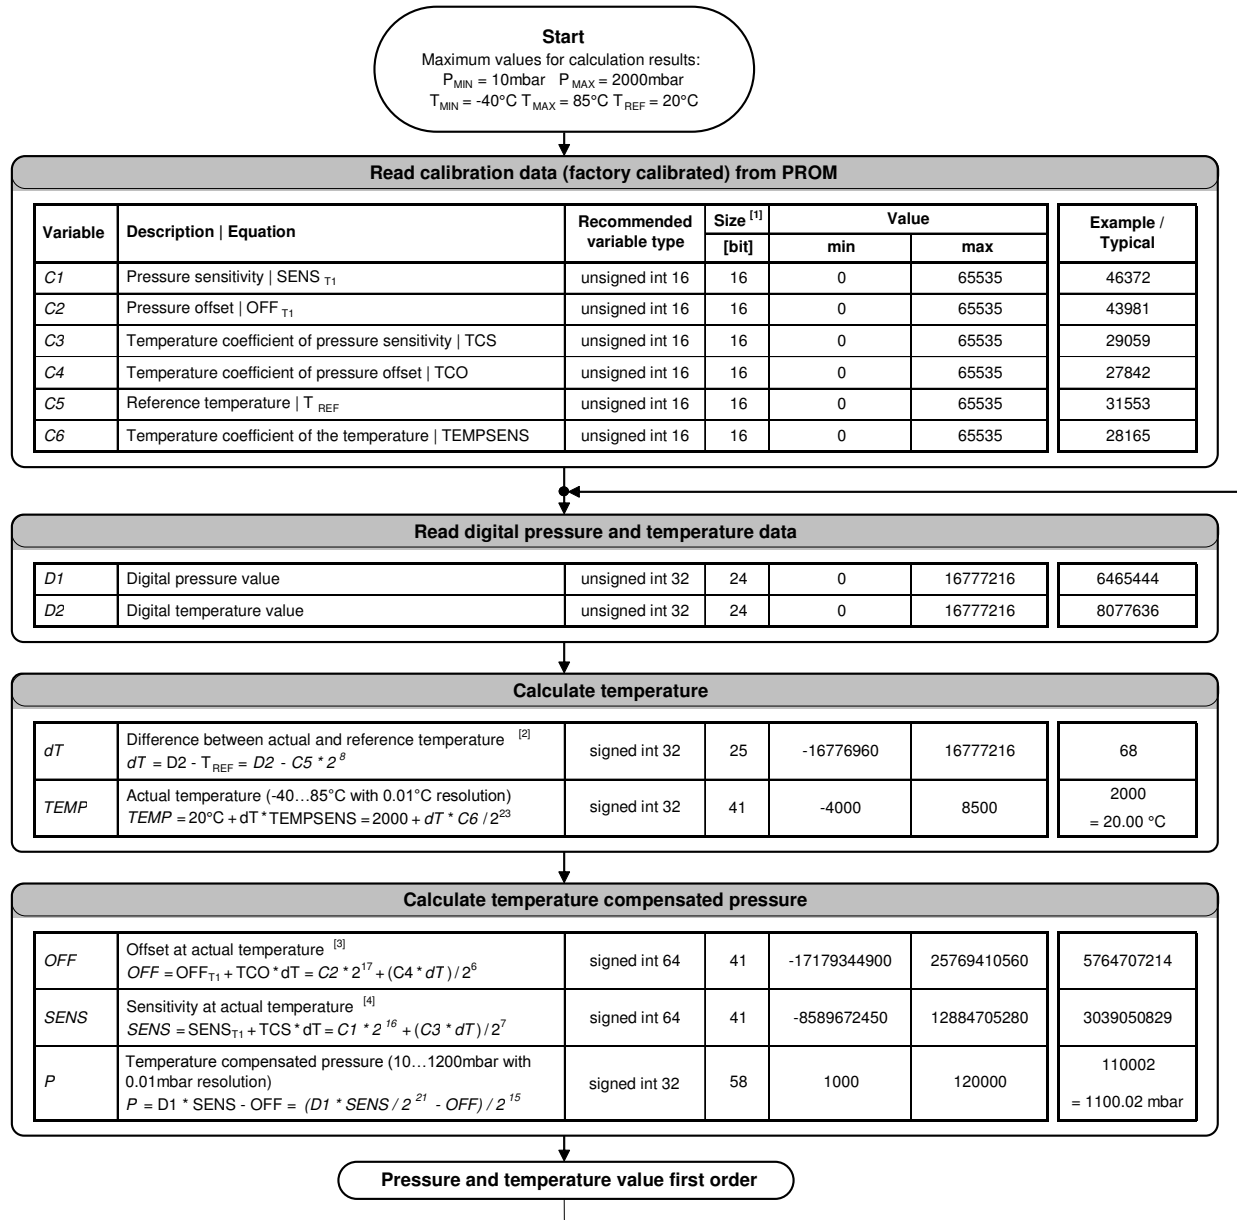


## Notes

- [1] Maximal size of intermediate result during evaluation of variable  
 [2] min and max have to be defined  
 [3] min and max have to be defined  
 [4] min and max have to be defined

Flow chart for pressure and temperature reading and software compensation

## SECOND ORDER TEMPERATURE COMPENSATION

The results of the last first order calculation are entered in the following chart to obtain the pressure and temperature compensated with the 2<sup>nd</sup> order: P2 and TEMP2.

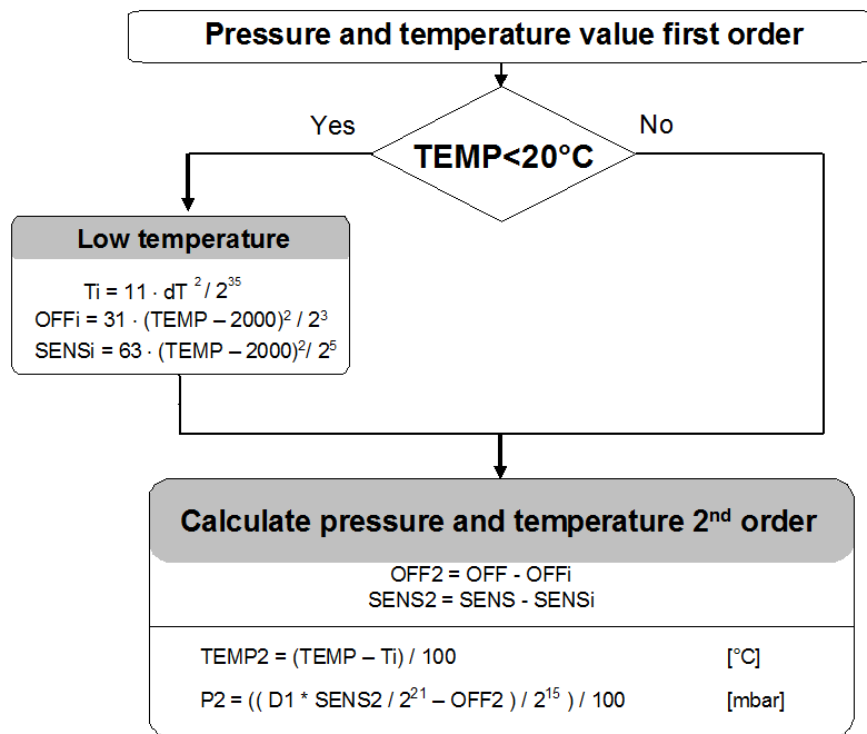

Flow chart for pressure and temperature to the optimum accuracy

**I<sup>2</sup>C INTERFACE****COMMANDS**

The MS5837 has only five basic commands:

1. Reset
2. Read PROM (112 bit of calibration words)
3. D1 conversion
4. D2 conversion
5. Read ADC result (24 bit pressure / temperature)

Each I<sup>2</sup>C communication message starts with the start condition and it is ended with the stop condition. The MS5837 address is 1110110x (write: x=0, read: x=1).

Size of each command is 1 byte (8 bits) as described in the table below. After ADC read commands, the device will return 24 bit result and after the PROM read 16 bit results. The address of the PROM is embedded inside of the PROM read command using the a2, a1 and a0 bits.


|                       | Command byte |      |   |     |         |         |         |      | hex value    |
|-----------------------|--------------|------|---|-----|---------|---------|---------|------|--------------|
| Bit number            | 0            | 1    | 2 | 3   | 4       | 5       | 6       | 7    |              |
| Bit name              | PROM         | CONV | - | Typ | Ad2/Os2 | Ad1/Os1 | Ad0/Os0 | Stop |              |
| Command               |              |      |   |     |         |         |         |      |              |
| Reset                 | 0            | 0    | 0 | 1   | 1       | 1       | 1       | 0    | 0x1E         |
| Convert D1 (OSR=256)  | 0            | 1    | 0 | 0   | 0       | 0       | 0       | 0    | 0x40         |
| Convert D1 (OSR=512)  | 0            | 1    | 0 | 0   | 0       | 0       | 1       | 0    | 0x42         |
| Convert D1 (OSR=1024) | 0            | 1    | 0 | 0   | 0       | 1       | 0       | 0    | 0x44         |
| Convert D1 (OSR=2048) | 0            | 1    | 0 | 0   | 0       | 1       | 1       | 0    | 0x46         |
| Convert D1 (OSR=4096) | 0            | 1    | 0 | 0   | 1       | 0       | 0       | 0    | 0x48         |
| Convert D1 (OSR=8192) | 0            | 1    | 0 | 0   | 1       | 0       | 1       | 0    | 0x4A         |
| Convert D2 (OSR=256)  | 0            | 1    | 0 | 1   | 0       | 0       | 0       | 0    | 0x50         |
| Convert D2 (OSR=512)  | 0            | 1    | 0 | 1   | 0       | 0       | 1       | 0    | 0x52         |
| Convert D2 (OSR=1024) | 0            | 1    | 0 | 1   | 0       | 1       | 0       | 0    | 0x54         |
| Convert D2 (OSR=2048) | 0            | 1    | 0 | 1   | 0       | 1       | 1       | 0    | 0x56         |
| Convert D2 (OSR=4096) | 0            | 1    | 0 | 1   | 1       | 0       | 0       | 0    | 0x58         |
| Convert D2 (OSR=8192) | 0            | 1    | 0 | 1   | 1       | 0       | 1       | 0    | 0x5A         |
| ADC Read              | 0            | 0    | 0 | 0   | 0       | 0       | 0       | 0    | 0x00         |
| PROM Read             | 1            | 0    | 1 | 0   | Ad2     | Ad1     | Ad0     | 0    | 0xA0 to 0xAE |

Command structure

## RESET SEQUENCE

The Reset sequence shall be sent once after power-on to make sure that the calibration PROM gets loaded into the internal register. It can be also used to reset the device PROM from an unknown condition.


The reset can be sent at any time. In the event that there is not a successful power on reset this may be caused by the SDA being blocked by the module in the acknowledge state. The only way to get the MS5837 to function is to send several SCLs followed by a reset sequence or to repeat power on reset.

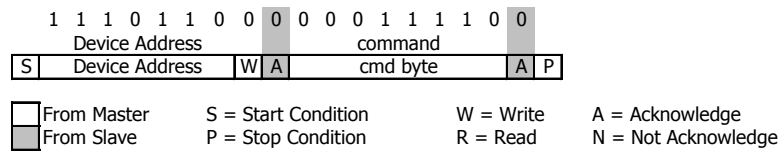


I<sup>2</sup>C Reset Command

## PROM READ SEQUENCE

The read command for PROM shall be executed once after reset by the user to read the content of the calibration PROM and to calculate the calibration coefficients. There are in total 7 addresses resulting in a total memory of 112 bit. Addresses contain factory data and the setup, calibration coefficients, the serial code and CRC. The command sequence is 8 bits long with a 16 bit result which is clocked with the MSB first. The PROM Read command consists of two parts. First command sets up the system into PROM read mode. The second part gets the data from the system.

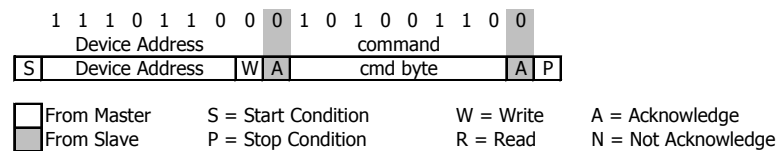


I<sup>2</sup>C Command to read memory address= 011

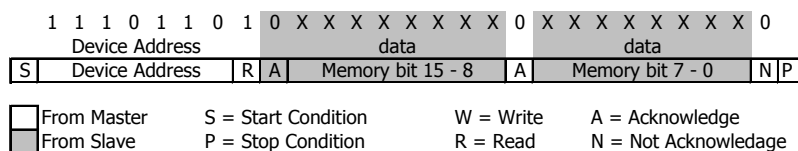


I<sup>2</sup>C answer from MS5837

## CONVERSION SEQUENCE


The conversion command is used to initiate uncompensated pressure (D1) or uncompensated temperature (D2) conversion. After the conversion, using ADC read command the result is clocked out with the MSB first. If the conversion is not executed before the ADC read command, or the ADC read command is repeated, it will give 0 as the output result. If the ADC read command is sent during conversion the result will be 0, the conversion will not stop and the final result will be wrong. Conversion sequence sent during the already started conversion process will yield incorrect result as well. A conversion can be started by sending the command to MS5837. When command is sent to the system it stays busy until conversion is done. When conversion is finished the data can be accessed by sending a Read command, when an acknowledge is sent from the MS5837, 24 SCL cycles may be sent to receive all result bits. Every 8 bits the system waits for an acknowledge signal.

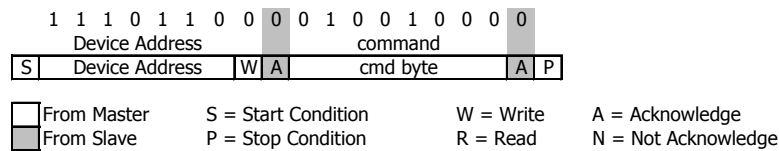

I<sup>2</sup>C command to initiate a pressure conversion (OSR=4096, typ=D1)

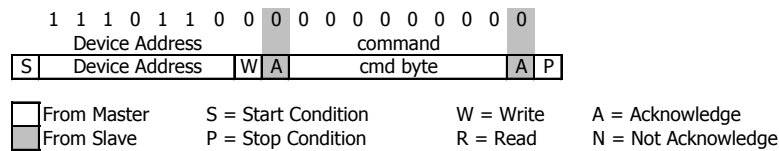

I<sup>2</sup>C ADC read sequence

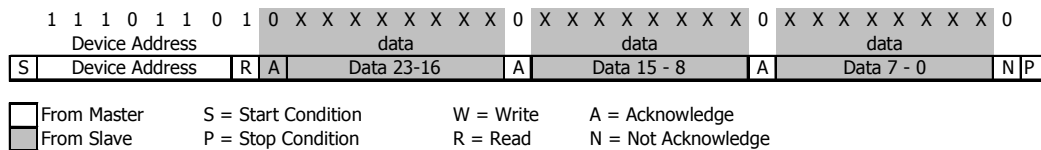

I<sup>2</sup>C answer from MS5837

## MS5837-02BA

Ultra Small Gel Filled Pressure & Temperature Sensor, with Stainless Steel Cap

### Version PROM Word 0 programming

For product type, the bits [11:5] of memory address 0 must be programmed with the following fixed values:

#### MS5837-02BA01

| Address | 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4                | 3 | 2 | 1 | 0 |
|---------|-----|----|----|----|----|----|---|---|---|---|---|------------------|---|---|---|---|
| 0       | crc |    |    |    | 0  | 0  | 0 | 0 | 0 | 0 | 0 | factory settings |   |   |   |   |

#### MS5837-02BA06

| Address | 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4                | 3 | 2 | 1 | 0 |
|---------|-----|----|----|----|----|----|---|---|---|---|---|------------------|---|---|---|---|
| 0       | crc |    |    |    | 1  | 0  | 1 | 1 | 1 | 0 | 1 | factory settings |   |   |   |   |

#### MS5837-02BA21

| Address | 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4                | 3 | 2 | 1 | 0 |
|---------|-----|----|----|----|----|----|---|---|---|---|---|------------------|---|---|---|---|
| 0       | crc |    |    |    | 0  | 0  | 1 | 0 | 1 | 0 | 1 | factory settings |   |   |   |   |

#### MS5837-02BA26

| Address | 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4                | 3 | 2 | 1 | 0 |
|---------|-----|----|----|----|----|----|---|---|---|---|---|------------------|---|---|---|---|
| 0       | crc |    |    |    | 0  | 0  | 1 | 1 | 0 | 1 | 0 | factory settings |   |   |   |   |

**CYCLIC REDUNDANCY CHECK (CRC)**

MS5837 contains a PROM memory with 112-Bit. A 4-bit CRC has been implemented to check the data validity in memory.

| MS5837-02BA |     |   |   |   |   |                 |   |   |   |   |                 |   |   |   |   |
|-------------|-----|---|---|---|---|-----------------|---|---|---|---|-----------------|---|---|---|---|
| A           | D   | D | D | D | D | D               | D | D | D | D | D               | D | D | D | D |
| d           | B   | B | B | B | B | B               | B | B | B | B | B               | B | B | B | B |
| d           | 1   | 1 | 1 | 1 | 1 | 1               | 9 | 8 | 7 | 6 | 5               | 4 | 3 | 2 | 1 |
|             | 5   | 4 | 3 | 2 | 1 | 0               |   |   |   |   |                 |   |   |   | 0 |
| 0           | CRC |   |   |   |   | Version defined |   |   |   |   | Factory defined |   |   |   |   |
| 1           | C1  |   |   |   |   |                 |   |   |   |   |                 |   |   |   |   |
| 2           | C2  |   |   |   |   |                 |   |   |   |   |                 |   |   |   |   |
| 3           | C3  |   |   |   |   |                 |   |   |   |   |                 |   |   |   |   |
| 4           | C4  |   |   |   |   |                 |   |   |   |   |                 |   |   |   |   |
| 5           | C5  |   |   |   |   |                 |   |   |   |   |                 |   |   |   |   |
| 6           | C6  |   |   |   |   |                 |   |   |   |   |                 |   |   |   |   |

Memory PROM mapping

C Code example for CRC-4 calculation:

```

unsigned char crc4(unsigned int n_prom[])           // n_prom defined as 8x unsigned int (n_prom[8])
{
    int cnt;                                       // simple counter
    unsigned int n_rem=0;                         // crc remainder
    unsigned char n_bit;

    n_prom[0]=((n_prom[0]) & 0xFFFF);           // CRC byte is replaced by 0
    n_prom[7]=0;                                 // Subsidiary value, set to 0
    for (cnt = 0; cnt < 16; cnt++)               // operation is performed on bytes
    {                                             // choose LSB or MSB
        if (cnt%2==1)    n_rem ^= (unsigned short) ((n_prom[cnt]>>1]) & 0x00FF);
        else             n_rem ^= (unsigned short) (n_prom[cnt>>1]>>8);
        for (n_bit = 8; n_bit > 0; n_bit--)
        {
            if (n_rem & (0x8000))    n_rem = (n_rem << 1) ^ 0x3000;
            else                     n_rem = (n_rem << 1);
        }
    }
    n_rem= ((n_rem >> 12) & 0x000F);           // final 4-bit remainder is CRC code
    return (n_rem ^ 0x00);
}

```

## APPLICATION CIRCUIT

The MS5837 is a circuit that can be used in conjunction with a microcontroller in mobile altimeter applications.


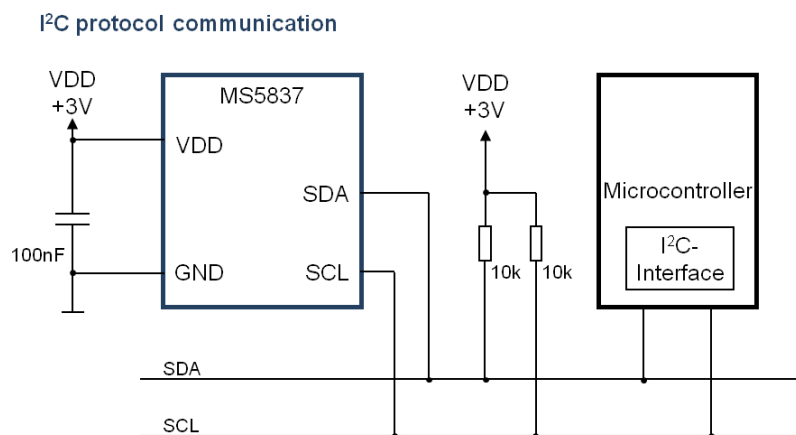


Figure: Typical application circuit

## PIN CONFIGURATION AND DEVICE PACKAGE OUTLINE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. GENERAL TOLERANCE  $\pm 0.15\text{mm}$

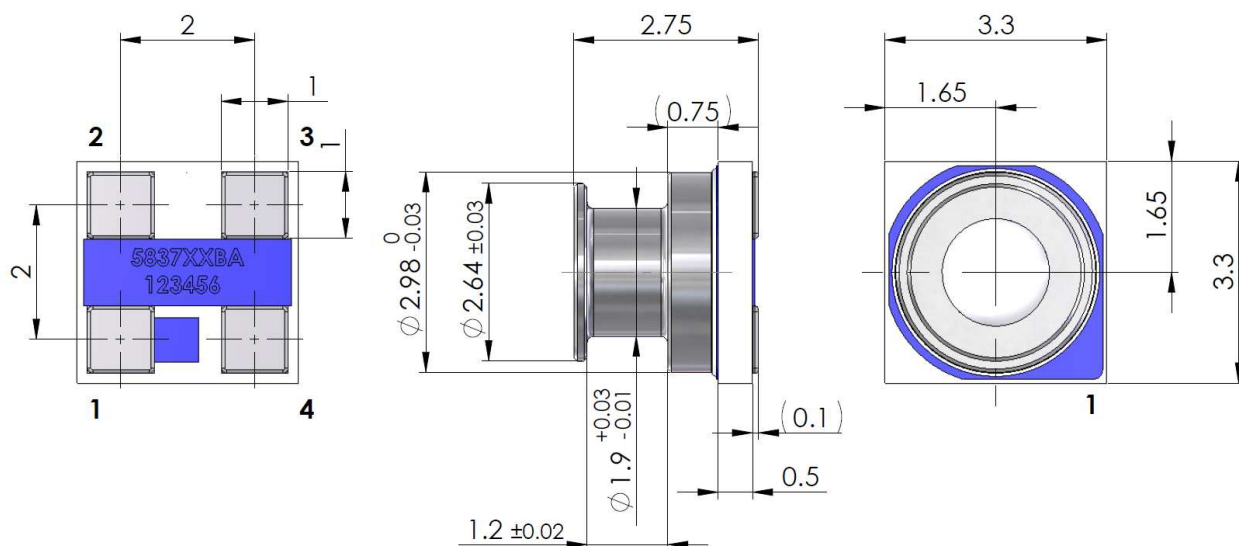


|   |     |                        |
|---|-----|------------------------|
| 1 | GND | GROUND                 |
| 2 | VDD | POSITIVE SUPPLY        |
| 3 | SCL | I <sup>2</sup> C CLOCK |
| 4 | SDA | I <sup>2</sup> C DATA  |


Figure: Package outlines and Pin configuration

## Ultra Small Gel Filled Pressure & Temperature Sensor, with Stainless Steel Cap

Pad layout for bottom side of the MS5837-30BA soldered onto printed circuit board.



## SHIPPING PACKAGE

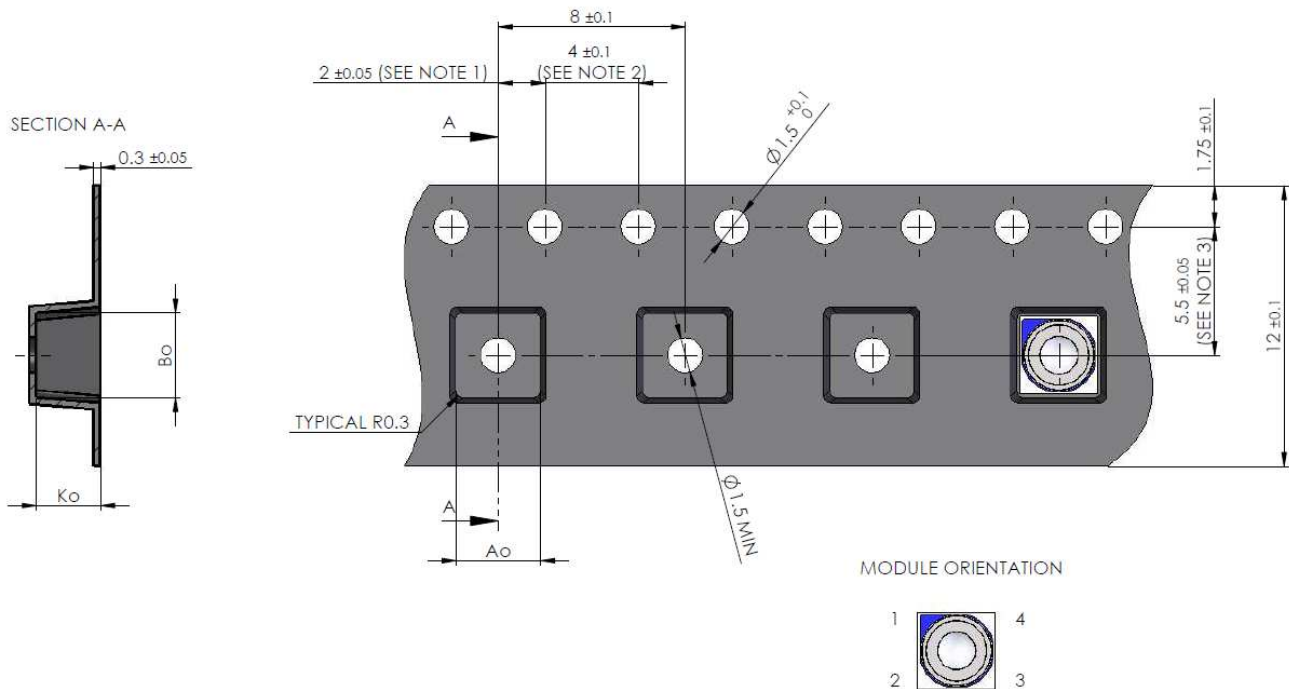

|    |          |
|----|----------|
| AO | 3.6±0.1  |
| BO | 3.6±0.1  |
| KO | 2.75±0.1 |

1: Measured from centerline of sprocket hole to centerline of pocket  
2: Cumulative tolerance of 10 sprocket holes is  $\pm 0.2\text{mm}$   
3: Measured from centerline of sprocket hole to centerline of pocket

## MOUNTING AND ASSEMBLY CONSIDERATIONS

### SOLDERING

Please refer to the application note AN808 available on our website for soldering recommendations.

### MOUNTING

The MS5837 can be placed with automatic Pick & Place equipment using vacuum nozzles. It will not be damaged by the vacuum.

Due to the low stress assembly, the sensor does not show pressure hysteresis effects. It is important to solder all contact pads. Gel must stay free of external physical contact when manipulation.

### CONNECTION TO PCB

The package outline of the module allows the use of a flexible PCB for interconnection. This can be important for applications in watches and other special devices.

### SEALING WITH O-RINGS

In applications such as outdoor watches the electronics must be protected against direct water or humidity. For such applications the MS5837 provides the possibility to seal with an O-ring. The O-ring shall be placed at the groove location, i.e. the small outer diameter of the metal lid. The following O-ring / housing dimensions are recommended:

|                               |                |
|-------------------------------|----------------|
| O-ring inner diameter         | 1.8 ± 0.05 mm  |
| O-ring cross-section diameter | 0.8 ± 0.03 mm  |
| Housing bore diameter         | 3.07 ± 0.03 mm |

Please refer to the application note AN523 available on our website for O-ring mounting recommendations.

### CLEANING

The MS5837 has been manufactured under clean-room conditions. It is therefore recommended to assemble the sensor under class 10'000 or better conditions. Should this not be possible, it is recommended to protect the sensor opening during assembly from entering particles and dust. To avoid cleaning of the PCB, solder paste of type "no-clean" shall be used. Warning: cleaning might damage the sensor.

### ESD PRECAUTIONS

The electrical contact pads are protected against ESD. It is therefore essential to ground machines and personnel properly during assembly and handling of the device. The MS5837 is shipped in antistatic transport boxes. Any test adapters or production transport boxes used during the assembly of the sensor shall be of an equivalent antistatic material.

### DECOUPLING CAPACITOR

Particular care must be taken when connecting the device to the power supply. A 100nF minimum ceramic capacitor must be placed as close as possible to the MS5837 VDD pin. This capacitor will stabilize the power supply during data conversion and thus, provide the highest possible accuracy.

## MS5837-02BA

Ultra Small Gel Filled Pressure & Temperature Sensor, with Stainless Steel Cap

### ORDERING INFORMATION

| PART NUMBER     | DESCRIPTION   | Chlorine Resistant - *6 | Enhanced Shielding – 2* |
|-----------------|---------------|-------------------------|-------------------------|
| MS583702BA01-50 | MS5837-02BA01 |                         |                         |
| 20000979-00     | MS5837-02BA21 |                         | X                       |
| 10207018-00     | MS5837-02BA06 | X                       |                         |
| 20000983-00     | MS5837-02BA26 | X                       | X                       |

#### PRODUCT DESCRIPTION

MS5837-\_\_BA\_\_

#### Pressure Range

02 2 bar

#### Version

|    |                                  |
|----|----------------------------------|
| 01 | Standard                         |
| 06 | Chlorine resistant               |
| 21 | Shielding                        |
| 26 | Chlorine resistant and shielding |

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity company  
Tel: 800-522-6752  
Email: [customercare.hmpt@te.com](mailto:customercare.hmpt@te.com)

#### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Tel: 800-440-5100  
Email: [customercare.bevx@te.com](mailto:customercare.bevx@te.com)

#### ASIA

Measurement Specialties (China) Ltd.,  
a TE Connectivity company  
Tel: 0400-820-6015  
Email: [customercare.shzn@te.com](mailto:customercare.shzn@te.com)

#### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)