



# Grove - Touch Sensor User Manual

Release date: 2015/9/22

Version: 1.0

Wiki: [http://www.seeedstudio.com/wiki/Grove\\_-\\_Relay](http://www.seeedstudio.com/wiki/Grove_-_Relay)

Bazaar: [http://www.seeedstudio.com/depot/Grove-Touch-Sensor-p-747.html?cPath=85\\_94](http://www.seeedstudio.com/depot/Grove-Touch-Sensor-p-747.html?cPath=85_94)

## Document Revision History

---

Revision	Date	Author	Description
1.0	Sep 22, 2015	Loovee	Create file

## Contents

Document Revision History .....	2
1. Introduction .....	2
2. Specifications .....	3
3. Demonstration .....	4
3.1 With Arduino .....	4
3.2 With Raspberry Pi .....	4
4. Resources .....	6

### *Disclaimer*

*For physical injuries and possessions loss caused by those reasons which are not related to product quality, such as operating without following manual guide, natural disasters or force majeure, we take no responsibility for that.*

*Under the supervision of Seeed Technology Inc., this manual has been compiled and published which covered the latest product description and specification. The content of this manual is subject to change without notice.*

### *Copyright*

*The design of this product (including software) and its accessories is under tutelage of laws. Any action to violate relevant right of our product will be penalized through law. Please consciously observe relevant local laws in the use of this product.*

## 1. Introduction

---

Grove - Touch Sensor enables you to replace press with touch. It can detect the change in capacitance when a finger is nearby. That means no matter your finger directly touches the pad or just stays close to the pad, Grove - Touch Sensor would outputs HIGH also.



## 2. Specifications


---

- Operating Voltage: 2.0 - 5.5V
- Operating Current( $V_{cc}=3V$ ): 1.5 - 3.0  $\mu A$
- Operating Current( $V_{DD}=3V$ ): 3.5 - 7.0  $\mu A$
- Output Response Time: 60 - 220mS
- Used Chipset: TTP223-BA6

## 3. Demonstration

---

### 3.1 With Arduino

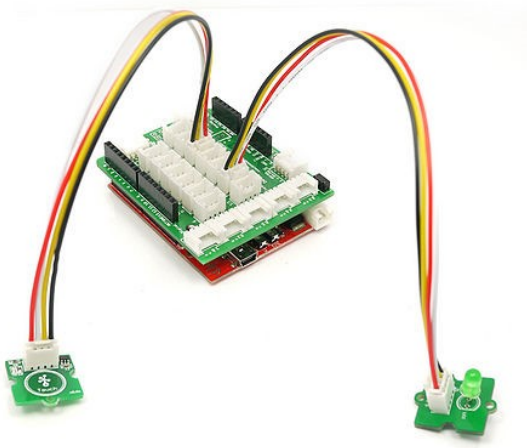

This demo is going to show you how to turn on/off an LED.

#### Demo Code:

```
const int TouchPin=9;
const int ledPin=12;
void setup() {
  pinMode(TouchPin, INPUT);
  pinMode(ledPin, OUTPUT);
}

void loop() {
  int sensorValue = digitalRead(TouchPin);
  if(sensorValue==1)
  {
    digitalWrite(ledPin,HIGH);
  }
  else
  {
    digitalWrite(ledPin,LOW);
  }
}
```

### 3.2 With Raspberry Pi

You should have got a raspberry pi and a grovepi or grovepi+.

You should have completed configuring the development enviroment, otherwise follow [here](#).

## Connection

Plug the sensor to grovepi socket D4 by using a grove cable.

Navigate to the demos' directory:

```
cd yourpath/GrovePi/Software/Python/
```

- **To see the code**

```
nano grove_touch_sensor.py # "Ctrl+x" to exit #
import time
import grovepi

# Connect the Grove Touch Sensor to digital port D4
# SIG, NC, VCC, GND
touch_sensor = 4

grovepi.pinMode(touch_sensor, "INPUT")

while True:
    try:
        print grovepi.digitalRead(touch_sensor)
        time.sleep(.5)

    except IOError:
        print "Error"
```

## 5. Run the demo.

```
sudo python grove_touch_sensor.py
```



## 4. Resources

---

- [Eagle Files](#)
- [TTP223pdf](#)
- [how to upload code](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)