



IR Emitter and Detector Product Data Sheet LTDL-RX16P05

Spec No.: DS50-2003-017

Effective Date: 09/26/2003

Revision: -

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4


FEATURES

- * High speed transmission (16 Mbps , NRZ code)
- * TTL compatible
- * Same package as fiber optic transmitting module LTDL-TX12P05

APPLICATIONS

- * Digital audio system
- * CD & DVD players

PACKAGE DIMENSIONS

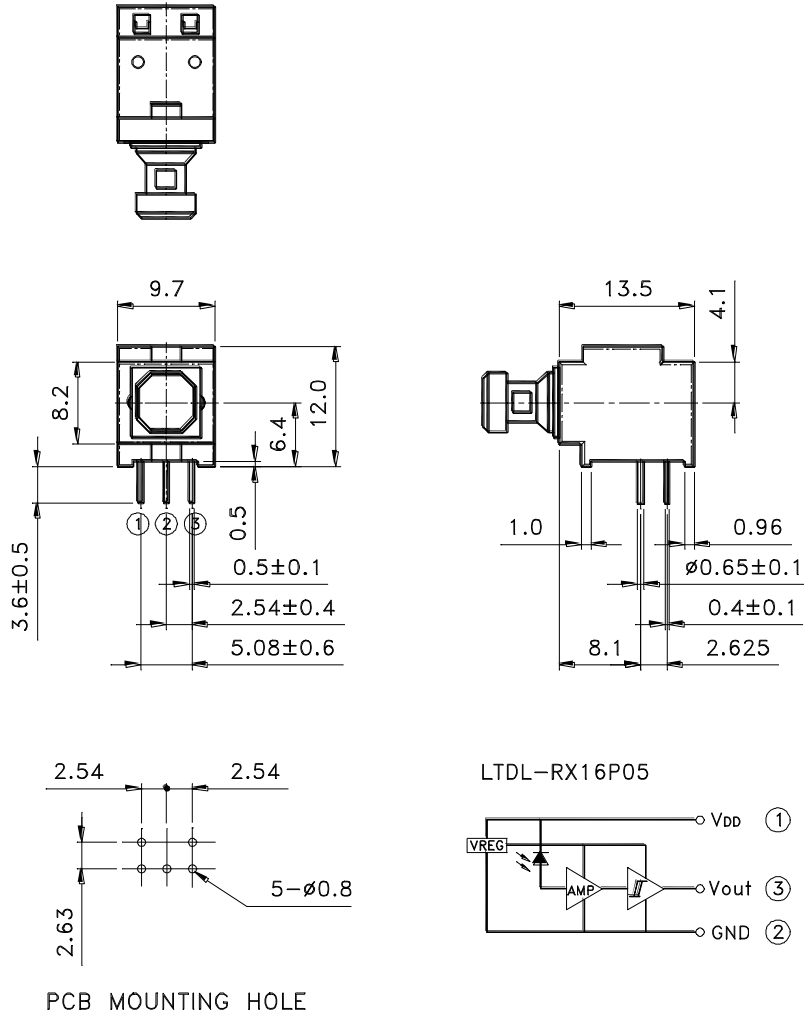

NOTES:

1. All dimensions are in millimeters.
2. Tolerance is ±0.3 mm unless otherwise noted.



LITE-ON TECHNOLOGY CORPORATION

Property of Lite-On Only


ELECTRO—OPTICAL CHARACTERISTICS

ABSOLUTE MAXIMUM RATINGS AT Ta=25°C


PARAMETER	MAXIMUM RATING	UNIT
Supply Voltage (V _{DD})	6.0	V
Output Voltage (V _O)	V _{DD} + 0.3	V
Operating Temperature Range	-20°C to + 70°C	
Storage Temperature Range	-30°C to + 80°C	
Lead Soldering Temperature [1.6mm(.063") From Body]	260°C for 5 Seconds	

ELECTRICAL OPTICAL CHARACTERISTICS AT Ta=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Data Rate	T _s	0.1	—	16	Mbps	NRZ signal
Operating Voltage	V _{DD}	4.75	—	5.25	V	
Peak Sensitivity Wavelength	λ _{Peak}	—	650	—	nm	
Input Sensitivity	P _i	-24	—	-14	dBm	
Dissipation current	I _{DD}	2	7	10	mA	NRZ signal
High level output voltage	V _{OH}	2.4	4.8	—	V	Dc Light , I _{OH} = -20 μA
Low level output voltage	V _{OL}	—	0.2	0.4	V	Dark , I _{OL} = 0.6mA
“Low→High”propagation delay time	t _{PLH}	—	—	166	ns	*1
“High→Low”propagation delay time	t _{PHL}	—	—	166	ns	
Pulse width distortion	Δ t _w	-18	—	+18	ns	
Jitter	Δ t _j	—	1	5	ns	*1
Rise Time	t _r	—	8	20	ns	*1
Fall Time	t _f	—	8	20	ns	*1

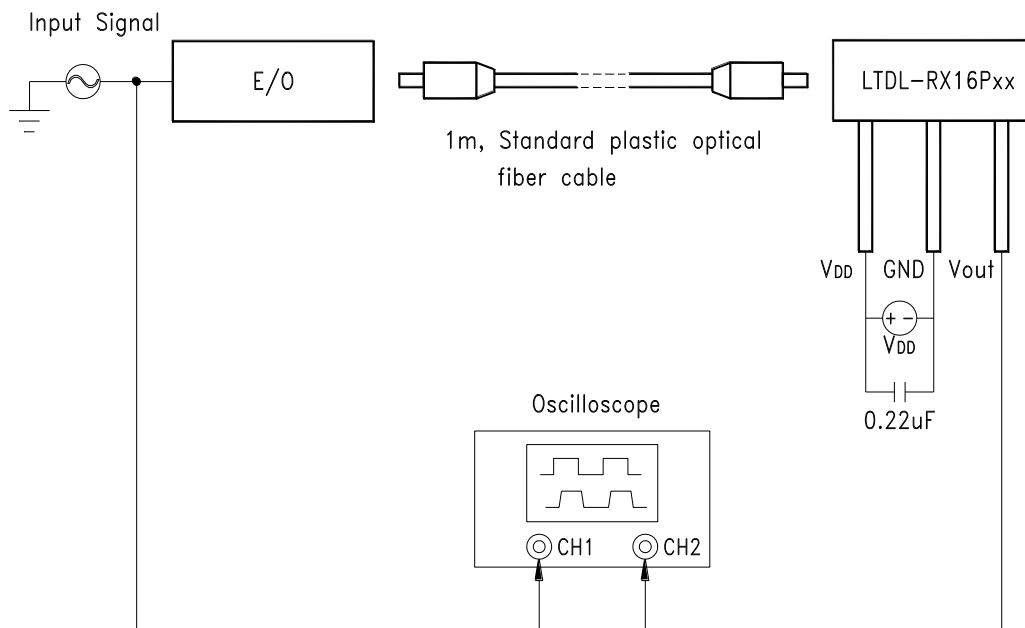
***1 Setup of Measuring System**

Rise and Fall Times and Pulse Width Distortion

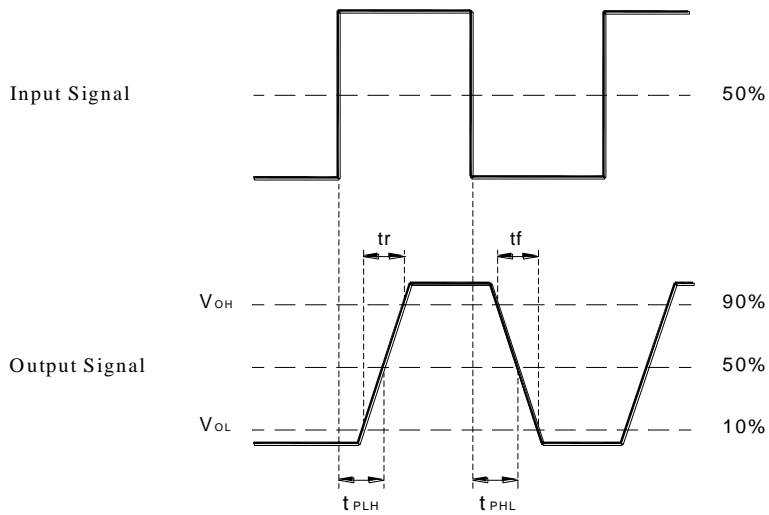

Pulse Width Distortion = $\Delta t_w = t_{PHL} - t_{PLH}$

Jitter

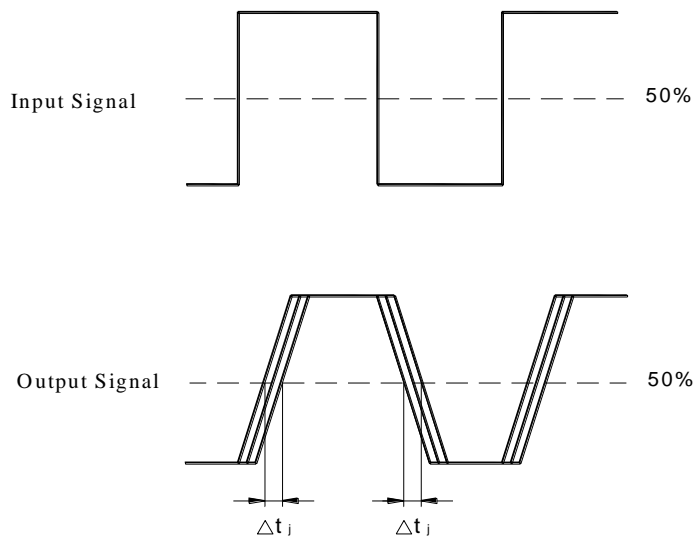

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru