


**K-No.: 24618**
**50/100 A Current Sensor**

For the electronic measurement of currents:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between the primary circuit  
(high power) and the secondary circuit  
(electronic circuit)


**Date: 28.01.2008**
**Customer: Standard type**
**Customers Part no.:**
**Page 1 of 2**
**Description**

- Closed loop (compensation)  
Current Sensor with magnetic  
field probe
- Printed circuit board mounting
- Casing and materials UL-listed

**Characteristics**

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset  
current drift
- Very low hysteresis of offset current
- Low response time
- Wide frequency bandwidth
- Compact design
- Reduced offset ripple

**Applications**

Mainly used for stationary operation in industrial  
applications:

- AC variable speed drives and servo motor  
drives
- Static converters for DC motor drives
- Battery supplied applications
- Switched Mode Power Supplies (SMPS)
- Power Supplies for welding applications
- Uninterruptable Power Supplies (UPS)

**Electrical data – Ratings<sup>1)</sup>**

|                       |                                                                                               |              |    |
|-----------------------|-----------------------------------------------------------------------------------------------|--------------|----|
| <b>I<sub>PN</sub></b> | Primary nominal r.m.s. current<br>@ V <sub>C</sub> = ±15V, R <sub>M</sub> ≥ 0 Ω               | 50           | A  |
|                       | @ V <sub>C</sub> = ±12V, R <sub>M</sub> ≥ 0 Ω or V <sub>C</sub> = ±15V, R <sub>M</sub> ≥ 16 Ω | 100          | A  |
| <b>R<sub>M</sub></b>  | Measuring resistance V <sub>C</sub> = ±12V                                                    | 0 ... 200    | Ω  |
|                       | V <sub>C</sub> = ±15V                                                                         | 16 ... 400   | Ω  |
| <b>I<sub>SN</sub></b> | Secondary nominal r.m.s. current                                                              | 25/50        | mA |
| <b>K<sub>N</sub></b>  | Turns ratio                                                                                   | 1...3 : 2000 |    |

**Accuracy – Dynamic performance data<sup>1)</sup>**

|                               |                                                                           | min.     | typ. | max. | Unit |
|-------------------------------|---------------------------------------------------------------------------|----------|------|------|------|
| <b>I<sub>P,max</sub></b>      | Max. measuring range                                                      |          |      |      |      |
|                               | @ V <sub>C</sub> = ±12V, R <sub>M</sub> = 10 Ω (t <sub>max</sub> = 10sec) | ±145     |      |      | A    |
|                               | @ V <sub>C</sub> = ±15V, R <sub>M</sub> = 16 Ω (t <sub>max</sub> = 10sec) | ±175     |      |      | A    |
| <b>X</b>                      | Accuracy @ I <sub>PN</sub> , T <sub>A</sub> = 25°C                        |          | 0.1  | 0.5  | %    |
| <b>ε<sub>L</sub></b>          | Linearity                                                                 |          |      | 0.1  | %    |
| <b>I<sub>0</sub></b>          | Offset current @ I <sub>P</sub> = 0, T <sub>A</sub> = 25°C                |          | 0.02 | 0.08 | mA   |
| <b>t<sub>r</sub></b>          | Response time                                                             |          | 500  |      | ns   |
| <b>Δt (I<sub>P,max</sub>)</b> | Delay time at di/dt = 100 A/μs                                            |          | 200  |      | ns   |
| <b>f</b>                      | Frequency bandwidth                                                       | DC...200 |      |      | kHz  |

**General data<sup>1)</sup>**

|                          |                                                                                                                                                                            | min.       | typ.       | max.   | Unit |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|--------|------|
| <b>T<sub>A</sub></b>     | Ambient operating temperature                                                                                                                                              | -40        |            | +85    | °C   |
| <b>T<sub>S</sub></b>     | Ambient storage temperature                                                                                                                                                | -40        |            | +90    | °C   |
| <b>m</b>                 | Mass                                                                                                                                                                       |            | 13,5       |        | g    |
| <b>V<sub>C</sub></b>     | Supply voltage                                                                                                                                                             | ±11.4      | ±12 or ±15 | ±15.75 | V    |
| <b>I<sub>C</sub></b>     | Current consumption                                                                                                                                                        |            | 18.5       |        | mA   |
|                          | Constructed and manufactured and tested in accordance with EN 61800-5-1 (Pin 1 - 6 to Pin 7 – 9)<br>Reinforced insulation, Insulation material group 1, Pollution degree 2 |            |            |        |      |
| <b>S<sub>clear</sub></b> | clearance (component without solder pad)                                                                                                                                   | 10.2       |            |        | mm   |
| <b>S<sub>creep</sub></b> | creepage (component without solder pad)                                                                                                                                    | 10.2       |            |        | mm   |
| <b>V<sub>sys</sub></b>   | System voltage overvoltage category 3                                                                                                                                      | RMS        |            | 600    | V    |
| <b>V<sub>work</sub></b>  | Working voltage (table 7 acc. to EN61800-5-1)                                                                                                                              | RMS        |            | 1020   | V    |
| <b>U<sub>PD</sub></b>    | Rated discharge voltage                                                                                                                                                    | peak value |            | 1400   | V    |


| Date     | Name | Issue | Amendment                   |
|----------|------|-------|-----------------------------|
| 28.01.08 | Le   | 81    | Date changed. Insignificant |

|                       |                        |                        |                         |                          |
|-----------------------|------------------------|------------------------|-------------------------|--------------------------|
| Hrsg.: KB-E<br>editor | Bearb.: SA<br>designer | KB-E BE: Len.<br>check | KB-PM IA: KRe.<br>check | freig.: Heu.<br>released |
|-----------------------|------------------------|------------------------|-------------------------|--------------------------|

K-No.: 24618

**50/100 A Current Sensor**

For the electronic measurement of currents:  
DC, AC, pulsed, mixed ..., with a galvanic  
Isolation between the primary circuit  
(high power) and the secondary circuit  
(electronic circuit)



Date: 28.01.2008


Customer: Standard type

Customers Part no.:

Page 2 of 2

**Mechanical outline (mm):**

General tolerances DIN ISO 2768-c

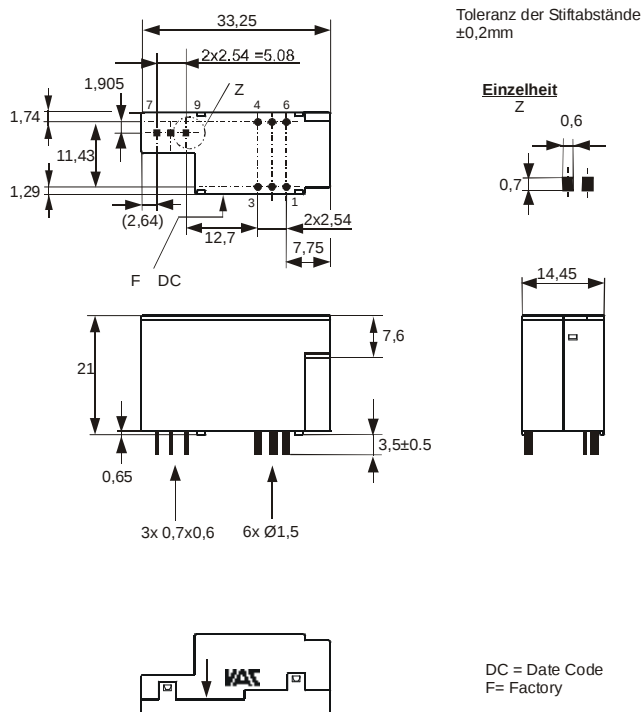


Connections:

1...6: Ø 1,5 mm

7...9: 0,6x0,7 mm

Marking:

**VAC**  
4646X412  
F DC

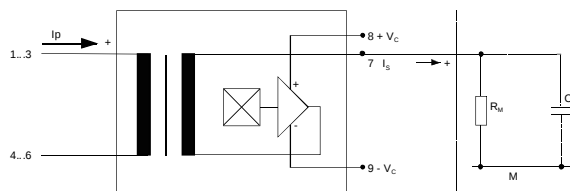**Schematic diagram**

**Possibilities of wiring for  $V_C = \pm 15V$  <sup>1)</sup>** (@  $T_A = 85^\circ C$ ,  $R_M = 25 \Omega$ )

| primary windings<br>$N_P$ | primary current<br>RMS<br>$I_P$ [A] | primary current<br>maximal<br>$\hat{I}_{P,max}$ [A] | output current<br>RMS<br>$I_S$ ( $I_P$ ) [mA] | turns ratio<br>$K_N$ | primary resistance<br>$R_P$ [mW] | wiring |
|---------------------------|-------------------------------------|-----------------------------------------------------|-----------------------------------------------|----------------------|----------------------------------|--------|
| 1                         | 100                                 | 175                                                 | 50                                            | 1:2000               | 0.12                             |        |
| 2                         | 35                                  | 82                                                  | 35                                            | 2:2000               | 0.54                             |        |
| 3                         | 25                                  | 58                                                  | 37,5                                          | 3:2000               | 1.1                              |        |

<sup>1)</sup> preliminary data

Temperature of the primary conductor should not exceed 100°C.

Additional information is obtainable on request.

This specification is no declaration of warranty acc. BGB §443 dar.

Hrsg.: KB-E  
editor

Bearb.: SA  
designer

KB-E BE: Len.  
check


KB-PM IA: KRe.  
check

freig.: Heu.  
released

K-No.: 24618

## 50/100 A Current Sensor

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit



Date: 28.01.2008

Customer:

Customers Part No.:

Page 1 of 3

### Electrical Data (investigate by a type checking)<sup>1)</sup>

|                         |                                                                                                                                                                                                                   | min. | typ.  | max.  | Unit       |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|-------|------------|
| $V_{Ctot}$              | Maximum supply voltage (without function)<br>±15.75 bis ±18 V: for 1s per hour                                                                                                                                    |      |       | ±18   | V          |
| $R_S$                   | Secondary coil resistance @ $T_A=85^\circ\text{C}$                                                                                                                                                                |      |       | 145   | $\Omega$   |
| $R_p$                   | Primary coil resistance per turn @ $T_A=25^\circ\text{C}$                                                                                                                                                         |      |       | 0.36  | m $\Omega$ |
| $X_{Ti}$                | Temperature drift of X @ $T_A = -40 \dots +85^\circ\text{C}$                                                                                                                                                      |      |       | 0.1   | %          |
| $I_{0ges}$              | Offset current (including $I_0$ , $I_{0t}$ , $I_{0T}$ )                                                                                                                                                           |      |       | 0.1   | mA         |
| $I_{0t}$                | Long term drift Offset current $I_0$                                                                                                                                                                              |      | 0.03  |       | mA         |
| $I_{0T}$                | Offset current temperature drift $I_0$ @ $T_A = -40 \dots +85^\circ\text{C}$                                                                                                                                      |      | 0.03  |       | mA         |
| $I_{0H}$                | Hysteresis current @ $I_p=0$ (caused by primary current $3 \times I_{PN}$ )                                                                                                                                       |      | 0.02  | 0.05  | mA         |
| $\Delta I_0/\Delta V_C$ | Supply voltage rejection ratio                                                                                                                                                                                    |      |       | 0.01  | mA/V       |
| $i_{loss}$              | Offset ripple* (with 1 MHz- filter first order)                                                                                                                                                                   |      |       | 0.15  | mA         |
| $i_{loss}$              | Offset ripple* (with 100 kHz- filter first order)                                                                                                                                                                 |      | 0.017 | 0.025 | mA         |
| $i_{loss}$              | Offset ripple* (with 20 kHz- filter first order)                                                                                                                                                                  |      | 0.005 | 0.007 | mA         |
| $C_k$                   | Maximum possible coupling capacity (primary – secondary)                                                                                                                                                          |      | 5     |       | pF         |
|                         | Mechanical Stress according to M3209/3<br>Settings: 10 – 2000 Hz, 1 min/Decade, 2 hours<br>An exceptionally high rate of on/off – switching of the supply voltage<br>accelerates the aging process of the sensor. |      |       | 10g   |            |

### Inspection<sup>1)</sup> (Measurement after temperature balance of the samples at room temperature)

|                |            |         |                                                                    |                      |
|----------------|------------|---------|--------------------------------------------------------------------|----------------------|
| $K_N(N_1/N_2)$ | (V)        | M3011/6 | Transformation ratio ( $I_p=3 \times 10A$ , 40-80 Hz)              | 1...3 : 2000 ± 0.5 % |
| $I_0$          | (V)        | M3226   | Offset current                                                     | < 0.05 mA            |
| $V_{P,eff}$    | (V)        | M3014   | Test voltage, rms, 1s<br>Pin 1 - 6 to Pin 7 - 9                    | 2.5 kV               |
| $V_e$          | (AQL 1/S4) |         | Partial discharge voltage acc. M3024 (RMS)<br>with $V_{vor}$ (RMS) | 1500 V<br>1875 V     |

### Type Testing (Pin 1 - 6 to Pin 7 – 9)

Designed according standard EN 61800 with insulation material group 1


|       |                                                                                             |       |              |        |
|-------|---------------------------------------------------------------------------------------------|-------|--------------|--------|
| $V_W$ | HV transient test according (to M3064)<br>(1,2 $\mu\text{s}$ / 50 $\mu\text{s}$ -wave form) |       | 8            | kV     |
| $V_d$ | Testing voltage acc. M3014 (RMS)                                                            | (5 s) | 5            | kV     |
| $V_e$ | Partial discharge voltage acc. M3024 (RMS)<br>with $V_{vor}$ (RMS)                          |       | 1500<br>1875 | V<br>V |

|                       |                        |       |                                                                       |
|-----------------------|------------------------|-------|-----------------------------------------------------------------------|
| Datum                 | Name                   | Index | Änderung                                                              |
| 28.01.08              | Le                     | 81    | Page 3: write error in $X_{ges}$ ( $I_{PN}$ ). changed. Insignificant |
| Hrsg.: KB-E<br>editor | Bearb.: SA<br>designer |       | KB-E BE: Len.<br>check                                                |
|                       |                        |       | KB-PM IA:KRe.<br>check                                                |
|                       |                        |       | freig.: Heu.<br>released                                              |

K-No.: 24618

### 50/100 A Current Sensor

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit



Date: 28.01.2008


Customer:

Customers Part No.:

Page 2 of 3


#### Limit curve of measurable current $\hat{I}_P(R_M)$ <sup>1)</sup>

@ ambient temperature  $T_A \leq 85^\circ\text{C}$

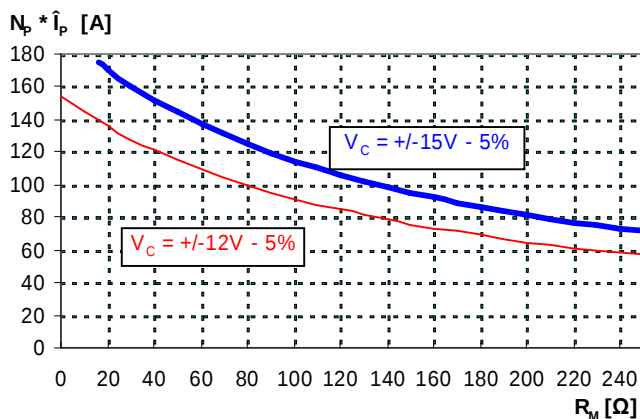

#### Maximum measuring range ( $\mu\text{s}$ -range) <sup>1)</sup>

Output current behaviour of a 3kA current pulse  
@  $V_C = \pm 15V$  und  $R_M = 25\Omega$

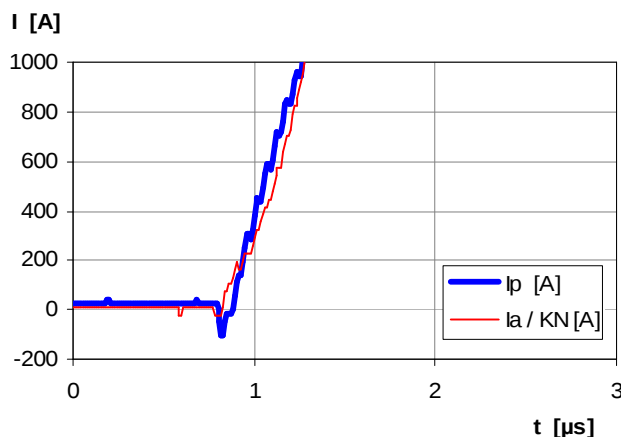

Fast increasing currents (higher than the specified  $I_{p,max}$ ), e.g. in case of a short circuit, can be transmitted because the currents are transformed directly.

The offset ripple can be reduced by an external low pass. Simplest solution is a passive low pass filter of 1st order with

$$f_g = \frac{1}{2p \cdot R_M \cdot C_a}$$

In this case the response time is enlarged.

It is calculated from:

$$t'_r \leq t_r + 2,5R_M C_a$$

#### Applicable documents

Current direction: A positive output current appears at point  $I_s$ , by primary current in direction of the arrow.

Constructed and manufactured and tested in accordance with EN 61800.

Housing and bobbin material UL-listed: Flammability class 94V-0.

Hrsg.: KB-E  
editor

Bearb: SA  
designer

KB-E BE: Len.  
check


KB-PM IA:KRe.  
check

freig.: Heu.  
released

K-No.: 24618

### 50/100 A Current Sensor

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit



Date: 28.01.2008

Customer:

Customers Part No.:

Page 3 of 3

$I_{0H}$ : Zero variation of  $I_0$  after overloading with a DC of tenfold the rated value ( $R_M = R_{MN}$ )

$I_{0t}$ : Long term drift of  $I_0$  after 100 temperature cycles in the range -40 bis 85 °C.

$t_r$ : Response time (describe the dynamic performance for the specified measurement range), measured as delay time at  $I_P = 0,9 \cdot I_{Pmax}$  between a rectangular current and the output current.

$\Delta t (I_{Pmax})$ : Delay time (describe the dynamic performance for the rapid current pulse rate e.g short circuit current) measured between  $I_{Pmax}$  and the output current  $i_a$  with a primary current rise of  $di_1/dt = 100 A/\mu s$ .

$X_{ges}(I_{PN})$ : The sum of all possible errors over the temperature range by measuring a current  $I_{PN}$ :

$$X_{ges} = 100 \cdot \left| \frac{I_S(I_{PN})}{K_N \cdot I_{PN}} - 1 \right| \%$$

$X$ : Permissible measurement error in the final inspection at RT, defined by

$$X = 100 \cdot \left| \frac{I_{SB}}{I_{SN}} - 1 \right| \%$$

where  $I_{SB}$  is the output DC value of an input DC current of the same magnitude as the (positive) rated current ( $I_0 = 0$ )

$X_{Ti}$ : Temperature drift of the rated value orientated output term.  $I_{SN}$  (cf. Notes on F<sub>i</sub>) in a specified temperature range, obtained by:

$$X_{Ti} = 100 \cdot \left| \frac{I_{SB}(T_{A2}) - I_{SB}(T_{A1})}{I_{SN}} \right| \%$$

$\epsilon_L$ : Linearity fault defined by 
$$e_L = 100 \cdot \left| \frac{I_P}{I_{PN}} - \frac{I_{Sx}}{I_{SN}} \right| \%$$

Where  $I_P$  is any input DC and  $I_{Sx}$  the corresponding output term.  $I_{SN}$ : see notes of F<sub>i</sub> ( $I_0 = 0$ ).

This "Additional information" is no declaration of warranty according BGB §443.

Hrsg.: KB-E  
editor

Bearb: SA  
designer

KB-E BE: Len.  
check

KB-PM IA:KRe.  
check

freig.: Heu.  
released

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)