

# Amphenol® High Frequency Contacts for Multi-pin Connectors

12-130-4

HIGH PERFORMANCE CONNECTORS  
AND CONTACTS PROVIDE SECURE,  
RELIABLE DATA TRANSMISSION

CONCENTRIC TWINAX

COAXIAL

TRIAx

TWINAX PC TAIL

DIFFERENTIAL  
TWINAX

QUADRAX CONTACTS . DIFFERENTIAL TWINAX CONTACTS . TRANSITION ADAPTERS

**Amphenol**  
Aerospace

# Amphenol High Frequency Contacts



## TABLE OF CONTENTS

|                                                            |      |
|------------------------------------------------------------|------|
| • Table of Contents . . . . .                              | 2    |
| • Overview of Amphenol's High Frequency Contacts . . . . . | 3-7  |
| • Cable Systems . . . . .                                  | 8    |
| • Cable Usage Guide . . . . .                              | 9-12 |

## MIL-DTL-38999 Circular Connector Overview . . . . . 13

### Contacts for MIL-DTL-38999 Connectors:

|                                                                                                        |        |
|--------------------------------------------------------------------------------------------------------|--------|
| • Quadrax Contacts . . . . .                                                                           | 14-16  |
| • New "Split-Pair" Quadrax Contacts . . . . .                                                          | 17-20  |
| • Differential Twinax Contacts . . . . .                                                               | 21, 22 |
| • Compliant Quadrax and PC Tail Quadrax Contacts . . . . .                                             | 23     |
| • Quadrax Transition & Differential Twinax Transitional Adapters . . . . .                             | 24-26  |
| • Differential Twinax Transition Adapters . . . . .                                                    | 27     |
| • Micro D-Twinax Transition Adapters . . . . .                                                         | 28-30  |
| • Insert Arrangements for MIL-DTL-38999, Series III . . . . .                                          | 31, 32 |
| • How to Order 38999 Series III with Quadrax 100 ohm Contacts . . . . .                                | 33     |
| • Coaxial Contacts . . . . .                                                                           | 34-37  |
| • Matched Impedance Coaxial Contacts . . . . .                                                         | 38     |
| • Typical Contact Installation Instructions for Coax Contacts . . . . .                                | 39     |
| • High Frequency Contacts (DC to 40 GHz) . . . . .                                                     | 40     |
| • Twinax Contacts . . . . .                                                                            | 41-43  |
| • Triax Contacts . . . . .                                                                             | 44     |
| • Coax, Twinax & Triax PC Tail Contacts . . . . .                                                      | 45-47  |
| • Insert Patterns for MIL-DTL-38999 Series III Incorporating Coax, Twinax and Triax Contacts . . . . . | 48-50  |

## Standard MIL-DTL-5015 & Heavy Duty MIL-DTL-22992 Circular Connector Overview . . . . . 51

### Contacts for Standard MIL-DTL-5015 & Heavy Duty

#### MIL-DTL-22992 Connectors:

|                                                                                                                |        |
|----------------------------------------------------------------------------------------------------------------|--------|
| • Coaxial Contacts . . . . .                                                                                   | 52, 53 |
| • Insert Patterns for Standard MIL-DTL-5015 and Heavy Duty MIL-DTL-22992 Incorporating Coax Contacts . . . . . | 54     |
| • Rectangular Rack & Panel Connectors that incorporate High Speed . . . . .                                    | 55, 56 |
| • Additional Contact Styles from Amphenol . . . . .                                                            | 57     |
| • Guide for Selecting High Frequency Contacts and Cables . . . . .                                             | 58     |



## High Frequency Contacts Typical Markets:

- Military & Commercial Aviation
- Military Vehicles
- Missiles & Ordnance
- C4ISR

**Amphenol**  
Aerospace

# Amphenol® High Frequency Contacts

## Provide High Speed Transmission and Operate in High Frequency Conditions



*When you need superior electrical performance plus shielding to eliminate interference from outside electrical sources in a connector, Amphenol has the most reliable contact solutions.*

Amphenol offers a very wide range of contacts that provide high speed transmission and operate in high frequency conditions. You can be assured of interconnection compatibility when you come to Amphenol for your contact needs as well as your connector needs. Amphenol's expertise in interconnection solutions assures that your contacts will mate properly and will perform to the application specifications of your particular requirements.

*MIL-DTL-38999 CONNECTORS - The high performance series most ideal for integrating high speed and high frequency contacts. MIL-DTL-38999, Series I, II and III are by far the choice of connector for today's avionics needs - these subminiature family connectors are ideally suited for the incorporation of shielded contacts.*

This catalog section is primarily devoted to the high speed and high frequency contact options for use in MIL-DTL-38999 Connectors, which include:



| Coaxial                                                                                               | Concentric Twinax                                                                                                                                   | Triax                                                                                               | Quadrax                                                                                                                                                      | Differential Twinax                                                                                                                           | High Frequency                                                                                                                               | Transition Adapters                                                                                                                  |
|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Pin and socket contacts designed for RF/microwave and shielded wire applications. Sizes 4, 8, 12 & 16 | Pin and socket contacts designed for protection from magnetic and electro-static interference including nuclear electromagnetic pulse. Sizes 8 & 12 | Pin and socket contacts designed for shielded wire applications with 3 conductors. Sizes 8, 10 & 12 | Size 8 pin and socket contacts. An outer contact with 4 strategically spaced inner contacts forming two 100 or 150 Ohm matched impedance differential pairs. | Size 8 pin and socket contacts. An outer contact with 2 inner contacts spaced to form one 100 or 150 Ohm matched impedance differential pair. | Size 8 Coaxial contacts that provide high frequencies (DC to 40 GHz). Unique "Float Mount" technology maintains tight mechanical tolerances. | Matched impedance quadrax and twinax transition adapters provide a method of launching from the high speed connectors to PCB boards. |

Other series of connectors from Amphenol Aerospace, in addition to 38999 connectors, can incorporate shielded contacts. These include the following (and are also covered in this catalog section):

- Amphenol® Heavy Duty Circular Connectors, MIL-DTL-22992 - with coax contacts.
- Amphenol® Printed Circuit Board Connectors - Rectangular connectors with standard low mating force brush contacts can have hybrid arrangements with coax contacts.
- LRM Interconnects - Rectangular module and backplane connectors with standard low mating force brush contacts can have hybrid arrangements with coax contacts.
- Amphenol® ARINC 600 and R27 Rack & Panel Connectors are available with quadrax, coax, twinax and differential twinax contacts.

The Cable Usage Guide is a key reference to help guide you in selecting the contacts best suited to your needs. Since most shielded wire applications start with a fixed requirement for cable types, the guide refers you to the Amphenol connector family utilizing contacts which are compatible with the cable characteristics.

For more information on other Amphenol connectors with shielded contacts:

- Amphenol® Circular Connectors, MIL-DTL-26482, Series 1 are available with coaxial contacts, size 8 and 12 for crimp and solder type. See catalog 12-070 on-line at [www.amphenol-industrial.com](http://www.amphenol-industrial.com), or consult Amphenol Industrial Operations.
- Amphenol® MS/Standard, MIL-DTL-5015 Circular Connectors are available with size 4, 8 and 12 coax contacts. Consult Amphenol Industrial Operations for more information or on-line at [www.amphenol-industrial.com](http://www.amphenol-industrial.com).

For more information on connectors with fiber optics see the Fiber Optic section of this catalog or consult Amphenol Aerospace, Sidney, NY.

*See High Frequency Contact Designer's Guide at end of this catalog.*





Amphenol provides the latest technology in high speed contacts - differential twinax and quadrax contacts, size 8, for use in MIL-DTL-38999 Special\* Circular Connectors.

## DIFFERENTIAL TWINAX CONTACTS

High speed Differential Twinax contacts consist of an outer contact with two inner contacts spaced to form one 100 or 150 Ohm controlled impedance differential pair. See pages 385 and 386 for performance data and ordering of Differential Twinax contacts, and consult Amphenol Aerospace for more information.



**Differential Twinax Contact**

## QUADRAX CONTACTS

- High speed Quadrax contacts consist of an outer contact with four inner contacts spaced to form two 100 or 150 Ohm controlled impedance differential pair.
- Both contacts, when used in Amphenol MIL-DTL-38999 Series III and ARINC type connectors, provide an excellent alternative for harsh environment applications such as:
- Ethernet 100 Base-T-100 Ohm
- Gigabit Ethernet 1000 Base-T-100 Ohm
- Fibre Channel-150 Ohm
- IEEE1394B FireWire-110 Ohm



**Quadrax Contact**


Differential Twinax and Quadrax contact options include:

- Crimp or printed circuit board termination
- Established designs to accommodate a variety of cable types and gages
- Ground plane connectors can incorporate quadrax contacts. These connections have conductive inserts that ground the outer conductor of the contact body to the shell of the connector. They accommodate size 8 and 12 shielded contacts of which the size 8 can be quadrax type.

See pages 378-380 for performance data of Quadrax contacts. Consult Amphenol Aerospace for further information needed.

\* Requires modified connector to accommodate keyed contacts.

Differential Twinax and Quadrax contacts provide high data transfer rates, low power consumption, and excellent EMI capability. They offer controlled impedance of 100 or 150 Ohm and are ideal for use in harsh environments.

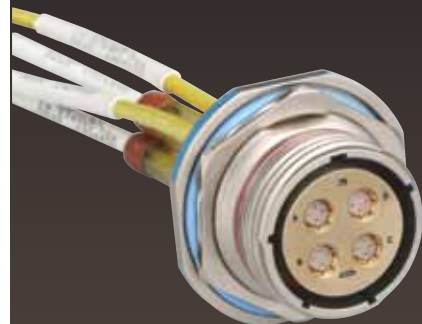

*D38999 Series III  
Ground Plane Connectors with Quadrax  
PCB Socket contacts*



*D38999 Series III  
with Quadrax and  
Power Contacts*



*D38999 Series III  
Connectors (standoff  
shell at right and  
standard shell below)  
with Quadrax PC Tail  
Contacts*



## QUADRAX CONTACTS FOR ARINC CONNECTORS

Amphenol ARINC 600 Rack and Panel connectors can incorporate high speed quadrax contacts as well as coax, twinax and differential twinax contacts. R27 Rack and Panel connectors use the same contacts as ARINC 600 connectors. For more information about rack and panel connectors contact Amphenol Aerospace, Sidney, NY.



**Quadrax Contact for ARINC Connectors**

## BOARD LEVEL CONNECTORS WITH COMPLIANT QUADRAX CONTACTS

Amphenol also provides compliant quadrax socket contacts and Quadrax pin contacts with PC tails for attaching to printed circuit boards. See page 387 for more information.



**Compliant Quadrax Socket and PCB Tail Quadrax Pin**

## FEED-THROUGH CONNECTOR WITH QUADRAX CONTACTS

Amphenol's feed-through connector is double-ended for through bulkhead applications. Consult Amphenol for more information.



## Quadrax Terminators

Amphenol offers a terminator assembly which is a low reactance, resistive impedance match to the characteristic impedance of a transmission line. It is used to terminate the far ends of a transmission line or an open tap so that the energy from signals traveling down the transmission line is absorbed within the resistor and not reflected back down the transmission line causing signal interference (noise). Consult Amphenol for more information.



**Quadrax Terminator**

## Transition Adapters

In conjunction with its Differential Twinax and Quadrax contacts, Amphenol has developed a full line of Transition Adapters in order to facilitate launching of controlled impedance signals to printed circuit boards. These use differential twinax or quadrax 90° or straight receptacles and they can be either threaded or cable to board direct. The threaded transition adapters provide an ideal method of disconnecting the differential twinax or quadrax connector from the board.

See pages 388-390 for further description, performance data and ordering of transition adapters.

*Board Level Connector with Compliant Quadrax Contacts*




*Straight Quadrax Receptacle Contact*



*90° Quadrax Receptacle and Plug Transition Adapter*



*90° Differential Twinax Receptacle and Plug Transition Adapter*

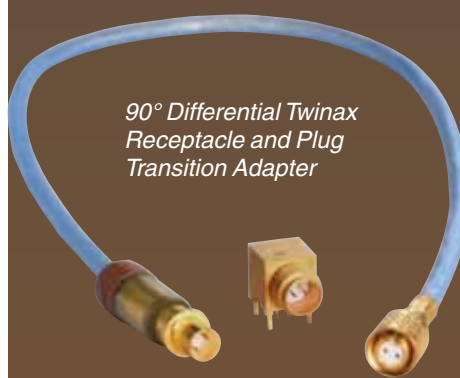

Optional choices, other than standard crimp or solder 500 cycle and 1500 cycle contacts, are often required for high frequency interconnections. Amphenol offers shielded contacts for RF applications as well as balanced high sensitivity circuits.

### SHIELDED COAXIAL CONTACTS

High speed Coax contacts within a connector provide the shielding protection, and many cases the RF/microwave performance, needed in the circuitry of many applications.



**Shielded Coax Contacts**

All popular series of Amphenol circular connectors and many rectangular connectors are available with coax contacts. Diameters are standardized in sizes 4, 8, 12 and 16 so that coaxial contacts may be interchanged with power contacts in connector arrangements which include those sizes. Popular RG cable types and a variety of other commercial coaxial cables can be accommodated. See page 398 for coax contact performance data. Matched impedance size 12 coax contacts are also available (see page 402). The use of coax contacts within a connector, compared to the use of individual coaxial/shielded connectors, offers advantages of savings in space and weight and no cross-mating difficulties. Coax and standard contacts may be mixed within the connector to meet special signal needs. The connector itself offers further protection and environmental integrity through the grommets and seals used, and coaxial junction is protected by the connector outer shell.

### CONCENTRIC TWINAX SHIELDED CONTACTS

High performance shielding capabilities are available with Concentric Twinax contacts. These are designed for protection from magnetic and electrostatic interference including nuclear electro-magnetic pulse. The contact is crimp terminable to twisted shielded cable and is fully scoop-proof (recessed pins) in MIL-DTL-38999 connectors. The concentric twinax contact is engineered to maintain shield integrity through a multi-pin circular connector and does not require contact polarization within the insert. Size 8 concentric twinax contacts were developed for use in MIL-STD-1553B Airborne multiplex data bus applications. Ideal for this application need is the high performance Tri-Start connector with its fully scoop-proof feature of recessed pins.



**Concentric Twinax Contacts Size 8**



**MIL-DTL-38999 Lanyard "Breakaway" Connector with Concentric Twinax Contacts, Qualified for MIL-STD-1760**

The concentric twinax contact is crimp terminable to twisted shielded cable. Size 12 concentric twinax contacts were developed for SAAB. They can be used in any size 12 cavity of D38999 I, II or III or SJT connector.

Size 8 & 12 coax, triax or twinax contacts or size 16 coax contacts are available in Ground Plane Connectors (See photo preceding page). These are MIL-DTL-38999 Series III connectors for data bus, LAN and coax/triax/twinax transmission lines with conductive inserts that ground the outer contact conductor to the shell. They are sold "less contacts"

*Amphenol® Shielded Contacts provide design versatility for electrical circuitry. Shielded contacts are used to eliminate interference from outside electrical sources, when standard crimp or solder contacts are not enough.*



**MIL-DTL-38999 Connector with High Speed Coax Contacts**



**Size 8 Coax Pin Contact**

**Concentric Twinax Size 12 Contacts**



**MIL-DTL-38999 Connector with Concentric Twinax Contacts**



# Coax Contacts with Frequency

## Range of DC to 40 GHz

### HIGH FREQUENCY COAX CONTACTS WITH “FLOAT MOUNT” TECHNOLOGY

Amphenol Aerospace now offers DC to 40 GHz size 8 coaxial contacts for the D38999 housing and standard inserts. These contacts can be terminated to a multiple of cable types depending on the application.

By using standard interfaces that are based on MIL-STD-348 and can be installed in any D38999 size 8 insert, Amphenol has transformed the circular connector industry. This technology expands the use of D38999 connectors to include the microwave transmission lines within the multi-port configuration without change to a custom connector.

The high frequencies are maintained by Amphenol's unique “Float Mount” technology. This technology allows for consistent microwave performance while maintaining tight mechanical tolerances. This consistency provides superior electrical performance and, unlike other blindmate connectors, will maintain an accurate phase length when mated. See page 404 for specifications, performances and ordering of this contact.



**High Frequency Size 8 Coax  
Contacts with “Float Mount”  
Technology**

## Twinox Contacts for Printed Circuit Board Applications

### PC TAIL TWINAX CONTACTS

Amphenol provides Printed Circuit Tail Twinox contacts for MIL-DTL-38999 Series I and III circular connectors and also for ARINC 404 and ARINC 600 rectangular connectors. High reliability is assured with factory pre-assembled contacts and standardized termination to the board.

See pages 409-411 for performance data and ordering of PC tail twinax contacts, and consult Amphenol Aerospace for further information needed. Also see the Printed Circuit Board, and the Series I, II, III section for MIL-DTL-38999 connectors.



**Variety of PC Tail Twinox Contacts**

### TRIAx CONTACTS WITH THREE CONDUCTORS FOR USE WITH TRIAX CABLE

Amphenol supplies sizes 8, 10 and 12 triax contacts for use in MIL-DTL-38999 Series I, II and III connectors. Triax contacts provide additional shielding when terminated to triax cable having solid or stranded center conductors. See cable compatibility in the Cable Usage Guide and performance data and ordering of triax contacts on pages 408-411. Each of the three conductors of the triax contact is separated by dielectric insulation to isolate ground planes and to improve shielding effectiveness. All conductors are crimp terminated for high reliability and ease of assembly. Triax contacts may be specified for direct connection to printed circuit boards. For maximum system flexibility, triax contacts may be mixed with coax, twinax and power contacts in a single connector.



**Triax Contacts**

### HF38999 - D38999 Connectors with High Frequency Coax Contacts



### D38999 Connectors with PC Tail Twinox Contacts



*Printed Circuit Twinox Contacts provide a cost effective packaging solution for limited space applications where connectors are attached to printed circuit boards.*

### Rail Launch MIL-STD-1760 Connector with Triax Contacts



## CABLE ASSEMBLY CAPABILITIES

Amphenol provides a large array of cable assemblies with high speed quadrx and differential twinax contacts, as well as coax and concentric twinax contacts. This page shows a few examples. The Cable Usage Guide pages that follow list the design possibilities for these high speed contacts.

Amphenol strives to offer customers the widest range of cable assemblies, keeping abreast of the latest cable types in the marketplace. Please consult with the contact product managers at Amphenol Aerospace for assistance in designing the cable assembly that suits your particular needs. From a simple one-cable interconnection, to a multiple cable system, Amphenol can design and supply your cable needs for high frequency contacts and connectors. See the High Frequency Contact Designer's Guide at the end of this catalog



*Eight Wire Gigabit Ethernet Assembly*



*Quadrx Contact with 8P8C "RJ45" Jack Ethernet Assembly*



**Variety of Quadrx Cable Assemblies**

## TESTING OF CABLES

Rigid testing is performed 100% on cable assemblies at Amphenol before they are shipped to make sure they meet customer requirements. These requirements include tests such as DWV, resistance and continuity. Amphenol has the background experience and understanding of harsh environmental testing to assure reliable "end-to-end" interconnect solutions.



*Quadrx Cable Assembly can be attached to any connector application*



*Quadrx Cable Assembly attached to Board Level Compliant Quadrx Connector*

Use the Cable Usage Guide on pages 373-376 as follows:

1. Locate the cable you are using in Cable Type column. For cables not listed consult Amphenol Aerospace.
2. Refer to the Amphenol Connector section which features contacts/adapters for this cable. Connector size, performance features and insert pattern availability may influence your choice.
3. Order your connector and contacts or transition adapters by following the procedure given in the section for the connector series selected. These instructions are supplemented by the Amphenol Catalog Section covering the basic connector.

**Quadrax Contacts**  
**CABLE USAGE GUIDE**  
**D38999 Series III\* Connectors**



| Cable Type   |                     | Nominal Impedance (ohms) |
|--------------|---------------------|--------------------------|
| Draka Fileca | F-4703-3            | 100                      |
|              | F-4703-4            |                          |
|              | F-4704-5            |                          |
|              | F-47-4-6            |                          |
| Filotex      | ET2PC236            |                          |
|              | ET2PF870            |                          |
| PIC Wire     | E50424              |                          |
|              | E50426              |                          |
|              | E51424              |                          |
|              |                     |                          |
| Tensolite    | NF22Q100            |                          |
|              | NF24Q100            |                          |
|              | NF24Q100-1          |                          |
|              | NF24Q100-01-200C    |                          |
|              | NF26Q100            |                          |
|              | NF26Q100-1          |                          |
|              | NF26-2Q100          |                          |
|              | 24443/03130X-4(LD)  |                          |
|              | 24443/03166X-4(LD)  |                          |
|              | 24443/9P025X-4(LD)  |                          |
|              | 23450/04090X-4 (LD) |                          |
|              | 24443/C20714X-4(LD) |                          |
| Gore         | RCN7688             |                          |
|              | RCN8513             |                          |
|              | RCN8672             |                          |
| S280W502-4   |                     |                          |
| JSF-18-3     |                     |                          |
| Themax       | 956-4TN             |                          |
|              | 956-5               |                          |
|              | T956-4T200          |                          |
|              | MX100Q-24           |                          |
| Tensolite    | 24450/03089X-4(LD)  |                          |
| Gore         | RCN8487             |                          |
| JSFY02-1     |                     |                          |
| JSF18        |                     |                          |
| Tensolite    | 26473/02006X-4(LD)  |                          |
| Gore         | RCN8328             |                          |
|              |                     | 150                      |

\* Requires modified connector to accommodate keyed contacts.

**Differential Twinax Contacts**  
**CABLE USAGE GUIDE**  
**D38999 Series III\* Connectors**



| Cable Type   |                      | Nominal Impedance (ohms) |
|--------------|----------------------|--------------------------|
| Tensolite    | 26463/70460X-2       | 98                       |
| ST5M1284-003 |                      |                          |
| Draka Fileca | 2709-3               | 100                      |
| PIC Wire     | E10224               |                          |
| Tensolite    | NF24T100-200C Space  |                          |
|              | 23460/05114X-2(LD)   |                          |
|              | 24463/03220T-2(LD)   |                          |
|              | 24463/05099X-8(LD)   |                          |
|              | 26453/03184X-2(LD)   |                          |
|              | 24463/9P025X-2(LD)   |                          |
| Raychem      | 0026A0024, 0024G0024 |                          |
| S280W502-6   |                      |                          |
| JSFY11-24    |                      |                          |
| Gore         | GSC-05-827300-00     |                          |
| Thermax      | 956-6262, 956-1T200  |                          |
|              | 12814                |                          |
|              | MX 100-24            |                          |
| Tensolite    | 26483/03071X-2(LD)   | 150                      |

**Quadrax Transition Adapters**  
**CABLE USAGE GUIDE**  
**D38999 Series III\* Connectors**  
**or ARINC 600 Connectors**



| Cable Type   |                    | Nominal Impedance (ohms) |
|--------------|--------------------|--------------------------|
| Draka Fileca | F-4703-3           | 100                      |
|              | F-4704-4           |                          |
| Tensolite    | NF22Q100           |                          |
|              | NF22Q100-01        |                          |
|              | NF24Q100           |                          |
|              | NF26Q100           |                          |
| Themax       | 956-5              | 150                      |
| Gore         | GSC-10-8273900     |                          |
| Tensolite    | 26473/02006X-4(LD) |                          |

**Differential Twinax Transition Adapters**  
**CABLE USAGE GUIDE**  
**D38999 Series III\* Connectors**  
**or ARINC 600 Connectors**



| Cable Type    |                    | Nominal Impedance (ohms) |
|---------------|--------------------|--------------------------|
| M17/176-00002 |                    | 78                       |
| Tensolite     | 224463/9P025X-2    | 100                      |
|               | 24463/9P025X-2(LD) |                          |
| Tensolite     | 26483/03071X-2     | 150                      |

**Quadrax Contacts**  
**CABLE USAGE GUIDE**  
**ARINC 600 Rack & Panel Connectors**


| Cable Type   |                    | Nominal Impedance (ohms) |
|--------------|--------------------|--------------------------|
| Draka Fileca | F-4703-3           | 100                      |
|              | F-4704-5, F4704-4  |                          |
| Tensolite    | NF22Q100           |                          |
|              | NF24Q100           |                          |
|              | 24443/03130X-4(LD) |                          |
|              | 24443/9P025X-4(LD) |                          |
| S280W502-4   |                    | 110                      |
| JSFY02-1     |                    |                          |
| Gore         | RCN8328            | 150                      |
| Tensolite    | 26473/02006X-4(LD) |                          |

**Differential Twinax Contacts**  
**CABLE USAGE GUIDE**  
**ARINC 600 Rack & Panel Connectors**


| Cable Type   |                    | Nominal Impedance (ohms) |
|--------------|--------------------|--------------------------|
| ABS0386WF24  |                    | 100                      |
| ASNE0272TK22 |                    | 100                      |
| ASNE0272TK24 |                    | 100                      |
| Tensolite    | 24463/9P025X-2(LD) | 100                      |

**Concentric Twinax Contacts**  
**CABLE USAGE GUIDE**  
**D38999 Series I, II, III & SJT Connectors**


| Cable Type         |       | Nominal Impedance (ohms) |
|--------------------|-------|--------------------------|
| EPD32263A          |       | 77                       |
| EPD22189B          |       | 77                       |
| M17/176-00002      |       | 77                       |
| GSC-12-2548-00     |       | 77                       |
| GC875TM24H         |       | 77                       |
| GSC-12-81095-00    |       | 77                       |
| Raychem            | 10602 | 77                       |
|                    | 10606 | 77                       |
|                    | 10612 | 77                       |
|                    | 10613 | 77                       |
|                    | 10614 | 77                       |
| 23089/RC           |       | 77                       |
| 05A0771            |       | 77                       |
| T10971             |       | 77                       |
| 7724C8664          |       | 77                       |
| 7726D0664          |       | 77                       |
| 782OD0111 (20 AWG) |       | 78                       |
| 0024G0024          |       | 100                      |
| 5M2022-003         |       | 100                      |
| HS5930             |       | 100                      |
| S280W502-1         |       | 100                      |
| CXN2268            |       | 100                      |

**Triax Contacts**  
**CABLE USAGE GUIDE**  
**D38999 Series I, II, III & SJT Connectors**


| Cable Type           |                  | Nominal Impedance (ohms) |
|----------------------|------------------|--------------------------|
| JN1088WT             |                  | 50                       |
| 5M2397-002           |                  | 75                       |
| 81264-02             |                  | 75                       |
| JN1088WU             |                  | 75                       |
| Gore                 | GSC-03-81497-00  | 75                       |
| RG179 (Coax Cable)   |                  | 75                       |
| Tensolite            | 28988/50823LXX-1 | 75                       |
| Tensolite            | 28988/50823LXX-1 | 75                       |
| Thermatics           | 12447            | 75                       |
| 10602 (Twinax Cable) |                  | 77                       |
| 5M2559-001           |                  | 95                       |
| 81264-01             |                  | 95                       |
| ST5M1323-001         |                  | 95                       |
| Champlain            | 81-00700         | 95                       |
| Tensolite            | 28598/9C026LT-1  | 95                       |
|                      | 26895/90334X-1   | 95                       |
| Teledyne             | 13809            | 95                       |
| 11914/1              |                  | 95                       |
| Times AA6603         |                  | 95                       |
| RGX179               |                  | 75                       |

**Concentric Twinax Contacts**  
**CABLE USAGE GUIDE**  
**ARINC 600 Rack & Panel Connectors**


| Cable Type | Nominal Impedance (ohms) |
|------------|--------------------------|
| S280W502-1 | 100                      |

Use the Cable Usage Guides on this page for Coax Contacts as follows:

1. Locate the cable you are using in Cable Type column. For cables not listed consult Amphenol Aerospace.
2. Refer to the Amphenol connector section which features contacts for this cable, as indicated by a • in the appropriate column. If more than one connector series utilizes contacts designed for your cable, investigate each of them. Connector size, performance features and insert pattern availability may influence your choice.
3. Order your connector and coax contact by following the procedure given in the section for the connector series selected. These instructions are supplemented by the Amphenol Catalog Section covering the basic connector.
4. The Additional Contacts column of this guide is used to indicate an additional availability of contact designs for older cable types or capability. Consult Amphenol Aerospace for further information.

## Coax Contacts CABLE USAGE GUIDE



| Cable Type          |                 | Nominal Impedance (ohms) | For Circular (MIL-DTL-38999 type) | For Standard & Heavy Duty Circular (MIL-DTL-5015 type) (MIL-DTL-22992 type) | For Rectangular Connectors | Additional Contacts (Consult Amphenol) |
|---------------------|-----------------|--------------------------|-----------------------------------|-----------------------------------------------------------------------------|----------------------------|----------------------------------------|
| RG-5B/U             | (M17/073-RG212) | 50                       |                                   |                                                                             |                            | •                                      |
| RG-6A/U             | (M17/2-RG6)     | 75                       |                                   |                                                                             |                            | •                                      |
| RG-7/U              |                 | 97                       |                                   |                                                                             |                            | •                                      |
| RG-9B/U             | (M17/075-RG214) | 50                       |                                   |                                                                             |                            | •                                      |
| RG-11A/U            | (M17/6-RG11)    | 75                       |                                   |                                                                             |                            | •                                      |
| RG-12A/U            | (M17/6-RG12)    | 75                       |                                   |                                                                             |                            | •                                      |
| RG-13A/U            |                 | 74                       |                                   |                                                                             |                            | •                                      |
| RG-21A/U            |                 | 53                       |                                   |                                                                             |                            | •                                      |
| RG-55B/U            | (M17/084-RG223) | 53                       |                                   | •                                                                           | •                          |                                        |
| RG-58C/U            | (M17/028-RG058) | 50                       |                                   | •                                                                           | •                          |                                        |
| RG-58               | (M17/155-00001) | 50                       | •                                 |                                                                             |                            |                                        |
| RG-59B/U            | (M17/29-RG59)   | 75                       |                                   | •                                                                           |                            |                                        |
| RG-62A/U            | (M17/030-RG062) | 93                       |                                   | •                                                                           |                            |                                        |
| RG-62B/U            |                 | 93                       |                                   | •                                                                           |                            |                                        |
| RG-63B/U            | (M17/31-RG63)   | 125                      |                                   |                                                                             |                            | •                                      |
| RG-71B/U            | (M17/90-RG71)   | 93                       |                                   |                                                                             |                            | •                                      |
| RG-87A/U            |                 | 50                       |                                   |                                                                             |                            | •                                      |
| RG-115/U            |                 | 50                       |                                   |                                                                             |                            | •                                      |
| RG-115A/U           |                 | 50                       |                                   |                                                                             |                            | •                                      |
| RG-116/U            |                 | 50                       |                                   |                                                                             |                            | •                                      |
| RG-122/U            | (M17/054-RG122) | 50                       |                                   |                                                                             | •                          | •                                      |
| RG-133A/U           | (M17/100-RG133) | 95                       |                                   |                                                                             |                            | •                                      |
| RG-140/U            | (M17/110-RG302) | 75                       |                                   | •                                                                           |                            |                                        |
| RG-141A/U           |                 | 50                       |                                   | •                                                                           | •                          |                                        |
| RG-142A/U           |                 | 50                       |                                   | •                                                                           | •                          | •                                      |
| RG-142B/U           | (M17/060-RG142) | 50                       | •                                 | •                                                                           | •                          | •                                      |
| RG-143A/U           |                 | 50                       |                                   |                                                                             |                            | •                                      |
| RG-161/U            |                 | 70                       | •                                 | •                                                                           |                            |                                        |
| RG-174A/U           | (M17/119-RG174) | 50                       | •                                 | •                                                                           |                            |                                        |
| RG-178B/U           | (M17/093-RG178) | 50                       | •                                 | •                                                                           |                            |                                        |
| RG-179B/U           | (M17/094-RG179) | 75                       | •                                 | •                                                                           |                            |                                        |
| RG-180B/U           | (M17/095-RG180) | 95                       | •                                 | •                                                                           | •                          |                                        |
| RG-187A/U           | (M17/094-RG179) | 75                       | •                                 | •                                                                           |                            |                                        |
| RG-188A/U           | (M17/113-RG316) | 50                       | •                                 | •                                                                           |                            |                                        |
| RG-188 Double Braid |                 | 50                       |                                   |                                                                             |                            |                                        |
| RG-195A/U           | (M17/095-RG180) | 95                       | •                                 | •                                                                           | •                          |                                        |
| RG-195 Double Braid |                 | 95                       |                                   |                                                                             |                            |                                        |
| RG-196A/U           | (M17/169-00001) | 50                       | •                                 | •                                                                           |                            |                                        |
| RG-210/U            |                 | 93                       |                                   | •                                                                           |                            |                                        |
| RG-212/U            | (M17/073-RG212) | 50                       |                                   | •                                                                           |                            | •                                      |
| RG-214/U            | (M17/075-RG214) | 50                       |                                   |                                                                             |                            | •                                      |
| RG-216/U            | (M17/77-RG216)  | 75                       |                                   |                                                                             |                            | •                                      |
| RG-222/U            |                 | 50                       |                                   |                                                                             |                            | •                                      |
| RG-223/U            | (M17/084-RG223) | 50                       | •                                 | •                                                                           | •                          |                                        |
| RG-225/U            | (M17/86-RG225)  | 50                       |                                   |                                                                             |                            | •                                      |
| RG-227/U            |                 | 50                       |                                   |                                                                             |                            | •                                      |
| RG-302/U            | (M17/110-RG302) | 75                       |                                   | •                                                                           |                            |                                        |

CHART CONTINUES ON NEXT PAGE

NOTE: For information on coax contacts for Miniature circular connectors, MIL-DTL-26482 Series 1, see catalog 12-070 and consult Amphenol Industrial Operations.

NOTE: MIL-DTL-38999 supersedes MIL-C-38999.  
MIL-DTL-5015 supersedes MIL-C-38999.  
MIL-DTL-22992 supersedes MIL-C-22992



## Coax Contacts CABLE USAGE GUIDE, cont.

| Cable Type          |                 | Nominal Impedance (ohms) | For Circular (MIL-DTL-38999 type) | For Standard & Heavy Duty Circular (MIL-DTL-5015 type) (MIL-DTL-22992 type) | For Rectangular Connectors | Additional Contacts (Consult Amphenol) |
|---------------------|-----------------|--------------------------|-----------------------------------|-----------------------------------------------------------------------------|----------------------------|----------------------------------------|
| RG-303/U            | (M17/111-RG303) | 50                       |                                   | •                                                                           | •                          |                                        |
| RG-304/U            | (M17/112-RG304) | 50                       |                                   |                                                                             |                            | •                                      |
| RG-316/U            | (M17/113-RG316) | 50                       | •                                 | •                                                                           |                            |                                        |
| RD-316 Double Braid | (M17/152-00001) | 50                       | •                                 |                                                                             |                            |                                        |
| RG-400              | (M17/128-RG400) | 50                       | •                                 |                                                                             |                            |                                        |
| M/A-COM 5M2869-001  |                 | 50                       | •                                 |                                                                             | •                          |                                        |
| 5022A1311-D         |                 | 50                       | •                                 |                                                                             |                            |                                        |
| Beldon 9307         |                 | 50                       | •                                 |                                                                             |                            |                                        |
| FA-19X              |                 | 50                       | •                                 |                                                                             |                            |                                        |
| T-Flex-402          |                 | 50                       | •                                 |                                                                             |                            |                                        |
| T-Flex-405          |                 | 50                       | •                                 |                                                                             |                            |                                        |
| Filotex ET124962    |                 | 50                       | •                                 |                                                                             |                            |                                        |
| JN1088WT            | (Triax)         | 50                       | •                                 |                                                                             |                            |                                        |
| JN1088WU            | (Triax)         | 75                       | •                                 |                                                                             |                            |                                        |
| PAN6422XQ           |                 | 50                       | •                                 |                                                                             |                            |                                        |
| PAN6422XY           |                 | 75                       | •                                 |                                                                             |                            |                                        |
| PAN6595XM           | (Triax)         | 75                       | •                                 |                                                                             |                            |                                        |
| Haveg               | 51-04486        |                          | •                                 |                                                                             |                            |                                        |
|                     | 81-00207        |                          | •                                 |                                                                             |                            |                                        |
| Gore                | GWN1159A        |                          | •                                 |                                                                             |                            |                                        |
|                     | CXN3403         |                          | •                                 |                                                                             |                            |                                        |
| Times               | AA3248          |                          | •                                 |                                                                             |                            |                                        |
| Teledyne            | 11299           |                          | •                                 |                                                                             |                            |                                        |
| Raychem             | 5021D1331-0     | 50                       | •                                 |                                                                             |                            |                                        |
|                     | 5021D1331-9     | 50                       | •                                 |                                                                             |                            |                                        |
|                     | 5022D1312-9     | 50                       | •                                 |                                                                             |                            |                                        |
|                     | 7527A1318       | 75                       | •                                 |                                                                             |                            |                                        |
|                     | 9527A1314       | 95                       | •                                 |                                                                             |                            |                                        |
|                     | 9528A1318       | 95                       | •                                 |                                                                             |                            |                                        |
|                     | 9530A5314       | 95                       | •                                 |                                                                             |                            |                                        |
| Thermatics          | 9530D5314       | 95                       | •                                 |                                                                             |                            |                                        |
|                     | 2929-29         |                          | •                                 |                                                                             |                            |                                        |
| Tensolite           | 30850/87T-1     |                          | •                                 |                                                                             |                            |                                        |
| Thermax             | 50C-25A-DS-1    |                          | •                                 |                                                                             |                            |                                        |
|                     | ESC352001       | 50                       | •                                 |                                                                             |                            |                                        |
|                     | ESC432101       | 50                       | •                                 |                                                                             |                            |                                        |

For Cable not found in the Coax Contact Cable Usage Guide, refer to these general dimensional ranges:  
(In general, for D38999 Connectors, the size 8, 12 and 16 Coax Contacts will terminate cable in the following ranges )

### SIZE 16

|                                                            |
|------------------------------------------------------------|
| .012 / .0215 Center Conductor (Stranded)                   |
| .031 / .066 Dielectric                                     |
| .085 Max Outer braid (must be round for crimp termination) |
| .102 Max. Jacket                                           |

### SIZE 12

|                                                            |
|------------------------------------------------------------|
| .012 / .0215 Center Conductor (Stranded)                   |
| .031 / .105 Dielectric                                     |
| .126 Max Outer braid (must be round for crimp termination) |
| .145 Max. Jacket                                           |

### SIZE 8

|                                                            |
|------------------------------------------------------------|
| .012 / .0395 Center Conductor (Stranded)                   |
| .055 / .133 Dielectric                                     |
| .180 Max Outer braid (must be round for crimp termination) |
| .201 Max. Jacket                                           |

Special coax contacts may be available for cables outside of ranges shown. Consult Amphenol Aerospace for further assistance in selection of coax contact cables.

# MIL-DTL-38999 Circular Connector

## Overview

Amphenol® Connectors are ideally suited for the incorporation of shielded contacts for high performance interconnection applications. The circular family is built around MIL-DTL-38999 specifications, with Mil-approved and commercial styles offered. Normal operating voltage for circulars with power contacts only is up to 900 VAC (RMS) at sea level.

### The MIL-DTL-38999 family offer these features for contact termination flexibility:

- Widest selection of insert arrangements that can incorporate:
  - Size 8 high speed Quadrax and Differential Twinax contacts for MIL-DTL-38999 Series III (specially modified to accommodate keyed contacts)
  - Transition adapters for use in attaching D38999 Series III connectors with high speed quadrax or differential contacts to PCB boards
  - Size 8, 12 and 16 Coax contacts
  - Size 8 and 12 Twinax contacts
  - Size 8, 10 & 12 Triax contacts
- Wide selection of connector shell styles and sizes
- Scoop-Proof recessed design in LJT-R, TV-R and SJT-R connectors provide protection for contacts
- Standard power contacts are crimp rear release, qualified to SAE AS39029
- Coax, Twinax, and Triax contacts employ the same retention system as power contacts, simplifying user substitution

### GENERAL ORDERING INFORMATION

Amphenol MIL-DTL-38999, which feature rear removable contacts, are normally supplied with a full complement of power contacts, separately packaged. Coax, twinax and triax contacts are ordered by part number as referenced in the part number charts on the following pages of this catalog, and are substituted for the power contacts at the time of the cable or equipment assembly. If the application is for coax, twinax or triax contacts only, the connector may be ordered *less contacts* and no power contacts will be supplied.

### HOW TO ORDER CONNECTORS AND HIGH FREQUENCY CONTACTS

- Select the Circular Series desired.  
(See features of each series given briefly on this page and in-depth in the other sections of this catalog, which are on-line at [www.amphenol-aerospace.com](http://www.amphenol-aerospace.com)).  
Series I - LJT-R Connectors  
Series II - JT-R Connectors  
Series III - TV-R Connectors  
SJT\* - SJT-R Connectors  
See Amphe-Lite (Industrial 38999 type) Catalog 12-094
- Select the quadrax, differential twinax, coax, twinax and/or triax contacts or the transition adapters that are needed from the tables on the following pages that correspond to the cable being used.
- Select the insert arrangement to accommodate required number of contacts. Insert patterns for quadrax and differential twinax contacts are on pages 395,396. Insert patterns for coax, twinax and triax contacts are on pages 404-406.
- Complete the connector part number from the connector series catalog, incorporating the chosen insert pattern number. See detailed how to order page 397 for ordering 38999, Series III with quadrax and differential twinax contacts. Consult Amphenol for assistance in ordering 38999 circulars with coax, twinax and triax contacts.
- Consult Amphenol Aerospace for ordering information for connectors with PC tail contacts, and for transition adapters.
- If connector is ordered less contacts, power contacts and/or sealing plugs may be ordered separately to fill out the insert arrangement.



**TV-R, Tri-Start, D38999 Series III**

- High performance capability series for both general duty and severe environment applications
  - Offers the widest range of Subminiature Family Mil-Spec qualified options in contact and connector styles
  - Threaded coupling; completely mates in one turn; crimp termination
  - Superior EMI/EMP shielding effectiveness
  - Scoop-proof design (recessed pins)
  - Available in aluminum, stainless steel and firewall, or lightweight composite styles
- See 38999 section Series III for complete information on this section.



**JT-R, D38999 Series II**

See 38999 section Series II, JT for complete information on this series.

- Shorter profile connector series for applications requiring maximum space savings
- Bayonet coupling, crimp termination
- Also available in solder termination types under MIL-DTL-27599 Series II



**LJT-R, D38999 Series I**

See 38999 section Series I, LJT for complete information on this series.

- Scoop-proof (recessed pins)
- Bayonet coupling, crimp termination
- Also available in solder termination types under MIL-DTL-27599 Series II



**Amphe-Lite, 38999 Type**

See Catalog 12-094 for complete information on this series.

- Commercial/Industrial 38999 Series III type
- Cost effective high performance connector for severe environments or general duty industrial applications
- Consult Amphenol Industrial Operations for further information 12-094 catalog is on-line at [www.amphenol-industrial.com](http://www.amphenol-industrial.com).



**SJT-R, 38999 Type**

See the SJT section of this catalog.

- Amphenol proprietary series (non-MS) which is a further expansion of the basic JT family, but incorporates the LJT scoop-proof design
- Compliant with several European specifications

NOTE: SAE AS39029 supersedes MIL-C-39029.  
NOTE: MIL-DTL-38999 supersedes MIL-C-38999.  
MIL-DTL-27599 supersedes MIL-C-27599

**Amphenol® Quadrax Contacts** -offer several advantages for high data transfer rates, low power consumption and excellent EMI compatibility:

- Four strategically spaced inner contacts form two 100 or 150 Ohm matched impedance differential pairs
- Outer contact has rugged wall section for durability
- Available in size 8 crimp termination style
- Also available in size 8 with PC tails (see page 379)
- Requires modification of MIL-DTL-38999 connector to accommodate keyed contacts



Cable Illustration - Quadrax Contact

**TYPICAL QUADRAX SOCKET CONTACT**  
has socket outer contact  
with a socket inner contact

**TYPICAL QUADRAX PIN CONTACT**  
has pin outer contact  
with a pin inner contact



Quadrax Pin with 8P8C "RJ45" Jack



Quadrax Pin Size 8 and MIL-DTL-38999  
Series III Connector



Quadrax in an Eight Wire Gigabit Ethernet Assembly

### Quadrax Contacts are gold plated, crimp termination

Finish of mating contacts parts: supplied with 0.000050 min. gold over nickel on mating parts. Consult Amphenol for availability of other finishes.

### Quadrax Size 8 Contact Performance:

- Bandwidth: Up to 3 Gigahertz
- Data Rate: Exceeding 3 Gbits/sec.
- Voltage Rating: 500 Vrms max. @ sea level
- Dielectric Withstanding Voltage: 1000 VAC rms between all inner contacts @ sea level, 500 VAC rms between inner and outer contacts @ sea level

### Suggested Strain Relief - Insert Arrangements 9-5 or 19-18 with Quadrax Contacts


Due to the piggyback grommet interference with normal strain reliefs on the shell size 9 only, the recommended strain relief for the connector is: Amphenol part number TGW-R-5309-10 (OD Cad) or TGF-R-5309-10 (Electroless nickel)

- shell size 9 only. For 19-18 insert pattern, recommended backshell: Glenair 367-221-NF. This is recommended due to the proximity of the size 8 contacts in relation to the shell.



Also see Quadrax contacts for ARINC 600 and R27 Rack and Panel Connectors on page 419 and 420.

### Suggested Numbering for Quadrax Contacts

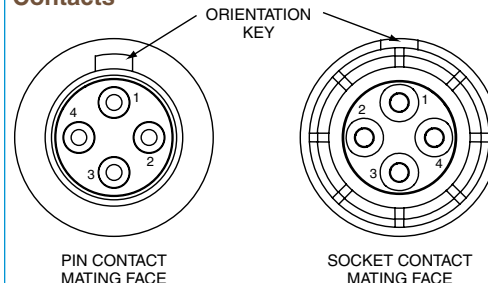

Differential Pairs, contacts 1-3, 2-4.

See page 397 for part number ordering of popularly used 38999 Series III connectors with 100 ohm quadrax contacts.

Quadrax differential pairs are 1 and 3, 2 and 4.

# Quadrax Contacts for MIL-DTL-38999

## Series III, Application Data

### TV-R Series, MIL-DTL-38999 Series III\* Connectors

| QUADRAX CONTACTS FOR USE IN TV-R CONNECTORS                                                                                                                                                                                                                                             |                                                          |                              |                     |                             |                 |                                                                                  |                                                                         |                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|------------------------------|---------------------|-----------------------------|-----------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------------|
| Cable                                                                                                                                                                                                                                                                                   | Contact Part Number<br>(Termination Instruction Sheet)** |                              | Impedance<br>(Ohms) | Inner<br>Conductor<br>(AWG) | Contact<br>Size | Electrical<br>Protocol††                                                         | Crimping Tools                                                          |                                                   |
|                                                                                                                                                                                                                                                                                         | Pin                                                      | Socket                       |                     |                             |                 |                                                                                  | Inner<br>Contact                                                        | Outer<br>Contact                                  |
| Draka Fileca F-4703-3, F4704-4, Filotex ET 2PC236, Filotex ET2PF870, PIC Wire E50424 ABS0972, Tensolite 23450/04090X-4(LD) Draka Fileca F-4704-5, ABS1503 KD 24                                                                                                                         | 21-033384-021<br>(L-2119-A)                              | 21-033385-021<br>(L-2119-A)  | 100                 | 24                          | 8               | Ethernet, 1000 Base-T Gigabit Ethernet                                           | M22520/2-01 with Positioner M22520/2-37 or with Daniels Positioner K709 | M22520/5-01 with Die Set M22520/5-45 (Location A) |
| Tensolite NF24Q100, NF24Q100-01, 24443/9P025X-4(LD), S280W502-4, 24443/03130X-4(LD), 24443/C20714X-4(LD), 24450/0120X-4(LD), NF24-2Q100, TYCO CEC-RWC-18664, GORE GSC-01-81869-01, 24443/03166X-4(LD), Thermax T956-4T200, Pic Wire E51424, Thermax MX100Q-24, NF24Q100-01-200C (Space) | 21-033384-051<br>(L-2119-D)                              | 21-033385-051<br>(L-2119-D)  |                     | 24                          |                 | Ethernet, 1000 Base-T Gigabit Ethernet                                           |                                                                         |                                                   |
| Tensolite NF22Q100, NF22Q100-01, Thermax 956-5, GORE RCN 7688                                                                                                                                                                                                                           | 21-033384-061<br>(L-2119-H)                              | 21-033385-061<br>(L-2119-H)  |                     | 22                          |                 | Ethernet (100 Mbps), 1000 Base-T Gigabit Ethernet (1 Gbps)                       |                                                                         |                                                   |
| Tensolite NF26Q100, NF26Q100-01, NF26-2Q100, PIC E51426                                                                                                                                                                                                                                 | 21-033384-071<br>(L-2119-AB)                             | 21-033385-071<br>(L-2119-AB) |                     | 26                          |                 | Ethernet (100 Mbps), 1000 Base-T Gigabit Ethernet (1 Gbps)                       |                                                                         |                                                   |
| S280W502-4/BMS13-72T03C04G024                                                                                                                                                                                                                                                           | 21-033384-141<br>(BACC47GM1)                             | 21-033385-141<br>(BACC45GN1) |                     | 24                          |                 |                                                                                  |                                                                         |                                                   |
| Draka Fileca F-4704-6, Gore RCN 8672                                                                                                                                                                                                                                                    | 21-033384-151<br>(L-2119-AW)                             | 21-033385-151<br>(L-2119-AW) |                     | 26                          |                 | Ethernet (100 Mbps), 1000 Base-T Gigabit Ethernet (1 Gbps)                       |                                                                         |                                                   |
| Tensolite NF24Q100-01 (same as 21-03338( ) -51, uses EMI Piggyback)                                                                                                                                                                                                                     | 21-033384-161<br>(L-2119-BE)                             | 21-033385-161<br>(L-2119-BE) |                     | 24                          |                 | Ethernet (100 Mbps), 1000 Base-T Gigabit Ethernet (1 Gbps)                       |                                                                         |                                                   |
| Gore RCN8513, JSFY18-3                                                                                                                                                                                                                                                                  | 21-033384-171<br>(L-2119-BN)                             | 21-033385-171<br>(L-2119-BN) |                     | 22                          |                 | Ethernet (100 Mbps), 1000 Base-T Gigabit Ethernet (1 Gbps)                       |                                                                         |                                                   |
| Tensolite NF22Q100 Special Box pattern, only mates with 21-0333 ( ) -181                                                                                                                                                                                                                | 21-033384-181<br>(L-2119-BP)                             | 21-033385-181<br>(L-2119-BP) |                     | 22                          |                 | Ethernet (100 Mbps), 1000 Base-T Gigabit Ethernet (1 Gbps)                       |                                                                         |                                                   |
| Tensolite NF24Q100, NF24Q100-01 for 2.5 Gbps applications                                                                                                                                                                                                                               | 21-033384-191<br>(L-2119-BS)                             | 21-033385-191<br>(L-2119-BS) |                     | 24                          |                 | • Serial FPD Applications (2.5 Gbps) (Typical app run at 150 Ohms)<br>• HDMI 1.3 |                                                                         |                                                   |
| USB2 (28433/02171LX-4)                                                                                                                                                                                                                                                                  | 21-033384-101†                                           | 21-033385-101†               | 90                  |                             |                 | USB2.0 (480 Mbps)                                                                |                                                                         |                                                   |
| Tensolite 24450/03089X-4(LD) Gore RCN8647                                                                                                                                                                                                                                               | 21-033384-211                                            | 21-033385-211                | 110                 | 24                          |                 | IEEE 1394B Firewire                                                              |                                                                         |                                                   |
| JSFY02-1, JSFY18                                                                                                                                                                                                                                                                        | 21-033384-221                                            | 21-033385-221                |                     | 24                          |                 | IEEE 1394B Firewire                                                              |                                                                         |                                                   |
| Gore RCN8487, JSFY18                                                                                                                                                                                                                                                                    | 21-033384-231                                            | 21-033385-231                |                     | 24                          |                 | IEEE 1394B Firewire                                                              |                                                                         |                                                   |
| Tensolite 24450/03089X-4(LD) Same as 21-03338( ) -211 but Box pattern, mates with 21-03338( ) -241 only                                                                                                                                                                                 | 21-033384-241†                                           | 21-033385-241†               |                     | 24                          |                 | IEEE 1394B Firewire                                                              |                                                                         |                                                   |
| F-4703, ABS1503KD24                                                                                                                                                                                                                                                                     | 21-033384-281                                            | 21-033385-281                | 100                 |                             |                 | Meets EN3155-074                                                                 |                                                                         |                                                   |
| Tensolite 26473/02006X-4(LD)/Gore RCN8328 (not for new designs, use 21-033450/1 series)                                                                                                                                                                                                 | 21-033384-31<br>(L-2119-B)                               | 21-033385-031<br>(L-2119-B)  | 150                 | 26                          |                 |                                                                                  |                                                                         |                                                   |

CHART CONTINUES ON NEXT PAGE

#### QUADRAX CONTACT DATA

Contacts are inserted by hand. Refer to termination instructions listed. Contacts are removed with a removal tool. Recommended tool is MIL-I-81969/14-06, Daniels DRK-264-8. Refer to termination instructions listed. Finish of mating contact parts: Contact part numbers shown in the chart above are supplied gold plated per ASTM B488 Type II, Code C, .000050 min. thick over nickel plate per AMS-QQ-N-290, Class 2, .000030/.000150 thick.

Daniels crimping tools available from Daniels Mfg. Corp. 6103 Anno Ave., Orlando, FL 32809

\* Requires modified connector to accommodate keyed contacts.

\*\* Termination instructions are packaged with each contact and can be found on-line at: [www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

† Consult Amphenol for current release of this contact or instruction sheet if applicable.

†† Test reports available for indicated protocols. Consult Amphenol Aerospace. Typical applications run at 150 Ohms

### TV-R Series, MIL-DTL-38999 Series III\* Connectors

#### QUADRAX CONTACTS FOR USE IN TV-R CONNECTORS

| Cable                                                                                                                          | Contact Part Number<br>(Termination Instruction Sheet)** |                           | Impedance<br>(Ohms) | Inner<br>Conductor<br>(AWG) | Contact<br>Size | Electrical<br>Protocol††                                                           | Crimping Tools                                                          |                                                   |
|--------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|---------------------------|---------------------|-----------------------------|-----------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------------|
|                                                                                                                                | Pin                                                      | Socket                    |                     |                             |                 |                                                                                    | Inner<br>Contact                                                        | Outer<br>Contact                                  |
| Tensolite 26473/02006X-4(LD) Same as 21-033384/5-31 but box pattern (not for new designs, use 21-033450/1 series) Gore RCN8328 | 21-033384-201†                                           | 21-033385-201†            | 150                 | 26                          | 8               | Fibre-Channel (1 GBPS, 2 GBPS, 1G/2G), 1000 Base-CX (1.25 GBPS), SCSI-2 (3.2 GBPS) | M22520/2-01 with Positioner M22520/2-37 or with Daniels Positioner K709 | M22520/5-01 with Die Set M22520/5-45 (Location A) |
| Gore RCN7625                                                                                                                   | 21-033384-271                                            | 21-033385-271             |                     |                             |                 |                                                                                    |                                                                         |                                                   |
| Tensolite 26473/02006X-4(LD), Gore RCN8328                                                                                     | 21-033450-001 (L-2119-BW)                                | 21-033451-001 (L-2119-BW) |                     | 26                          |                 |                                                                                    |                                                                         |                                                   |
| Tensolite 26473/02006X-4(LD), Gore RCN8328 (same as 21-033450/1-1 except box pattern. Mates with 21-033450/1-11 only.          | 21-033450-011†                                           | 21-033451-011†            |                     | 26                          |                 |                                                                                    |                                                                         |                                                   |

| Contact Part Number |               | Impedance<br>(Ohms) | L Dim | Pretinned |
|---------------------|---------------|---------------------|-------|-----------|
| Pin                 | Socket        |                     |       |           |
| 21-033398-021       | 21-033397-021 | 100 Ohm             | 1.035 | X         |
| 21-033398-031       | 21-033397-031 | 100 Ohm             | 0.866 |           |
| 21-033398-061       | 21-033397-061 | 150 Ohm             | 1.035 |           |
| 21-033398-071       | 21-033397-071 | 150 Ohm             | 0.494 | X         |
| 21-033398-081       | 21-033397-081 | 150 Ohm             | 0.780 | X         |
| 21-033398-091       | 21-033397-091 | 100 Ohm             | 0.840 | X         |
| 21-033398-111       | 21-033397-111 | 100 Ohm             | 0.708 |           |
| 21-033398-121       | 21-033397-121 | 100 Ohm             | 0.859 |           |
| 21-033398-131       | 21-033397-131 | 150 Ohm             | 0.780 | X         |
| 21-033398-141       | 21-033397-141 | 100 Ohm             | 0.615 |           |
| 21-033398-151       | 21-033397-151 | 150 Ohm             | 0.815 |           |
| 21-033398-191       | 21-033397-191 | 100 Ohm             | 0.605 |           |
| 21-033398-211       | 21-033397-211 | 150 Ohm             | 0.815 | X         |
| 21-033398-221       | 21-033397-221 | 100 Ohm             | 0.775 |           |
| 21-033398-231       | 21-033397-231 | 100 Ohm             | 0.494 |           |
| 21-033398-241       | 21-033397-241 | 100 Ohm             | 0.741 |           |
| 21-033398-251       | 21-033397-251 | 100 Ohm             | 0.788 |           |
| 21-033398-271       | 21-033397-271 | 100 Ohm             | 0.741 |           |
| 21-033398-281       | 21-033397-281 | 100 Ohm             | 0.806 |           |
| 21-033398-291       | 21-033397-291 | 100 Ohm             | 1.035 |           |
| 21-033398-301       | 21-033397-301 | 100 Ohm             | 0.836 |           |
| 21-033398-311       | 21-033397-311 | 100 Ohm             | 0.940 |           |
| 21-033398-341       | 21-033397-341 | 100 Ohm             | 0.901 |           |
| 21-033398-351       | 21-033397-351 | 100 Ohm             | 0.871 |           |
| 21-033398-361       | 21-033397-361 | 100 Ohm             | 0.939 |           |
| 21-033398-371       | 21-033397-371 | 100 Ohm             | 0.672 |           |
| 21-033398-381       | 21-033397-381 | 100 Ohm             | 0.914 |           |
| 21-033398-391       | 21-033397-391 | 100 Ohm             | 0.360 |           |
| 21-033398-401       | 21-033397-401 | 100 Ohm             | 1.009 |           |
| 21-033398-411       | 21-033397-411 | 150 Ohm             | 0.866 |           |
| 21-033398-421       | 21-033397-421 | 100 Ohm             | 1.169 |           |
| 21-033398-431       | 21-033397-431 | 100 Ohm             | 0.819 |           |
| 21-033398-451       | 21-033397-451 | 150 Ohm             | 0.494 |           |
| 21-033398-461       | 21-033397-461 | 100 Ohm             | 0.761 |           |
| 21-033398-471       | 21-033397-471 | 100 Ohm             | 0.889 |           |
| 21-033398-481       | 21-033397-481 | 100 Ohm             | 0.971 |           |
| 21-033398-491       | 21-033397-491 | 100 Ohm             | 0.418 |           |
| 21-033398-501       | 21-033397-501 | 100 Ohm             | 0.875 |           |
| 21-033398-511       | 21-033397-511 | 100/150 Ohm         | 0.699 |           |
| 21-033398-521       | 21-033397-521 | 100 Ohm             | 0.582 |           |
| 21-033398-531       | 21-033397-531 | 100 Ohm             | 0.666 |           |
| 21-033398-541       | 21-033397-541 | 100 Ohm             | 0.946 |           |
| 21-033398-551       | 21-033397-551 | 100 Ohm             | 0.788 | X         |
| 21-033398-561       | 21-033397-561 | 100 Ohm             | 0.815 |           |

| Contact Part Number |               | Impedance<br>(Ohms) | L Dim                                | Pretinned |
|---------------------|---------------|---------------------|--------------------------------------|-----------|
| Pin                 | Socket        |                     |                                      |           |
| 21-033398-581       | 21-033397-581 | 100 Ohm             | 0.721                                |           |
| 21-033398-591       | 21-033397-591 | 100/150 Ohm         | 0.939                                |           |
| 21-033398-601       | 21-033397-601 | 100 Ohm             | 0.939                                |           |
| 21-033398-611       | 21-033397-611 | 100 Ohm             | 1.366                                |           |
| 21-033452-011       | 21-033453-011 | 150 Ohm             | 1.035 (mates to 21-033450/51 series) |           |
| 21-033452-021       | 21-033453-021 | 150 Ohm             | 0.815 (mates to 21-033450/51 series) |           |
| 21-033452-031       | 21-033453-031 | 150 Ohm             | 0.815 (mates to 21-033450/51 series) | X         |
| 21-033452-041       | 21-033453-041 | 150 Ohm             | 0.866 (mates to 21-033450/51 series) |           |
| 21-033452-051       | 21-033453-051 | 150 Ohm             | 0.494 (mates to 21-033450/51 series) |           |
| 21-033452-061       | 21-033453-061 | 150 Ohm             | 0.582 (mates to 21-033450/51 series) |           |
| 21-033452-071       | 21-033453-071 | 150 Ohm             | 0.939 (mates to 21-033450/51 series) |           |

Daniels crimping tools are available from Daniels Mfg. Corp. 6103 Anno Ave., Orlando, FL 32809

\* Requires modified connector to accommodate keyed contacts.

\*\* Termination instructions are packaged with each contact and can be found on-line at: [www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

† Consult Amphenol Aerospace for current release of this contact or instruction sheet if applicable.

†† Test reports available for indicated protocols. Consult Amphenol Aerospace.

\*\*\* Must be used with 21-033321-005 piggyback grommet seal.


#### SEALING PLUGS

| Sealing Plugs<br>for use with D38999 Connectors<br>using Quadrax Contacts -<br>Size 8 Cavities | Part Number   |
|------------------------------------------------------------------------------------------------|---------------|
| ***Standard Plastic                                                                            | T3-4008-59P   |
| Standard Plastic to be used with PCB tails<br>(shorter tail length)                            | T3-4008-59P1  |
| ***Metal sealing plug - can be used when<br>mating with contacts on mating half                | 21-033899-8Q1 |
| Metal sealing plug used with PCB's and<br>mating contact on mating half                        | 21-033899-8Q2 |

#### PIGGYBACK GROMMET

| Grommet for use with D38999<br>Connectors<br>using Quadrax Contacts | Part Number   |
|---------------------------------------------------------------------|---------------|
| Metallized piggyback grommet                                        | 21-033321-023 |

Indicated length given in chart at left is the distance from the rear of the contact retention shoulder to the tip of the PCB tails.



Note: it does not indicate stickout length when installed in D38999 connector.

# New “Split-Pair” Quadrax Contacts & Cables

## Assemblies for MIL-DTL-38999, Series III

### for use with CAT6A Type Cable

Amphenol Aerospace offers the high performance interconnect solution for CAT6A type cable.

#### FEATURES & BENEFITS:

- Overall higher bandwidth than standard CAT5E quadrax
- Enhanced crosstalk performance (compared to standard quadrax) due to compatibility with shielded twisted pair of cables
- Can be used for a variety of high speed applications beyond current quadrax design\*\*
- Four strategically spaced inner contacts form two 100 Ohm matched impedance differential pairs
- Outer contact has rugged wall section for durability
- Available in size 8 crimp termination style
- Also available in size 8 PC tails
- Can be installed into existing quadrax contact connector cavities
- Requires modification of MIL-DTL-38999 connector to accommodate keyed contacts



MIL-DTL-38999 Series III Connectors with “Split-Pair” Quadrax Contacts for use with CAT6A Type Cable



“Split-Pair” Quadrax Contacts for use with CAT6A Type Cable

#### APPLICATIONS:

For use with, but not limited to, the following electrical protocols :

- 10/100/1000/10GBASE-T Ethernet
- DVI
- USB 2.0
- Serial RapidIO (up to 3.125 Gbps)
- PCI-Express 2.0
- HDMI 1.3a
- SATA 2.0 (up to 3 GHz)

#### Suggested Numbering for Quadrax Contacts



Differential Pairs: 1 & 4, 2 & 3

#### SPLIT-PAIR QUADRAX CONTACT\* PART NUMBERS:

| Crimp Style Part Number     | Cable                       | AWG       |
|-----------------------------|-----------------------------|-----------|
| <b>PIN 21-033470-001</b>    | <b>Thermax<br/>1536-224</b> | <b>24</b> |
| <b>SOCKET 21-033471-001</b> |                             |           |
| <b>PIN 21-033470-021</b>    | <b>Thermax<br/>1536-195</b> | <b>26</b> |
| <b>SOCKET 21-033471-021</b> |                             |           |

#### CRIMP TOOLS:

| Outer Contact                                                        | Inner Contact                                        |
|----------------------------------------------------------------------|------------------------------------------------------|
| <b>DANIELS M22520/5-01<br/>with die set Y1999 or<br/>M22520/5-45</b> | <b>DANIELS M22520/2-01<br/>with positioner K1777</b> |

Daniels crimping tools are available from Daniels Mfg. Corp. 6103 Anno Ave., Orlando, FL 32809

REMOVAL TOOL: **M81969/14-12**

\* Patent pending.



### PCB QUADRIX PIN

| PCB Pin Part Numbers | Impedance | Length $\pm .015$ |
|----------------------|-----------|-------------------|
| 21-033466-011        | 100 Ohm   | 1.035             |
| 21-033466-021        |           | .815              |
| 21-033466-031*       |           | .815              |
| 21-033466-041        |           | .866              |
| 21-033466-051        |           | .494              |
| 21-033466-061        |           | .582              |
| 21-033466-071        |           | .815              |
| 21-033466-081        |           | .840              |


### PCB QUADRIX SOCKET

| PCB Socket Part Numbers | Impedance | Length $\pm .015$ |
|-------------------------|-----------|-------------------|
| 21-033467-011           | 100 Ohm   | 1.035             |
| 21-033467-021           |           | .815              |
| 21-033467-031*          |           | .815              |
| 21-033467-041           |           | .866              |
| 21-033467-051           |           | .494              |
| 21-033467-061           |           | .582              |
| 21-033467-071           |           | .815              |
| 21-033467-081           |           | .840              |

\*Pretinned

Indicated length given in charts above is the distance from the rear of the contact retention shoulder to the tip of the PCB tails.

Note: it does not indicate stickout length when installed in D38999 connector.

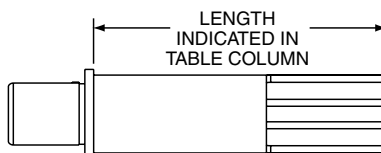

### TRANSITION ADAPTERS FOR LAUNCHING SIGNALS TO PC BOARDS

| 100 OHM QUADRIX TRANSITION ADAPTERS<br>FOR LAUNCHING CONTROLLED IMPEDANCE SIGNALS TO PC BOARDS      |                              |                                                                                     |               |               |                          |
|-----------------------------------------------------------------------------------------------------|------------------------------|-------------------------------------------------------------------------------------|---------------|---------------|--------------------------|
| Quadrix Type Adapter/<br>Cable or PCB Tail Length                                                   |                              | Illustration of Adapter                                                             | Part Number   |               | Mating<br>Thread<br>Size |
|                                                                                                     |                              |                                                                                     | Plug          | Receptacle    |                          |
| Quadrix Plug Adapter/<br>Thermax 1536-224                                                           | Mating plugs and receptacles |  | 21-033468-011 |               | 100                      |
| PCB Quadrix Receptacle 90<br>Degree Adapter/<br>Tail Length .110                                    |                              |  |               | 21-033469-001 |                          |
| PCB Quadrix Receptacle<br>Straight Adapter/<br>Tail Length .110                                     |                              |  |               | 21-033469-011 |                          |
| Quadrix Receptacle 90<br>degree Adapter with cable to<br>board/<br>Thermax 1536-224                 | Wired to board               |  |               | 21-033469-021 |                          |
| Quadrix Receptacle Straight<br>Adapter with cable to board/<br>.195 tail length Thermax<br>1536-224 |                              |  |               | 21-033469-031 |                          |

# New “Split-Pair” Quadrax Contacts

## Frequencies & Performance Data



For use with the following, but not limited to, electrical protocols:  
 10/100/1000/10GBASE-T Ethernet

- DVI
- USB 2.0
- Serial RapidIO (up to 3.125 Gbps)
- PCI-Express 2.0
- HDMI 1.3a
- SATA 2.0 (up to 3 GHz)

### FREQUENCIES OF INTEREST

| Frequency (GHz) | Insertion Loss (dB) | Return Loss (dB) | NEXT (dB) | FEXT (dB) |
|-----------------|---------------------|------------------|-----------|-----------|
| 0.1             | 0.09                | 35.68            | 62.36     | 59.29     |
| 0.24            | 0.22                | 36.44            | 42.87     | 62.25     |
| 0.5             | 0.45                | 43.66            | 43.63     | 55.22     |
| 0.625           | 0.57                | 43.49            | 53.68     | 43.53     |
| 1               | 0.98                | 17.82            | 49.26     | 48.33     |
| 1.25            | 1.29                | 15.1             | 43.57     | 44.12     |
| 1.5             | 1.47                | 17.94            | 46.02     | 40.78     |
| 1.7             | 1.86                | 12.23            | 48.01     | 47.23     |
| 2               | 2.11                | 12.9             | 37.45     | 38.12     |
| 2.5             | 2.42                | 15.97            | 29.9      | 31.52     |
| 3               | 2.86                | 16.52            | 35.94     | 29.36     |

**PERFORMANCE DATA**  
 The following graphs on this page and the next page provide performance data on Amphenol® 10GBASE signal integrity (SI) quadrax contacts. Testing was done with 2 mated contacts terminated on both ends of 1 meter Thermax cable.





# Differential Twinax Contacts, MIL-DTL-38999

## Series III, General Description

### Amphenol® Differential Twinax Contacts -

Offer several advantages for high data transfer rates, low power consumption and excellent EMI compatibility:


- Two strategically spaced inner contacts form two 100 or 150 Ohm matched impedance differential pairs
- Outer contact has rugged wall section for durability
- Available in size 8 crimp termination style
- Also available in size 8 with PC tails (see page 386)
- Requires modification of MIL-DTL-38999 connector to accommodate keyed contacts



Cable Illustration - Differential Twinax Contact

**TYPICAL DIFFERENTIAL TWINAX SOCKET CONTACT** has socket outer contact with a socket inner contact

**TYPICAL DIFFERENTIAL TWINAX PIN CONTACT** has pin outer contact with a pin inner contact

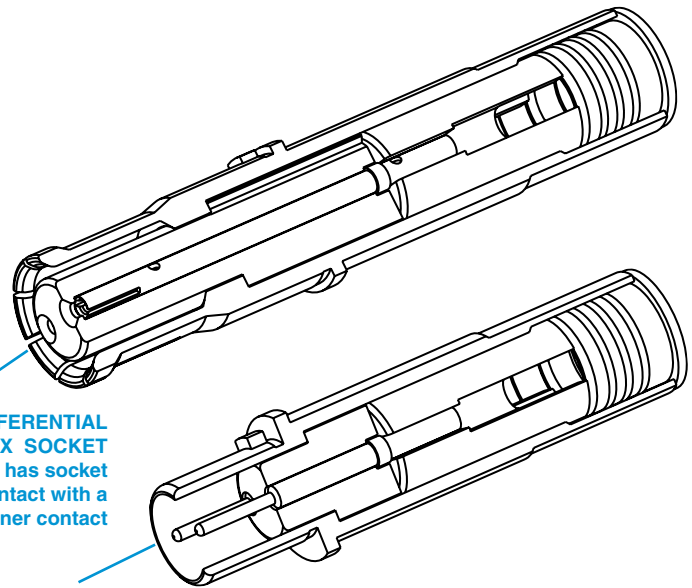

Differential Twinax Socket Contact



Differential Twinax Pin Contact


### Differential Twinax Contacts are Gold plated, Crimp Termination

Finish of mating contacts parts: supplied with 0.000050 min. gold over nickel on mating parts. Consult Amphenol for availability of other finishes.

### Differential Twinax Size 8 Contact Performance:

- Bandwidth: Up to 3 Gigahertz
- Data Rate: Exceeding 3 Gbits/sec.
- Voltage Rating: 500 Vrms max. @ sea level
- Dielectric Withstanding Voltage: 1000 VAC rms between all inner contacts @ sea level 500 VAC rms between inner and outer contacts @ sea level

### Suggested Numbering for Differential Twinax Contacts

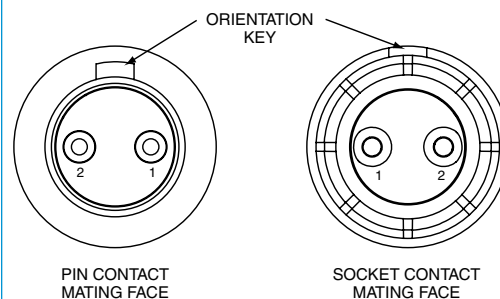

### TV-R Series, MIL-DTL-38999 Series III\* Connectors

| DIFFERENTIAL TWINAX CONTACTS FOR USE IN TV-R CONNECTORS                                                                                                                                                    |                                                              |                                 |                     |                 |                          |                                                                                     |                                                            |                                         |  |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|---------------------------------|---------------------|-----------------|--------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------|--|--|
| Cable                                                                                                                                                                                                      | Contact Part Number<br><br>(Termination Instruction Sheet)** |                                 | Impedance<br>(Ohms) | Contact<br>Size | Electrical<br>Protocol†† | Crimping Tools                                                                      |                                                            |                                         |  |  |
|                                                                                                                                                                                                            | Pin                                                          | Socket                          |                     |                 |                          | Inner<br>Contact                                                                    | Outer<br>Contact                                           |                                         |  |  |
| Tensolite 24463/05099X-8(LD), Thermax MX 100-24, Tensolite 24463/9P025X-2(LD), Thermax 12814, ST5M1284-003 (98 Ohm), 26463/70460X-2 (98 Ohm), PIC E10224, Fileca 2709-3, NF24T100-200C (Space), S280W502-1 | 21-033387-021<br>(L-2119-E)                                  | 21-033388-021<br>(L-2119-E)     | 100                 | 8               | Ethernet, USB            | M22520/2-01<br>with Positioner<br>M22520/2-37<br>or with Daniels<br>Positioner K709 | M22520/5-01<br>with Die Set<br>M22520/5-45<br>(Location A) |                                         |  |  |
| GORE GSC-05-827300-00 Tensolite 26453/03184X-2(LD) Thermax 956-626Z                                                                                                                                        | 21-033387-051***<br>(L-2119-AY)                              | 21-033388-051***<br>(L-2119-AY) |                     |                 |                          |                                                                                     |                                                            |                                         |  |  |
| Tensolite 26453/03184X-2(LD), Thermax 956-626Z, GORE GSC-05-827300-00 ASNE08072003-09                                                                                                                      | 21-033387-041<br>(L-2119-T)                                  | 21-033388-041<br>(L-2119-T)     |                     |                 |                          |                                                                                     |                                                            |                                         |  |  |
| 23460/05114X-2(LD), PIC E1024                                                                                                                                                                              | 21-033387-061<br>(L-2119-BH)                                 | 21-033388-061<br>(L-2119-BH)    |                     |                 |                          |                                                                                     |                                                            |                                         |  |  |
| Raychem 0026A0024, M17/176-00002 (77 Ohm)                                                                                                                                                                  | 21-033387-071<br>(L-2119-BJ)                                 | 21-033388-071<br>(L-2119-BJ)    |                     |                 |                          |                                                                                     |                                                            |                                         |  |  |
| JSFY11-24, Tensolite 24463/03220T-2(LD), Thermax 956-1T200                                                                                                                                                 | 21-033387-091<br>(L-2119-BT)                                 | 21-033388-091<br>(L-2119-BT)    |                     |                 |                          |                                                                                     |                                                            |                                         |  |  |
| S280W502-6, Tensolite 24463/9P026X-2(LD)                                                                                                                                                                   | 21-033387-101<br>(L-2119-AK)                                 | 21-033388-101<br>(L-2119-AK)    |                     |                 |                          |                                                                                     |                                                            |                                         |  |  |
| AXON P509782                                                                                                                                                                                               | 21-033387-131                                                | 21-033388-131                   | 100                 |                 |                          |                                                                                     |                                                            |                                         |  |  |
| Tensolite 26453/03184X-2(LD)                                                                                                                                                                               | 21-033387-151                                                | 21-033388-151                   | 100                 |                 |                          |                                                                                     |                                                            |                                         |  |  |
| Tensolite 26483/03071X-2(LD)                                                                                                                                                                               | 21-033387-031<br>(L-2119-AC)                                 | 21-033388-031<br>(L-2119-AC)    | 150                 |                 |                          |                                                                                     |                                                            |                                         |  |  |
| Tensolite 26483/03071X-2(LD)                                                                                                                                                                               | 21-033456-001<br>(L-2119-BX)†                                | 21-033457-001<br>(L-2119-BX)†   |                     |                 |                          |                                                                                     |                                                            | Fibre Channel, 1000 Base-CX<br>Ethernet |  |  |

| PCB DIFFERENTIAL TWINAX CONTACTS FOR USE IN TV-R CONNECTORS |                     |               |                     |                 |
|-------------------------------------------------------------|---------------------|---------------|---------------------|-----------------|
| PCB Quadrx<br>Contacts                                      | Contact Part Number |               | Impedance<br>(Ohms) | Contact<br>Size |
|                                                             | Pin                 | Socket        |                     |                 |
| PCB (.1035 Length)                                          | 21-033834-001       | 21-033835-001 | 100                 | 8               |
| PCB (.788 Length)                                           | 21-033834-031       | 21-033835-031 |                     |                 |
| PCB (.494 Length)                                           | 21-033834-041       | 21-033835-041 |                     |                 |
| PCB (.939 Length)                                           | 21-033834-051       | 21-033835-051 |                     |                 |
| PCB (.780 Length)                                           | 21-033834-061       | 21-033835-061 |                     |                 |
| PCB (.871 Length)                                           | 21-033834-071       | 21-033835-071 |                     |                 |
| PCB (.937 Length)                                           | 21-033834-081       | 21-033835-081 |                     |                 |
| PCB (1.035 Length)                                          | 21-033834-091       | 21-033835-091 |                     |                 |
| PCB (.843 Length)                                           | 21-033834-101       | 21-033835-101 |                     |                 |
| PCB (.806 Length)                                           | 21-033834-111       | 21-033835-111 |                     |                 |
| PCB (.908 Length)                                           | 21-033834-121       | 21-033835-121 |                     |                 |
| PCB (.530 Length)                                           | 21-033834-131       | 21-033835-131 |                     |                 |
| PCB (.819 Length)                                           | 21-033834-141       | 21-033835-141 |                     |                 |
| PCB (1.035 Length)                                          | 21-033834-021       | 21-033835-021 |                     |                 |
| PCB (1.035 Length) mates to<br>210-33456/57 series          | 21-033458-001       | 21-033457-001 | 150                 |                 |

Daniels crimping tools are available from Daniels Mfg. Corp. 6103 Anno Ave., Orlando, FL 32809

\* Requires modified connector to accommodate keyed contacts.

\*\*\* Indicated contact is vacuum degassed

†† Test reports available for indicated protocols.

Consult Amphenol Aerospace.

\*\*Termination instructions are packaged with each contact and can be found on-line at:  
[www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

† Consult Amphenol Aerospace for current release of this instruction sheet.

Indicated length given in chart at left is the distance from the rear of the contact retention shoulder to the tip of the PCB tails.



Note: it does not indicate stickout length when installed in D38999 connector.

### DIFFERENTIAL TWINAX CONTACT DATA

Contacts are inserted by hand. Refer to termination instructions listed.

Contacts are removed with a removal tool. Recommended tool is MIL-I-81969/14-06, Daniels DRK-264-8. Refer to termination instructions listed.

Finish of mating contact parts: Contact part numbers shown in the chart above are supplied gold plated per ASTM B488 Type II, Code C, .000050 min. thick over nickel plate per AMS-QQ-N-290, Class 2, .000030/.000150 thick.

# Compliant Quadrax Contacts and PC Tail

## Quadrax Contacts for Attachment to PC Boards

### General Description

#### Amphenol® Quadrax Contacts for Printed Circuit Board Attachment

- Available for MIL-DTL-38999 Series III Circular connectors with straight PC tail termination and with compliant pin termination. These provide the ideal solution for bringing high speed data transmission to the board.



Compliant Pin Quadrax and PC Tail Quadrax Contacts



MIL-DTL-38999, SERIES III CONNECTOR WITH PC TAIL CONTACTS. This arrangement has 33 size 22D and 2 Quadrax PC tail contacts.

MIL-DTL-38999, SERIES III CONNECTOR WITH PC TAIL CONTACTS. This arrangement has 8 Quadrax PC tail contacts.



#### Amphenol® Quadrax Contacts for Rectangular Board Level Connectors

- Incorporate the same size 8 Quadrax PCB contacts as used in circular 38999 connectors.


- Size 8 Quadrax Compliant contacts with hole diameters:
  - .025  $\pm$  .002 PTH Quadrax contact
  - .040  $\pm$  .003 PTH shell grounding
  - Accommodates backplane .125 inch min. thickness
- Consult Amphenol Aerospace for availability of additional connector configurations

##### 4 POSITION BOARD LEVEL CONNECTOR WITH QUADRAX



Compliant Pin Quadrax Board Level Connector

##### 8 POSITION BOARD LEVEL CONNECTOR WITH QUADRAX

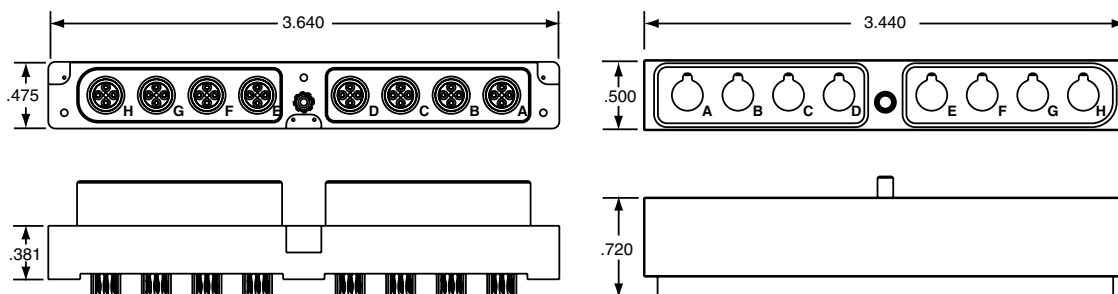

# Quadrax Transition Adapters and Differential Twinax Transition Adapters

## General Description


**Amphenol® Transition Adapters** - Are used to facilitate launching of controlled impedance signals to printed circuit boards. Amphenol provides transition adapters in both contact types:

- Quadrax transition adapters, 90° or straight receptacles threaded or cable to board style
- Differential twinax transition adapters, 90° or straight receptacles, threaded or cable to board style



90° Quadrax Receptacle and Plug Transition Adapter

### Suggested Numbering for Transition Adapters with Quadrax Contacts

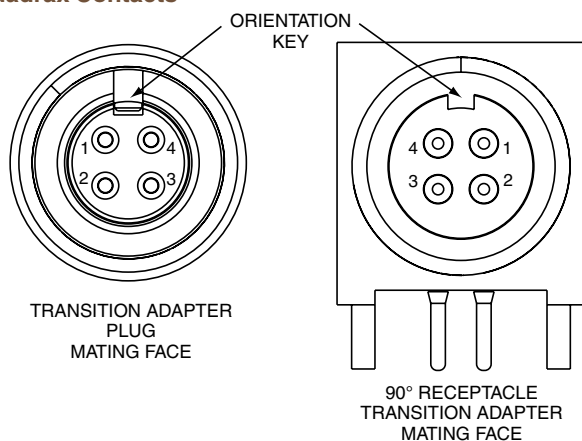


90° Differential Twinax Receptacle and Plug Transition Adapter

### TRANSITION ADAPTER DATA

Finish of mating contact parts: Contacts are supplied gold plated per ASTM B488 Type II, Code C, .000050 min. thick over nickel plate per AMS-QQ-N-290, Class 2, .000030/.000150 thick.

QUADRAX  
TRANSITION  
ADAPTER PLUG

QUADRAX  
TRANSITION ADAPTER  
90 DEGREE RECEPTACLE

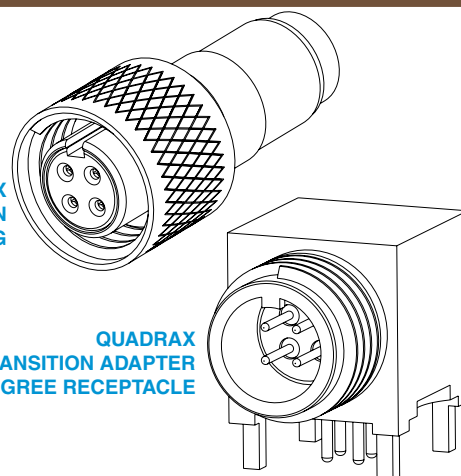

### ELECTRICAL PROTOCOLS FOR QUADRAX TRANSITION ADAPTERS

| Part Number   |                           | Impedance (Ohms) | Electrical Protocol††       |
|---------------|---------------------------|------------------|-----------------------------|
| Plug          | Receptacle                |                  |                             |
| 21-033836-031 |                           | 100              | Ethernet, gigabit Ether     |
| 21-033836-041 |                           |                  | Ethernet, gigabit Ether     |
| 21-033836-051 |                           |                  | Ethernet, gigabit Ether     |
| 21-033836-061 |                           |                  | Ethernet, gigabit Ether     |
|               | 21-033837-081 (90 degree) |                  |                             |
|               | 21-033837-091 (90 degree) |                  |                             |
|               | 21-033837-041 (90 degree) |                  |                             |
|               | 21-033837-051 (straight)  |                  | Ethernet, gigabit Ether     |
|               | 21-033837-061 (90 degree) |                  |                             |
|               | 21-033837-141 (90 degree) |                  |                             |
| 21-033837-101 |                           | 150              | 1000 Base CX, Fibre channel |
| 21-033836-021 |                           |                  | 1000 Base CX, Fibre channel |
|               | 21-033837-021 (90 degree) |                  |                             |
|               | 21-033837-211 (jam nut)   |                  |                             |
|               | 21-033837-031 (straight)  |                  |                             |
|               | 21-033837-071 (90 degree) |                  |                             |
| 21-033837-111 |                           |                  |                             |

### ELECTRICAL PROTOCOLS FOR DIFFERENTIAL TWINAX TRANSITION ADAPTERS

| Part Number    |                            | Impedance (Ohms) | Electrical Protocol†† |
|----------------|----------------------------|------------------|-----------------------|
| Plug           | Receptacle                 |                  |                       |
| 21-033832-81   |                            | 100              | Ethernet              |
| 21-033832-21   |                            |                  | Ethernet              |
|                | 21-033833-021 (90 degree)  |                  |                       |
|                | 21-033833-031 (90 degree)  |                  |                       |
|                | 21-033833-151 (90 degree)  |                  |                       |
| 21-033832-111† |                            |                  |                       |
|                | 21-033833-161† (90 degree) |                  |                       |
|                | 21-033833-171† (90 degree) |                  |                       |
|                | 21-033833-091 (90 degree)  |                  |                       |
|                | 21-033833-051 (90 degree)  |                  |                       |
|                | 21-033833-141 (90 degree)  |                  |                       |
| 21-033832-91   |                            | 150              |                       |
|                | 21-033833-111 (90 degree)  |                  |                       |
|                | 21-033833-181† (90 degree) |                  |                       |
|                | 21-033833-101 (90 degree)  |                  |                       |

† Consult Amphenol Aerospace for current release of this adapter.

†† Test reports available for indicated protocols; consult Amphenol Aerospace.

# Quadrax Transition Adapters

for Attachment to PC Boards

## Application Data

### 100 OHM QUADRAX TRANSITION ADAPTERS FOR LAUNCHING CONTROLLED IMPEDANCE SIGNALS TO PC BOARDS

| Quadrax Type Adapter/<br>Cable or PCB Tail Length                                                                                                                                               | Illustration of Adapter                                                             | Part Number<br>(Termination Instruction Sheet)** |                               | Impedance<br>(Ohms) | Mating<br>Thread<br>Size | Crimping Tools                                                                            |                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------|-------------------------------|---------------------|--------------------------|-------------------------------------------------------------------------------------------|------------------------------------------------------------|
|                                                                                                                                                                                                 |                                                                                     | Plug                                             | Receptacle                    |                     |                          | Inner Contact                                                                             | Outer Contact                                              |
| Quadrax Plug Adapter/<br>Tensolite NF24Q100, NF24Q100-01<br>24443/9P025X-4(LD) S280W502-4<br>24443/03130X-4(LD) Thermax<br>956-4TN                                                              |    | 21-033836-031<br>(L-2119-U)                      |                               | 100                 | .375                     | M22520/2-01<br>with Positioner<br>M22520/2-37<br>or with<br>Daniels Positioner<br>K709    | M22520/5-01<br>with Die Set<br>M22520/5-45<br>(Location A) |
| Quadrax Plug Adapter/<br>Tensolite NF22Q100, NF22Q100-01,<br>Thermax 956-5, Tensolite<br>24450/030894-4(LD) Draka Fileca<br>F-4704-5                                                            |                                                                                     | 21-033836-041<br>(L-2119-W)†                     |                               |                     |                          |                                                                                           |                                                            |
| Quadrax Plug Adapter/<br>Draka Fileca F-4703-3, F-4704-4                                                                                                                                        |                                                                                     | 21-033836-051<br>(L-2119-Y)                      |                               |                     |                          |                                                                                           |                                                            |
| Quadrax Plug Adapter/<br>NF26Q100                                                                                                                                                               |                                                                                     | 21-033836-061<br>(L-2119-AM)†                    |                               |                     |                          |                                                                                           |                                                            |
| Gore RCN8724 (30 awg)                                                                                                                                                                           |                                                                                     | 21-033836-071                                    |                               |                     |                          |                                                                                           |                                                            |
| Gore ACN1042 (28 awg) Gore<br>RCN8973                                                                                                                                                           |                                                                                     | 21-033836-101                                    |                               |                     |                          |                                                                                           |                                                            |
| Quadrax Plug Adapter/<br>Hexnut with Lock Wire Holes<br>Tensolite NF24Q100-01                                                                                                                   |    | 21-033836-081                                    |                               |                     |                          |                                                                                           |                                                            |
| Quadrax Receptacle Straight Adapter<br>in-line jam nut (threaded)/<br>GSC-10-8273900                                                                                                            |   |                                                  | 21-033837-081<br>(L-2119-AR)† |                     |                          |                                                                                           |                                                            |
| Quadrax Receptacle Straight Adapter<br>in-line jam nut (threaded) Tensolite<br>NF24Q100-01                                                                                                      |                                                                                     |                                                  | 21-033837-261                 |                     |                          |                                                                                           |                                                            |
| Quadrax Receptacle Straight Adapter<br>in-line (threaded)/NF24Q100<br>Tensolite NF24Q100-01, Tensolite<br>24443/9P025X-4 (LD), S280W502-4,<br>Tensolite 24443/03130X-4 (LD),<br>Thermax 956-4TN |                                                                                     |                                                  | 21-033837-091<br>(L-2119-BL)  |                     |                          |                                                                                           |                                                            |
| PCB Quadrax Receptacle 90 Degree<br>Adapter/Tail Length .110                                                                                                                                    |                                                                                     |                                                  | 21-033837-041                 |                     |                          |                                                                                           |                                                            |
| PCB Quadrax Receptacle 90 Degree<br>Adapter/Tail Length .200                                                                                                                                    |  |                                                  | 21-033837-201                 |                     |                          | NA                                                                                        | NA                                                         |
| PCB Quadrax Receptacle Straight<br>Adapter/Tail Length .110                                                                                                                                     |  |                                                  | 21-033837-051                 |                     |                          |                                                                                           |                                                            |
| PCB Quadrax Receptacle Straight<br>Adapter/Special Tail Length (.200)                                                                                                                           |                                                                                     |                                                  | 21-033837-061                 |                     |                          |                                                                                           |                                                            |
| Straight adapter Tail Length .175                                                                                                                                                               |                                                                                     |                                                  | 21-033837-131                 |                     |                          |                                                                                           |                                                            |
| Quadrax Receptacle 90 degree<br>Adapter with cable to board/<br>NF24Q100 Tail Length .110                                                                                                       |  |                                                  | 21-033837-141<br>(L-2119-BB)† | 100                 |                          | M22520/2-01<br>with Positioner<br>M22520/2-37<br>or with<br>Daniels<br>Positioner<br>K709 | M22520/5-01<br>with Die Set<br>M22520/5-45<br>(Location A) |
| Quadrax Receptacle 90 degree<br>Adapter with cable to board/<br>ABS1503KD24 Tail Length .110<br>Tensolite NF22Q100-01 Thermax<br>956-5 Draka Fileca F4704-5                                     |                                                                                     |                                                  | 21-033837-231                 |                     |                          |                                                                                           |                                                            |
| Quadrax Receptacle Straight Adapter<br>with cable to board/<br>NF24Q100, NF24Q100-01 Tail<br>Length .195                                                                                        |  |                                                  | 21-033837-101<br>(L-2119-AN)  |                     |                          |                                                                                           |                                                            |
| Quadrax receptacle straight adapter<br>w/ cable to board, Tail length .195<br>Draka Fileca F-4703-3, F-4703-4                                                                                   |                                                                                     |                                                  | 21-033837-241                 |                     |                          |                                                                                           |                                                            |

Daniels crimping tools are available from Daniels Mfg. Corp. 6103 Anno Ave., Orlando, FL 32809

\*\*Termination instructions are packaged with each contact and can be found on-line at: [www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)




† Consult Amphenol Aerospace for current release of this adapter and instruction sheet if applicable.

See electrical protocols for transition adapters on page 388.

# Quadrax Transition Adapters

## For Attachment to PC Boards

### Application Data

| 150 OHM QUADRIX TRANSITION ADAPTERS<br>FOR LAUNCHING CONTROLLED IMPEDANCE SIGNALS TO PC BOARDS                      |                                                                                   |                                                                                    |                               |                     |                          |                                               |                                                            |  |
|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------|---------------------|--------------------------|-----------------------------------------------|------------------------------------------------------------|--|
| Quadrax Type Adapter/<br>Cable or PCB Tail Length                                                                   | Illustration of Adapter                                                           | Part Number<br>(Termination Instruction Sheet)**                                   |                               | Impedance<br>(Ohms) | Mating<br>Thread<br>Size | Crimping Tools                                |                                                            |  |
|                                                                                                                     |                                                                                   | Plug                                                                               | Receptacle                    |                     |                          | Inner Contact                                 | Outer Contact                                              |  |
| Quadrax Plug Adapter/<br>Tensolite 26473/02006X-4(LD), Gore<br>RCN8328                                              |  | 21-033836-021<br>(L-2119-S)                                                        |                               | 150                 | .375                     | M22520/2-01<br>with Positioner<br>M22520/2-34 | NA                                                         |  |
| PCB Quadrax Receptacle 90 Degree<br>Adapter/Tail Length .110                                                        |                                                                                   |                                                                                    | 21-033837-021                 |                     |                          | NA                                            |                                                            |  |
| PCB Receptacle 90 Degree Adapter/<br>Tail Length .200                                                               |                                                                                   |                                                                                    | 21-033837-251                 |                     |                          |                                               |                                                            |  |
| PCB Quadrax Receptacle Straight<br>Adapter/Tail Length .110                                                         |                                                                                   |   | 21-033837-031                 |                     |                          |                                               |                                                            |  |
| Quadrax Receptacle Straight Adapter<br>in-line Jam Nut (threaded) Tensolite<br>26473/02006X-4 (LD), Gore<br>RCN8328 |  |                                                                                    | 21-033837-211<br>(L-2119-BY)  | 150                 |                          |                                               |                                                            |  |
| Quadrax Receptacle 90 degree<br>Adapter with cable to board/<br>Tensolite 26473/02006X-4                            |                                                                                   |   | 21-033837-071<br>(L-2119-AI)† |                     |                          | M22520/2-01<br>with Positioner<br>M22520/2-34 | M22520/5-01<br>with Die Set<br>M22520/5-45<br>(Location A) |  |
| Quadrax Receptacle Straight Adapter<br>with cable to board/<br>Tensolite 26473/02006X-4 (LD)                        |                                                                                   |  | 21-033837-111<br>(L-2119-AP)  |                     |                          |                                               |                                                            |  |

Daniels crimping tools are available from Daniels Mfg. Corp. 6103 Anno Ave., Orlando, FL 32809

\*\*Termination instructions are packaged with each contact and can be found on-line at: [www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

† Consult Amphenol Aerospace for current release of this adapter and instruction sheet if applicable.

See electrical protocols for transition adapters on page 388.

# Differential Twinax Transition Adapters for Attachment to PC Boards - Application Data

| 100 OHM DIFFERENTIAL TWINAX TRANSITION ADAPTERS<br>FOR LAUNCHING CONTROLLED IMPEDANCE SIGNALS TO PC BOARDS         |                         |                                                  |                              |                     |                          |                                               |                                                            |                |
|--------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------------------------------|------------------------------|---------------------|--------------------------|-----------------------------------------------|------------------------------------------------------------|----------------|
| Differential Twinax Type Adapter/<br>Cable or PCB Tail Length                                                      | Illustration of Adapter | Part Number<br>(Termination Instruction Sheet)** |                              | Impedance<br>(Ohms) | Mating<br>Thread<br>Size | Crimping Tools                                |                                                            |                |
|                                                                                                                    |                         | Plug                                             | Receptacle                   |                     |                          | Inner Contact                                 | Outer Contact                                              |                |
| Differential Twinax Plug Adapter/<br>M17/176-00002 (77 ohms)<br>24463/9P026X-2                                     |                         | 21-033832-081<br>(L-2119-AJ)                     |                              | 100                 | .3125                    | M22520/2-01<br>with Positioner<br>M22520/2-34 | M22520/5-01<br>with Die Set<br>M22520/5-05<br>(Location B) |                |
| Differential Twinax Plug Adapter/<br>Tensolite 24463/9P025X-2(LD)<br>10-646060                                     |                         | 21-033832-021<br>(L-2119-P)                      |                              |                     |                          |                                               |                                                            |                |
| PCB Differential Twinax Receptacle 90<br>Degree Adapter/ Tail Length .110                                          |                         |                                                  |                              |                     |                          | 21-033833-021                                 | N/A                                                        | N/A            |
| PCB Differential Twinax Receptacle<br>Straight Adapter/ Tail Length .110                                           |                         |                                                  |                              |                     |                          | 21-033833-031                                 |                                                            |                |
| PCB Differential Twinax Receptacle<br>Straight Adapter/ Tail Length .165                                           |                         |                                                  | 21-033833-151                |                     |                          |                                               |                                                            |                |
| Differential Twinax Plug Adapter/<br>Tensolite CAN22TDT120 (120 Ohm)                                               |                         | 21-033832-111†                                   |                              | 100                 | .375                     | M22520/2-01<br>with Positioner<br>M22520/2-34 | M22520/5-01<br>with Die Set<br>M22520/5-45<br>(Location A) |                |
| PCB Differential Twinax Receptacle 90<br>degree Adapter/Tail Length .283                                           |                         |                                                  |                              |                     |                          |                                               |                                                            | 21-033833-161† |
| PCB Differential Twinax Receptacle<br>Straight Adapter/Tail Length .283                                            |                         |                                                  |                              |                     |                          | 21-033833-171†                                |                                                            |                |
| Differential Twinax Receptacle 90<br>degree Adapter (low profile) with cable<br>to board/ Tensolite 24463/9P026X-2 |                         |                                                  | 21-033833-091<br>(L-2119-AF) | 100                 | N/A                      | M22520/2-01<br>with Positioner<br>M22520/2-34 | M22520/5-01<br>with Die Set<br>M22520/5-45<br>(Location A) |                |
| Differential Twinax Receptacle 90<br>degree Adapter with cable to board/<br>Tensolite 24463/9P025X-2               |                         |                                                  | 21-033833-051<br>(L-2119-V)  |                     |                          |                                               |                                                            |                |
| Differential Twinax Receptacle 90<br>degree Adapter with cable to board/<br>Tensolite 24463/9P025X-2               |                         |                                                  | 21-033833-141<br>(L-2119-BU) |                     |                          |                                               |                                                            |                |

| 150 OHM DIFFERENTIAL TWINAX TRANSITION ADAPTERS<br>FOR LAUNCHING CONTROLLED IMPEDANCE SIGNALS TO PC BOARDS |                         |                                                  |                               |                     |                          |                                               |                                                            |  |
|------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------------------------------|-------------------------------|---------------------|--------------------------|-----------------------------------------------|------------------------------------------------------------|--|
| Differential Twinax Type Adapter/<br>Cable or PCB Tail Length                                              | Illustration of Adapter | Part Number<br>(Termination Instruction Sheet)** |                               | Impedance<br>(Ohms) | Mating<br>Thread<br>Size | Crimping Tools                                |                                                            |  |
|                                                                                                            |                         | Plug                                             | Receptacle                    |                     |                          | Inner Contact                                 | Outer Contact                                              |  |
| Differential Twinax Plug<br>Adapter/<br>Tensolite 26483/03071X-2                                           |                         | 21-033832-091<br>(L-2119-BR)                     |                               | 150                 | .375                     | M22520/2-01<br>with Positioner<br>M22520/2-34 | M22520/5-01<br>with Die Set<br>M22520/5-45<br>(Location A) |  |
| PCB Differential Twinax<br>Receptacle 90 Degree Adapter/<br>Tail Length .110                               |                         |                                                  | 21-033833-111                 |                     |                          | N/A                                           | N/A                                                        |  |
| PCB Differential Twinax<br>Receptacle Straight Adapter/<br>Tail Length .110                                |                         |                                                  | 21-033833-181†                |                     |                          | N/A                                           | N/A                                                        |  |
| Differential Twinax Receptacle<br>90 degree Adapter with cable to<br>board/<br>Tensolite 26483/03071X-2    |                         |                                                  | 21-033833-101<br>(L-2119-BM)† | 150                 | N/A                      | M22520/2-01<br>with Positioner<br>M22520/2-34 | M22520/5-01<br>with Die Set<br>M22520/5-45<br>(Location A) |  |

\*\*Termination instructions are packaged with each contact and can be found on-line at:  
[www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

† Consult Amphenol Aerospace for current release of this adapter and instruction  
sheet if applicable. See electrical protocols for transition adapters on page 388.

Amphenol now offers differential twinax transition adapters in smaller sizes that provide matched impedance interconnection to PCB boards. Our unique push-pull quick disconnect adapter design offers:

- Advantages over traditional threaded type adapters
- Launching of controlled impedance (100 ohm) signals for high speed twinax contacts with push-pull quick disconnect coupling
- Rugged construction, 100+ mating cycles for reliable and secure data transmission
- Miniature size for tighter spacing on boards
- Intermountability with existing threaded solutions having the same PCB tail footprint

Styles include:

- Plug - standard length and extended length options
- Straight PCB receptacle, 90° PCB receptacle
- Two jam nut receptacle styles - both with standard length and extended length options
- Bushing assembly 90° adapter (used with plug or jam nut receptacle)



**Micro D-Twinax Transition Adapters**  
Shown right: Straight receptacle mated to plug  
Shown left: Jam nut and 90° receptacles

### Micro D-Twinax Transition Adapter Plug



| Part Number     | Cable Type*                                    | Impedance (Ohms) |
|-----------------|------------------------------------------------|------------------|
| 21-033832-151   | Calmont 3007-1923-12-7                         | 100              |
| 21-033832-161   | Tensolite 26453/03184X-2LD<br>Thermax 956-626Z |                  |
| 21-033832-121** | Calmont 3007-1923-12-7                         |                  |

\* See page 3 for information on other cable terminations.

\*\* Same as -151 with extended ferrule for added cable support

### Micro D-Twinax Transition Adapter Straight PCB Receptacle




| Part Number   | Impedance (Ohms) |
|---------------|------------------|
| 21-033833-191 | 100              |

All dimensions for reference only.

# Micro D-Twinax Transition Adapters

## Push-Pull Quick disconnect Interconnects

### Micro D-Twinax Transition Adapter 90° PCB Receptacle

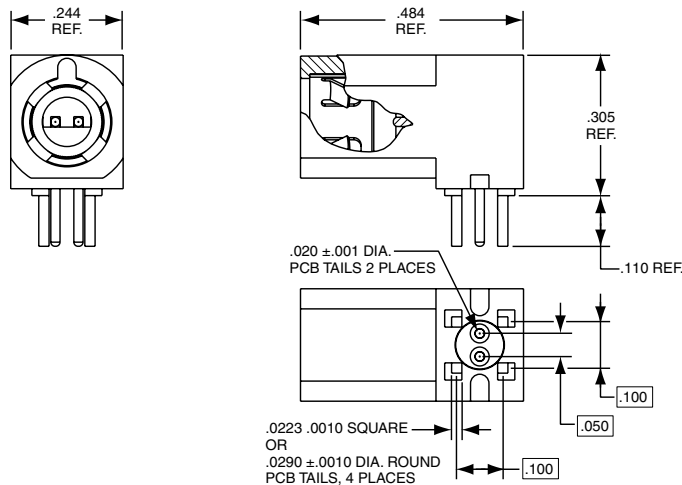

90 Degree receptacle  
mated to plug


| Part Number          | Impedance (Ohms) |
|----------------------|------------------|
| 21-033833-201        | 100              |
| 21-033833-281        |                  |
| .140 PCB tail length |                  |

All dimensions for reference only.

### Micro D-Twinax Transition Adapter Jam Nut Receptacles

#### Jam Nut Receptacle, Style 1

Smaller diameter front shell requires a smaller mounting D-hole dimension in panel.

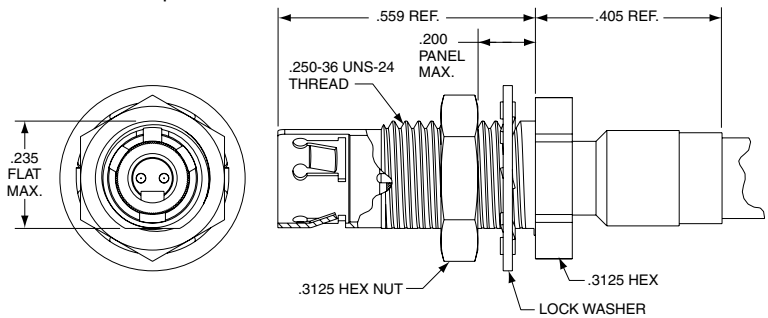

Jam nut receptacle, Style 1,  
mated to plug


| Part Number     | Cable Type*                                    | Impedance (Ohms) |
|-----------------|------------------------------------------------|------------------|
| 21-033833-241   | Calmont 3007-1923-12-7                         | 100              |
| 21-033833-261   | Tensolite 26453/03184X-2LD<br>Thermax 956-626Z |                  |
| 21-033833-211** | Calmont 3007-1923-12-7                         |                  |

\* See page 3 for information on other cable terminations.

\*\* Same as -241 with extended ferrule for added cable support

#### Jam Nut Receptacle, Style 2

Has a larger diameter front shell than Style 1. Requires a larger mounting D-hole in panel.

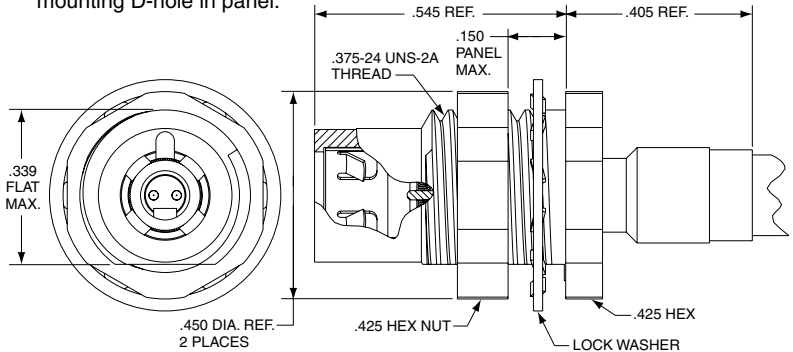

Jam nut receptacle, Style 2,  
mated to plug

| Part Number     | Cable Type*                                    | Impedance (Ohms) |
|-----------------|------------------------------------------------|------------------|
| 21-033833-251   | Calmont 3007-1923-12-7                         | 100              |
| 21-033833-271   | Tensolite 26453/03184X-2LD<br>Thermax 956-626Z |                  |
| 21-033833-231** | Calmont 3007-1923-12-7                         |                  |

\* See page 3 for information on other cable terminations.

\*\* Same as -251 with extended ferrule for added cable support

### 90° Bushing Assemblies for use with Wired Micro D Transition Adapters

To facilitate tight cable bend requirements, Amphenol provides 90° bushing assemblies which convert straight plug and receptacle wired adapters into 90° wired adapters.



#### 90° Bushing Assembly Part Number

21-033425-201

90° bushing assembly is ordered separately.  
Adapters are not included with bushing assembly.




90° Bushing Assembly with  
Jam Nut Micro D Transition Adapter

Illustrations below show how the 90° bushing assembly attaches to either a plug or a jam nut receptacle adapter.



90° Bushing Assembly with Wired Micro D Plug  
Transition Adapter

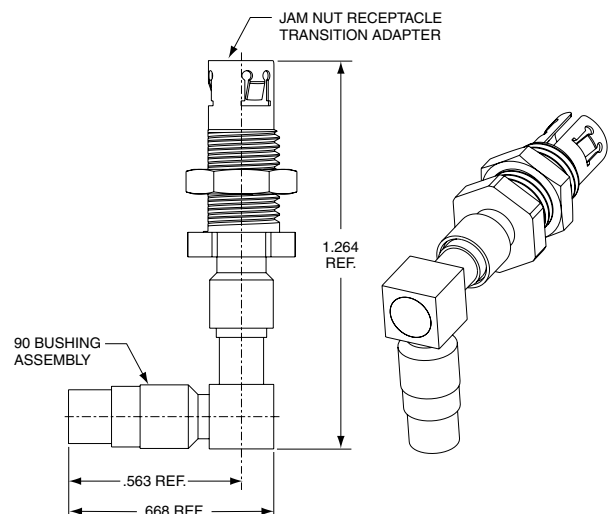

90° Bushing Assembly with Wired Micro D Jam  
Nut Receptacle Transition Adapter

All dimensions for reference only.

Amphenol transition adapters are capable of terminating to additional 100 Ohm cables beyond what are listed in the charts on pages 1 and 2. Cables need to have the following dimensions:

- .0210/.011 Dia. stranded center conductor (26/30 AWG)
- .045 Dia. max. inner wire insulation
- .115 Dia. max. outer braid (round type preferred)
- .150 Dia. max. jacket

Consult Amphenol Aerospace for other cable termination possibilities.





# Insert Arrangements - MIL-DTL-38999, Series III

## Incorporating Quadrax & Differential Twinax Contacts








This illustrated listing represents the most readily available patterns incorporating quadrax and differential twinax contacts within D38999, Series III connectors. If you require other arrangements than what are shown here, consult Amphenol for further availability. In most cases, unless otherwise stated, size 8 cavities can be filled with quadrax or differential twinax contacts. Arrangements can be mixed with any size 8 coax, and/or concentric twinax or triax contacts.

### Front face of pin inserts illustrated






| Insert Arrangement | 9-5      | 17-2     | 17-22 | 17-52                      | 17-60 |
|--------------------|----------|----------|-------|----------------------------|-------|
| Number of Contacts | 1        | 38       | 2     | 2                          | 8     |
| Contact Size       | 8        | 22D      | 12    | 8                          | 22D   |
|                    | Grounded | 8 Twinax | 8     | Meets Boeing Specification | 8     |



| Insert Arrangement | 19-18 | 19-31 | 19-AB | 19-AD | 21-75 |
|--------------------|-------|-------|-------|-------|-------|
| Number of Contacts | 14    | 12    | 4     | 16    | 4     |
| Contact Size       | 22D   | 22D   | 8     | 20    | 8     |
|                    | 8     | 12    |       | 8     |       |

Note: 19-AB same as 19-18 but no 22D contacts. Ground plane only.





| Insert Arrangement | 21-79 | 23-6 | 25-7 |
|--------------------|-------|------|------|
| Number of Contacts | 17    | 6    | 97   |
| Contact Size       | 22D   | 8    | 22D  |



### CONTACT LEGEND



Front face of pin inserts illustrated



| Insert Arrangement | 25-8 |  |  | 25-17 |   |  | 25-20 |    |   |    |
|--------------------|------|--|--|-------|---|--|-------|----|---|----|
| Number of Contacts | 8    |  |  | 36    | 6 |  | 10    | 13 | 3 | 4  |
| Contact Size       | 8    |  |  | 22D   | 8 |  | 20    | 16 | 8 | 12 |



| Insert Arrangement | 25-26 |    |    | 25-46 |    |   | 25-62 |   |
|--------------------|-------|----|----|-------|----|---|-------|---|
| Number of Contacts | 16    | 5  | 41 | 40    | 4  | 2 | 8     | 4 |
| Contact Size       | 20    | 12 | 8  | 20    | 16 | 8 | 16    | 8 |

Ground plane only



# How to Order 38999, Series III Circular With Quadrax 100 Ohm Contacts

Amphenol Tri-Start, 38999 Series III\* Connectors can be ordered with the following popularly used Quadrax contacts:  
100 ohm quadrax 21-033385-051 socket contacts  
100 ohm quadrax 21-033384-051 pin contacts  
Use the following coded number ordering procedure :

| 1.             | 2.         | 3.            | 4.                                 | 5.           | 6.                           |
|----------------|------------|---------------|------------------------------------|--------------|------------------------------|
| Connector Type | Shell Type | Service Class | Shell Size –<br>Insert Arrangement | Contact Type | Alternate Keying<br>Position |
| <b>TVP</b>     | <b>00</b>  | <b>RQW</b>    | <b>21–75</b>                       | <b>P</b>     | <b>B</b>                     |

For ordering of connectors with any other quadrax contacts or differential twinax contacts, please consult Amphenol Aerospace for part numbers.

## Step 1. Select a Connector Type

|             |                                                     |
|-------------|-----------------------------------------------------|
| <b>TV</b>   | Tri-Start Series Connector with metal shells        |
| <b>TVP</b>  | Back panel mounted receptacle with metal shells     |
| <b>CTV</b>  | Tri-Start Series Connector with composite shells    |
| <b>CTVP</b> | Back panel mounted receptacle with composite shells |

## Step 2. Select a Shell Style

|           |                                                                                             |
|-----------|---------------------------------------------------------------------------------------------|
| <b>00</b> | Wall mount receptacle                                                                       |
| <b>02</b> | Box mount receptacle available only with the PCB tails and epoxy backfilled (non-removable) |
| <b>06</b> | Straight plug                                                                               |
| <b>07</b> | Jam nut receptacle                                                                          |

## Step 3. Select a Service Class with Quadrax

|             |                                                     |
|-------------|-----------------------------------------------------|
| <b>RQF</b>  | Electroless nickel plated                           |
| <b>RGQF</b> | Electroless nickel plated ground plane              |
| <b>RQW</b>  | Olive drab cadmium plate                            |
| <b>RGQW</b> | Olive drab cadmium plated ground plane              |
| <b>RQB</b>  | NiAlBronze                                          |
| <b>RGQB</b> | NiAlBronze ground plane                             |
| <b>RQK</b>  | Corrosion resistance stainless steel                |
| <b>RGQK</b> | Stainless steel ground plane                        |
| <b>QDT</b>  | Durmalon plated, Nickel-PTFE alternative to cadmium |
| <b>GQDT</b> | Groundplane Durmalon                                |

## Step 4. Select a Shell Size and Insert Arrangement

See insert arrangements available with quadrax contacts on preceding pages. Shell Size and Insert Arrangements are together in one chart. First number represents Shell Size, second number is the Insert Arrangement

## Step 5. Select Contact Type


|          |                 |
|----------|-----------------|
| <b>P</b> | Pin contacts    |
| <b>S</b> | Socket contacts |

## Step 6. Select an Alternate Keying Position

Locksmith keying—rotation of minor keys. See Series III Alternate Positions below “N” not required for normal position

### Tri-Start Alternate Positions

A plug with a given rotation letter will mate with a receptacle with the same rotation letter. The angles for a given connector are the same whether it contains pins or sockets. Inserts are not rotated in conjunction with the master key/keyway.

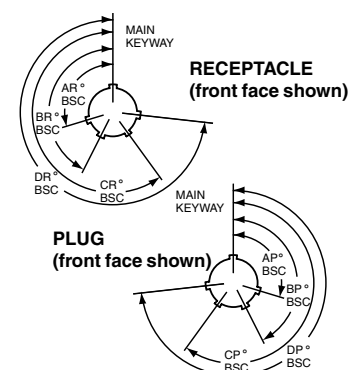

| Shell Size         | Key & Keyway<br>Arrangement<br>Identification<br>Letter | AR°<br>or<br>AP°<br>BSC | BR°<br>or<br>BP°<br>BSC | CR°<br>or<br>CP°<br>BSC | DR°<br>or<br>DP°<br>BSC |
|--------------------|---------------------------------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| 9                  | N                                                       | 105                     | 140                     | 215                     | 265                     |
|                    | A                                                       | 102                     | 132                     | 248                     | 320                     |
|                    | B                                                       | 80                      | 118                     | 230                     | 312                     |
|                    | C                                                       | 35                      | 140                     | 205                     | 275                     |
|                    | D                                                       | 64                      | 155                     | 234                     | 304                     |
|                    | E                                                       | 91                      | 131                     | 197                     | 240                     |
| 11, 13,<br>and 15  | N                                                       | 95                      | 141                     | 208                     | 236                     |
|                    | A                                                       | 113                     | 156                     | 182                     | 292                     |
|                    | B                                                       | 90                      | 145                     | 195                     | 252                     |
|                    | C                                                       | 53                      | 156                     | 220                     | 255                     |
|                    | D                                                       | 119                     | 146                     | 176                     | 298                     |
|                    | E                                                       | 51                      | 141                     | 184                     | 242                     |
| 17 and 19          | N                                                       | 80                      | 142                     | 196                     | 293                     |
|                    | A                                                       | 135                     | 170                     | 200                     | 310                     |
|                    | B                                                       | 49                      | 169                     | 200                     | 244                     |
|                    | C                                                       | 66                      | 140                     | 200                     | 257                     |
|                    | D                                                       | 62                      | 145                     | 180                     | 280                     |
|                    | E                                                       | 79                      | 153                     | 197                     | 272                     |
| 21, 23,<br>and 25  | N                                                       | 80                      | 142                     | 196                     | 293                     |
|                    | A                                                       | 135                     | 170                     | 200                     | 310                     |
|                    | B                                                       | 49                      | 169                     | 200                     | 244                     |
|                    | C                                                       | 66                      | 140                     | 200                     | 257                     |
|                    | D                                                       | 62                      | 145                     | 180                     | 280                     |
|                    | E                                                       | 79                      | 153                     | 197                     | 272                     |
| 25L, 33,<br>and 37 | N                                                       | 80                      | 142                     | 188                     | 293                     |
|                    | A                                                       | 135                     | 170                     | 188                     | 310                     |
|                    | B                                                       | 49                      | 169                     | 188                     | 244                     |
|                    | C                                                       | 66                      | 140                     | 188                     | 257                     |
|                    | D                                                       | 62                      | 145                     | 188                     | 280                     |
|                    | E                                                       | 79                      | 153                     | 188                     | 272                     |

\* The incorporation of quadrax or differential twinax contacts requires a modified connector to accommodate keyed contacts.

For more information on Tri-Start, MIL-DTL-38999 Series III connectors see the section in this catalog.

**Amphenol® Coaxial Contacts** - Offer several advantages for reliable interconnection and continued performance:

- Large crimping area assures low contact resistance and high tensile strength
- Back insulator positively captivates inner contact against axial loads
- Front insulator provides closed entry for socket inner contact
- Recessed inner contact is protected
- Outer contact has rugged wall section for durability

**TYPICAL SUBMINIATURE COAX SOCKET CONTACT** has socket outer contact with a pin inner contact

**TYPICAL SUBMINIATURE COAX PIN CONTACT** has pin outer contact with a socket inner contact



MIL-DTL-38999 LJT-R, JT-R, TV-R, SJT-R MS Type,  
Coax Size 12 Socket Assembled Contact




MIL-DTL-38999 LJT-R, JT-R, TV-R, SJT-R MS Type,  
Coax Size 16 Pin Unassembled Contact



MIL-DTL-38999 LJT-R, JT-R, TV-R, SJT-R MS Type,  
Coax Size 8 Pin Assembled Contact



MIL-DTL-38999 LJT-R, JT-R, TV-R, SJT-R MS Type,  
Coax Size 8 Socket Unassembled Contact

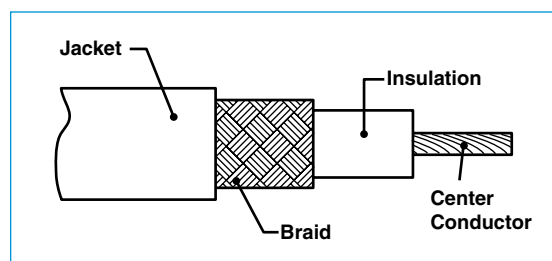

Cable Illustration - Coax Contact

### Coax Contacts are gold plated, crimp termination

Finish of mating contacts parts: supplied with 0.000050 min. gold over nickel on mating parts. Other finishes are available; consult Amphenol for further information.

#### Coax Size 12 & 16 Contact Performance:

- Typical VSWR: 1.5:1 maximum up to 700 MHz and 500 MHz respectively, for properly cabled size 12 and 16 coaxial contacts in the M38999 Series I, II and III
- Insulation Resistance: 5,000 megohms minimum @ 25°C
- Dielectric Withstanding Voltage:  
Size 12: 1,000 VAC Rms @ sea level, 250 VAC Rms @ 50,000 ft.  
Size 16: 800 VAC Rms @ sea level, 250 VAC Rms @ 50,000 ft.
- Contact Resistance: See MIL-C-39029/27, /28, /75, /76, /77, /78

#### Coax Size 8 Contact Performance:

- Typical VSWR when terminated to specified 50 ohm cable: 1.5:1 maximum up to 3 GHz (excluding 21-033101/2-27)
- Insulation Resistance: 5,000 megohms minimum @ 25°C
- Dielectric Withstanding Voltage:  
1,300 VAC Rms @ sea level, 250 VAC Rms @ 50,000 ft.
- Contact Resistance: See MIL-C-39029/59, /60

# Coaxial Contacts for MIL-DTL-38999

## Application Data

### JT-R Series, MIL-DTL-38999 Series II, SAE AS39029 (27, 28, 76, 78)

| COAX CONTACTS FOR USE IN JT-R CONNECTORS                                                                                                                     |                                                          |                                                 |              |                                                                                        |                                                                                                              |                                            |                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------|--------------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------------------------|
| Cable                                                                                                                                                        | Contact Part Number<br>(Termination Instruction Sheet)** |                                                 | Contact Size | Crimping Tools                                                                         |                                                                                                              | Installation Tools                         |                                            |
|                                                                                                                                                              | Pin                                                      | Socket                                          |              | Inner Contact                                                                          | Crimp Ferrule                                                                                                | Insertion                                  | Removal                                    |
| RG-178B/U, RG-196A/U                                                                                                                                         | 21-033122-564<br>(M39029/76-425)<br>(L-2035-AG)          | 21-033121-564<br>(M39029/78-433)<br>(L-2035-AH) | 16           | M22520/2-01<br>with Positioner<br>M22520/2-35<br>or with<br>Daniels Positioner<br>K532 | M22520/4-01<br>with Positioner<br>M22520/4-02                                                                | M81969/8-07<br>or<br>M81969/14-03          | M81969/8-08<br>or<br>M81969/14-03          |
| Haveg<br>30-00761, 30-02024,<br>30-02033<br>Tensolite<br>24713/A955KK1, 26723/<br>A955KK1                                                                    | 21-033122-562†<br>(L-2035-AN)                            | 21-033121-562†<br>(L-2035-AP)                   |              |                                                                                        |                                                                                                              | or<br>Amphenol<br>11-8674-16<br>11-8794-16 | or<br>Amphenol<br>11-8675-16<br>11-8795-16 |
| Haveg 61-02051                                                                                                                                               | 21-033122-561†<br>(L-2035-AK)                            | 21-033121-561†<br>(L-2035-AL)                   |              |                                                                                        |                                                                                                              | or<br>MS27495A16<br>or<br>MS27534-16       | or<br>MS27495R16<br>or<br>MS27534-16       |
| RG-174A/U, RG-188A/U,<br>RG-161/U,<br>RG-187A/U, RG-316/U,<br>RG-179B/U,<br>Haveg 8100207, Times<br>(HS-179)<br>AA3248, Teledyne 11299,<br>Raychem 7528H1424 | 21-033122-563<br>(M39029/76-424)<br>(L-2035-AD)          | 21-033121-563<br>(M39029/78-432)<br>(L-2035-AE) |              |                                                                                        |                                                                                                              |                                            |                                            |
|                                                                                                                                                              | 21-033122-546<br>(M39029/28-211)<br>(L-2035-F)           | 21-033121-546<br>(M39029/27-210)<br>(L-2035-G)  | 12           | M22520/2-01<br>with Positioner<br>M22520/2-34<br>or with<br>Daniels Positioner<br>K323 | M22520/31-01<br>with Positioner<br>M22520/31-02<br>or<br>Daniels GS-200<br>Tool<br>with Positioner<br>G2P330 | M81969/8-09<br>or<br>M81969/14-04          | M81969/8-10<br>or<br>M81969/14-04          |
| RG-180B/U, RG-195A/U,<br>Raychem 9528A1318                                                                                                                   | 21-033122-541<br>(M39029/28-409)<br>(L-2035-C)           | 21-033121-541<br>(M39029/27-402)<br>(L-2035-E)  |              |                                                                                        |                                                                                                              | or<br>Amphenol<br>11-8674-12<br>11-8794-12 | or<br>Amphenol<br>11-8675-12<br>11-8795-12 |
| Raychem 5022E5111                                                                                                                                            | 21-033122-543†<br>(L-2035-M)                             | 21-033121-543†<br>(L-2035-N)                    |              |                                                                                        |                                                                                                              | or<br>MS27495A12<br>or<br>MS27534-12       | or<br>MS27495R12<br>or<br>MS27534-12       |
| Raychem 9530A5314                                                                                                                                            | 21-033122-544<br>(L-2035-R)                              | 21-033121-544<br>(L-2035-S)                     |              |                                                                                        |                                                                                                              |                                            |                                            |
| Raychem 9527A1318                                                                                                                                            | 21-033122-545<br>(L-2035-U)                              | 21-033121-545<br>(L-2035-V)                     |              |                                                                                        |                                                                                                              |                                            |                                            |
| Gore GWN1159A                                                                                                                                                | 21-033122-547†<br>(L-2035-X)                             | 21-033121-547†<br>(L-2035-Y)                    |              |                                                                                        |                                                                                                              |                                            |                                            |

### MIL-DTL-38999 CONTACT DATA

All contacts mate with other contacts in this series which have the same inner and outer contact diameters.

NOTE: SAE AS39029 supersedes MIL-C-39029

\*\*Termination instructions are packaged with each contact and can be found on-line at:  
[www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

|                                         |                                                                                                                                               |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| JT Example:                             | Socket 21-033121-564 on RG-196A/U cable will mate with pin 21-033122-563 on RG-188A/U cable which is used in both this and the LJ-T-R series. |
| LJT, TV, SJT,<br>Amphe-Lite<br>Example: | Socket 21-033123-564 on RG-196A/U cable will mate with pin 21-033122-563 on RG-188A/U cable which is used in both this and the JT-R series.   |

Finish of mating contact parts: Contact part numbers shown in the chart above are supplied with 0.000050 min. gold (Knoop hardness 130-200) over nickel on mating parts. Other finishes are available; consult Amphenol.

Daniels crimping tools are available from:  
Daniels Mfg. Corp. 6103 Anno Ave., Orlando FL 32809

### LJT-R, MIL-DTL-38999 Series I; TV-R, MIL-DTL-38999 Series III; Amphe-Lite and SJT-R Series, SAE AS39029 (28, 59, 60, 75, 76, 77)

| COAX CONTACTS FOR USE IN LJTR, TV-R, AMPHE-LITE AND SJT-R CONNECTORS                                                                                       |                                                 |                                                 |              |                                                                                        |                                                                                                                                                      |                                                                                                                         |                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------------------------|--------------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Cable                                                                                                                                                      | Contact Part Number                             |                                                 | Contact Size | Crimping Tools                                                                         |                                                                                                                                                      | Installation Tools                                                                                                      |                                                                                                                         |
|                                                                                                                                                            | Pin                                             | Socket                                          |              | Inner Contact                                                                          | Crimp Ferrule                                                                                                                                        | Insertion                                                                                                               | Removal                                                                                                                 |
| RG-178B/U, RG-196A/U                                                                                                                                       | 21-033122-564<br>(M39029/76-425)<br>(L-2035-AG) | 21-033123-564<br>(M39029/77-429)<br>(L-2035-AJ) | 16           | M22520/2-01<br>with Positioner<br>M22520/2-35<br>or with<br>Daniels Positioner<br>K532 | M22520/4-01<br>with Positioner<br>M22520/4-02                                                                                                        | M81969/8-07<br>or<br>M81969/14-03<br>or<br>Amphenol<br>11-8674-16<br>11-8794-16<br>or<br>MS27495A16<br>or<br>MS27534-16 | M81969/8-08<br>or<br>M81969/14-03<br>or<br>Amphenol<br>11-8675-16<br>11-8795-16<br>or<br>MS27495R16<br>or<br>MS27534-16 |
| Haveg 30-00761, 30-02024,<br>30-02033<br>Tensolite 24713/A955KK1,<br>26723/A955KK1                                                                         | 21-033122-562†<br>(L-2035-AN)                   | 21-033123-562†<br>(L-2035-AR)†                  |              |                                                                                        |                                                                                                                                                      |                                                                                                                         |                                                                                                                         |
| Haveg 61-02051                                                                                                                                             | 21-033122-561†<br>(L-2035-AK)†                  | 21-033123-561†<br>(L-2035-AM)†                  |              |                                                                                        |                                                                                                                                                      |                                                                                                                         |                                                                                                                         |
| RG-174A/U, RG-188A/U,<br>RG-316/U,<br>RG-161/U RG-187A/U,<br>RG-179B/U,<br>Haveg 8100207, Times<br>(HS-179)<br>Raychem 7528H1424<br>AA3248, Teledyne 11299 | 21-033122-563<br>(M39029/76-424)<br>(L-2035-AD) | 21-033123-563<br>(M39029/77-428)<br>(L-2035-AF) |              |                                                                                        |                                                                                                                                                      |                                                                                                                         |                                                                                                                         |
| RG-180B/U, RG-195A/U,<br>Raychem 9528A1318                                                                                                                 | 21-033122-546<br>(M39029/28-211)<br>(L-2035-F)  | 21-033123-546<br>(M39029/75-416)<br>(L-2035-H)  | 12           | M22520/2-01<br>with Positioner<br>M22520/2-34<br>or with<br>Daniels Positioner<br>K323 | M22520/31-01<br>with Positioner<br>M22520/31-02<br>or<br>Daniels<br>GS-200 Tool<br>with Positioner<br>G2P330                                         | M81969/8-09<br>or<br>M81969/14-04<br>or<br>Amphenol<br>11-8674-12<br>11-8794-12<br>or<br>MS27495A12<br>or<br>MS27534-12 | M81969/8-10<br>or<br>M81969/14-04<br>or<br>Amphenol<br>11-8675-12<br>11-8795-12<br>or<br>MS27495R12<br>or<br>MS27534-12 |
| Raychem 5022E5111                                                                                                                                          | 21-033122-541<br>(M39029/28-409)<br>(L-2035-C)  | 21-033123-541<br>(M39029/75-417)<br>(L-2035-D)  |              |                                                                                        |                                                                                                                                                      |                                                                                                                         |                                                                                                                         |
| Raychem 9530A5314                                                                                                                                          | 21-033122-543†<br>(L-2035-M)†                   | 21-033123-543†<br>(L-2035-P)†                   |              |                                                                                        |                                                                                                                                                      |                                                                                                                         |                                                                                                                         |
| Raychem 9527A1318                                                                                                                                          | 21-033122-544†<br>(L-2035-R)                    | 21-033123-544†<br>(L-2035-T)†                   |              |                                                                                        |                                                                                                                                                      |                                                                                                                         |                                                                                                                         |
| Raychem 9527A1314                                                                                                                                          | 21-033122-545†<br>(L-2035-U)†                   | 21-033123-545†<br>(L-2035-W)                    |              |                                                                                        |                                                                                                                                                      |                                                                                                                         |                                                                                                                         |
| Raychem 9527A1314                                                                                                                                          | 21-033122-585<br>(L-2035-GG)                    | 21-033123-585<br>(L-2035-GH)                    |              |                                                                                        |                                                                                                                                                      |                                                                                                                         |                                                                                                                         |
| Gore GWN1159A, Nexans<br>RG179-DT                                                                                                                          | 21-033122-547<br>(L-2035-X)†                    | 21-033123-547<br>(L-2035-Z)†                    |              |                                                                                        |                                                                                                                                                      |                                                                                                                         |                                                                                                                         |
| M/A-Com 5M2869-001                                                                                                                                         | 21-033122-589<br>(L-2035-GR)                    | 21-033123-589<br>(L-2035-GT)                    |              |                                                                                        |                                                                                                                                                      |                                                                                                                         |                                                                                                                         |
| RG-187A/U, RG-179B/U,<br>RG-174A/U,<br>RG-188A/U, RG-316/U,<br>RG-161/U<br>Haveg 8100207, Times<br>(HS-179)AA3248, Teledyne<br>11299                       | 21-033102-023†<br>(L-1107-C)                    | 21-033101-023†<br>(L-1107-G)                    | 8            | M22520/2-01<br>with Positioner<br>M22520/2-31††<br>or solder                           | M22520/5-01<br>with die set<br>M22520/5-03 (A)<br>or M22520/5-08<br>(A)<br>M22520/5-35 (B)<br>or M22520/10-01<br>with Die Set<br>M22520/10-05<br>(A) | Hand<br>inserted                                                                                                        | 11-9170<br>or<br>MS                                                                                                     |
| RG-142B/U, RG-223/U                                                                                                                                        | 21-033102-024*<br>(L-1107-D)                    | 21-033101-024*<br>(L-1107-H)                    |              |                                                                                        | M22520/5-01<br>with die set<br>M22520/5-05 (A)<br>or M22520/5-19<br>(B)<br>or M22520/10-01<br>with Die Set<br>M22520/10-07<br>(A)                    |                                                                                                                         |                                                                                                                         |

NOTE: SAE AS39029 supersedes MIL-C-39029

CRIMPING TOOLS: Italicized letters in parenthesis that follow positioner part numbers indicate applicable die closure. Commercial equivalents with the same die closure dimension may be used.

CHART CONTINUES ON NEXT PAGE

† Consult Amphenol Aerospace for current release of this contact or instruction sheet if applicable.

†† When inner contact is installed by crimping only. 11-10134 Expander Tool Kit must be used to assemble rear insulator over contact.

\*\*Termination instructions are packaged with each contact and can be found on-line at: [www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

### LJT-R, MIL-DTL-38999 Series I; TV-R, MIL-DTL-38999 Series III; Amphe-Lite and SJT-R Series, SAE AS39029 (28, 59, 60, 75, 76, 77), cont.

| COAX CONTACTS FOR USE IN LJt-R, TV-R, AMPHE-LITE AND SJt-R CONNECTORS, CONT.       |                                                                |                                                                |              |                                                           |                                                                                                                    |                    |               |
|------------------------------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|--------------|-----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------|---------------|
| Cable                                                                              | Contact Part Number<br>(Termination Instruction Sheet)***      |                                                                | Contact Size | Crimping Tools                                            |                                                                                                                    | Installation Tools |               |
|                                                                                    | Pin                                                            | Socket                                                         |              | Inner Contact                                             | Crimp Ferrule                                                                                                      | Insertion          | Removal       |
| Haveg 51-03111, Tensolite 28895/2X1                                                | 21-033102-022<br>(L-1107-B)                                    | 21-033101-022<br>(L-1107-F)                                    | 8            | M22520/2-01 with Positioner<br>M22520/2-31**<br>or solder | M22520/5-01 with die set<br>M22520/5-05 (B) or M22520/5-41 (B)<br>or M22520/10-01 with Die Set<br>M22520/10-07 (B) | Hand inserted      | 11-9170 or MS |
| RG-180B/U, RG-195A/U, Raychem 9528A1318                                            | 21-033102-021 (M39029/60-367 Supersedes MS27536)<br>(L-1107-A) | 21-033101-021 (M39029/59-366 Supersedes MS27535)<br>(L-1107-E) |              |                                                           |                                                                                                                    |                    |               |
| RD-316 Double Shield (M17/152-00001)                                               | 21-033102-025<br>(L-1107-J)                                    | 21-033101-025<br>(L-1107-N)                                    |              | M22520/2-01 with Positioner<br>M22520/2-31                | M22520/5-01 with Die Set<br>M22520/5-37 (B) or M22520/10-01 with Die Set<br>M22520/10-15 (A)                       |                    |               |
| Raychem 7524D5111-9 (triax cable - contact will terminate inner coax portion only) | 21-033102-026<br>(L-1107-M)                                    | 21-033101-026<br>(L-1107-M)                                    |              |                                                           |                                                                                                                    |                    |               |
| RG-400, ECS3C058A ECS352001 ECS432101                                              | 21-033102-027<br>(L-1286-B)                                    | 21-033101-027<br>(L-1293-B)                                    |              | M22520/2-01 with Positioner<br>M22520/2-10                | M22520/5-01 with Die Set<br>M22520/5-45 (A)                                                                        |                    |               |
| RG-58 (M17/155-00001), M17/028-RG-058 RG303 Times LMR-195-UF                       | 21-033102-029<br>(L-1107-AA)                                   | 21-033101-029<br>(L-1107-Y)†                                   |              | Solder                                                    | M22520/5-01 with Die Set<br>M22520/5-05 (B)                                                                        |                    |               |
| 5021D1331-0                                                                        | 21-033102-036<br>(L-1107-P)                                    | 21-033101-036†<br>(L-1107-Q)                                   |              | M22520/2-01 with Positioner<br>M22520/2-31                | M22520/5-01 with Die Set<br>M22520/5-05 (B) or M22520/10-01 with Die Set<br>M22520/10-07 (B)                       |                    |               |
| 5M2869-001 ESC432101 BMS13-65                                                      | 21-033102-037<br>(L-1107-V)                                    | 21-033101-037<br>(L-1107-W)                                    |              |                                                           |                                                                                                                    |                    |               |
| 5022A1311-0                                                                        | 21-033102-039<br>(L-1107-AC)                                   | 21-033101-036†<br>(L-1107-AB)                                  |              |                                                           |                                                                                                                    |                    |               |
| FA-19X                                                                             | 21-033652-001<br>(L-2091-A)                                    | 21-033653-001<br>(L-2091-B)                                    |              | M22520/2-01 with Positioner<br>K1106                      | M22520/5-01 with Die Set Y25 (B)                                                                                   |                    |               |
| T Flex-402 Utiflex UFB142G                                                         | 21-033102-041<br>(L-1107-AG)                                   | 21-033101-041<br>(L-1107-AF)                                   |              | Solder                                                    | M22520/5-01 with Die Set<br>M22520/5-05 (B)                                                                        |                    |               |

NOTE: SAE AS39029 supersedes MIL-C-39029

NOTE: Contacts can be ordered by part numbers given in chart

CRIMPING TOOLS: Italicized letters in parenthesis that follow positioner part numbers indicate applicable die closure. Commercial equivalents with the same die closure dimension may be used.

† Consult Amphenol Aerospace for current release of this contact or instruction sheet if applicable

\*\*When inner contact is installed by crimping only. 11-10134 Expander Tool Kit must be used to assemble rear insulator over contact.


\*\*\*Termination instructions are packaged with each contact and can be found on-line at: [www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

## Amphenol® Matched Impedance Size 12 Coaxial Contacts for RF/Microwave, High Frequency and High Performance Requirements

The matched impedance coax contact is available in size 12. It incorporates a captivated inner contact which “snaps into” the outer contact preventing displacement or pull back of the inner contact in situations where the cable may be bent.

**TYPICAL MATCHED IMPEDANCE  
COAX SOCKET CONTACT**  
has socket outer contact with a captivated  
pin inner contact

**TYPICAL MATCHED IMPEDANCE  
COAX PIN CONTACT**  
has pin outer contact with a captivated  
socket inner contact

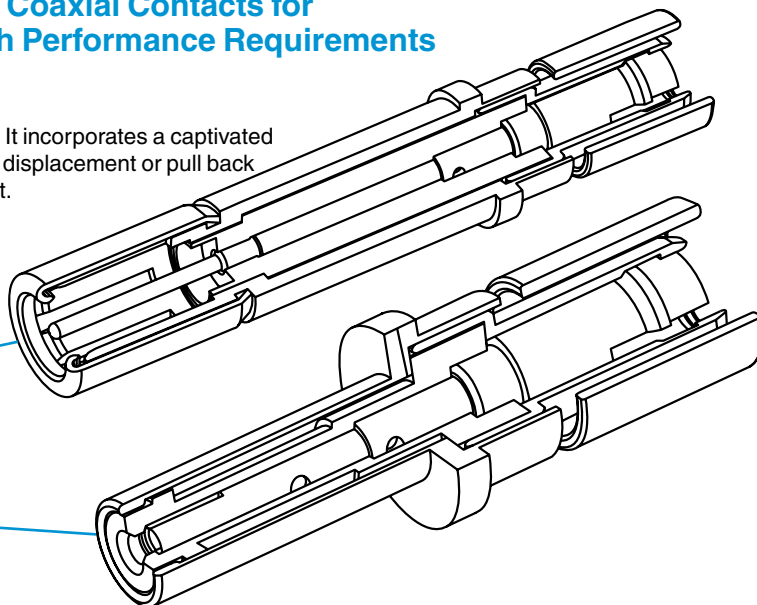

Design features and benefits of the Matched Impedance:

- For use in 90 degree angle or bent cable applications
- Provides 50 ohm matched impedance resulting in low VSWR and low insertion loss
- Frequency range for a mated pair extends to 3 GHz and beyond, higher than other coaxial contacts previously offered.
- Ideally suited for D38999 high performance and MIL-STD-1760 high band coaxial contact requirements

### High Performance Size 12 Coax 50 Ohm matched

**LJT-R, MIL-DTL-38999 Series I, JT-R, MIL-DTL-38999 Series II, and TV-R, MIL-DTL-38999 Series III**

| Use with Cable                                   | Comment                          | Pin<br>(Termination Instruction Sheet)*** | Socket<br>(Termination Instruction Sheet)*** |
|--------------------------------------------------|----------------------------------|-------------------------------------------|----------------------------------------------|
| RG316,<br>T-Flex-405<br>Semflex SM405            | M39029/102/103                   | 21-033651-011<br>(L-2092-C)               | 21-033650-011<br>(L-2092-C)                  |
| RG-316,<br>T-Flex-405                            | JT-R, MIL-DTL-38999<br>Series II |                                           | 21-033729-011<br>(L-2092-P)                  |
| RD316,<br>Filotex,<br>ET124962,<br>M17/152-00001 | M39029/102/103 Type              | 21-033651-017<br>(L-2092-F)               | 21-033650-017<br>(L-2092-F)                  |
| JN1088WT                                         | JN1104*50C                       | 21-033213-042                             | 21-033214-042<br>(L-2092-D)                  |
| PAN6422XQ                                        | PAN6841*50C                      | 21-033651-012<br>(L-2092-E)               | 21-033650-012                                |
| RG178,<br>Gore CXN 3403                          | M39029/102/103 Type              | 21-033651-018<br>(L-2092-K)               | 21-033650-018<br>(L-2092-K)                  |
| RG178,<br>Gore CXN 3403                          | JT-R, MIL-DTL-38999<br>Series II |                                           | 21-033729-018<br>(L-2092-K)                  |
| SFT-316-TR                                       | M39029/102/103 Type              | 21-033651-022<br>(L-2092-N)               | 21-033650-022<br>(L-2092-N)                  |
| Semflex SW060                                    | M39029/102/103 Type              | 21-033651-025                             | 21-033650-025                                |
| Semflex SW086<br>(solid inner<br>conductor)      | M39029/102/103 Type              | 21-033651-026                             | 21-033650-026                                |

\* Add P or S for pin or socket

\*\*\*Termination instructions are packaged with each contact and can be found on-line at:  
[www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

### Matched Impedance Coax Contact Performance:

Electrical Specifications:

- Contact impedance = 50 ohms nominal
- Frequency range = 0–3 GHz Operable at higher frequencies depending on cable selection. Consult Amphenol for details.
- Dielectric withstanding voltage (for a mated pair):  
At sea level = 1000 VRMS  
At 50, 000 ft. = 250 VRMS
- Insulation resistance: 5 gigaohms min. @ 25°C
- VSWR: 1.20 + .04F (F in GHz) max. up to 3 GHz
- Insertion Loss:  $.11 \sqrt{f \text{ GHz}} \text{ dB max.}$

Environmental Specifications:

- Thermal limits: –55 ° to 200°C

Mechanical Specifications:

- Mating: slide-on
- Mounting: conforms to M39029/102 & /103 envelope dimensions

# Typical Contact Installation Instructions for Coax Contacts

The following is an example of a contact instruction sheet that would be shipped within the package of contacts for a Crimp, Size 12 Coax Contact for use in Subminiature, D38999 connectors. The sheet provides detailed instructions for assembling the component parts and for crimping the contact to coaxial cable, along with the recommended cable and tooling to be used. Installation instructions are included within all contacts for D38999 connectors. For installation instructions for other connector series, there are separate documents (not included in packaging of parts) as follows: L-633 for Miniature solder types, L-613 for Miniature SE types, L-660 for Miniature CE types, and L-650 for MS/Standard and Heavy Duty types. For any other instructions needed, consult Amphenol. Most installation instructions can be found on-line at [www.amphenol-aerospace.com](http://www.amphenol-aerospace.com) (from home page, go to Service Instructions and enter contact part number or instruction sheet number).

## 21-033651-011 (PIN) 21-033650-011 (SOCKET)

Contact, Pin and Socket, Coaxial,  
Type LJT-R & TV-R, (MIL-DTL-38999 Series I & III) Crimp, Size 12  
Installation Instructions

See table on reverse side for coaxial cable recommended and crimp tool information.

- A. 1. Slide outer crimp ferrule over cable outer jacket as shown.
2. Strip cable outer braid as illustrated. Ends must be cut cleanly and at right angles to the axial plane of the cable. The cable must not be deformed while making cuts.
3. Flare outer braid, then strip cable dielectric as shown.
- B. 1. Assemble inner contact assembly over cable center conductor and cable dielectric until inside bore of bushing butts against cable dielectric.
2. Cable center conductor must be visible through the inspection hole in the inner contact wire well.
3. Crimp inner contact wire well using crimp tool listed in table.
- C. 1. Carefully slide outer contact assembly over inner contact assembly and under cable outer braid until inner contact butts against insulator shoulder as illustrated. (Inner contact assembly will snap into the locked position when fully assembled inside the outer contact assembly.)
2. Bring outer crimp ferrule forward over cable outer braid as illustrated. (Continue to push the inner contact assembly fully forward while bringing the outer crimp ferrule into position.)
3. Crimp outer crimp ferrule using crimp tool listed in table (.156 Max. over ferrule after crimping). Trim excess braid ahead of crimp ferrule, if necessary.

### CONTACT INSERTION INTO CONNECTOR

Using insertion tool (part number M81969/8-09 or M81969/14-04), insert contact assembly into rear connector grommet hole. Contact must be aligned with hole and not inserted at an angle. Push forward until contact is felt to snap into position within insert. Remove tool.

### CONTACT REMOVAL FROM CONNECTOR

Position removal tool (part number M81969/8-10 or M81969/14-04) around cable and slide tool down wire until tool tips enter rear grommet and come to a positive stop. Hold tool tip firmly against positive stop on contact, grip wire and simultaneously remove tool, contact and cable.

## 21-033651-011 (PIN) 21-033650-011 (SOCKET)



L-2092-C  
October 2001

FSCM77820

| Amphenol®<br>Part Number | Description                                  | Coaxial Cable<br>Accommodated | Tools           |         |                         |               |                                          |
|--------------------------|----------------------------------------------|-------------------------------|-----------------|---------|-------------------------|---------------|------------------------------------------|
|                          |                                              |                               | Inner Contact   |         |                         | Outer Contact |                                          |
|                          |                                              |                               | Crimp Tool      | Setting | Positioner<br>(Daniels) | Tool          | Positioner                               |
| 21-033651-011            | Matched Impedance*<br>Size 12 Coax<br>Pin    | RG316<br>(M17/113-RG316)      | MH992 (Daniels) | 5       | K1360                   | M22520/5-01   | M22520/5-03 (A)<br>or<br>M22520/5-35 (B) |
|                          |                                              | RG179<br>(M17/094-RG179)      | MH992 (Daniels) | 4       | K1360                   |               |                                          |
| 21-033650-011            | Matched Impedance*<br>Size 12 Coax<br>Socket | RG316<br>(M17/113-RG316)      | MH992 (Daniels) | 5       | K1360                   |               |                                          |
|                          |                                              | RG179<br>(M17/094-RG179)      | MH992 (Daniels) | 4       | K1360                   |               |                                          |

\* Matched Impedance applies when contacts are terminated to RG316 cable only.

### Amphenol® High Frequency Contacts

Amphenol and SV Microwave (an Amphenol company) offer DC to 40 GHz high frequency size 8, 12 and 16 coaxial contacts for the D38999 Series III housing and standard inserts. These contacts allow any application to continue to use the D38999 connector and be able to expand the use to include the microwave transmission lines. Features include:

- Superior electrical performance and high frequency capability
- Blindmate advantage and maintenance of an accurate phase length when mated
- Can be terminated to a multiple of cable types depending on the application
- Uses standard interfaces based on MIL-STD-348, and can be installed in any MIL-DTL-38999 size 8, 12 or 16 insert
- Unique "Float Mount" technology allows for consistent microwave performance while maintaining tight mechanical tolerances



Subminiature MIL-DTL-38999 Series III  
Connector with Size 8 High Frequency Contacts

## HIGH FREQUENCY CONTACTS

### SPECIFICATIONS

#### Electrical

(Mated pair size 8 - RG 405 Semi-Rigid Cable)

|                                 |                                |
|---------------------------------|--------------------------------|
| Impedance                       | 50 $\Omega$                    |
| Frequency Range                 | DC - 40 GHz                    |
| VSWR                            | 1.05 +.01 (freq. GHz)          |
| Insertion Loss                  | 0.03 $\sqrt{\text{freq. GHz}}$ |
| Insulation Resistance (Min.)    | 10,000 M $\Omega$              |
| Contact Resistance (Max.)       |                                |
| Center conductor:               | 6.0 m $\Omega$                 |
| outer conductor:                | 3.0 m $\Omega$                 |
| outer to cable:                 | 0.5 m $\Omega$                 |
| Dielectric Withstanding Voltage | 1,000 VRMS                     |
| Corona Extinction Voltage       | 250 VRMS                       |
| RF High Potential Voltage       | 500 VRMS                       |
| RF Leakage                      | -(80-freq. GHz)                |

#### Materials and Finish

|                      |                                                                                                                                                                                       |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body and Sleeve      | Stainless steel per AMS-5640 Alloy UNS S30300 Type 1                                                                                                                                  |
| Ferrule              | Brass per ASTM B16, Alloy UNS C36000                                                                                                                                                  |
| Contact & Lock Ring  | Beryllium copper per ASTM B196 Alloy UNS C17300, Td04                                                                                                                                 |
| Insulator            | PTFE per ASTM D1710, Type 1, Grade 1, Class B                                                                                                                                         |
| Spring               | Stainless steel per ASTM A313 Type 631                                                                                                                                                |
| Rear Body & Contacts | Gold per ASTM B488 Type II, Code C, Class 1.27; over Nickel per AMS-QQ-N-290 Class 1 (60 $\mu$ inches); over Copper per MIL-C-14550 (10 $\mu$ inches) Passivated per AMS-2700, Type 2 |

#### Environmental

|                                |                                                       |
|--------------------------------|-------------------------------------------------------|
| Temperature Range              | -65°C to +125°C                                       |
| Corrosion (Salt Spray)         | MIL-STD-202, Method 101, Condition B                  |
| Vibration                      | MIL-STD-202, Method 204, Condition D, 20 Gs           |
| Shock                          | MIL-STD-202, Method 213, Condition 1, 100 Gxs         |
| Thermal Shock                  | MIL-STD-202, Method 107, Condition B, -65°C to +125°C |
| Moisture Resistance            | MIL-STD-202, Method 106, Less step 7B                 |
| Barometric Pressure (Altitude) | MIL-STD-202, Method 105, Condition C, 70,000 ft.      |


| HIGH FREQUENCY COAX CONTACTS<br>FOR USE IN D38999, SERIES III CONNECTORS |                   |           |                     |        |             |                   |
|--------------------------------------------------------------------------|-------------------|-----------|---------------------|--------|-------------|-------------------|
| High Frequency Amphenol Part Number<br>(Termination Instruction Sheet)   | Interface         | Frequency | For use with Cable  | Type   | Cavity Size | Piggyback Grommet |
| 21-033449-001HF<br>(300-17-008)                                          | BMZ               | 40 GHz    | TFLEX-405           | Socket | 8           | 21-033321-007     |
| 21-033448-001HF<br>(300-17-008)                                          |                   |           |                     | Pin    |             |                   |
| 21-033449-002HF<br>(300-89-009)                                          | BMZ               | 18 GHz    | TFLEX-405           | Socket | 8           | 21-033321-007     |
| 21-033448-002HF<br>(300-89-009)                                          |                   |           |                     | Pin    |             |                   |
| 21-033449-003HF<br>(300-89-008)                                          | BMZ               | 12 GHz    | RG-400/<br>RG-142   | Socket | 8           | 21-033321-009     |
| 21-033448-003HF<br>(300-89-008)                                          |                   |           |                     | Pin    |             |                   |
| 21-033449-004HF<br>(300-89-002)                                          | BMZ               | 18 GHz    | TFLEX-402           | Socket | 8           | 21-033321-010     |
| 21-033448-004HF<br>(300-89-002)                                          |                   |           |                     | Pin    |             |                   |
| 21-033449-006HF                                                          | BMA               | 26.5 GHz  | TFLEX-405           | Socket | 8           | 21-033321-007     |
| 21-033448-006HF                                                          |                   |           |                     | Pin    |             |                   |
| 21-033449-007HF                                                          | BMA               | 26.5 GHz  | TFLEX-402           | Socket | 8           | 21-033321-010     |
| 21-033448-007HF                                                          |                   |           |                     | Pin    |             |                   |
| 21-033449-008HF                                                          | BMZ-<br>75<br>Ohm | 2 GHz     | LMR-240-<br>75      | Socket | 8           | 21-033321-008     |
| 21-033448-008HF                                                          |                   |           |                     | Pin    |             |                   |
| 21-033449-009HF                                                          | SMPM              | 65 GHz    | TFLEX-405           | Socket | 12          | N/A               |
| 21-033448-009HF                                                          |                   |           |                     | Pin    |             |                   |
| 21-033449-010HF                                                          | SMPS              | 65 GHz    | 0.047 Dia.<br>Cable | Socket | 16          | N/A               |
| 21-033448-010HF                                                          |                   |           |                     | Pin    |             |                   |

# Twinax Contacts for MIL-DTL-38999

## General Description, Application Data - Size 10 & 12

**Amphenol®Twinax Contacts** -Were designed for use with twinax cable in Data Bus systems. Twinax contacts provide the following benefits:

- Protection from magnetic interference
- Protection from electrostatic interference including nuclear electromagnetic pulse
- Meets parameters defined by MIL-STD-1553B
- Maintains shield integrity through a multi-pin circular connector and does not require contact polarization within the insert

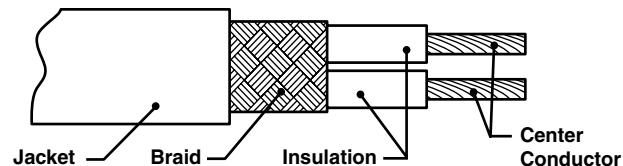

Cable Illustration - Twinax Contact

### SIZE 10 & 12 CONCENTRIC TWINAX CONTACTS

The size 12 concentric twinax contact interface was developed for JN1104 EuroFighter contacts, and can be used in any size 12 cavity M38999 I, II or III or SJT connector.

Features:

- Operating temperature –55°C to 175°C
- Pins are scoop-proof
- Meets performance levels of M38999 connector
- 4 components, gold plated crimp termination
- For use with a variety of cables (See chart below)



Concentric Twinax Contacts Size 12

### TYPICAL ELECTRICAL PERFORMANCE

#### Size 10 & 12 Concentric Twinax Contacts

Voltage Rating: 500 Vrms max. @ sea level

Contact Resistance:

Center @ 1 Amp, 55 millivolts max. voltage drop @ 25°C

Intermediate @ 1 Amp, 55 millivolts max. voltage drop @ 25°C

Outer @ 12 Amps, 85 millivolts max. voltage drop @ 25°C

Operating Frequency: 0–30 MHz

Dielectric Withstanding Voltage:

Center to Intermediate 800 VAC Rms @ Sea Level

Intermediate to Outer 500 VAC Rms @ Sea Level



Unassembled Components of Size 12 Concentric Twinax Contact

| SIZE 10 & 12 CONCENTRIC TWINAX CONTACTS FOR USE IN D38999 CONNECTORS |                                          |                              |              |                                  |                      |
|----------------------------------------------------------------------|------------------------------------------|------------------------------|--------------|----------------------------------|----------------------|
| For use with Cable                                                   | Concentric Twinaxial Contact Part Number |                              | Contact Size | Comments                         | Connector Series     |
|                                                                      | (Termination Instruction Sheet)**        |                              |              |                                  |                      |
|                                                                      | Pin                                      | Socket                       |              |                                  |                      |
| M17/176-00002, ST5M1212-002, TWC-78-1                                | 21-033909-025<br>(L-2092-G)              | 21-033908-025<br>(L-2092-G)  | 12           | JN1104 Interface                 | D38999 Series I, III |
| 0024A0024, Fileca F2709-13-CA                                        | 21-033909-028<br>(L-2092-G)              | 21-033908-028<br>(L-2092-G)  |              |                                  |                      |
| EPD32263A, 10612, GSC-12-2548-00                                     | 21-033909-029<br>(L-2092-H)              | 21-033908-029<br>(L-2092-H)  |              |                                  |                      |
| ASNE0849, 5PTM1T04-1                                                 | 21-033909-081<br>(L-2092-AB)             | 21-033908-081<br>(L-2092-AB) |              |                                  |                      |
| VG95218T023D002                                                      | 21-033909-091<br>(L-2092-AC)             | 21-033908-091<br>(L-2092-AC) |              |                                  |                      |
| VG95218T023D002                                                      | 21-033909-101<br>(L-2092-AC)             | 21-033908-101<br>(L-2092-AC) |              |                                  |                      |
| M17/176-00002, GSC-12-2549-00                                        |                                          | 21-033640-025<br>(L-2092-W)  | 12           | JN1104 Interface                 | D38999 Series II     |
| 0024A0024                                                            |                                          | 21-033640-028<br>(L-2092-V)  |              |                                  |                      |
| 5M2022-003                                                           | 21-033844-001<br>(L-1255-A)              | 21-033843-001<br>(L-1255-B)  | 10           | Supplied with Thermal fit sleeve | D38999 Series I, III |

\*\*Termination instructions are packaged with each contact and can be found on-line at: [www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

High performance connectors within the D38999 families are the most commonly used connectors for incorporation of Twinax contacts. These connectors offer wide versatility in insert arrangements for not only concentric Twinax contacts, but also coax, triax, PCB, wire wrap, thermocouples and EMI filter contacts.

Other connectors available with concentric Twinax contacts:

- Wire Integrated Connectors (WICS) for Data Bus Systems. Consult Amphenol Aerospace, Sidney, NY.
- ARINC 404, ARINC 600 and R27 Series rectangular connectors. Supplied by Amphenol Canada.

### SIZE 8 CONCENTRIC TWINAX CONTACTS

The size 8 concentric Twinax contact was developed for use in MIL-STD-1553 Airborne multiplex data bus applications which require high performance interconnect characteristics in multi-pin connectors. Ideal for this application need is the high performance Tri-Start connector with its fully scoop-proof feature of recessed pins. The concentric Twinax contact is crimp terminable to twisted shielded cable. Features include:

- Provides protection from magnetic and electrostatic interference including nuclear electromagnetic pulse
- Maintains shield integrity through a multi-pin circular connector and does not require contact polarization within the insert
- 175°C rated and meets performance levels of MIL-DTL-38999 Series III connectors
- MIL-C-17/176-00002 cable termination
- Gold plated full crimp termination contacts qualified to M39029/90 & /91
- Integral part of the MIL-STD-1760 interconnection system
- Also available in modified but intermateable versions for termination to a host of cables (See chart on next page)

### TYPICAL ELECTRICAL PERFORMANCE

#### Size 8 Concentric Twinax Contacts

Voltage Rating: 500 Vrms max. @ sea level

Contact Resistance:

Center @ 1 Amp, 55 millivolts max. voltage drop @ 25°C

Intermediate @ 1 Amp, 55 millivolts max. voltage drop @ 25°C

Outer @ 12 Amps, 75 millivolts max. voltage drop @ 25°C

Operating Frequency: 0–20 MHz

Dielectric Withstanding Voltage:

Center to Intermediate: 1000 VAC Rms @ Sea Level

Intermediate to Outer: 500 VAC Rms @ Sea Level

### SHORT PROFILE TWINAX CONTACT OPTION

A Short Profile size 8 Twinax is available that can be used with a low profile right angle backshell and can offer increased packaging efficiency. Consult Amphenol Aerospace for further information.



MIL-DTL-38999 Series III Connector with Twinax Contacts and Standard Contacts



Concentric Twinax Contacts Size 8



Short Profile Twinax vs Standard Length Twinax Contact

# Twinax Contacts for MIL-DTL-38999

## General Description, Application Data - Size 8, cont.

| SIZE 8 CONCENTRIC TWINAX CONTACTS FOR USE IN D38999 CONNECTORS                                                |                                                                                      |                              |                                                                         |                         |
|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------|-------------------------------------------------------------------------|-------------------------|
| For use with Cable                                                                                            | Size 8 Concentric Twinaxial Contact Part Number<br>(Termination Instruction Sheet)** |                              | Comments                                                                | Connector Series        |
|                                                                                                               | Pin                                                                                  | Socket                       |                                                                         |                         |
| M17/176-00002                                                                                                 | 21-033190-625<br>(L-1253-AG)                                                         | 21-033191-628<br>(L-1253-AG) | AS39029/113-625 & /114-628 (Amphenol)<br>Supplied with heat shrink seal | D38999<br>Series I, III |
| M17/176-00002,<br>5PTM1T04-2                                                                                  | 21-033190-529<br>(L-1253-A)                                                          | 21-033191-530<br>(L-1253-B)  | AS39029/90/91 (Amphenol)<br>Supplied with heat shrink seal              |                         |
| M17/176-00002                                                                                                 | T3-46T08-LD<br>(PN-430)                                                              | T3-47T08-LD<br>(PN-430)      | M39029/90/91 (Pyle)<br>Supplied with heat shrink seal                   |                         |
| M17/176-00002                                                                                                 | 21-033190-000<br>(L-1253-A)                                                          | 21-033191-000<br>(L-1253-B)  | Without seals                                                           |                         |
| M17/176-00002                                                                                                 | 21-033190-001<br>(L-1253-A)                                                          | 21-033191-001<br>(L-1253-B)  | Supplied with piggyback grommet seal                                    |                         |
| Raychem 10612, 5M2022-003                                                                                     | 21-033190-026<br>(L-1253-AA)                                                         | 21-033191-026†               | Without seals                                                           |                         |
| Raychem 10614, EPD22189B,<br>7724C8664, 05A0771,<br>GC875TM24H, T10971                                        | 21-033190-022<br>(L-1253-C)                                                          | 21-033191-022<br>(L-1253-D)  | Without seals                                                           |                         |
| Raychem 10613,<br>PAN711-6421, 23089/RC                                                                       | 21-033190-027<br>(L-1253-K)                                                          | 21-033191-027<br>(L-1253-L)  | Supplied with heat shrink seal                                          |                         |
| Raychem 10613,<br>PAN711-6421, 23089/RC                                                                       | 21-033190-029<br>(L-1253-K)                                                          | 21-033191-029<br>(L-1253-L)  | Supplied with piggyback grommet seal                                    |                         |
| Raychem 10613,<br>PAN711-6421, 23089/RC                                                                       | 21-033190-030<br>(L-1253-K)                                                          | 21-033191-030<br>(L-1253-L)  | Without seals                                                           |                         |
| GSC-12-2548-00,<br>7726D0664, ASNE 08072003-09                                                                | 21-033190-040<br>(L-1253-S)                                                          | 21-033191-040<br>(L-1253-T)  | Supplied with heat shrink sleeve                                        |                         |
| Axon P517417                                                                                                  | 21-033190-081<br>(L-1253-W)†                                                         | 21-033191-081<br>(L-1253-Y)† | Supplied with piggyback grommet seal                                    |                         |
| Raychem 10612, 5M2022-003                                                                                     | 21-033190-261<br>(L-1253-AA)                                                         | 21-033191-261†               | Supplied with piggyback grommet seal                                    |                         |
| Raychem 10612, 5M2022-003                                                                                     | 21-033190-262<br>(L-1253-AA)                                                         | 21-033190-262†               | Supplied with heat shrink seal                                          |                         |
| Raychem 10614,<br>7724C8664                                                                                   | T3-46TB08-LD<br>(PN-494)                                                             | T3-47TB08-LD<br>(PN-494)     | Without seals                                                           |                         |
| 7820D0111 (20 AWG)                                                                                            | T3-46TC08-LD<br>(PN-537)                                                             | T3-47TC08-LD<br>(PN-537)     | Without seals                                                           |                         |
| Gore CXN2268                                                                                                  | T3-46TE08-LD<br>(PN-1001)                                                            | T3-47TE08-LD<br>(PN-1001)    | Short profile<br>Supplied with heat shrink seal (.465)                  |                         |
| M17/176-00002                                                                                                 | T3-46TD08-LD<br>(PN-1000)                                                            | T3-47TD08-LD<br>(PN-1000)    | Short profile<br>Supplied with heat shrink seal (.465)                  |                         |
| M17/176-00002                                                                                                 | 21-033910-015†<br>(PN-1005)                                                          | 21-033922-015<br>(PN-1005)   | Short profile<br>Without seals (.263)                                   |                         |
| M17/176-00002                                                                                                 | 21-033617-001<br>(REF PN-100)                                                        |                              | Short profile<br>Supplied with piggyback grommet seal (.465)            |                         |
| Gore CNX2702                                                                                                  | T3-46TF08-LD<br>(PN-1002)                                                            | T3-47TF08-LD<br>(PN-1002)    | Short profile<br>Supplied with heat shrink seal (.465)                  |                         |
| M17/176-00002                                                                                                 |                                                                                      | P-209546-27†                 | Short profile<br>Without seals (.303)                                   |                         |
| S280W502-1, Fileca F2709-13-CA,<br>HS5930, Raychem 10602 0024G0024,<br>0024A0024                              | 21-033190-070<br>(L-1253-U)                                                          | 21-033191-070<br>(L-1253-V)  | Without seals                                                           |                         |
| S280W502-1, Fileca F2709-13-CA,<br>HS5930, Raychem 10602 0024G0024,<br>0024A0024 Tensolite 24463/9P025x-2(LD) | 21-033190-071<br>(L-1253-U)                                                          | 21-033191-071<br>(L-1253-V)  | Supplied with piggyback grommet seal                                    |                         |
| S280W502-1, Fileca F2709-13-CA,<br>HS5930, Raychem 10602 0024G0024,<br>0024A0024                              | 21-033190-072<br>(L-1253-U)                                                          | 21-033191-072<br>(L-1253-V)  | Supplied with heat shrink seal                                          |                         |
| 0024A0311, PIC E10244                                                                                         | 21-033190-090†                                                                       | 21-033191-090<br>(L-1253-AD) | Without seals                                                           |                         |
| 0024A0311, PIC E1024                                                                                          | 21-033190-091†                                                                       | 21-033191-091<br>(L-1253-AD) | Supplied with piggyback grommet seal                                    |                         |
| 0024A0311, PIC E1024                                                                                          | 21-033190-092†                                                                       | 21-033191-092<br>(L-1253-AD) | Supplied with heat shrink seal                                          |                         |
| M17/176-00002                                                                                                 | 21-033190-625<br>(L-1253-AG)                                                         | 21-033191-628<br>(L-1253-AG) | M39029/113-625 & /114-628<br>Supplied with heat shrink seal             |                         |

\*\*Termination instructions are packaged with each contact and can be found on-line at: [www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

† Consult Amphenol Aerospace for current release of this contact or instruction sheet if applicable.

**Amphenol® Triax Contacts** -Provide additional shielding when terminated to triax cable having solid or stranded center conductors. Amphenol supplies triax contacts in sizes 8, 10 and 12 and they are ideally suited for use in D38999 Series I, II and III circular connectors.

Features and benefits of Amphenol triax contacts include:

- Incorporates three conductors, designed for use with triax cable
- Each of the three conductors are separated by dielectric insulation to isolate ground planes
- Shielding effectiveness is improved with two isolated shields
- May be specified for direct connection to printed circuit boards
- May be mixed with coax, twinax and power contacts in a single connector



Cable Illustration - Triax Contact



Triax Size 8 Pin Contact



Triax Size 12 Socket Contact

### TYPICAL ELECTRICAL PERFORMANCE

#### Size 8, 10 and 12 Triax Contacts

Center @ 1 Amp, 120 millivolts max. voltage drop @ 25°C  
Intermediate @ 1 Amp, 60 millivolts max. voltage drop @ 25°C  
Outer @ 12 Amps, 90 millivolts max. voltage drop @ 25°C

Operating Frequency:

Size 12: 0-30 MHz

Size 10: 0-300 MHz

Size 8: 0-500 MHz

Dielectric Withstanding Voltage:

Center to Intermediate 800 VAC Rms @ Sea Level

Intermediate to Outer 500 VAC Rms @ Sea Level

Insulation Resistance:

1000 megohms minimum @ 25°C

#### SIZE 8, 10 & 12 TRIAX CONTACTS FOR USE IN D38999 SERIES I & III CONNECTORS

| For use with Cable                                                                                                                                            | Size | Size 8, 10, 12 Triax Contact Part Number<br>(Termination Instruction Sheet)** |                                          | Comments                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------------------------|
|                                                                                                                                                               |      | Pin                                                                           | Socket                                   |                                                                   |
| 5M2397-002, 81264-02, RGX-179, RT-179, Champlain 81-00321A, Tensolite 28883/02060X-1(LD), 7528A5314, Thermatics 12447, 28883/02060X-1, RTG 179, Semflex RT316 | 8    | 21-033198-003<br>(L-1254-F)                                                   | 21-033197-003<br>(L-1254-E)              |                                                                   |
| 752866314, 7528G6314                                                                                                                                          | 8    | 21-033198-011<br>(L-1254-V)                                                   | 21-033197-011<br>(L-1254-T)              |                                                                   |
| 5M2559-001, 81264-01, Tensolite 28598/9J063T-1, Teledyne 13809, Cheminax 9530F5214                                                                            | 8    | 21-033198-004<br>(L-1254-D)                                                   | 21-033197-004<br>(L-1254-C)              |                                                                   |
| ST5M1323-001, Champlain 81-00700, Teledyne 11914/1, Times AA6603, Tensolite 26895/90334X-1                                                                    | 8    | 21-033198-010<br>(L-1254-S)                                                   | 21-033197-010<br>(L-1254-S)              |                                                                   |
| 5M2397-002                                                                                                                                                    | 10   | 21-033800-001<br>(L-1256-A)                                                   | 21-033801-001<br>(L-1256-B)              |                                                                   |
| JN1088WU (75Ω), JN1088WT (50Ω)                                                                                                                                | 12   | 21-033909-012<br>(L-1256-J)                                                   | 21-033908-012<br>(L-1256-J)              | JN1104 Interface                                                  |
| GSC-03-81497-00 (75Ω)                                                                                                                                         | 12   | 21-033909-023<br>(L-1256-M)                                                   | 21-033908-023<br>(L-1256-M)              | Replaced by -33 with improved rear insulator                      |
| GSC-03-81497-00 (75Ω)                                                                                                                                         | 12   | 21-033909-033<br>(L-1256-P)                                                   | 21-033908-033<br>(L-1256-P)              | JN1104 Interface                                                  |
| Harbour TRX179, Times Microwave AA-6151 (RT-179), Axon RGX-179, 540-1050-000 (75Ω)                                                                            | 12   | 21-033909-071<br>(L-1256-AA)                                                  | 21-033908-071<br>(L-1256-AA)             |                                                                   |
| 10602 (Twinax)                                                                                                                                                | 8    | 21-033724-015<br>(L-1255-C)                                                   | (Consult with Amphenol for availability) | Special design with triax mating end and twinax cable termination |


\*\*Termination instructions are packaged with each contact and can be found on-line at:  
[www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

### Amphenol® Printed Circuit Tail Contacts

are currently supplied as follows:

- 8, 12 and 16 Coax
- 8, 10 and 12 Twinax
- 8 Triax (socket only)

PC Tail shielded contacts provide a cost effective packaging solution for limited space applications where connectors are attached to printed circuit boards. High reliability is assured with factory pre-assembled contacts and standardization termination to the board. PC Tail contacts are available for MIL-DTL-38999 Series I and III circular connectors and also for ARINC 404, ARINC 600 and R27 rectangular connectors. The following pages (410 & 411) show the available PC Tail contact part numbers for 38999 Circular connectors. See page 420 Rectangular Section of this catalog for information on twinax contacts for ARINC Rectangular connectors along with compatible cable terminations. Consult Amphenol Aerospace for further information on the applicable tooling for these contacts.

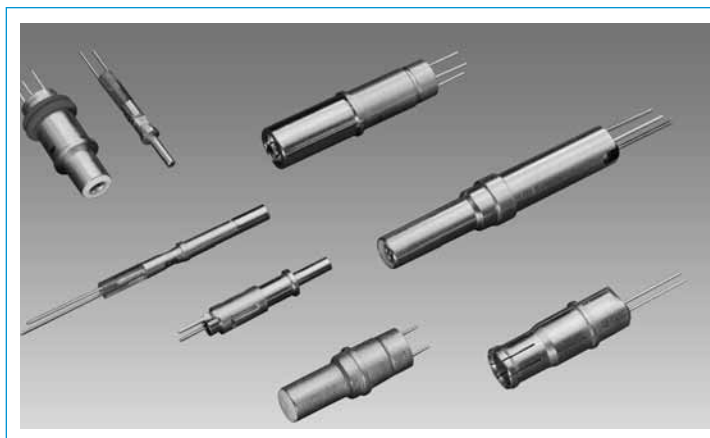

PC Tail Coax and Twinax Contacts for Attachment to Printed Circuit Boards

### TYPICAL ELECTRICAL PERFORMANCE

#### Size 8, 12 & 16 PC Tail Coax Contacts

Contact Resistance:

Center @ 1 Amp, 55 millivolts max. voltage drop @ 25°C

Outer @ 1 Amp, 55 millivolts max. voltage drop @ 25°C

Operating Frequency: 0–500 MHz

Dielectric Withstanding Voltage:

Center to Outer 500 VAC Rms @ Sea Level

Insulation Resistance

1,000 megohms minimum @ 25°C

### TYPICAL ELECTRICAL PERFORMANCE

#### Size 8, 10 & 12 PC Tail Twinax Contacts

Contact Resistance:

Center @ 1 Amp, 55 millivolts max. voltage drop @ 25°C

Intermediate @ 1 Amp, 55 millivolts max. voltage drop @ 25°C

Outer @ 1 Amp, 55 millivolts max. voltage drop @ 25°C

Operating Frequency: 0–20 MHz

Dielectric Withstanding Voltage:

Center to Intermediate 500 VAC Rms @ Sea Level

Intermediate to Outer 500 VAC Rms @ Sea Level

Insulation Resistance

1,000 megohms minimum @ 25°C

### TYPICAL ELECTRICAL PERFORMANCE

#### Size 8 PC Tail Triax Contacts

Contact Resistance:

Center @ 1 Amp, 55 millivolts max. voltage drop @ 25°C

Intermediate @ 1 Amp, 55 millivolts max. voltage drop @ 25°C

Outer @ 1 Amp, 55 millivolts max. voltage drop @ 25°C

Operating Frequency: 0–500 MHz


Dielectric Withstanding Voltage:

Center to Intermediate 500 VAC Rms @ Sea Level

Intermediate to Outer 500 VAC Rms @ Sea Level

Insulation Resistance

1,000 megohms minimum @ 25°C

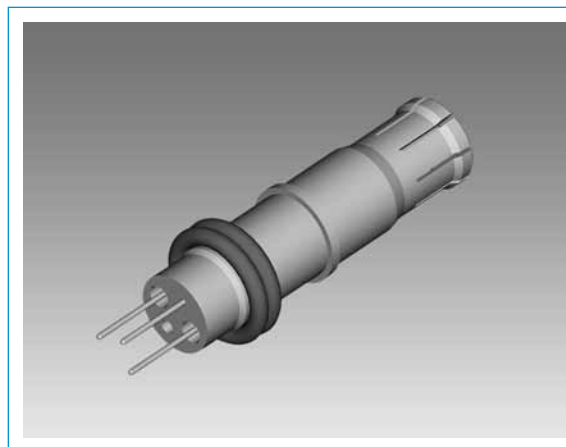

Size 8, PC Tail Twinax Socket Contact for use in D38999 Connectors



D38999 Connector with PC Tail Coax Contacts, Sealing Plugs in unused contact cavities and PC Tail Alignment Disc

| PCTAIL COAX, TWINAX, AND TRIAX CONTACTS FOR USE IN D38999 SERIES I & III CONNECTORS |                                  |                                    |                                   |                            |                                                  |
|-------------------------------------------------------------------------------------|----------------------------------|------------------------------------|-----------------------------------|----------------------------|--------------------------------------------------|
| Size                                                                                | PC Tail Coax Contact Part Number | PC Tail Twinax Contact Part Number | PC Tail Triax Contact Part Number | Tails*                     | Comments                                         |
| 8 Pin                                                                               | 21-033733-007                    |                                    |                                   | PCB 2 tails                |                                                  |
| 8 Pin                                                                               | 21-033733-002                    |                                    |                                   | PCB 2 tails                | For epoxy filled connector                       |
| 8 Pin                                                                               | 21-033733-004                    |                                    |                                   | PCB 2 tails                | For epoxy filled connector                       |
| 8 Pin                                                                               | 21-033733-005                    |                                    |                                   | PCB 4 outer tails, 1 inner |                                                  |
| 8 Pin                                                                               | 21-033733-009                    |                                    |                                   | PCB 2 tails                |                                                  |
| 8 Pin                                                                               | 21-033733-008                    |                                    |                                   | PCB 2 tails                |                                                  |
| 8 Socket                                                                            | 21-033426-001                    |                                    |                                   | PCB 2 tails                |                                                  |
| 8 Pin                                                                               |                                  | 21-033967-115                      |                                   | PCB 3 tails                | M39029/90/91 Interface                           |
| 8 Pin                                                                               |                                  | 21-033967-125                      |                                   | PCB 3 tails                |                                                  |
| 8 Pin                                                                               |                                  | 21-033967-015                      |                                   | PCB 3 tails                |                                                  |
| 8 Pin                                                                               |                                  | 21-033967-045                      |                                   | PCB 3 tails                |                                                  |
| 8 Pin                                                                               |                                  | 21-033967-055                      |                                   | PCB 3 tails                |                                                  |
| 8 Pin                                                                               |                                  | 21-033967-065                      |                                   | PCB 3 tails                |                                                  |
| 8 Pin                                                                               |                                  | 21-033967-085                      |                                   | PCB 3 tails                |                                                  |
| 8 Pin                                                                               |                                  | 21-033967-095                      |                                   | PCB 3 tails                |                                                  |
| 8 Pin                                                                               |                                  | P-209550†                          |                                   | PCB 3 tails                |                                                  |
| 8 Pin                                                                               |                                  | P-209532-1                         |                                   | PCB 9 tails                |                                                  |
| 8 Pin                                                                               |                                  | P-209532-2                         |                                   | PCB 9 tails                |                                                  |
| 8 Socket                                                                            |                                  | 21-033921-015                      |                                   | PCB 3 tails                |                                                  |
| 8 Socket                                                                            |                                  | 21-033921-045                      |                                   | PCB 3 tails                |                                                  |
| 8 Socket                                                                            |                                  | 21-033921-035                      |                                   | PCB 3 tails                |                                                  |
| 8 Socket                                                                            |                                  | 21-033921-065                      |                                   | PCB 3 tails                |                                                  |
| 8 Socket                                                                            |                                  | 21-033921-075                      |                                   | PCB 3 tails                |                                                  |
| 8 Socket                                                                            |                                  | 21-033921-115†                     |                                   | PCB 3 tails                |                                                  |
| 8 Socket                                                                            |                                  | 21-033479-001                      |                                   | PCB 3 tails                | AS39029/114 Type (with hood)                     |
| 8 Socket                                                                            |                                  | 21-033479-021                      |                                   | PCB 3 tails                | AS39029/114 Type (with hood)                     |
| 8 Socket                                                                            |                                  | 21-033921-105†                     |                                   | PCB 3 tails                | M39029/90/91 Interface .040 dia. tails           |
| 8 Socket                                                                            |                                  | DB-109002                          |                                   | PCB 2 tails                | M39029/91 Interface Outer body grounded to shell |
| 8 Socket                                                                            |                                  | 21-033919-015                      |                                   | PCB 2 tails                |                                                  |
| 8 Socket                                                                            |                                  | 21-033919-025                      |                                   | PCB 2 tails                |                                                  |
| 8 Pin                                                                               |                                  |                                    | 21-033828-001                     | PCB 3 tails                |                                                  |
| 8 Pin                                                                               |                                  |                                    | 21-033828-021                     | PCB 3 tails                |                                                  |
| 8 Pin                                                                               |                                  |                                    | 21-033828-041                     | PCB 3 tails                |                                                  |
| 8 Socket                                                                            |                                  |                                    | 21-033840-001                     | PCB 3 tails                |                                                  |
| 8 Socket                                                                            |                                  |                                    | 21-033840-021                     | PCB 2 tails                | Outer body grounded to shell                     |
| 8 Socket                                                                            |                                  |                                    | 21-033841-001                     | PCB 2 tails                | Outer body grounded to shell                     |
| 10 Pin                                                                              |                                  | 21-033844-002†                     |                                   | PCB 2 tails                | Outer body grounded to shell                     |
| 12 Socket                                                                           |                                  |                                    |                                   |                            |                                                  |

\* Consult Amphenol Aerospace for tail configurations and tail diameters.

† Consult Amphenol Aerospace for current release of this contact.

# Coax, Twinax & Triax PC Tail Contacts

## Application Data, cont.

| PC TAIL COAX, TWINAX, AND TRIAX CONTACTS FOR USE IN D38999 SERIES I & III CONNECTORS |                                  |                                    |                                   |                        |                                        |
|--------------------------------------------------------------------------------------|----------------------------------|------------------------------------|-----------------------------------|------------------------|----------------------------------------|
| Size                                                                                 | PC Tail Coax Contact Part Number | PC Tail Twinax Contact Part Number | PC Tail Triax Contact Part Number | Tails*                 | Comments                               |
| 12 Pin                                                                               | 21-033686-008                    |                                    |                                   | PCB 2 tails            |                                        |
| 12 Pin                                                                               | 21-033686-009                    |                                    |                                   | PCB 2 tails            | Outer tail clip type                   |
| 12 Pin                                                                               | 21-033686-005                    |                                    |                                   | PCB 2 tails            |                                        |
| 12 Pin                                                                               | 21-033686-010                    |                                    |                                   | PCB 2 tails            |                                        |
| 12 Pin                                                                               | 21-033686-013                    |                                    |                                   | PCB 2 tails            | Outer tail clip type                   |
| 12 Pin                                                                               | 21-033687-006                    |                                    |                                   | PCB 2 tails            | For epoxy filled connector             |
| 12 Pin                                                                               | 21-033687-007                    |                                    |                                   | PCB 2 tails            |                                        |
| 12 Pin                                                                               | 21-033686-016†                   |                                    |                                   | PCB 2 tails            |                                        |
| 12 Socket                                                                            | 21-033614-001                    |                                    |                                   | PCB 2 tails            |                                        |
| 12 Socket                                                                            | 21-033614-021                    |                                    |                                   | PCB 2 tails            |                                        |
| 12 Socket                                                                            | 21-033614-041                    |                                    |                                   | PCB 2 tails            |                                        |
| 12 Socket                                                                            | 21-033611-003                    |                                    |                                   | PCB 2 tails            | Outer tail clip type                   |
| 12 Socket                                                                            | 21-033440-001                    |                                    |                                   | PCB 3 tails            |                                        |
| 12 Socket                                                                            | 21-033430-001                    |                                    |                                   | PCB 2 tails            | Outer tail clip type, M38999 Series II |
| 12 Socket                                                                            | 21-033430-021                    |                                    |                                   | PCB 2 tails            | M38999 Series II                       |
| 12 Socket                                                                            | 21-033430-041                    |                                    |                                   |                        | M38999 Series II                       |
| 12 Pin                                                                               |                                  | 21-033633-001†**                   |                                   | PCB 4 tails            | JN1104 Interface                       |
| 12 Pin                                                                               |                                  | 21-033633-002**                    |                                   | PCB 4 tails            |                                        |
| 12 Pin                                                                               |                                  | 21-033633-006**                    |                                   | PCB 4 tails            |                                        |
| 12 Pin                                                                               |                                  | 21-033633-007**                    |                                   | PCB 4 tails            |                                        |
| 12 Socket                                                                            |                                  | 21-033393-006**                    |                                   | PCB 4 tails            |                                        |
| 12 Socket                                                                            |                                  | 21-033393-005**                    |                                   | PCB 4 tails            |                                        |
| 12 Socket                                                                            |                                  | 21-033433-001**                    |                                   | PCB 4 tails            | M38999 Series II, JN1104 Interface     |
| 16 Pin                                                                               | 21-033856-015                    |                                    |                                   | PCB 2 tails            |                                        |
| 16 Pin                                                                               | 21-033856-025                    |                                    |                                   | PCB 90 degree, 2 tails |                                        |
| 16 Pin                                                                               | 21-033856-065                    |                                    |                                   | PCB 2 tails            |                                        |
| 16 Pin                                                                               | 21-033634-015                    |                                    |                                   | PCB 1 tail             | Outer body grounded to shell           |
| 16 Pin                                                                               | 21-033634-035                    |                                    |                                   | PCB 1 tail             | Outer body grounded to shell           |
| 16 Pin                                                                               | 21-033634-045                    |                                    |                                   | PCB 1 tail             |                                        |
| 16 Pin                                                                               | 21-033386-001                    |                                    |                                   | PCB 2 tails            |                                        |
| 16 Socket                                                                            | 21-033857-001                    |                                    |                                   | PCB 2 tails            |                                        |
| 16 Socket                                                                            | 21-033857-008                    |                                    |                                   | PCB 2 tails            |                                        |
| 16 Socket                                                                            | 21-033857-007                    |                                    |                                   | PCB 2 tails            |                                        |
| 16 Socket                                                                            | 21-033610-001                    |                                    |                                   | PCB 2 tails            |                                        |
| 16 Socket                                                                            | 21-033610-002                    |                                    |                                   | PCB 2 tails            |                                        |
| 16 Socket                                                                            | 21-033441-001                    |                                    |                                   | PCB 2 tails            |                                        |
| 16 Socket                                                                            | 21-033606-001                    |                                    |                                   | PCB 2 tails            |                                        |
| 16 Socket                                                                            | 21-033606-021†                   |                                    |                                   | PCB 2 tails            | M38999 Series II                       |
| 16 Socket                                                                            | 21-033606-031†                   |                                    |                                   | PCB 2 tails            |                                        |
| 16 Socket                                                                            | 21-033610-003                    |                                    |                                   | PCB 2 tails            |                                        |
| 16 Socket                                                                            | 21-033857-003                    |                                    |                                   | PCB 2 tails            |                                        |

\* Consult Amphenol Aerospace for tail configurations and tail diameters.



















\*\* Size 12 twinax and triax contacts are interchangeable.

† Consult Amphenol Aerospace for current release of this contact.

# Insert Arrangements - MIL-DTL-38999

## Incorporating Coax, Twinax and Triax Contacts

Front face of pin inserts illustrated

|                               |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |
|-------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                               |    |    |     |    |    |
| Insert Arrangement            | 9-5                                                                                 | 10-2 11-2                                                                           | 12-3 13-3                                                                            | 12-4 13-4                                                                             | 14-4 15-4                                                                             |
| Connector Series              | TV                                                                                  | SJT LJT,TV                                                                          | JT LJT                                                                               | JT, SJT LJT,TV                                                                        | JT LJT                                                                                |
| Service Rating                | Grounded                                                                            | I                                                                                   | II                                                                                   | I                                                                                     | I                                                                                     |
| Number of Contact             | 1                                                                                   | 2                                                                                   | 3                                                                                    | 4                                                                                     | 4                                                                                     |
| Contact Size                  | 8 Twinax                                                                            | 16                                                                                  | 16                                                                                   | 16                                                                                    | 12                                                                                    |
|                               |    |    |     |    |    |
| Insert Arrangement            | 14-5 15-5                                                                           | 14-15 15-15                                                                         | 14-68 15-68                                                                          | 14-97 15-97                                                                           | 16-6 17-6                                                                             |
| Available in Connector Series | JT, SJT LJT,TV                                                                      | JT, SJT LJT,TV                                                                      | JT LJT                                                                               | JT, SJT LJT,TV                                                                        | JT, SJT LJT,TV                                                                        |
| Service Rating                | II                                                                                  | I                                                                                   | I                                                                                    | I                                                                                     | I                                                                                     |
| Number of Contact             | 5                                                                                   | 14 1                                                                                | 8                                                                                    | 8 4                                                                                   | 6                                                                                     |
| Contact Size                  | 16                                                                                  | 20 16                                                                               | 16                                                                                   | 20 16                                                                                 | 12                                                                                    |
|                               |   |   |   |   |   |
| Insert Arrangement            | 16-8 17-8                                                                           | 16-13 17-13                                                                         | 16-99 17-99                                                                          | 17-2 17-22                                                                            | 16-6 17-6                                                                             |
| Connector Series              | JT, SJT LJT,TV                                                                      | JT, SJT LJT                                                                         | JT, SJT LJT,TV                                                                       | LJT TV                                                                                | LJT TV                                                                                |
| Service Rating                | II                                                                                  | I                                                                                   | I                                                                                    | M                                                                                     | Coax                                                                                  |
| Number of Contact             | 8                                                                                   | 13                                                                                  | 21 2                                                                                 | 38 1                                                                                  | 2 2                                                                                   |
| Contact Size                  | 16                                                                                  | 16                                                                                  | 20 16                                                                                | 22D 8                                                                                 | 12 8                                                                                  |
|                               |  |  |  |  |  |
| Insert Arrangement            | 17-25                                                                               | 18-11 19-11                                                                         | 18-28 19-28                                                                          | 18-30 19-30                                                                           | 19-31                                                                                 |
| Connector Series              | LJT                                                                                 | JT, SJT LJT,TV                                                                      | JT LJT                                                                               | JT LJT                                                                                | TV                                                                                    |
| Service Rating                | M                                                                                   | II                                                                                  | I                                                                                    | I                                                                                     | M                                                                                     |
| Number of Contact             | 22 2                                                                                | 11                                                                                  | 26 2                                                                                 | 29 1                                                                                  | 2 1 12                                                                                |
| Contact Size                  | 22D 8                                                                               | 16                                                                                  | 20 16                                                                                | 20 16                                                                                 | 8 12 22D                                                                              |

The insert arrangements shown on this page and the next page represent the most readily available patterns within the 38999 Circular Series. If you require other arrangements than what are shown here, consult Amphenol for further availability. In most cases, unless otherwise stated, size 8 and size 12 cavities can be filled with either coax, twinax, triax or power contacts.





### CONTACT LEGEND

|                                                                                     |                                                                                     |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |
| 8                                                                                   | 10                                                                                  | 12                                                                                    | 16                                                                                    | 20                                                                                    | 22D                                                                                   |
| Coax/Twinax/Triax or Power                                                          | Twinax/Triax or Power                                                               | Coax/Twinax/Triax or Power                                                            | Coax or Power                                                                         | Power                                                                                 | Power                                                                                 |





# Insert Patterns - MIL-DTL-38999

## Incorporating Coax, Twinax and Triax Contacts





Front face of pin inserts illustrated



| Insert Arrangement | 18-68 | 19-68 | 18-96 | 20-11   | 21-11   | 20-16   | 21-16   |
|--------------------|-------|-------|-------|---------|---------|---------|---------|
| Connector Series   | JT    | LJT   | JT    | JT, SJT | LJT, TV | JT, SJT | LJT, TV |
| Service Rating     |       | I     | I     |         | I       |         | II      |
| Number of Contact  | 18    |       | 9     |         | 11      |         | 16      |
| Contact Size       | 16    |       | 12    |         | 12      |         | 16      |






| Insert Arrangement | 20-39   | 21-39   | 20-75 | 21-75   | 20-79 | 21-79 | 22-21   | 23-21   |
|--------------------|---------|---------|-------|---------|-------|-------|---------|---------|
| Connector Series   | JT, SJT | LJT, TV | SJT   | LJT, TV | SJT   | LJT   | JT, SJT | LJT, TV |
| Service Rating     |         | I       |       | M       |       | II    |         | II      |
| Number of Contact  | 37      | 2       |       | 4       |       | 17    |         | 21      |
| Contact Size       | 20      | 16      |       | 8       |       | 22D   |         | 16      |



| Insert Arrangement | 23-54 | 23-97 | 23-99 | 24-4    | 25-4    |
|--------------------|-------|-------|-------|---------|---------|
| Connector Series   | TV    | LJT   | LJT   | JT, SJT | LJT, TV |
| Service Rating     |       | II    | II    |         | I       |
| Number of Contact  | 40    | 9     | 4     | 48      | 8       |
| Contact Size       | 22D   | 16    | 12    | 20      | 16      |




### CONTACT LEGEND

|                            |                       |                            |               |       |       |
|----------------------------|-----------------------|----------------------------|---------------|-------|-------|
|                            |                       |                            |               |       |       |
| 8                          | 10                    | 12                         | 16            | 20    | 22D   |
| Coax/Twinax/Triax or Power | Twinax/Triax or Power | Coax/Twinax/Triax or Power | Coax or Power | Power | Power |





| Insert Arrangement | 24-19   | 25-19   | 24-20 | 25-20*  | 24-24   | 25-24   |
|--------------------|---------|---------|-------|---------|---------|---------|
| Connector Series   | JT, SJT | LJT, TV | SJT   | LJT, TV | JT, SJT | LJT, TV |
| Service Rating     |         | I       |       | N       |         | I       |
| Number of Contact  |         | 19      | 10    | 13      | 12      | 12      |
| Contact Size       |         | 12      | 20    | 16      | 16      | 12      |

(Locations U and Y - Dedicated to Fiber Optics)



| Insert Arrangement | 24-29   | 25-29   | 24-37   | 25-37   | 24-43   | 25-43   |
|--------------------|---------|---------|---------|---------|---------|---------|
| Connector Series   | JT, SJT | LJT, TV | JT, SJT | LJT, TV | JT, SJT | LJT, TV |
| Service Rating     |         | I       |         | I       |         | I       |
| Number of Contact  |         | 29      |         | 37      | 23      | 20      |
| Contact Size       |         | 16      |         | 16      | 20      | 16      |



| Insert Arrangement | 24-46 | 25-46   | 25-11*  |
|--------------------|-------|---------|---------|
| Connector Series   | SJT   | LJT, TV | LJT, TV |
| Service Rating     |       | I       | N       |
| Number of Contact  | 40    | 4       | 2       |
| Contact Size       | 20    | 16      | 8       |

\* For use in MIL-STD-1760 applications with MIL-DTL-38999 Series III.

### CONTACT LEGEND

|                                                                                     |                                                                                     |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |
| 8                                                                                   | 10                                                                                  | 12                                                                                    | 16                                                                                    | 20                                                                                    | 22D                                                                                   |
| Coax/Twinax/<br>Triax or Power                                                      | Twinax/Triax/<br>or Power                                                           | Coax/Twinax/<br>Triax or<br>Power                                                     | Coax or<br>Power                                                                      | Power                                                                                 | Power                                                                                 |

# MIL-DTL-5015, MIL-DTL-22992 Circular Connector Overview

Amphenol's medium to heavy weight circular include the MS/Standard MIL-DTL-5015 series and the heaviest weight, largest size circular is the Heavy Duty MIL-DTL-22992 series. These time-tested circulars have been used for several years. They are dependable general duty and environmentally resistant connectors for military and industrial applications.

Shielded coax contacts, although more popularly used in 38999 types and 26482 types, can be incorporated into some arrangements of the 5015 and 22992 type circulars. Shielded coaxial contacts within these series are considered MS modifications to the MIL-spec connector and the coax contacts are pre-installed in the connector. Normal operating voltage with power contacts only is up to 3000 VAC (RMS) at sea level for MIL-DTL-5015 circulars. The Heavy Duty types are designed for high current capacity and have current ratings (with power contacts only) of up to 200 amps.



MS/Standard MIL-DTL-5015 Type Connectors

## Standard and Heavy Duty Circular offer these features for contact termination flexibility:

- Insert arrangements that can incorporate:
- Size 4, 8 & 12 Crimp Coax contacts, pre-installed in the connector
- Wide selection of connector shell styles and sizes
- Standard power contact options within the various connector styles include: solder type, crimp front release, crimp rear release
- Coax contacts are designed to the same high performance standards as power contacts. Coax and power contacts may be intermixed with no degradation of connector reliability.

## Amphenol® MS/Standard Circular MIL-DTL-5015\* Type Connector Family:

See MS/Standard catalog 12-020 for complete information on these styles

### MS-A, MS-C, MS-E, MS-F, MS-R

- Produced in strict accordance with MIL-DTL-5015
- Threaded coupling, solder or crimp rear insertion contacts (coax available in crimp type only)
- Class A, Solid Shell - intended for general connector usage
- Class C, Pressurized - for use on pressurized bulkheads or pressure barriers
- Class E/F, Environmental Resisting - ideally suited for installation where condensation, vibration and rapid changes in pressure or temperature are considerations
- Class R, Lightweight Environmental Resisting - shorter in length and lighter in weight than Class E



Heavy Duty QWLD, MIL-DTL-22992 Connectors

## Amphenol® Heavy Duty Circular MIL-DTL-22992 Connector Family:

### QWLD

- Designed for most power and control circuits
  - Military MIL-DTL-22992 qualified versions and proprietary equivalents
- See Catalog 12-052 for complete information on these styles.

### QWL

- A more compact heavy duty design for industrial power and control applications

See Catalog 12-053 for complete information on these styles.

## GENERAL ORDERING INFORMATION

Amphenol MS/Standard MIL-DTL-5015 type and Heavy Duty MIL-DTL-22992 type circulars are normally supplied with a full complement of power contacts, separately packaged. Coax contacts are ordered by part number as referenced in the part number charts on the following pages of this catalog, and are substituted for the power contacts at the time of the cable or equipment assembly. Coax contacts are pre-installed in these series. Installation instructions for the coax contacts for these series are provided in Amphenol document L-650.

### HOW TO ORDER:

1. Select the coax contacts designed for the cable being used from the chart on page 409 of this catalog. Select a connector insert from those shown on page 44 which will accommodate the quantity and size of coaxial contacts needed plus any power contacts required.
2. Determine the MS/Standard or Heavy Duty Series style desired. (See features of each series referenced above). The catalog referenced for each series will guide you in determining shell style, finish, service class and insert rotation required for your application.  
MS/Standard MIL-DTL-5015 Type Connectors (Catalog 12-020 on-line at [www.amphenol-industrial.com](http://www.amphenol-industrial.com))  
Catalog 12-052 - MIL-DTL-22992 QWLD Connectors (on-line at [www.amphenol-aerospace.com](http://www.amphenol-aerospace.com))  
Catalog 12-053 - QWL Connectors (currently not on-line; consult Amphenol Aerospace for hardcopy)
3. Consult Amphenol, Sidney, NY with the pertinent cable, contact, insert arrangement and connector style choices for complete connector part number.

\* Amphenol also offers the following other MIL-DTL-5015 Circular Connectors which are threaded coupling (consult Amphenol Industrial for availability of shielded contacts in any of these series):

- Amphenol®/Matrix® MIL-DTL-5015 with crimp rear releasable and rear insertable contacts. (See Matrix 5015 section of this catalog)
- Amphenol® MIL-DTL-5015 Modifications (Ask for Industrial Catalog 12-021)
- Amphenol® GT Series with reverse bayonet coupling (Ask for Catalog 12-024)
- Amphenol® AC Threaded and AC-B Bayonet Series (Ask for Industrial Catalog 12-025)

NOTE:  
MIL-DTL-5015 supersedes MIL-C-5015  
MIL-DTL-22992 supersedes MIL-C-22992

**Amphenol® Coaxial Contacts** can be incorporated into MS/Standard MIL-DTL-5015 Type Circular Connectors and Heavy Duty MIL-DTL-22992 Connectors. They offer the same durability advantages and design benefits for reliable interconnection as the Amphenol coax contacts used in high performance D38999 connectors. A variety of military and commercial shielded cables are accommodated within these circular series.

Other features of the coax contacts available for MS/Standard and Heavy Duty circulars include:

- Several insert arrangements that can incorporate:
  - Size 4, 8 and 12 coax contacts
- Advanced shielding wire technology in a rugged military connector
- Single connector with multiple coaxial connection eliminates cross-mating
- Positive contact captivation - especially important in these series with its much higher coupling/uncoupling force
- Older shielded cable type availability



**Coax Contact, Pin**  
for use in MS/Standard MIL-DTL-5015 and  
Heavy Duty MIL-DTL-22992 Connectors



**Coax Contact, Socket**  
for use in MS/Standard MIL-DTL-5015 and  
Heavy Duty MIL-DTL-22992 Connectors

## TYPICAL ELECTRICAL PERFORMANCE

Size 4, 8 & 12 Contacts

Contact Resistance:

Center @ 1 Amp, 170 millivolts max. voltage drop @ 25°C

Outer @ 12 Amps, 150 millivolts max. voltage drop @ 25°C

Dielectric Withstanding Voltage:

Size 4 & 8: 1,300 VAC Rms @ sea level

Size 12: 1,000 VAC Rms @ sea level

Size 4, 8 & 12: 250 VAC Rms @ 50,000 ft.

Insulation Resistance

5,000 megohms minimum @ 25°C

All contacts in these series are non-impedance matched contacts.


Part numbers 21-033063-XX( ) and 21-033064-XX( ) are moisture seal design (internal O-ring).

## CONTACT FINISHES:

Suffix      Finish

|   |                                                        |
|---|--------------------------------------------------------|
| 1 | 0.00020 min. silver over copper flash                  |
| 2 | 0.00005 min. gold (Knoop hardness 130-200) over silver |
| 3 | 0.00010 min. gold (Knoop hardness 130-200) over silver |
| 4 | 0.00010 min. gold (Knoop hardness 130-200) over copper |
| 5 | 0.00005 min. gold (Knoop hardness 130-200) over nickel |
| E | 0.00005 min. gold (Knoop hardness 90 max.) over copper |
| F | 0.00005 min. gold (Knoop hardness 130-200) over copper |
| H | 0.00010 min. gold (Knoop hardness 130-200) over copper |

# Coaxial Contacts for MIL-DTL-5015, Heavy Duty MIL-DTL-22992 Application Data

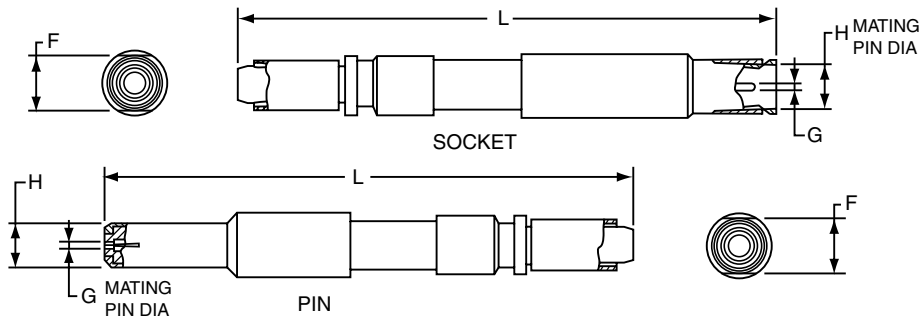

NOTE: All contacts of the same size and the same inner and outer contact diameters (G & H) will mate with each other.

| COAX CONTACTS                                                                         |                                                                                                        |                  |      |                                                    |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------|------|----------------------------------------------------|------------------------------------------|-------------------------|--------------------------------|-----------------------------------------------------|------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------------|---------------------------|-----------|
| For use in MS/Standard MIL-DTL-5015 Type and Heavy Duty MIL-DTL-22992 Type Connectors |                                                                                                        |                  |      |                                                    |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
| Cable                                                                                 | Contact Part Number<br>(See L-650 Termination<br>Instruction Sheet for all<br>contacts listed below)** |                  | Size | Finish<br>on<br>Mating<br>Parts<br>(See<br>Pg. 42) | Dimensional Data<br>(See Drawings above) |                         |                                |                                                     | Crimp Ferrule Tools                                  |                                                        |                                                       | Retainer<br>Nut<br>Wrench |           |
|                                                                                       |                                                                                                        |                  |      |                                                    | G<br>Dia.                                | H<br>Dia.<br>±<br>0.001 | F<br>Across<br>Flats<br>±0.004 | L<br>Length Ref.                                    |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | Pin                                                                                                    | Socket           |      |                                                    |                                          |                         |                                | MIL-T-22910/7-1<br>Tool Use with<br>Die Part Number | MIL-T-22520/5-01<br>Tool Use with Die<br>Part Number | MIL-T-229520/10-01<br>Tool Use with Die<br>Part Number |                                                       |                           |           |
| RG-58C/U,<br>RG-141A/U,<br>RG-303/U                                                   | 21-033014-001                                                                                          | 21-033013-001    | 8    | 5                                                  | 0.0355<br>± 0.0010                       | 0.218                   | 0.280                          | 1.481                                               | 1.511                                                | M22910/7-15 (B)                                        | M22520/5-05 (B)<br>M22520/5-41 (B)                    | M22520/10-07 (B)          | 11-8676-2 |
|                                                                                       | 21-033034-002                                                                                          | 21-033033-002    | 8    | 1                                                  |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033048-002                                                                                          | 21-033047-002    | 8    | ††                                                 |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033016-005                                                                                          | 21-033015-005    | 8    | 3                                                  |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033130-002()                                                                                        | 21-033129-002()  | 8    | ***                                                |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
| RG-59B/U,<br>RG-62A/U,<br>RG-62B/U,<br>RG-210/U                                       | 21-033014-005                                                                                          | 21-033013-005    | 8    | 5                                                  | 0.0355<br>± 0.0010                       | 0.218                   | 0.280                          | 1.481                                               | 1.511                                                | M22910/7-18 (B)                                        | M22520/5-45 (B)                                       |                           | 11-8676-3 |
|                                                                                       | 21-033016-002                                                                                          | 21-033015-002    | 8    | 3                                                  |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033034-005                                                                                          | 21-033033-005†   | 8    | 1                                                  |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033130-005()                                                                                        | 21-033129-005()  | 8    | ***                                                |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033064-021()                                                                                        | 21-033063-021()  | 8    | ***                                                |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
| RG-161/U,<br>RG-174A/U,<br>RG-179B/U,<br>RG-187A/U,<br>RG-188A/U,<br>RG-316/U         | 21-033014-003                                                                                          | 21-033013-003    | 8    | 5                                                  | 0.0355<br>± 0.0010                       | 0.218                   | 0.280                          | 1.481                                               | 1.511                                                | M22910/7-12 (B)                                        | M22520/5-03 (A)<br>M22520/5-08 (A)<br>M22520/5-35 (B) | M22520/10-05 (A)          | 11-8676-2 |
|                                                                                       | 21-033016-001                                                                                          | 21-033015-001    | 8    | 3                                                  |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033034-003                                                                                          | 21-033033-003    | 8    | 1                                                  |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033130-003()†                                                                                       | 21-033129-003()† | 8    | ***                                                |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033064-020()†                                                                                       | 21-033063-020()† | 8    | ***                                                |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033014-021                                                                                          | 21-033013-021    | 12   | 5                                                  | 0.0200<br>± 0.0005                       | 0.128                   | 0.172                          |                                                     |                                                      |                                                        |                                                       |                           |           |
| 21-033034-001                                                                         | 21-033033-001                                                                                          | 12               | 1    |                                                    |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
| 21-033048-001                                                                         | 21-033047-001                                                                                          | 12               | ***  |                                                    |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
| 21-033130-001()†                                                                      | 21-033129-001()†                                                                                       | 12               | ***  |                                                    |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
| RG-178B/U,<br>RG-196A/U                                                               | 21-033014-022†                                                                                         | 21-033013-022†   | 12   | 5                                                  | 0.0200<br>± 0.0005                       | 0.128                   | 0.172                          | 1.481                                               | 1.511                                                | M22910/7-11 (B)                                        | M22520/5-03 (B)<br>M22520/5-33 (B)                    | M22520/10-05 (B)          | 11-8676-1 |
| RG-180B/U,<br>RG-195A/U                                                               | 21-033014-006                                                                                          | 21-033013-006    | 8    | 5                                                  | 0.355<br>± 0.0010                        | 0.218                   | 0.280                          | 1.481                                               | 1.511                                                | M22910/7-15 (B)                                        | M22520/5-05 (B)<br>M22520/5-41 (B)                    | M22520/10-07 (B)          | 11-8676-2 |
|                                                                                       | 21-033034-006†                                                                                         | 21-033033-006†   | 8    | 1                                                  |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033048-003                                                                                          | 21-033047-003    | 8    | ***                                                |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033130-006()†                                                                                       | 21-033129-006()  | 8    | ***                                                |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
| RG-212/U                                                                              | 21-033060-011()                                                                                        | 21-033059-011()  | 4    | ***                                                | 0.0625<br>± 0.0010                       | 0.344                   | 0.375                          | 1.669                                               | 1.605                                                | M22910/7-14 (A)                                        | M22520/5-39 (A)                                       |                           | 11-8676-4 |
| RG-140/U,<br>RG-302/U                                                                 | 21-033014-008                                                                                          | 21-033013-008    | 8    | 5                                                  | 0.0355<br>± 0.0010                       | 0.218                   | 0.280                          | 1.481                                               | 1.511                                                | M22910/7-17 (B)                                        | M22520/5-05 (A)<br>M22520/5-19 (B)                    | M22520/10-07 (A)          | 11-8676-2 |
|                                                                                       | 21-033034-008                                                                                          | 21-033033-008    | 8    | 1                                                  |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033130-008()†                                                                                       | 21-033129-008()† | 8    | ***                                                |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
| RG-55B/U,<br>RG-142A/U,<br>RG-142B/U,<br>RG-223/U                                     | 21-033014-004                                                                                          | 21-033013-004    | 8    | 5                                                  | 0.0355<br>± 0.0010                       | 0.218                   | 0.280                          | 1.481                                               | 1.511                                                | M22910/7-17 (B)                                        | M22520/5-05 (A)<br>M22520/5-19 (B)                    | M22520/10-07 (A)          | 11-8676-2 |
|                                                                                       | 21-033034-004                                                                                          | 21-033033-004    | 8    | 1                                                  |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033130-004()                                                                                        | 21-033129-004()  | 8    | ***                                                |                                          |                         |                                |                                                     |                                                      |                                                        |                                                       |                           |           |
|                                                                                       | 21-033060-102()                                                                                        | 21-033059-012()  | 4    | ***                                                | 0.0625<br>± 0.0010                       | 0.344                   | 0.375                          | 1.669                                               | 1.605                                                |                                                        |                                                       |                           |           |





\*\*\*See finish options for MS/Standard and Heavy Duty contacts listed on page 416.  
Replace the parenthesis of the contact part number with the finish suffix number. However,  
you should consult Amphenol Aerospace regarding the availability of all finish choices for  
each part number.

† Consult Amphenol Aerospace for current availability of this contact.  
CRIMPING TOOLS: Italicized letters in parenthesis that follow  
positioner part numbers indicate applicable die closure. Commercial  
equivalents with the same die closure dimension may be used.  
†† 21-033047-X and 21-033048-X are supplied with E (soft gold)  
finish on mating socket parts, and F (hard gold) finish on mating pin  
parts.\*\*Termination instruction sheet L-650 can be found on-line at:  
[www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)





# Insert Patterns - Standard MIL-DTL-5015, Heavy Duty MIL-DTL-22992

## Incorporating Coax Contacts




Front face of pin inserts illustrated



| Insert Arrangement | 16-10                  | 18-10                  | 18-16                  | 20-4                   |
|--------------------|------------------------|------------------------|------------------------|------------------------|
| Connector Series   | MS/Standard, QWLD, QWL | MS/Standard, QWLD, QWL | MS/Standard, QWLD, QWL | MS/Standard, QWLD, QWL |
| Service Rating     | A                      | A                      | C                      | D                      |
| Number of Contact  | 3                      | 4                      | 1                      | 4                      |
| Contact Size       | 12                     | 12                     | 12                     | 12                     |



| Insert Arrangement | 20-15                  | 20-16                  | 24-2                   | 24-11                  |
|--------------------|------------------------|------------------------|------------------------|------------------------|
| Connector Series   | MS/Standard, QWLD, QWL | MS/Standard, QWLD, QWL | MS/Standard, QWLD, QWL | MS/Standard, QWLD, QWL |
| Service Rating     | A                      | A                      | D                      | A                      |
| Number of Contact  | 7                      | 2      7               | 7                      | 3      6               |
| Contact Size       | 12                     | 12      16             | 12                     | 8      12              |



| Insert Arrangement | 28-6                   | 28-11                  | 32-8                   |
|--------------------|------------------------|------------------------|------------------------|
| Connector Series   | MS/Standard, QWLD, QWL | MS/Standard, QWLD, QWL | MS/Standard, QWLD, QWL |
| Service Rating     | D                      | A                      | A                      |
| Number of Contact  | 3                      | 4      18              | 6      24              |
| Contact Size       | 4                      | 12      16             | 12      16             |

The insert arrangements shown on this page represent the most readily available patterns within the MIL-DTL-5015 and MIL-DTL-22992 Series. If you require other arrangements than what are shown here, consult Amphenol for further availability. MS/Standard connectors have over 200 insert pattern arrangements available, and within these patterns any size 4, 8 or 12 contact cavities can be incorporated with coax contacts. However, you need to consult Amphenol, Sidney NY for availability and ordering information. All coax contacts in the Standard and Heavy Duty series come pre-installed in connectors.

| CONTACT LEGEND                                                                        |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| 4                                                                                     | 8                                                                                     | 12                                                                                    | 16                                                                                    |
| Coax or Power                                                                         | Coax/<br>Twinax/Triax<br>or Power                                                     | Coax/Twinax/<br>Triax or<br>Power                                                     | Coax or<br>Power                                                                      |

# Rectangular Rack & Panel Connectors

## That Incorporate High Speed Contacts

Amphenol provides an impressive array of Rectangular Interconnection products to meet the needs of high density systems such as opto-electrical backplanes used in many applications that include: medical equipment, IC chip testers, telecommunications, military and commercial aviation, military ground vehicles, GPS systems, space and industrial applications.

- ARINC 600 and R27 Rack and Panel connectors can incorporate:
  - size 8 Coax contacts
  - Size 1 and size 5 Coax (consult Amphenol Canada)
  - Size 12 Twinax contacts
  - Size 8 Quadrax contacts
  - Size 8 Differential Twinax contacts

### ARINC 600 Rack and Panel Rectangular Connectors


See Amphenol Canada Publication SL-379, ARINC 600 Rack and Panel Connectors for complete information.

- The ARINC 600 is the successor to the ARINC 404 for many of the new avionics designs and offers lower mating force contacts, increased contact count and a front release, floating keying system
- ARINC 600 Connectors are a recognized standard rack and panel connector for aircraft applications with both environmental and non-environmental versions available
- Designed to meet all relevant ARINC 600 connector specifications
- Front removable keying posts
- Up to 800 size 22 contact positions in one connector
- Contact options: standard contacts are power/signal crimp rear release in sizes 12, 16, 20 and 22 in crimp or PCB; or shielded coax, concentric twinax, quadrax contacts; or fiber optics
- Waveguide connections


### R27 Rack and Panel Rectangular Connectors

See Amphenol Canada Publication for R27 Series Connectors for complete information.

- The R27 Series is a robust rectangular connector designed to meet or surpass all the requirements of the MIL-DTL-83527 specification and EN 3682 European Standard.
- Well suited for harsh environments - enhanced environmental sealing, robust and durable shells, EMI shielding spring
- Filtered or non-filtered
- Connectors, shells, inserts, termination modules and contacts are sold separately or fully assembled
- Interchangeable insert patterns with ARINC 600 models
- Contact options: standard contacts are power/signal crimp rear release in sizes 12, 16, 20 and 22 in crimp or PCB; or shielded coax, concentric twinax, quadrax contacts; or fiber optics

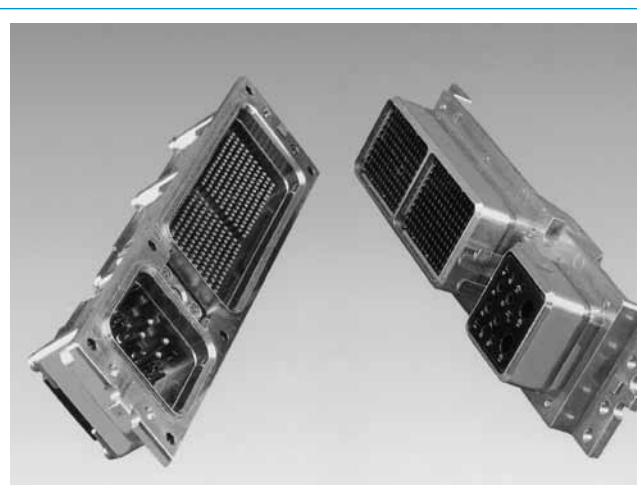


ARINC 600 Rack and Panel Connectors are high density connectors that can incorporate high speed shielded contacts

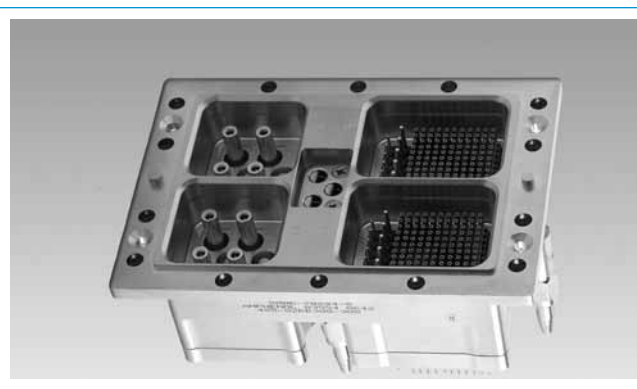

R27 Series Rack and Panel Connector can incorporate high speed shielded contacts



Coax Contact , Size 8 for use in ARINC Rack and Panel Connectors

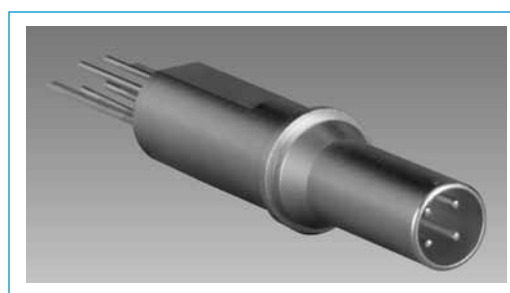

Quadrax Contact , Size 8 for use in ARINC Rack and Panel Connectors

### ARINC 600 & R27 Rack and Panel Connectors

| QUADRAX CONTACTS<br>FOR USE IN ARINC 600 & R27 CONNECTORS                       |                                                          |                               |                     |                 |                                                              |                                                         |
|---------------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------|---------------------|-----------------|--------------------------------------------------------------|---------------------------------------------------------|
| Cable                                                                           | Contact Part Number<br>(Termination Instruction Sheet)** |                               | Impedance<br>(Ohms) | Contact<br>Size | Crimping Tools                                               |                                                         |
|                                                                                 | Pin                                                      | Socket                        |                     |                 | Inner<br>Contact                                             | Outer Contact                                           |
| Tensolite NF24Q100-01,<br>24443/9P025X-4(LD),<br>S280W502-4, 24443/03130X-4(LD) | 21-033382-021<br>(L-2119-AH)                             | 21-033383-021<br>(L-2119-AH)  | 100                 | 8               | M22520/2-01<br>with Positioner Daniels K709<br>(M22520/2-37) | M22520/5-01<br>with Die Set M22520/5-45<br>(Location B) |
| Draka Fileca F-4703-3                                                           | 21-033382-031<br>(L-2119-I)                              | 21-033383-031<br>(L-2119-I)   | 100                 |                 |                                                              |                                                         |
| Draka Fileca F-4704-5, NF22Q100                                                 | 21-033382-101<br>(L-2119-AS)†                            | 21-033383-101<br>(L-2119-AS)† | 100                 |                 |                                                              |                                                         |
| JSFY02-1                                                                        | 21-033382-071<br>↑                                       | 21-033383-071<br>↑            | 110                 |                 |                                                              |                                                         |
| Tensolite 26473/02006X-4(LD),<br>Gore RCN8328                                   | 21-033382-061<br>(L-2119-L)                              | 21-033383-061<br>(L-2119-L)   | 150                 |                 | M22520/2-01<br>with Positioner Daniels K709<br>(M22520/2-37) | M22520/5-01<br>with Die Set M22520/5-45<br>(Location A) |

| DIFFERENTIAL TWINAX CONTACTS<br>FOR USE IN ARINC 600 & R27 CONNECTORS |                                                          |                              |                     |                 |                                                              |                                                             |
|-----------------------------------------------------------------------|----------------------------------------------------------|------------------------------|---------------------|-----------------|--------------------------------------------------------------|-------------------------------------------------------------|
| Cable                                                                 | Contact Part Number<br>(Termination Instruction Sheet)** |                              | Impedance<br>(Ohms) | Contact<br>Size | Crimping Tools                                               |                                                             |
|                                                                       | Pin                                                      | Socket                       |                     |                 | Inner<br>Contact                                             | Outer Contact                                               |
| ABS0386WF24                                                           | 21-033378-021<br>(L-2119-G)                              | 21-033379-021<br>(L-2119-G)  | 100                 | 8               | M22520/2-01<br>with Positioner Daniels K709<br>(M22520/2-37) | M22520/5-01<br>with Die Set M22520/5-45<br>(Location A & B) |
| ASNE0272TK22                                                          | 21-033378-031<br>(L-2119-G)                              | 21-033379-031<br>(L-2119-G)  | 100                 |                 |                                                              |                                                             |
| ASNE0272TK24                                                          | 21-033378-041<br>(L-2119-G)                              | 21-033379-041<br>(L-2119-G)  | 100                 |                 |                                                              |                                                             |
| Tensolite 24463/9P025X-2(LD)                                          | 21-033378-051<br>↑                                       | 21-033379-051<br>↑           | 100                 |                 |                                                              |                                                             |
| GC875TM24H                                                            | 21-033378-061<br>(L-2119-AU)                             | 21-033379-061<br>(L-2119-AU) | 77                  |                 |                                                              |                                                             |
|                                                                       | 21-033378-071<br>↑                                       | 21-033379-071<br>↑           | 110                 |                 |                                                              |                                                             |

| COAX CONTACTS<br>FOR USE IN ARINC 600 & R27 CONNECTORS |                                                          |                             |                 |                                         |                                                  |
|--------------------------------------------------------|----------------------------------------------------------|-----------------------------|-----------------|-----------------------------------------|--------------------------------------------------|
| Cable                                                  | Contact Part Number<br>(Termination Instruction Sheet)** |                             | Contact<br>Size | Crimping Tools                          |                                                  |
|                                                        | Pin                                                      | Socket                      |                 | Inner<br>Contact                        | Outer Contact                                    |
| RG-179                                                 | 21-033676-001<br>(L-2090-B)                              | 21-033675-001<br>(L-2090-A) | 8               | M22520/2-01<br>with Positioner<br>K1275 | M22520/10-01<br>with Die Set<br>M22520/10-05 (A) |
| RG-179                                                 | 21-033476-001                                            | 21-033475-001               |                 |                                         |                                                  |
| 5M2869-001                                             | 21-033676-002<br>↑                                       | 21-033675-002<br>↑          |                 |                                         |                                                  |

| PCB QUADRAX CONTACTS<br>FOR USE IN ARINC 600 & R27 CONNECTORS |                     |               |                     |                 |
|---------------------------------------------------------------|---------------------|---------------|---------------------|-----------------|
| PCB<br>Quadrax<br>Contacts                                    | Contact Part Number |               | Impedance<br>(Ohms) | Contact<br>Size |
|                                                               | Pin                 | Socket        |                     |                 |
| PCB (.346<br>Length)                                          |                     | 21-033397-171 | 100                 | 8               |
| PCB (.473<br>Length)                                          | 21-033398-261       |               |                     |                 |

| TWINAX CONTACTS<br>FOR USE IN ARINC 600 & R27 CONNECTORS |                                                          |                             |                 |                                   |                                     |
|----------------------------------------------------------|----------------------------------------------------------|-----------------------------|-----------------|-----------------------------------|-------------------------------------|
| Cable                                                    | Contact Part Number<br>(Termination Instruction Sheet)** |                             | Contact<br>Size | Crimping Tools                    |                                     |
|                                                          | Pin                                                      | Socket                      |                 | Inner<br>Contact                  | Outer Contact                       |
| EPD 32263,<br>10612,<br>GSC-12-2548-00                   | 21-033631-004†<br>(L-2092-U)↑                            | 21-033632-003<br>(L-2092-J) | 12              | MH992<br>with Positioner<br>K1365 | GS200-1<br>with Positioner<br>GP959 |

† Consult Amphenol Aerospace for current release of this contact or instruction sheet if applicable.  
Daniels crimping tools are available from Daniels Mfg. Corp. 6103 Anno Ave., Orlando, FL 32809

\*\*Termination instructions are packaged with each contact and can be found on-line at: [www.amphenol-aerospace.com/serviceinstructions.asp](http://www.amphenol-aerospace.com/serviceinstructions.asp)

*Amphenol has today's broadest range of interconnection solutions for military, commercial and industrial applications. As a worldwide interconnection product leader, Amphenol can meet not only connector needs, but also contact needs of all types. In addition to the shielded and high frequency contacts shown in this publication, Amphenol offers many other contact styles:*

## PRINTED CIRCUIT BOARD SIGNAL AND POWER CONTACTS

See the Printed Circuit Board section of this catalog.

## THERMOCOUPLE CONTACTS

Available for MIL-DTL-5015, MIL-DTL-22992, MIL-DTL-26482, MIL-DTL-26500, MIL-DTL-38999, MIL-DTL-83723 and other series connectors. Thermocouples are designed for temperature measuring applications, and are available in both pin and socket configurations in alumel, chromel, iron and constantan materials. Please refer to the mil series sections in this catalog.

## FLEX TERMINATION ASSEMBLIES FOR PCB APPLICATION

Flex circuits are available for MIL-DTL-38999, MIL-DTL-5015 and MIL-DTL-26482, as well as for special products such as EMI/EMP filter connectors and rectangular LRM connectors. Please contact an Amphenol Sales Person for more information or visit [www.amphenol-aerospace.com/support](http://www.amphenol-aerospace.com/support) to find a sales person in your area.

## FIBER OPTIC TERMINI

See the Fiber Optic section of this catalog

## FILTER P I TYPE TUBULAR AND PLANAR ARRAY CONTACT ASSEMBLIES

See the Printed Circuit Board section of this catalog.

## RADSOK® HIGH POWER CONTACTS

Amphenol's RADSOK® contact design is a hyperbolic, stamped grid configuration within the socket cylinder. As the male pin is inserted, axial members in the female socket half deflect, imparting high current flow across the connection with minimal voltage loss. Another advantage of the RADSOK® contact is low insertion force. The RADSOK® contact has been incorporated into three of the large industrial families of connectors; the GT series, the P-Lok series and 5015 types. These connectors, known as Amphe-Power® connectors, can handle up to 150% higher amperages. Amphenol Industrial Operations division also provides a wide range of power to board interconnects utilizing the RADSOK® technology. These provide high amperage connection to busbars, wires and circuit boards.

RADSOK® contacts are being further introduced into military/aerospace products. High power RADSOK® is now developed into applications for engine connectors for Commercial Air, and are also being designed into LRM interconnects for high speed data transfer. See Amphenol Industrial Brochure, SL-391. (visit [www.amphenol-industrial.com](http://www.amphenol-industrial.com))

See more information on RADSOK® in options, other products section of this catalog pages.

## RECTANGULAR CONNECTORS

Amphenol provides an impressive array of Rectangular Interconnection products to meet the needs of high density systems such as opto-electrical backplanes used in many applications that include: medical equipment, IC chip testers, telecommunications, military and commercial aviation, military ground vehicles, GPS systems, space and industrial applications.

Available in Low Mating Force with Brush contacts, Power Strip, LRM, ARINC 600 Rack and Panel, and R27 Rack and Panel Rectangular Connectors.

For more information please contact an Amphenol Sales Person on visit [www.amphenol-aerospace.com/support](http://www.amphenol-aerospace.com/support) for a sales person in your area.



PC Tails Signal and Power Contacts and Custom PC Tail Designs. Compliant Pin (Press Fit) Contacts for Solderless Mounting to PC Boards



Sculptured Flex Circuits



RADSOK® High Power Contacts and Connectors



LRM Connectors with Inserts of Staggered Brush Contacts and Inserts of Coax Contacts

The following check list is provided to help you specify a high frequency contact and cable system, and it will help our design team to meet your requirements. You may copy this page and fax it to Amphenol Aerospace 607-563-5157, attention Contact Design. Or call 607-563-5011 or 800-678-0141 for assistance.

Date \_\_\_\_\_

Amphenol  
Salesperson \_\_\_\_\_

## CUSTOMER INFORMATION

Customer Company Name \_\_\_\_\_

Engineer Name \_\_\_\_\_

Program \_\_\_\_\_

Forecast \_\_\_\_\_

## CABLE INFORMATION

Cable Part Number\* \_\_\_\_\_

Cable Manufacturer \_\_\_\_\_

Cable Type: Coaxial ☐ Twinax ☐

Triax ☐ Quadrax ☐

Cable Impedance \_\_\_\_\_

\* if not an RG-Number complete below information:

O.D. of Inner Wire \_\_\_\_\_ AWG of Inner Wires \_\_\_\_\_

No. of Inner Wire Strands \_\_\_\_\_ Material of Inner Wires \_\_\_\_\_

O.D. of Inner Insulation \_\_\_\_\_ Material of Inner Insulation \_\_\_\_\_

O.D. of First Braid \_\_\_\_\_ Braid Type \_\_\_\_\_ Braid AWG \_\_\_\_\_  
(flat, round, wrap)

O.D. of First Jacket \_\_\_\_\_ Jacket Material \_\_\_\_\_

O.D. of Second Braid \_\_\_\_\_ Braid Type \_\_\_\_\_ Braid AWG \_\_\_\_\_  
(flat, round, wrap)

O.D. of Second Jacket \_\_\_\_\_ Jacket Material \_\_\_\_\_

It is essential that a 3 foot sample of the cable be supplied for performance and crimp tool development.

## CONNECTOR INFORMATION

Connector Family: TV-R ☐ LJT-R ☐ JT-R ☐

Other \_\_\_\_\_

Insert Arrangement Desired \_\_\_\_\_

Shell Style \_\_\_\_\_

Shell Plating \_\_\_\_\_

## CONTACT INFORMATION

Type: Coaxial ☐ Concentric Twinax ☐ Triax ☐

Differential Twinax\* ☐ Quadrax\* ☐

Size\*: 8 ☐ 12 ☐ 16 ☐

Contact Impedance Matched? Yes ☐ No ☐

50Ω ☐ 75Ω ☐ 100Ω ☐ 150Ω ☐ Other \_\_\_\_\_

\* Quadrax and Differential Twinax currently available in size 8 only.

## PERFORMANCE INFORMATION

Electrical Protocol \_\_\_\_\_

VSWR Requirement 1. to 1. \_\_\_\_\_ Cross Talk \_\_\_\_\_ db

Operating Frequency \_\_\_\_\_ Attenuation \_\_\_\_\_ Insertion Loss \_\_\_\_\_

Operating Voltage \_\_\_\_\_ VAC (RMS) \_\_\_\_\_ DC

Current Outer Contact \_\_\_\_\_ Amp Current Inner Contacts \_\_\_\_\_

Application Temperature \_\_\_\_\_ Environmental Requirement \_\_\_\_\_

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)