



OPTION -A-

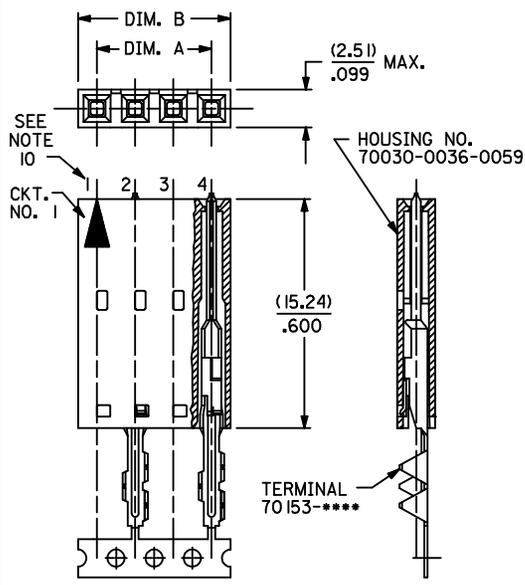


OPTION -D-  
(SEE NOTE 7)

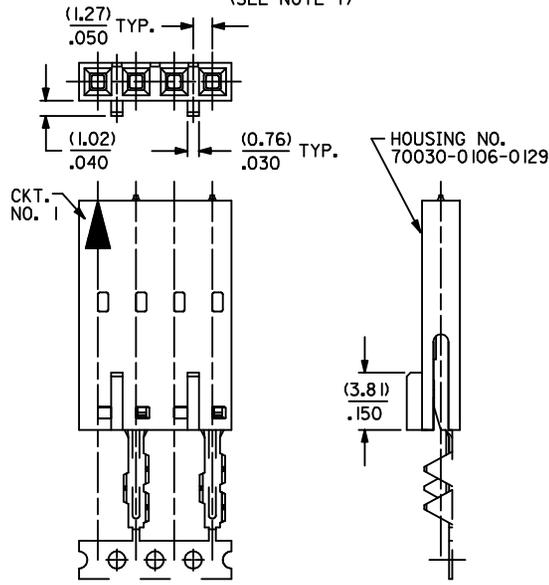

CKT. SIZE	A	B
4	(7.62) .300	(10.13) .399
5	(10.16) .400	(12.67) .499
6	(12.70) .500	(15.21) .599
7	(15.24) .600	(17.75) .699
8	(17.78) .700	(20.29) .799
9	(20.32) .800	(22.83) .899
10	(22.86) .900	(25.37) .999
11	(25.40) 1.000	(27.91) 1.099
12	(27.94) 1.100	(30.45) 1.199
13	(30.48) 1.200	(32.99) 1.299
14	(33.02) 1.300	(35.53) 1.399
15	(35.56) 1.400	(38.07) 1.499
16	(38.10) 1.500	(40.61) 1.599
17	(40.64) 1.600	(43.15) 1.699
18	(43.18) 1.700	(45.69) 1.799
19	(45.72) 1.800	(48.23) 1.899
20	(48.26) 1.900	(50.77) 1.999
21	(50.80) 2.000	(53.31) 2.099
22	(53.34) 2.100	(55.85) 2.199
23	(55.88) 2.200	(58.39) 2.299
24	(58.42) 2.300	(60.93) 2.399
25	(60.96) 2.400	(63.47) 2.499

NOTES:

- 1) SEE TABLE FOR CIRCUIT SIZES.
- 2) TERMINALS ARE SHOWN PRE-LOADED INTO HOUSING AND LOCKED INTO FIRST ROW.
- 3) STANDARD PACKAGING PER PK-70873-0001 SHALL BE USED.
- 4) ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- 5) SEE SHEET 2 OF FAMILY DRAWING FOR PART NO'S. AND PLATINGS.
- 6) PRE LOADED ASSEMBLY TO BE USED WITH (0.30)/.012 MAXIMUM THICK FLAT FLEX CABLE WITH (1.57)/.062 WIDE COPPER CONDUCTORS ON (2.54)/.100 CENTERS OR, (0.13)/.005 - (0.28)/.011 THICK MYLAR WITH (1.02)/.040 - (1.65)/.065 WIDE SILVER INK CONDUCTORS ON (2.54)/.100 CENTERS.
- 7) RECOMMENDED F.F.C. CONFIGURATION FOR OPTION "D" ONLY; WHEN USED WITH INTERIM CLIPS. SEE DETAIL 1.
- 8) SEE SHEET 2 FOR CORE-OUT CONFIGURATION.
- 9) REFER TO PRODUCT SPECIFICATION NO.: PS-70430.
- 10) NUMBERS DO NOT APPEAR ON ASSEMBLIES.

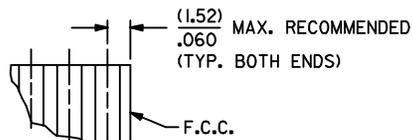

DETAIL - 1  
(SEE NOTE 7)

<b>UPDATE NOTES</b> EC NO: UCP2013-1408 DRWNG: IBARRA 2012/10/10 CHKD: DMORGAN 2012/10/10 APPR: SMILLER 2012/10/25	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES	± ---	± ---	DRAWN BY	DATE	ASSEMBLY, CONNECTOR F.F.C. MALE SINGLE ROW 2.54/.100 GRID W/ VOIDS <b>molex</b> DOCUMENT NO. SDA-70456-**** SHEET NO. 1 OF 2			
		3 PLACES	± ---	± ---	CHECKED BY	DATE				
		2 PLACES	± ---	± ---	DMORGAN	2012/10/10				
1 PLACE	± ---	± ---	APPROVED BY	DATE						
0 PLACE	± ---	± ---	SMILLER	2012/10/25	MATERIAL NO. SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ±1/2°		SIZE C						

OPTION "A"



OPTION "D"

ENG. NO.	PLATING	ENG. NO.	PLATING
A-70456-0001-0048	102	AX-70456-0097-0144	102
A-70456-0241-0288	571	AX-70456-0337-0384	571
AX-70456-0481-0528	574	AX-70456-0577-0624	574

PLATING CHART PER ES-88-\*\*\*:

102 - .000200 MINIMUM ELCTRO-TIN PALTE OVER-ALL  
 571 - .000015 MINIMUM GOLD PLATE IN SELECT AREA  
 .000075 MINIMUM TIN PLATE IN SELECT AREA  
 BOTH OVER NICKEL UNDERPLATE OVERALL  
 574 - .000030 MINIMUM GOLD PLATE IN SELECT AREA  
 .000075 MINIMUM TIN PLATE IN SELECT AREA  
 BOTH OVER NICKEL UNDERPLATE OVERALL

CORE-OUT FOR HOUSING  
OPTIONS A & D  
CKT. SIZES 2-25  
 (FOR CONTROL OF BOW)




SEE SHEET 1 EC NO: UCP2013-1408 DRWN: TIBARRA 2012/10/10 CHKD: DMORGAN 2012/10/10 APPR: SMILLER 2012/10/25	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	2 PLACES ± --- ± ---	1 PLACE ± --- ± ---	0 PLACE ± --- ± ---	DRAWN BY TIBARRA		DATE 2012/10/10	
		ANGULAR ±1/2°					CHECKED BY DMORGAN		DATE 2012/10/10	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					APPROVED BY SMILLER		DATE 2012/10/25	
							MATERIAL NO. SEE TABLE		DOCUMENT NO. SDA-70456-***	


ASSEMBLY, CONNECTOR  
 F.F.C. MALE SINGLE ROW  
 2.54/.100 GRID W/ VOIDS  
**molex**

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

"A" - OPTION

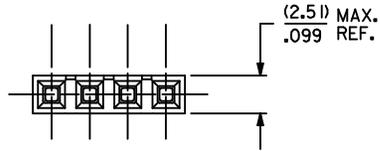


NUMBERS DO NOT APPEAR ON ASSEMBLIES SEE SHEET 2 FOR PART NUMBERS AND VOID LOCATIONS

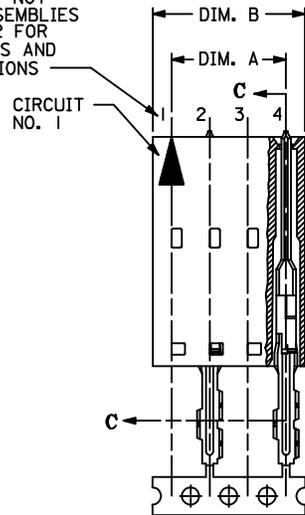

SECTION C-C



PRE-LOAD ASSEMBLY

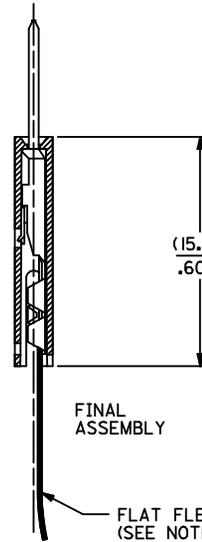

FINAL ASSEMBLY

NOTES:

- 1) PRE LOADED ASSEMBLY TO BE USED WITH (0.30)/.012 MAXIMUM THICK FLAT FLEX CABLE WITH (1.57)/.062 WIDE COPPER CONDUCTORS ON (2.54)/.100 CENTERS OR, (0.13)/.005 - (0.28)/.011 THICK MYLAR WITH (1.02)/.040 - (1.65)/.065 WIDE SILVER INK CONDUCTORS ON (2.54)/.100 CENTERS.
- 2) STANDARD PACKAGING PER PK-70873-0001 SHALL BE USED.
- 3) SEE CHART FOR CIRCUIT SIZES, "A" AND "B" DIMENSIONS.
- 4) REFER TO PRODUCT SPECIFICATION NO.: PS-70430.
- 5) PARTS STACKABLE SIDE TO SIDE ON (2.54)/.100 CENTERS.

HOUSING MATERIAL: GLASS-FILLED, POLYESTER, 94V-0  
 TERMINAL MATERIAL: PHOSPHOR BRONZE  
 PLATING:  
 .000200 MINIMUM ELECTRO-TIN PLATE  
 OVER .000100 MINIMUM COPPER UNDERPLATE OVERALL


CKT. SIZE	A	B
4	(7.62) .300	(10.13) .399
5	(10.16) .400	(12.67) .499
6	(12.70) .500	(15.21) .599
7	(15.24) .600	(17.75) .699
8	(17.78) .700	(20.29) .799
9	(20.32) .800	(22.83) .899
10	(22.86) .900	(25.37) .999
11	(25.40) 1.000	(27.91) 1.099
12	(27.94) 1.100	(30.45) 1.199
13	(30.48) 1.200	(32.99) 1.299
14	(33.02) 1.300	(35.53) 1.399
15	(35.56) 1.400	(38.07) 1.499
16	(38.10) 1.500	(40.61) 1.599
17	(40.64) 1.600	(43.15) 1.699
18	(43.18) 1.700	(45.69) 1.799
19	(45.72) 1.800	(48.23) 1.899
20	(48.26) 1.900	(50.77) 1.999
21	(50.80) 2.000	(53.31) 2.099
22	(53.34) 2.100	(55.85) 2.199
23	(55.88) 2.200	(58.39) 2.299
24	(58.42) 2.300	(60.93) 2.399
25	(60.96) 2.400	(63.47) 2.499

<b>UPDATE NOTES</b> EC NO: UCP2013-1408 DRWN: TIBARRA 2012/10/10 CHKD: DMORGAN 2012/10/01 APPR: SMILLER 2012/10/25	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± ---	mm	INCH	DRAWN BY	DATE	ASSEMBLY, CONNECTOR F.F.C. MALE SINGLE ROW 2.54/.100 GRID W/ VOIDS <b>molex</b>	
		3 PLACES ± --- ± .010			CHECKED BY	DATE		
		2 PLACES ± 0.25 ± .014			DMORGAN	2012/10/10		
1 PLACE ± 0.35 ± ---			APPROVED BY	DATE				
0 PLACE ± --- ± ---			SMILLER	2012/10/25	MATERIAL NO. SEE TABLE		DOCUMENT NO. SDA-70456-0001-0048	SHEET NO. 1 OF 2
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SIZE THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				


CKT. SIZE	ODD CIRCUIT VOIDS			EVEN CIRCUIT VOIDS		
	EDP NUMBER	ENG NUMBER	VOID LOCATIONS	EDP NUMBER	ENG NUMBER	VOID LOCATIONS
	2	NOT TOOLED	NOT TOOLED	N/A	NOT TOOLED	NOT TOOLED
3	NOT TOOLED	NOT TOOLED	N/A	NOT TOOLED	NOT TOOLED	N/A
4	NOT TOOLED	AX-70456-0003	1,3	NOT TOOLED	AX-70456-0027	2,4
5	015-38-6050	A-70456-0004	1,3,5	NOT TOOLED	AX-70456-0028	2,4
6	NOT TOOLED	AX-70456-0005	1,3,5	NOT TOOLED	AX-70456-0029	2,4,6
7	NOT TOOLED	AX-70456-0006	1,3,5,7	NOT TOOLED	AX-70456-0030	2,4,6
8	NOT TOOLED	AX-70456-0007	1,3,5,7	NOT TOOLED	AX-70456-0031	2,4,6,8
9	NOT TOOLED	AX-70456-0008	1,3,5,7,9	NOT TOOLED	AX-70456-0032	2,4,6,8
10	NOT TOOLED	AX-70456-0009	1,3,5,7,9	NOT TOOLED	AX-70456-0033	2,4,6,8,10
11	NOT TOOLED	AX-70456-0010	1,3,5,7,9,11	NOT TOOLED	AX-70456-0034	2,4,6,8,10
12	NOT TOOLED	AX-70456-0011	1,3,5,7,9,11	NOT TOOLED	AX-70456-0035	2,4,6,8,10,12
13	NOT TOOLED	AX-70456-0012	1,3,5,7,9,11,13	NOT TOOLED	AX-70456-0036	2,4,6,8,10,12
14	NOT TOOLED	AX-70456-0013	1,3,5,7,9,11,13	NOT TOOLED	AX-70456-0037	2,4,6,8,10,12,14
15	NOT TOOLED	AX-70456-0014	1,3,5,7,9,11,13,15	NOT TOOLED	AX-70456-0038	2,4,6,8,10,12,14
16	NOT TOOLED	AX-70456-0015	1,3,5,7,9,11,13,15	NOT TOOLED	AX-70456-0039	2,4,6,8,10,12,14,16
17	NOT TOOLED	AX-70456-0016	1,3,5,7,9,11,13,15,17	NOT TOOLED	AX-70456-0040	2,4,6,8,10,12,14,16
18	NOT TOOLED	AX-70456-0017	1,3,5,7,9,11,13,15,17	NOT TOOLED	AX-70456-0041	2,4,6,8,10,12,14,16,18
19	NOT TOOLED	AX-70456-0018	1,3,5,7,9,11,13,15,17,19	NOT TOOLED	AX-70456-0042	2,4,6,8,10,12,14,16,18
20	NOT TOOLED	AX-70456-0019	1,3,5,7,9,11,13,15,17,19	NOT TOOLED	AX-70456-0043	2,4,6,8,10,12,14,16,18,20
21	NOT TOOLED	AX-70456-0020	1,3,5,7,9,11,13,15,17,19,21	NOT TOOLED	AX-70456-0044	2,4,6,8,10,12,14,16,18,20
22	NOT TOOLED	AX-70456-0021	1,3,5,7,9,11,13,15,17,19,21	NOT TOOLED	AX-70456-0045	2,4,6,8,10,12,14,16,18,20,22
23	NOT TOOLED	AX-70456-0022	1,3,5,7,9,11,13,15,17,19,21,23	NOT TOOLED	AX-70456-0046	2,4,6,8,10,12,14,16,18,20,22
24	NOT TOOLED	AX-70456-0023	1,3,5,7,9,11,13,15,17,19,21,23	NOT TOOLED	AX-70456-0047	2,4,6,8,10,12,14,16,18,20,22,24
25	NOT TOOLED	AX-70456-0024	1,3,5,7,9,11,13,15,17,19,21,23,25	NOT TOOLED	AX-70456-0048	2,4,6,8,10,12,14,16,18,20,22,24

SEE SHEET 1 EC NO: UCP2013-1408 DRWN:TIBARRA 2012/10/10 CHKD:DMORGAN 2012/10/01 APPR:SMILLER 2012/10/25	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
		4 PLACES ± --- ± ---	3 PLACES ± --- ± .010	DRAWN BY TIBARRA	DATE 2012/10/10	ASSEMBLY, CONNECTOR F.F.C. MALE SINGLE ROW 2.54/.100 GRID W/ VOIDS <b>molex</b>					
		2 PLACES ± 0.25 ± .014	1 PLACE ± 0.35 ± ---	CHECKED BY DMORGAN	DATE 2012/10/10						
		0 PLACE ± --- ± ---		APPROVED BY SMILLER	DATE 2012/10/25	MATERIAL NO. SEE TABLE	DOCUMENT NO. SDA-70456-0001-0048	SHEET NO. 2 OF 2			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				ANGULAR ±1/2°	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

"A" - OPTION

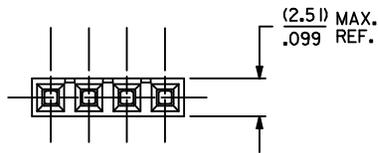


NUMBERS DO NOT APPEAR ON ASSEMBLIES SEE SHEET 2 FOR PART NUMBERS AND VOID LOCATIONS

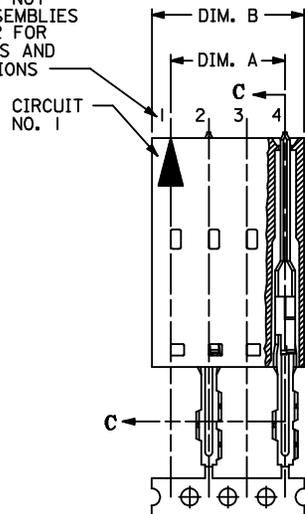

SECTION C-C



PRE-LOAD ASSEMBLY

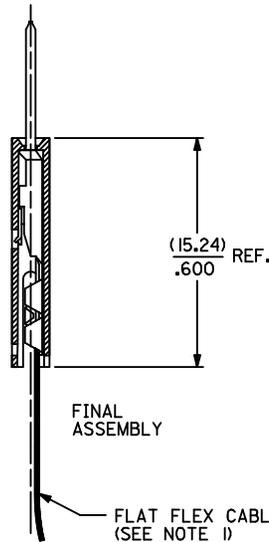

FINAL ASSEMBLY

FLAT FLEX CABLE (F.F.C.) (SEE NOTE 1)

NOTES:

- 1) PRE LOADED ASSEMBLY TO BE USED WITH (0.30)/.012 MAXIMUM THICK FLAT FLEX CABLE WITH (1.57)/.062 WIDE COPPER CONDUCTORS ON (2.54)/.100 CENTERS OR, (0.13)/.005 - (0.28)/.011 THICK MYLAR WITH (1.02)/.040 - (1.65)/.065 WIDE SILVER INK CONDUCTORS ON (2.54)/.100 CENTERS.
- 2) STANDARD PACKAGING PER PK-70873-0001 SHALL BE USED.
- 3) SEE CHART FOR CIRCUIT SIZES, "A" AND "B" DIMENSIONS.
- 4) REFER TO PRODUCT SPECIFICATION NO.: PS-70430.
- 5) PARTS STACKABLE SIDE TO SIDE ON (2.54)/.100 CENTERS.

CKT. SIZE	DIMENSIONS	
	A	B
4	(7.62) 300	(10.13) 399
5	(10.16) 400	(12.67) 499
6	(12.70) 500	(15.21) 599
7	(15.24) 600	(17.75) 699
8	(17.78) 700	(20.29) 799
9	(20.32) 800	(22.83) 899
10	(22.86) 900	(25.37) 999
11	(25.40) 1,000	(27.91) 1,099
12	(27.94) 1,100	(30.45) 1,199
13	(30.48) 1,200	(32.99) 1,299
14	(33.02) 1,300	(35.53) 1,399
15	(35.56) 1,400	(38.07) 1,499
16	(38.10) 1,500	(40.61) 1,599
17	(40.64) 1,600	(43.15) 1,699
18	(43.18) 1,700	(45.69) 1,799
19	(45.72) 1,800	(48.23) 1,899
20	(48.26) 1,900	(50.77) 1,999
21	(50.80) 2,000	(53.31) 2,099
22	(53.34) 2,100	(55.85) 2,199
23	(55.88) 2,200	(58.39) 2,299
24	(58.42) 2,300	(60.93) 2,399
25	(60.96) 2,400	(63.47) 2,499

HOUSING MATERIAL: GLASS-FILLED, POLYESTER, 94V-0  
 TERMINAL MATERIAL: PHOSPHOR BRONZE  
 PLATING:  
 .000015 MINIMUM GOLD PLATE IN SELECT AREA  
 .000075 MINIMUM TIN PLATE IN SELECT AREA  
 BOTH OVER NICKEL UNDERPLATE OVERALL

<b>UPDT NOTES</b> EC NO: UCP2013-1408 DRWNG: IBARRA 2012/10/10 CHKD: DMORGAN 2012/10/10 APPR: SMILLER 2012/10/25	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .014 1 PLACE ± 0.35 ± --- 0 PLACE ± --- ± ---	mm INCH	DRAWN BY TIBARRA	DATE 2012/10/10	TITLE ASSEMBLY, CONNECTOR F.F.C. MALE SINGLE ROW 2.54/.100 GRID W/ VOIDS	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CHECKED BY DMORGAN	DATE 2012/10/10		
		ANGULAR ±1/2°		APPROVED BY SMILLER	DATE 2012/10/25	MATERIAL NO. SEE TABLE	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

CKT. SIZE	ODD CIRCUIT VOIDS			EVEN CIRCUIT VOIDS		
	EDP NUMBER	ENG NUMBER	VOID LOCATIONS	EDP NUMBER	ENG NUMBER	VOID LOCATIONS
	2	NOT TOOLED	NOT TOOLED	N/A	NOT TOOLED	NOT TOOLED
3	NOT TOOLED	NOT TOOLED	N/A	NOT TOOLED	NOT TOOLED	N/A
4	NOT TOOLED	AX-70456-0243	1,3	NOT TOOLED	AX-70456-0267	2,4
5	015-38-6051	A-70456-0244	1,3,5	NOT TOOLED	AX-70456-0268	2,4
6	NOT TOOLED	AX-70456-0245	1,3,5	NOT TOOLED	AX-70456-0269	2,4,6
7	NOT TOOLED	AX-70456-0246	1,3,5,7	NOT TOOLED	AX-70456-0270	2,4,6
8	NOT TOOLED	AX-70456-0247	1,3,5,7	NOT TOOLED	AX-70456-0271	2,4,6,8
9	NOT TOOLED	AX-70456-0248	1,3,5,7,9	NOT TOOLED	AX-70456-0272	2,4,6,8
10	NOT TOOLED	AX-70456-0249	1,3,5,7,9	NOT TOOLED	AX-70456-0273	2,4,6,8,10
11	NOT TOOLED	AX-70456-0250	1,3,5,7,9,11	NOT TOOLED	AX-70456-0274	2,4,6,8,10
12	NOT TOOLED	AX-70456-0251	1,3,5,7,9,11	NOT TOOLED	AX-70456-0275	2,4,6,8,10,12
13	NOT TOOLED	AX-70456-0252	1,3,5,7,9,11,13	NOT TOOLED	AX-70456-0276	2,4,6,8,10,12
14	NOT TOOLED	AX-70456-0253	1,3,5,7,9,11,13	NOT TOOLED	AX-70456-0277	2,4,6,8,10,12,14
15	NOT TOOLED	AX-70456-0254	1,3,5,7,9,11,13,15	NOT TOOLED	AX-70456-0278	2,4,6,8,10,12,14
16	NOT TOOLED	AX-70456-0255	1,3,5,7,9,11,13,15	NOT TOOLED	AX-70456-0279	2,4,6,8,10,12,14,16
17	NOT TOOLED	AX-70456-0256	1,3,5,7,9,11,13,15,17	NOT TOOLED	AX-70456-0280	2,4,6,8,10,12,14,16
18	NOT TOOLED	AX-70456-0257	1,3,5,7,9,11,13,15,17	NOT TOOLED	AX-70456-0281	2,4,6,8,10,12,14,16,18
19	NOT TOOLED	AX-70456-0258	1,3,5,7,9,11,13,15,17,19	NOT TOOLED	AX-70456-0282	2,4,6,8,10,12,14,16,18
20	NOT TOOLED	AX-70456-0259	1,3,5,7,9,11,13,15,17,19	NOT TOOLED	AX-70456-0283	2,4,6,8,10,12,14,16,18,20
21	NOT TOOLED	AX-70456-0260	1,3,5,7,9,11,13,15,17,19,21	NOT TOOLED	AX-70456-0284	2,4,6,8,10,12,14,16,18,20
22	NOT TOOLED	AX-70456-0261	1,3,5,7,9,11,13,15,17,19,21	NOT TOOLED	AX-70456-0285	2,4,6,8,10,12,14,16,18,20,22
23	NOT TOOLED	AX-70456-0262	1,3,5,7,9,11,13,15,17,19,21,23	NOT TOOLED	AX-70456-0286	2,4,6,8,10,12,14,16,18,20,22
24	NOT TOOLED	AX-70456-0263	1,3,5,7,9,11,13,15,17,19,21,23	NOT TOOLED	AX-70456-0287	2,4,6,8,10,12,14,16,18,20,22,24
25	NOT TOOLED	AX-70456-0264	1,3,5,7,9,11,13,15,17,19,21,23,25	NOT TOOLED	AX-70456-0288	2,4,6,8,10,12,14,16,18,20,22,24

SEE SHEET 1 EC NO: UCP2013-1408 DRWN:TIBARRA 2012/10/10 CHKD:DMORGAN 2012/10/10 APPR:SMILLER 2012/10/25	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
				DRAWN BY DATE TIBARRA 2012/10/10		ASSEMBLY, CONNECTOR F.F.C. MALE SINGLE ROW 2.54/.100 GRID W/ VOIDS <b>molex</b>			
				CHECKED BY DATE DMORGAN 2012/10/10					
				APPROVED BY DATE SMILLER 2012/10/25		MATERIAL NO. SEE TABLE		DOCUMENT NO. SDA-70456-0241-0288	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)