

K-no.: 24845

**25 A Current Sensor for 5V- Supply Voltage**

Date: 28.01.2013

 For electronic current measurement:  
 DC, AC, pulsed, mixed ..., with a galvanic  
 isolation between primary circuit  
 (high power) and secondary circuit  
 (electronic circuit)

Customer: Standard type

Customers Part no.:

Page 1 of 2

**Description**

- Closed loop (compensation)  
Current Sensor with magnetic field probe
- Printed circuit board mounting
- Casing and materials UL-listed

**Characteristics**

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset current drift
- Very low hysteresis of offset current
- Short response time
- Wide frequency bandwidth
- Compact design
- Reduced offset ripple

**Applications**

Mainly used for stationary operation in industrial applications:

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Switched Mode Power Supplies (SMPS)
- Power Supplies for welding applications
- Uninterruptible Power Supplies (UPS)

**Electrical data – Ratings**

|           |  |  |    |
|-----------|--|--|----|
| $I_{PN}$  | Primary nominal r.m.s. current           | 25                                       | A  |
| $V_{out}$ | Output voltage @ $I_P$                   | $V_{Ref} \pm (0.625 \cdot I_P / I_{PN})$ | V  |
| $V_{out}$ | Output voltage @ $I_P=0, T_A=25^\circ C$ | $V_{Ref} \pm 5$                          | mV |
| $V_{Ref}$ | External Reference voltage range         | 0...4                                    | V  |
|           | Internal Reference voltage               | $2.5 \pm 0.005$                          | V  |
| $K_N$     | Turns ratio                              | 1...3 : 2000                             |    |

**Accuracy – Dynamic performance data**

|                                   |  | min.     | typ. | max.  | Unit   |
|-----------------------------------|--|----------|------|-------|--------|
| $I_{P,max}$                       | Max. measuring range   | ±85      |      |       |        |
| X                                 | Accuracy @ $I_{PN}, T_A=25^\circ C$  |          |      | 0.7   | %      |
| $\epsilon_L$                      | Linearity  |          |      | 0.1   | %      |
| $V_{out} - V_{Ref}$               | Offset voltage @ $I_P=0, T_A=25^\circ C$                                     |          |      | ±1.35 | mV     |
| $\Delta V_o / V_{Ref} / \Delta T$ | Temperature drift of $V_{out}$ @ $I_P=0, V_{Ref}=2.5V, T_A=-40...85^\circ C$ | 1.4      |      | 10    | ppm/°C |
| $t_r$                             | Response time @ 90% von $I_{PN}$   |          | 300  |       | ns     |
| $\Delta t (I_{P,max})$            | Delay time at $di/dt = 100 A/\mu s$  |          | 200  |       | ns     |
| f                                 | Frequency bandwidth  | DC...200 |      |       | kHz    |

**General data**

|       |                               | min. | typ. | max. | Unit |
|-------|-------------------------------|------|------|------|------|
| $T_A$ | Ambient operating temperature | -40  |      | +85  | °C   |
| $T_S$ | Ambient storage temperature   | -40  |      | +85  | °C   |
| m     | Mass                          |      | 12   |      | g    |
| $V_C$ | Supply voltage                | 4.75 | 5    | 5.25 | V    |
| $I_C$ | Current consumption           |      | 15   |      | mA   |

 Constructed and manufactured and tested in accordance with EN 61800-5-1 (Pin 1 - 6 to Pin 7 – 10)  
 Reinforced insulation, Insulation material group 3 b, Pollution degree 2

|             |  |   |  |     |      |
|-------------|--|---|--|-----|------|
| $S_{clear}$ | Clearance (component without solder pad) | 7.4   |  |     | mm   |
| $S_{creep}$ | Creepage (component without solder pad)  | 8.0   |  |     | mm   |
| $V_{sys}$   | System voltage                           | overvoltage category 3                                  |  | RMS | 300  |
| $V_{work}$  | Working voltage                          | (tabel 7 acc. to EN61800-5-1)<br>overvoltage category 2 |  | RMS | 350  |
| $U_{PD}$    | Rated discharge voltage                  | peak value  |  |     | 1037 |

| Date     | Name | Issue | Amendment  |
|----------|------|-------|--|
| 28.01.13 | Le   | 82    | Values for clearance and creepage changed from 7 → 7.4 and 7 → 8.0. Offset voltage from ±5 to ±1.35              |
|          |      |       | Frequency bandwidth f. 100 to 200 kHz. Temperature drift from 3 to 1.4. Marking: Issue (increased) added. CN-572 |

|                       |                         |                      |                        |
|-----------------------|-------------------------|----------------------|------------------------|
| Hrsg.: KB-E<br>editor | Bearb.: Le.<br>designer | KB-PM: KRe.<br>check | freig.: HS<br>released |
|-----------------------|-------------------------|----------------------|------------------------|

K-no.: 24845

**25 A Current Sensor for 5V- Supply Voltage**

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit  
(electronic circuit)

Date: 28.01.2013


Customer: Standard type

Customers Part no.:

Page 2 of 2

**Mechanical outline (mm):**

General tolerances DIN ISO 2768-c

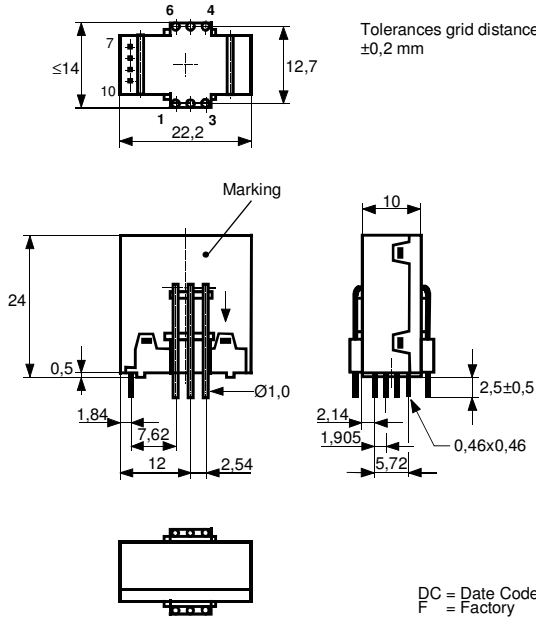


Connections:

1...6: Ø 1 mm  
7...10: 0,46x0,46 mm

Marking:

**VAC**  
4646X681-82  
F DC

**Schematic diagram**

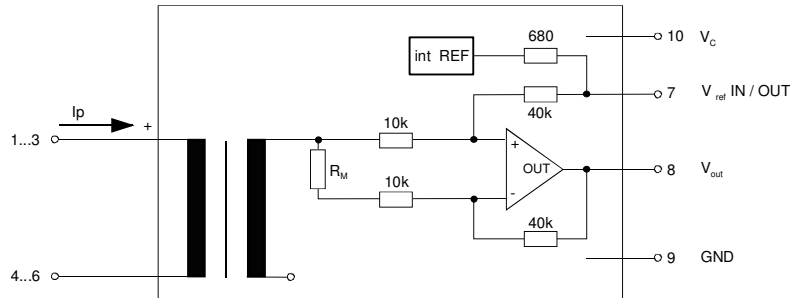

**Possibilities of wiring**

(@ TA = 85 °C)

| primary windings | primary current RMS | primary current maximal | output voltage RMS    | turns ratio | primary resistance | wiring |
|------------------|---------------------|-------------------------|-----------------------|-------------|--------------------|--------|
| $N_P$            | $I_P$ [A]           | $\hat{I}_{P,max}$ [A]   | $V_{out}(I_{PN})$ [V] | $K_N$       | $R_P$ [mΩ]         |        |
| 1                | 25                  | ±85                     | 2.5±0.625             | 1:2000      | 0.33               |        |
| 2                | 12                  | ±42                     | 2.5±0.600             | 2:2000      | 1.5                |        |
| 3                | 8                   | ±28                     | 2.5±0.600             | 3:2000      | 3                  |        |

Temperature of the primary conductor should not exceed 110 °C.  
Additional information is obtainable on request.  
This specification is no declaration of warranty acc. BGB §443 dar.

Hrsg.: KB-E  
editor

Bearb: Le.  
designer

KB-PM: KRe.  
check

freig.: HS  
released

K-No.: 24845

**25 A Current Sensor for 5V- Supply Voltage**

 For the electronic measurement of currents:  
 DC, AC, pulsed, mixed ..., with a galvanic  
 Isolation between the primary circuit  
 (high power) and the secondary circuit

Date: 28.01.2013

Customer:

Customers Part No.:

Page 1 of 2

**Electrical Data**

|  |  | min.                                 | typ. | max. | Unit       |
|--|--|--------------------------------------|------|------|------------|
| $V_{Ctot}$                               | Maximum supply voltage (without function)                                    |                                      |      | 6    | V          |
| $I_C$                                    | Supply Current with primary current  | $15mA + I_p \cdot K_N + V_{out}/R_L$ |      |      | mA         |
| $I_{out,SC}$                             | Short circuit output current   | $\pm 20$                             |      |      | mA         |
| $R_P$                                    | Resistance / primary winding @ $T_A=25^\circ C$                              | 1                                    |      |      | m $\Omega$ |
| $R_S$                                    | Secondary coil resistance @ $T_A=85^\circ C$                                 | 67                                   |      |      | $\Omega$   |
| $R_{i,Ref}$                              | Internal resistance of Reference input                                       | 670                                  |      |      | $\Omega$   |
| $R_{i,(V_{out})}$                        | Output resistance of $V_{out}$   | 1                                    |      |      | $\Omega$   |
| $R_L$                                    | External recommended resistance of $V_{out}$                                 | 1                                    |      |      | k $\Omega$ |
| $C_L$                                    | External recommended capacitance of $V_{out}$                                | 500                                  |      |      | pF         |
| $\Delta X_{Ti} / \Delta T$               | Temperature drift of X @ $T_A = -40 \dots +85^\circ C$                       | 40                                   |      |      | ppm/K      |
| $\Delta V_0 = \Delta(V_{out} - V_{Ref})$ | Sum of any offset drift including:   | 2                                    |      |      | mV         |
| $V_{0t}$                                 | Longtermdrift of $V_0$   | 1                                    |      |      | mV         |
| $V_{0T}$                                 | Temperature drift von $V_0$ @ $T_A = -40 \dots +85^\circ C$                  | 1                                    |      |      | mV         |
| $V_{0H}$                                 | Hysteresis of $V_{out}$ @ $I_p=0$ (after an overload of $10 \times I_{PN}$ ) | 2                                    |      |      | mV         |
| $\Delta V_0 / \Delta V_C$                | Supply voltage rejection ratio   | 1                                    |      |      | mV/V       |
| $V_{oss}$                                | Offsetripple (with 1 MHz- filter first order)                                | 30                                   |      |      | mV         |
| $V_{oss}$                                | Offsetripple (with 100 kHz- filter first order)                              | 3                                    |      |      | mV         |
| $V_{oss}$                                | Offsetripple (with 20 kHz- filter first order)                               | 0.8                                  |      |      | mV         |
| $C_k$                                    | Maximum possible coupling capacity (primary – secondary)                     | 5                                    |      |      | pF         |
|  | Mechanical stress according to M3209/3                                       | 30g                                  |      |      |            |
|  | Settings: 10 – 2000 Hz, 1 min/Decade, 2 hours                                |                                      |      |      |            |

**Inspection** (Measurement after temperature balance of the samples at room temperature)

|                             |              |   |                 |        |
|-----------------------------|--------------|---|-----------------|--------|
| $V_{out} (I_p=I_{PN})$      | (V) M3011/6: | Output voltage vs. external reference ( $I_p=25A, 40-80Hz$ )      | $625 \pm 0,7\%$ | mV     |
| $V_{out} - V_{Ref} (I_p=0)$ | (V) M3226:   | Offset voltage  | $\pm 5$         | mV     |
| $V_d$                       | (V) M3014:   | Test voltage, rms, 1 s<br>pin 1 – 6 vs. pin 7 – 10                | 1.5             | kV     |
| $V_e$                       | (AQL 1/S4)   | Partial discharge voltage acc.M3024 (RMS)<br>with $V_{vor}$ (RMS) | 1100<br>1375    | V<br>V |

**Type Testing** (Pin 1 - 6 to Pin 7 - 10)

|       |  |              |        |
|-------|--|--------------|--------|
| $V_W$ | HV transient test according to M3064 (1,2 $\mu s$ / 50 $\mu s$ -wave form) | 6            | kV     |
| $V_d$ | Testing voltage to M3014   | (5 s)        | 3      |
| $V_e$ | Partial discharge voltage acc.M3024 (RMS)<br>with $V_{vor}$ (RMS)          | 1100<br>1375 | V<br>V |

**Applicable documents**

Current direction: A positive output current appears at point  $I_s$ , by primary current in direction of the arrow.  
 Housing and bobbin material UL-listed: Flammability class 94V-0.  
 Enclosures according to IEC529: IP50.

| Datum    | Name | Index | Amendment                                     |
|----------|------|-------|---|
| 28.01.13 | Le   | 82    | Date updated..                                |
| 08.04.08 | Le.  | 81    | "preliminary" and EN 60721 5K3 delete. AA-427 |

|                       |                        |                      |                        |
|-----------------------|------------------------|----------------------|------------------------|
| Hrsg.: KB-E<br>editor | Bearb: Le.<br>designer | KB-PM: KRe.<br>check | freig.: HS<br>released |
|-----------------------|------------------------|----------------------|------------------------|

K-No.: 24845

**25 A Current Sensor for 5V- Supply Voltage**

For the electronic measurement of currents:  
DC, AC, pulsed, mixed ..., with a galvanic  
Isolation between the primary circuit  
(high power) and the secondary circuit

Date: 28.01.2013

Customer:

Customers Part No.:

Page 2 of 2

**Explanation of several of the terms used in the tablets (in alphabetical order)**

$t_r$ : Response time (describe the dynamic performance for the specified measurement range), measured as delay time at  $I_P = 0,9 \cdot I_{PN}$  between a rectangular current and the output voltage  $V_{out}(I_P)$

$\Delta t(I_{Pmax})$ : Delay time (describe the dynamic performance for the rapid current pulse rate e.g short circuit current) measured between  $I_{Pmax}$  and the output voltage  $V_{out}(I_{Pmax})$  with a primary current rise of  $di_P/dt \geq 100 \text{ A}/\mu\text{s}$ .

$U_{PD}$  Rated discharge voltage (recurring peak voltage separated by the insulation) proved with a sinusoidal voltage  $V_e$   
 $U_{PD} = \sqrt{2} \cdot V_e / 1,5$

$V_{vor}$  Defined voltage is the RMS value of a sinusoidal voltage with peak value of  $1,875 \cdot U_{PD}$  required for partial discharge test in IEC 61800-5-1  
 $V_{vor} = 1,875 \cdot U_{PD} / \sqrt{2}$

$V_{sys}$  System voltage RMS value of rated voltage according to IEC 61800-5-1

$V_{work}$  Working voltage voltage according to IEC 61800-5-1 which occurs by design in a circuit or across insulation

$V_o$ : Offset voltage between  $V_{out}$  and the rated reference voltage of  $V_{ref} = 2,5V$ .  
 $V_o = V_{out}(0) - 2,5V$

$V_{0H}$ : Zero variation of  $V_o$  after overloading with a DC of tenfold the rated value

$V_{0t}$ : Long term drift of  $V_o$  after 100 temperature cycles in the range -40 bis 85 °C.

X: Permissible measurement error in the final inspection at RT, defined by

$$X = 100 \cdot \left| \frac{V_{out}(I_{PN}) - V_{out}(0)}{0,625V} - 1 \right| \%$$

$X_{ges}(I_{PN})$ : Permissible measurement error including any drifts over the temperature range by the current measurement  $I_{PN}$

$$X_{ges} = 100 \cdot \left| \frac{V_{out}(I_{PN}) - 2,5V}{0,625V} - 1 \right| \% \quad \text{or} \quad X_{ges} = 100 \cdot \left| \frac{V_{out}(I_{PN}) - V_{ref}}{0,625V} - 1 \right| \%$$

$\epsilon_L$ : Linearity fault defined by  $\epsilon_L = 100 \cdot \left| \frac{I_P}{I_{PN}} - \frac{V_{out}(I_P) - V_{out}(0)}{V_{out}(I_{PN}) - V_{out}(0)} \right| \%$

This "Additional information" is no declaration of warranty according BGB §443.

Hrsg.: KB-E  
editor

Bearb: Le.  
designer

KB-PM: KRe.  
check

freig.: HS  
released

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)