


**FineAdjust
Applicator**



**Application Tooling
Specification Sheet**



Order No. 63904-2500

FEATURES


- Directly adapts to most automatic wire processing machines
- Quick punch removal with the push of a button for fast and easy tooling change
- Applicator designed to industry standard mounting and shut height 135.80mm (5.346")
- Quick set-up time; plus the crimp height, track and feed adjustments can be set without removing the applicator from the press
- Fine adjustment allows users to achieve target with little effort by adjusting in increments of .015mm (.0006") for conductor crimp height and .063mm (.0025") for insulation height
- Independent adjustment rings allow users to quickly adjust the conductor or insulation crimp height without affecting each other

SCOPE

Products: Hybrid Board-In Power Terminal for 1.50mm².

| Terminal Series No. | Terminal Order No. | Wire Size | | Insulation Diameter Maximum | | Strip Length | |
|---------------------|--------------------|-----------|-----------------|-----------------------------|------|--------------|-----------|
| | | AWG | mm ² | mm | In. | mm | In. |
| 201231 | 201231-8003 | - | 1.50 | 2.40 | .095 | 4.0-4.7 | .157-.185 |

DEFINITION OF TERMS

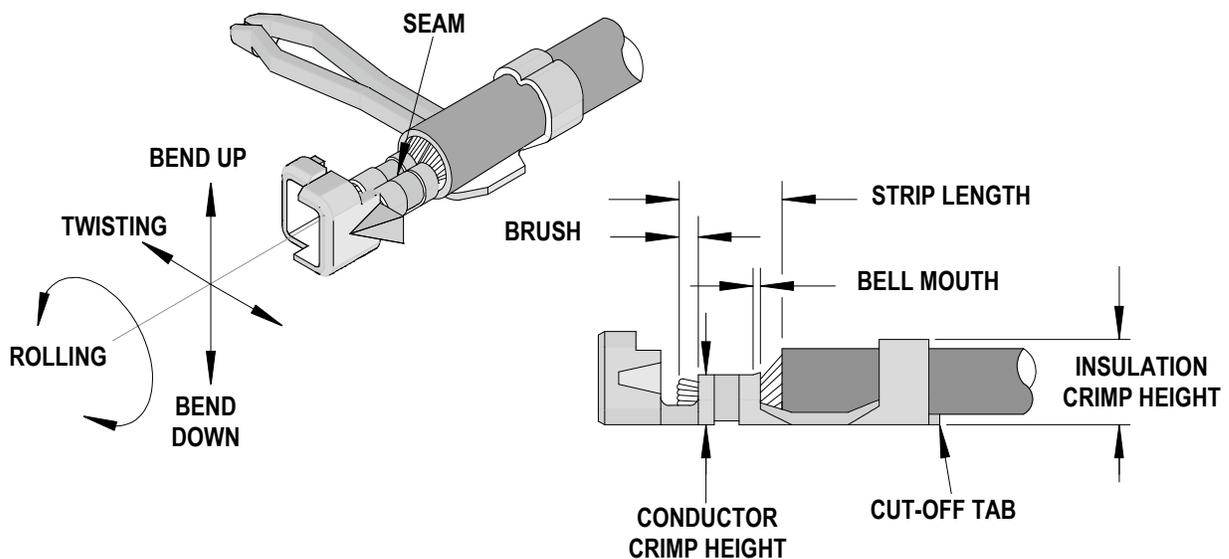

CRIMP SPECIFICATION

| Terminal Series No. | Bell mouth | | Cut-off Tab Maximum | | Conductor Brush | |
|---------------------|------------|-----------|---------------------|------|-----------------|-----------|
| | mm | In. | mm | In. | mm | In. |
| 201231 | 0.20-0.50 | .008-.020 | 0.20 | .008 | 0.3-1.0 | .012-.039 |

| Terminal Series No. | Bend up | Bend down | Twist | Roll | Punch Width mm (Ref) | | | | Seam Seam shall not be open and no wire allowed out of the crimping area |
|---------------------|---------|-----------|--------|------|----------------------|------|------------|------|---|
| | | | | | Conductor | | Insulation | | |
| | Degree | | Degree | | mm | In | mm | In | |
| 201231 | 3 | 3 | 3 | 3 | 2.35 | .093 | 3.00 | .118 | |

After crimping, the conductor profile should measure the following.

| Terminal Series No. | Wire Size | | Conductor | | | |
|---------------------|-----------|-----------------|--------------|-----------|-------------------|-----------|
| | | | Crimp Height | | Crimp Width (Ref) | |
| | AWG | mm ² | mm | In. | mm | In. |
| 201231 | - | 1.50 | 1.45-1.54 | .057-.061 | 2.35-2.45 | .093-.096 |

| Terminal Series No. | Wire Size | | Insulation | | | | Pull Force Minimum | |
|---------------------|-----------|-----------------|--------------------|------|-------------------|------|--------------------|-------|
| | | | Crimp Height (Max) | | Crimp Width (Ref) | | | |
| | AWG | mm ² | mm | In. | mm | In. | N | Lb. |
| 201231 | - | 1.50 | 3.10 | .122 | 3.10 | .122 | 49.0 | 11.02 |


Tool Qualification Notes:

1. Pull Force should be measured with no influence from the insulation crimp.
2. The above specifications are guidelines to an optimum crimp.

PARTS LIST

| FineAdjust Applicator 63904-2500 | | | | |
|--|-----------------|------------------------|------------------------------|-----------------|
| Item | Order No | Engineering No. | Description | Quantity |
| Perishable Tooling | | | | |
| | 63904-2570 | 63904-2570 | Tool Kit (All "Y" Items) | REF |
| 1 | 63457-2305 | 63457-2305 | Conductor Punch | 1 Y |
| 2 | 63455-2301 | 63455-2301 | Conductor Anvil | 1 Y |
| 3 | 63454-3007 | 63454-3007 | Insulation Punch | 1 Y |
| 4 | 63456-3002 | 63456-3002 | Insulation Anvil | 1 Y |
| 5 | 63443-0005 | 63443-0005 | Cut-Off Plunger | 1 Y |
| 6 | 63443-0012 | 63443-0012 | Front Plunger Retainer | 1 Y |
| Other Components | | | | |
| 7 | 11-18-4083 | 60707-8 | Feed Guide | 1 |
| 8 | 11-24-1067 | 4996-4 | Cut-off Plunger Spring | 1 |
| 9 | 63443-0009 | 63443-0009 | Scrape Chute | 1 |
| 10 | 63443-0024 | 63443-0024 | Lower Tooling Key | 1 |
| 11 | 63443-0090 | 63443-0090 | Wire Stop | 1 |
| 12 | 63443-1168 | 63443-1168 | Blade-Wire Hold Down | 1 |
| 13 | 63443-1720 | 63443-1720 | 19.00mm (Height Spacer) | 1 |
| 14 | 63443-2215 | 63443-2215 | 15.00mm (Coarse Spacer) | 1 |
| 15 | 63443-2306 | 63443-2306 | 3.30mm (Fine Spacer) | 1 |
| 16 | 63443-2805 | 63443-2805 | Front Plunger Striker | 1 |
| 17 | 63443-2915 | 63443-2915 | Striker Plunger | 1 |
| 18 | 63443-6109 | 63443-6109 | Rear Cover | 1 |
| 19 | 63600-1057 | 63600-1057 | Striker Plunger Spring | 1 |
| 20 | 63600-2673 | 63600-2673 | Mini Rod | 1 |
| 21 | 63600-4389 | 63600-4389 | Spring-Compression | 1 |
| Frame | | | | |
| 22 | 63800-4901 | 63800-4901 | Top | 1 |
| 23 | 63801-3281 | 63801-3281 | Base | 1 |
| 24 | 63801-4650 | 63801-4650 | Track | 1 |
| Hardware | | | | |
| 25 | N/A | N/A | M3 by 6 Long SHCS | 2** |
| 26 | N/A | N/A | M3 by 6 Long FHCS | 1** |
| 27 | N/A | N/A | M4 by 6 Long SHCS | 2** |
| 28 | N/A | N/A | M4 by 12 Long BHCS | 2** |
| 29 | N/A | N/A | M4 by 45 Long SHCS | 2** |
| 30 | N/A | N/A | M5 by 12 Long SHCS | 1** |
| 31 | N/A | N/A | #10-32 by 3/8" Long Flat SSS | 1** |
| 32 | N/A | N/A | #10-32 Hex Jam Nut | 1** |
| ** Available from an industrial supply company such as MSC (1-800-645-7270). | | | | |

Assembly Drawing

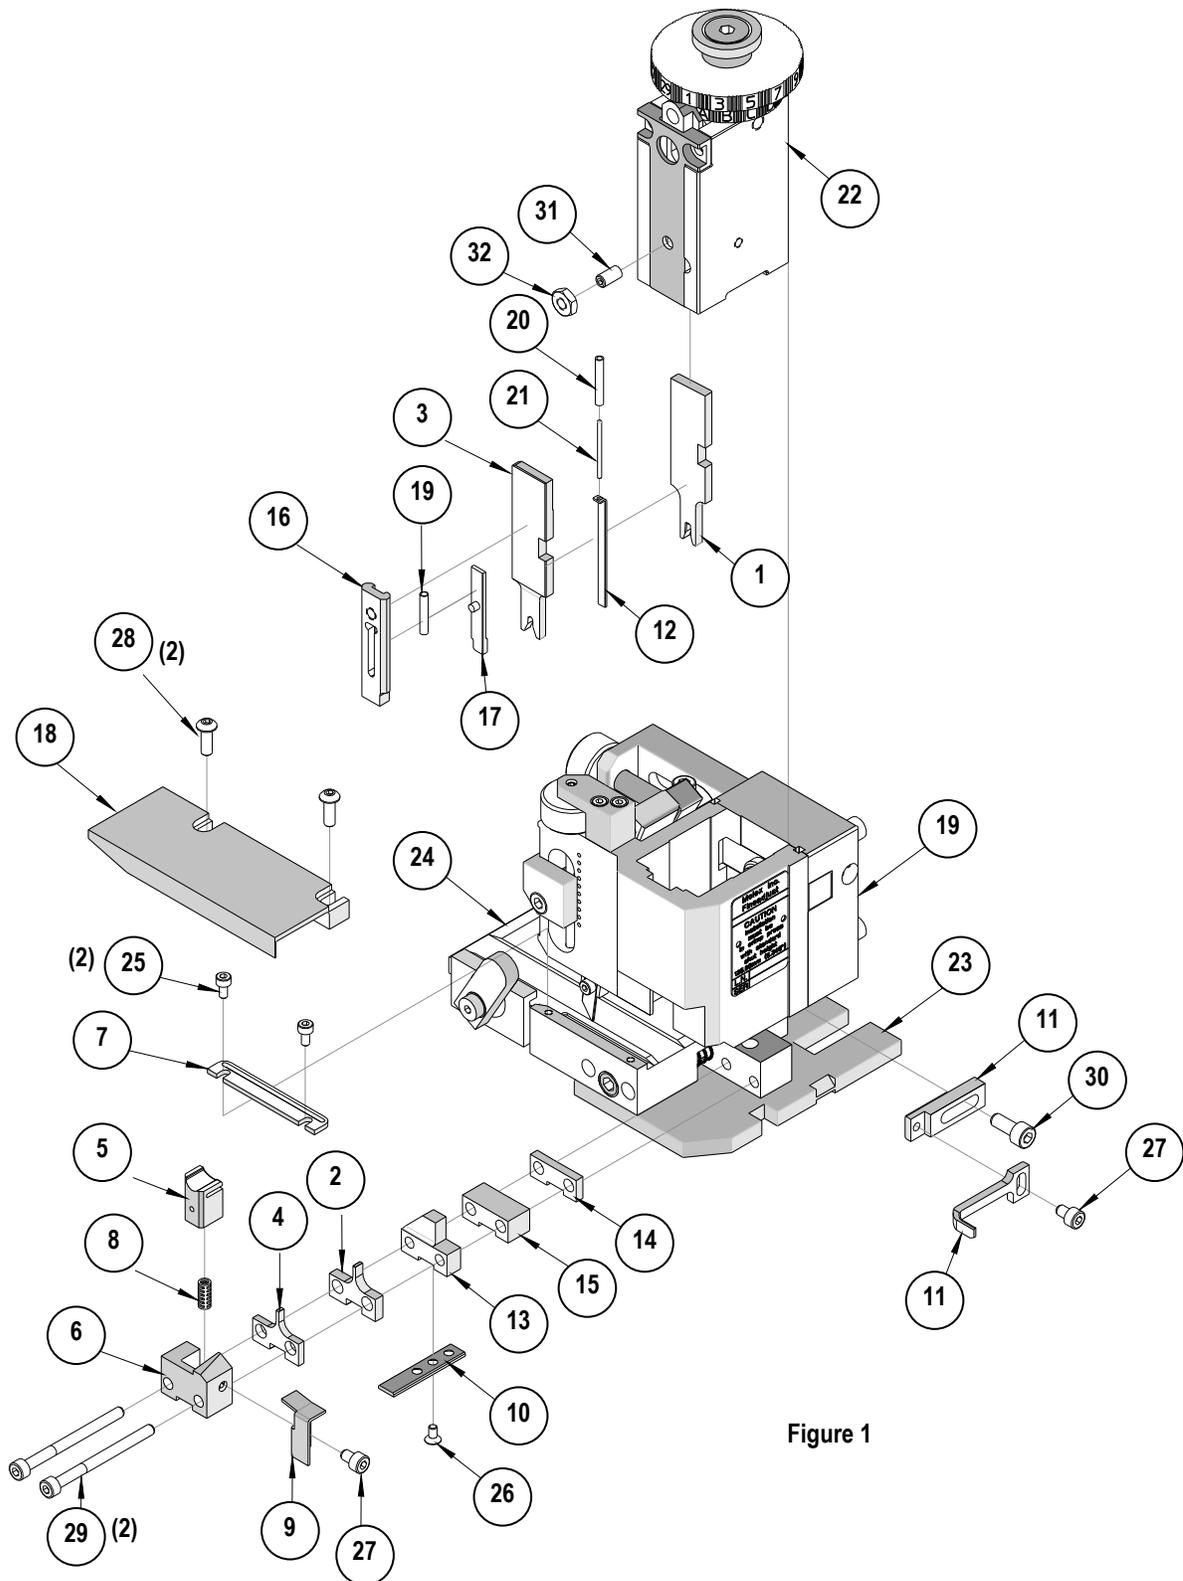

NOTES

1. Molex recommends an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power. Check that all screws are tight.
3. Slugs, Terminals, Dirt and Oil should be kept clear of work area.
4. Wear safety glasses at all times.
5. For recommended maintenance refer to the FineAdjust Manual.

CAUTION: This applicator should only be used in a press with a shut height of 135.8mm (5.346"). Tooling damage could result at a lower setting.

CAUTION: To prevent injury never operate this Applicator without the guards supplied with the press or wire-processing machine in place. Reference the press or wire processing manufacturer's instruction manual.

CAUTION: Molex crimp specifications are valid only when used with Molex terminals, applicators and tooling.

Application Tooling Support
2200 Wellington Court
Lisle, IL 60532 USA
Phone: +1-402-458-TOOL (8665)
E-mail: applicationtooling@molex.com

Visit our Website at www.molex.com/applicationtooling

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru