





- 1
- MAT'L: BRASS PER ASTM-B-16
- 2
- MAT'L: BERYLLIUM COPPER PER ASTM-B-196.
- 3
- MAT'L: PTFE PER ASTM-D-1710.
- 4
- FINISH: GOLD PLATE PER ASTM-B-488, TYPE 1, GRADE C, CLASS 1 OVER NICKEL .000050 [0.0013] THK PER AMS-QQ-N-290, CLASS 2.
- 5
- FINISH: PASSIVATE PER AMS-QQ-P-35.
- 6
- COLOR CODED PER MIL-C-39029, .020-.050 [0.51-1.27] WIDTH.
- 7
- 160 DP. FULL DIAMOND KNURL OVER THIS LENGTH.
- 8
- MAT'L: POLYESTER MLDG. CMPD. PER MIL-M-24519, TYPE C.
- 9
- MAT'L: STAINLESS STEEL PER ASTM-A-240.

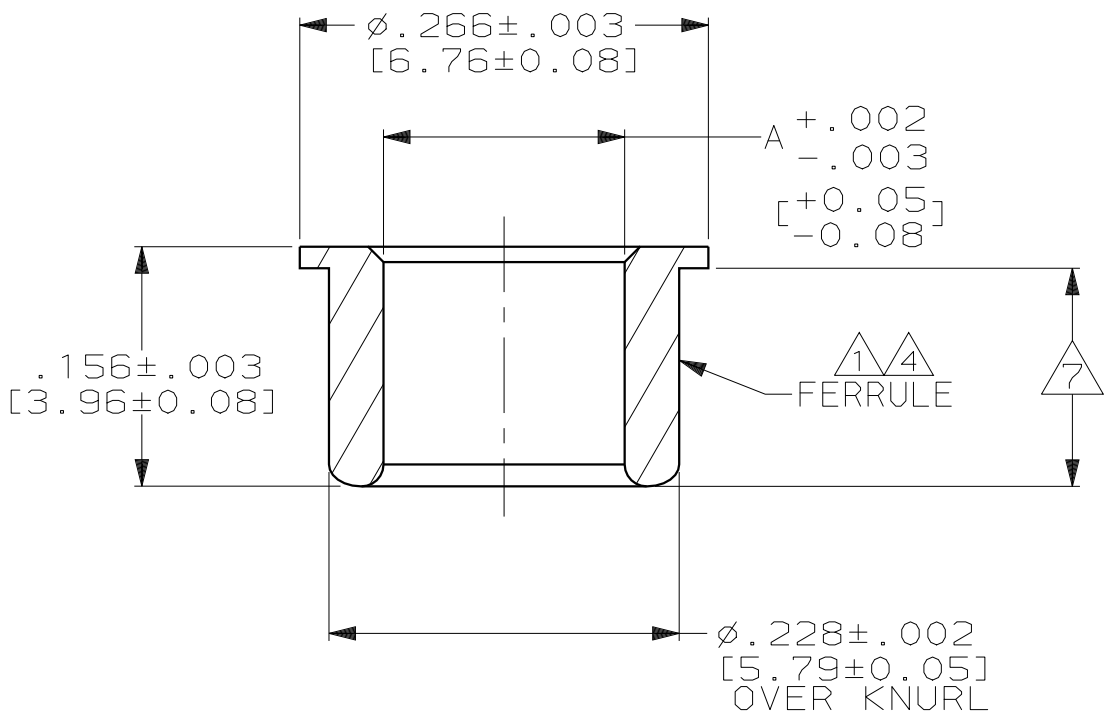

DETAIL A
FERRULE FOR 448543-1 & -2

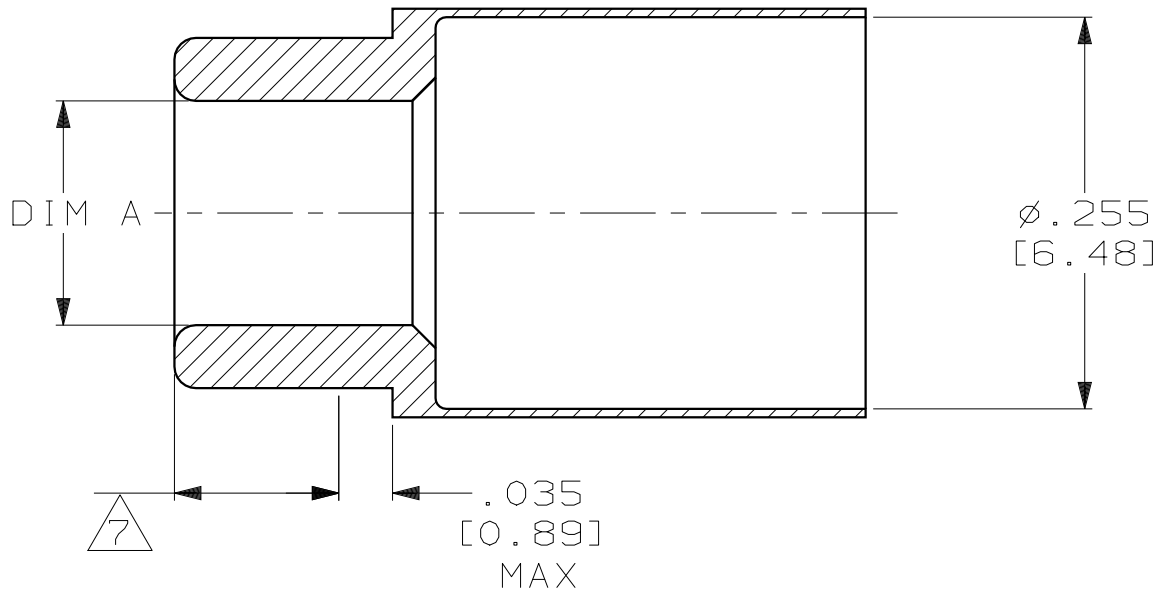

DETAIL B 1 4
FERRULE FOR 448543-3 ONLY

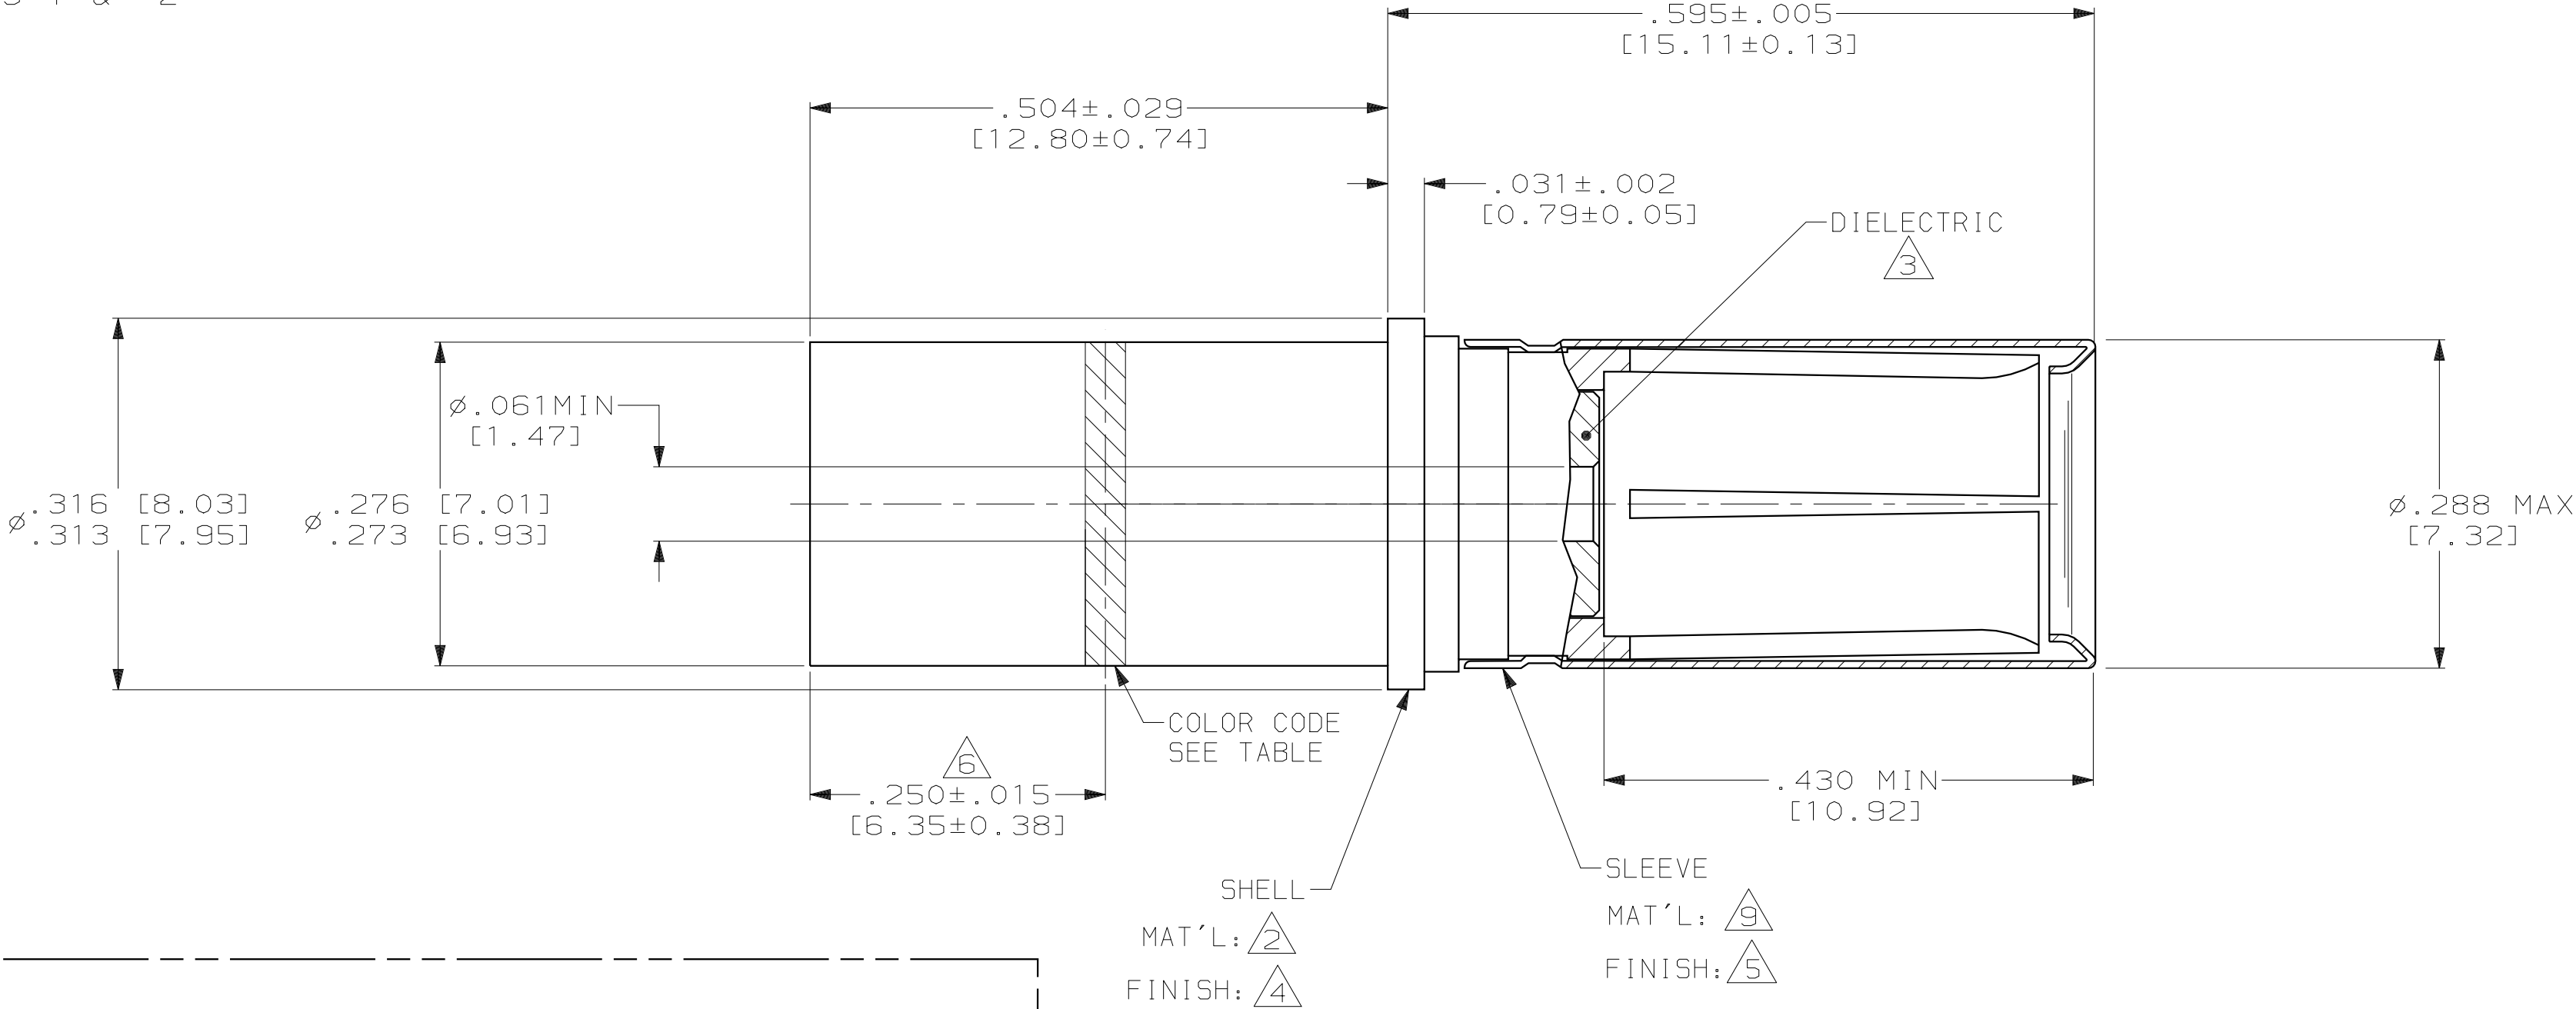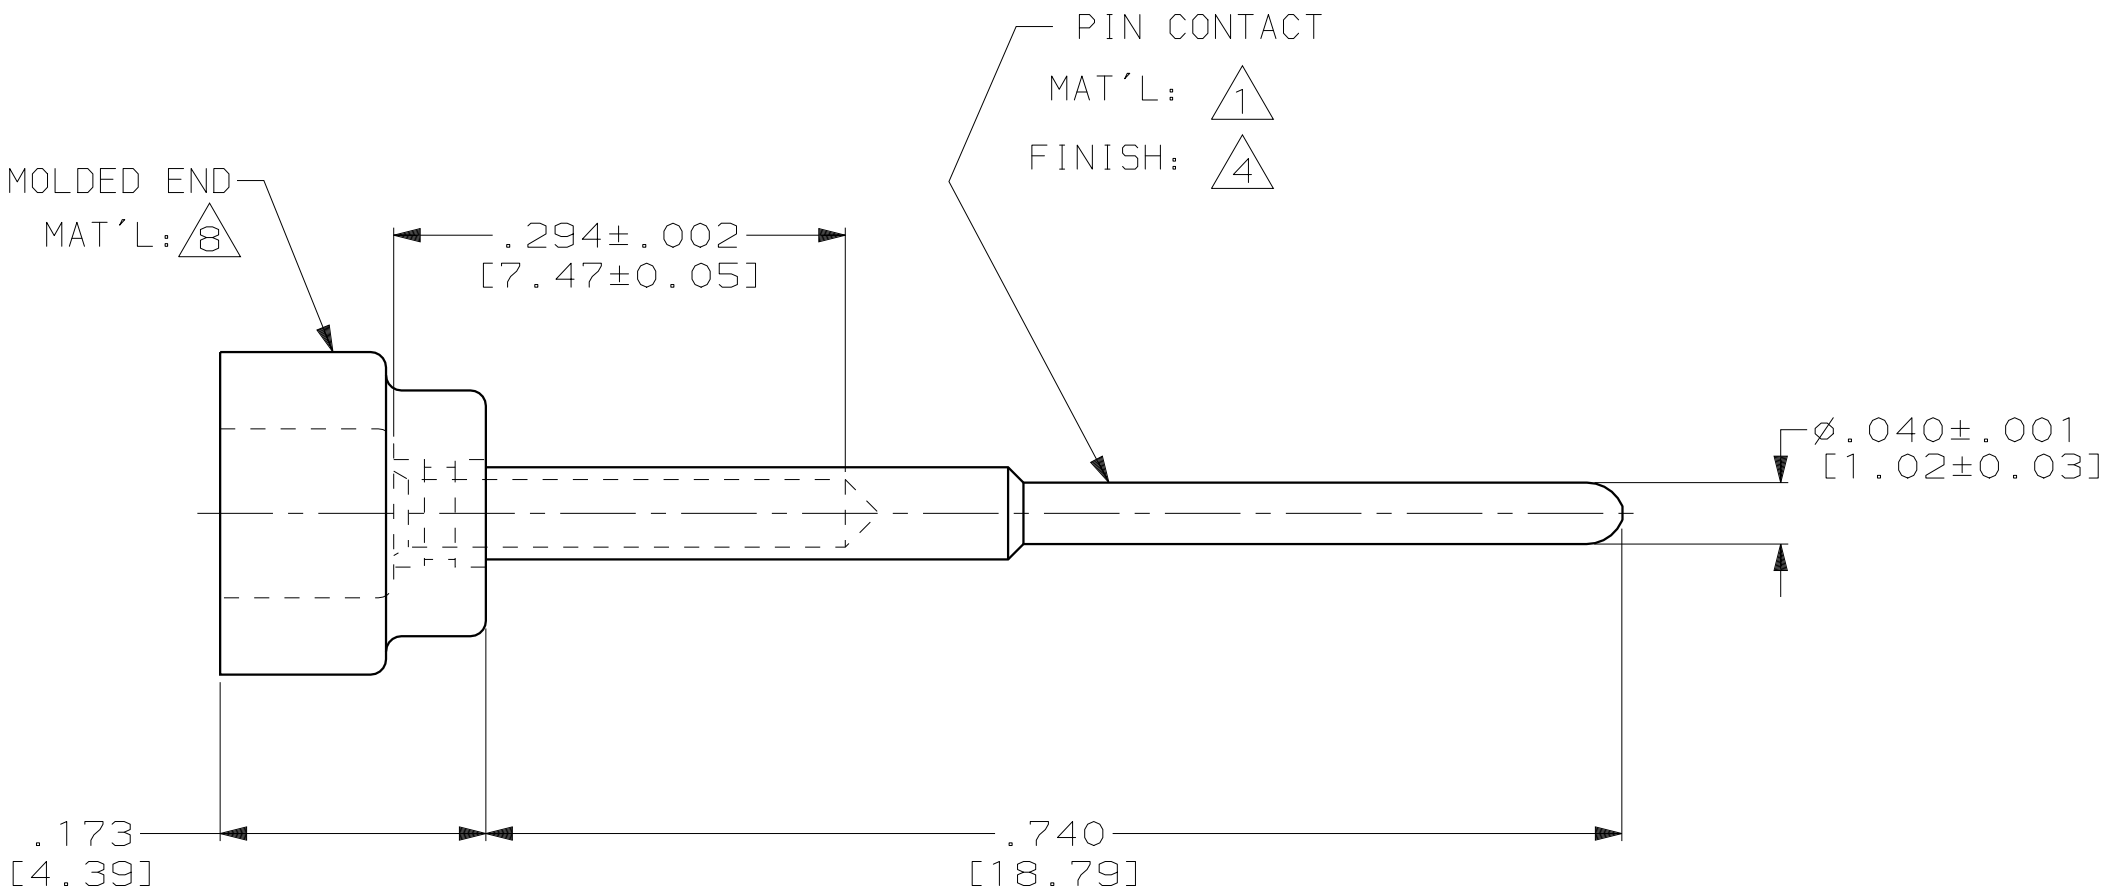

ASSEMBLY PROCEDURE FOR 448543-1 & 448543-2:

1. STRIP OUTER INSULATION BACK FROM END OF CABLE .500 INCH.
2. SLIDE OUTER FERRULE, LARGEST END FIRST, OVER CABLE JACKET.
3. COMB OUT SHIELD. FOLD SHIELD BACK OVER KNURLED AREA OF FERRULE AND TRIM EVEN WITH BACK EDGE OF KNURLED AREA OF FERRULE. TRIM BRAID EVEN WITH BACK EDGE OF KNURLED AREA.
4. TRIM THE DIELECTRIC TO EXPOSE APPROXIMATELY .300 INCH OF CENTER CONDUCTOR.
5. PLACE THE PIN CONTACT SUB-ASSEMBLY INTO A M22520/2-01 CRIMPING TOOL, SIDE OPPOSITE THE SELECTOR SWITCH. THE PLASTIC HOUSING ON THE PIN CONTACT SERVES AS A LOCATOR. SET CRIMP TOOL SELECTOR SWITCH TO #5. INSERT CENTER CONDUCTOR INTO CONTACT INSURING CABLE DIELECTRIC ENTERS PLASTIC AND HOUSING AND CENTER CONDUCTOR IS VISIBLE THRU VIEW HOLE IN CENTER CONTACT. CRIMP CONTACT.
6. SLIDE CRIMPED CONTACT SUB-ASSEMBLY INTO OUTER CONTACT BODY FIRMLY SEATING FERRULE. CRIMP FERRULE USING PROCRIMPER HANDTOOL #354940-1 AND LOCATOR 91907-1.

ASSEMBLY PROCEDURE FOR 448543-3

1. STRIP OUTER INSULATION BACK FROM END OF CABLE 1.00 INCH.
2. SLIGHTLY FLARE THE SHIELD AND TRIM APPROXIMATELY .25" OF THE DIELECTRIC, CENTER CONDUCTOR AND FILLER.
3. SLIDE INNER CRIMP FERRULE, LARGEST END FIRST, OVER THE SHIELD UNTIL IT. BOTTOMS ON THE OUTER INSULATION.
4. COMB OUT SHIELD. FOLD SHIELD BACK OVER THE INNER CRIMP FERRULE. TRIM THE SHIELD EVEN WITH THE BACK EDGE OF THE KNURLED AREA.
5. TRIM THE DIELECTRIC .10 INCH FROM THE SHIELD
6. TRIM THE FILLER FLUSH WITH THE END OF THE DIELECTRIC.
7. TRIM THE CENTER CONDUCTOR .30 INCH FROM THE END OF THE DIELECTRIC.
8. PLACE THE OUTER CONTACT BODY OVER THE CENTER CONDUCTOR AND SLIDE IT OVER THE SHIELD. ENSURE THAT NO SHIELD STRANDS PROTRUDE FROM BETWEEN THE OUTER CONTACT BODY AND THE INNER CRIMP FERRULE.
9. REMOVE THE OUTER CONTACT BODY AND TRIM THE SHIELD AS NEEDED.
10. PLACE THE PIN CONTACT SUB-ASSEMBLY INTO A M22520/2-01 CRIMPING TOOL, SIDE OPPOSITE THE SELECTOR SWITCH. THE PLASTIC HOUSING ON THE PIN CONTACT SERVES AS A LOCATOR. SET CRIMP TOOL SELECTOR SWITCH TO #5. INSERT CENTER CONDUCTOR INTO CONTACT INSURING CABLE DIELECTRIC ENTERS PLASTIC AND HOUSING AND CENTER CONDUCTOR IS VISIBLE THRU VIEW HOLE IN CENTER CONTACT. CRIMP CONTACT.
11. SLIDE CRIMPED CONTACT SUB-ASSEMBLY INTO OUTER CONTACT BODY FIRMLY SEATING FERRULE. CRIMP FERRULE USING PROCRIMPER HANDTOOL #354940-1 AND LOCATOR 91907-2.

DMS2345-62AU	SEE DETAIL B	-	.188 [4.78]	448543-3
ADAMS RUSSELL FC14Z	SEE DETAIL A	GREEN	.157 [3.99]	448543-2
ADAMS RUSSELL FC11Z	SEE DETAIL A	RED	.115 [2.92]	448543-1
CABLE	FERRULE VIEW	COLOR BAND	A DIM	PART NO.
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± .005 [0.13] ANGLES ± -	DR 10-23-92 C.C.THOMAS CHK 11-2-92 C.SHELLY APPD 11-2-92 C.SHELLY RLSE 11-2-92 C.C.THOMAS PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	AMP Incorporated Harrisburg, PA 17105-3608		
SEE CALLOUTS	SEE CALLOUTS	NAME	COAX SOCKET CONTACT ASSEMBLY, REAR RELEASE, LONG ENGAGEMENT, SIZE 8 (ARINC-TRIAx)	
FINISH	SEE CALLOUTS	SIZE	CAGE CODE	DRAWING NO
		D	00779	448543
		SCALE	8:1	SHEET 1 OF 1

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru