

FHC40LG


Super Low Noise HEMT

FEATURES

- Low Noise Figure: 0.3dB (Typ.)@f=4GHz
- High Associated Gain: 15.5dB (Typ.)@f=4GHz
- $L_g \leq 0.15\mu\text{m}$, $W_g = 280\mu\text{m}$
- Gold Gate Metallization for High Reliability
- Cost Effective Ceramic Microstrip (SMT) Package
- Tape and Reel Available

DESCRIPTION

The FH40LG is a Super High Electron Mobility Transistor (SuperHEMT™) intended for general purpose, ultra-low noise and high gain amplifiers in the 2-12GHz frequency range. This device is packaged in a cost effective, low parasitic, hermetically sealed metal-ceramic package for high volume telecommunication, DBS, TVRO, VSAT or other low noise applications.

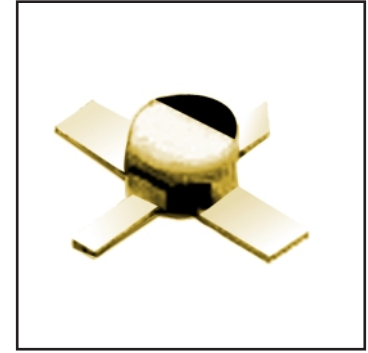

Fujitsu's stringent Quality Assurance Program assures the highest reliability and consistent performance.

ABSOLUTE MAXIMUM RATING (Ambient Temperature Ta=25°C)

Item	Symbol	Condition	Rating	Unit
Drain-Source Voltage	V_{DS}		3.5	V
Gate-Source Voltage	V_{GS}		-3.0	V
Total Power Dissipation	P_{tot}	Note	290	mW
Storage Temperature	T_{stg}		-65 to +175	°C
Channel Temperature	T_{ch}		175	°C

Note: Mounted on Al_2O_3 board (30 x 30 x 0.65mm)

Fujitsu recommends the following conditions for the reliable operation of GaAs FETs:

1. The drain-source operating voltage (V_{DS}) should not exceed 2 volts.
2. The forward and reverse gate currents should not exceed 0.2 and -0.075 mA respectively with gate resistance of 4000Ω.
3. The operating channel temperature (T_{ch}) should not exceed 80°C.



ELECTRICAL CHARACTERISTICS (Ambient Temperature Ta=25°C)

Item	Symbol	Condition	Limit			Unit
			Min.	Typ.	Max.	
Saturated Drain Current	I_{DSS}	$V_{DS} = 2\text{V}$, $V_{GS} = 0\text{V}$	10	40	85	mA
Transconductance	g_m	$V_{DS} = 2\text{V}$, $I_{DS} = 10\text{mA}$	45	65	-	mS
Pinch-off Voltage	V_p	$V_{DS} = 2\text{V}$, $I_{DS} = 1\text{mA}$	-0.1	-1.0	-2.0	V
Gate Source Breakdown Voltage	V_{GSO}	$I_{GS} = -10\mu\text{A}$	-3.0	-	-	V
Noise Figure	NF	$V_{DS} = 2\text{V}$, $I_{DS} = 10\text{mA}$, $f = 4\text{GHz}$	-	0.30	0.40	dB
Associated Gain	G_{as}		14.0	15.5	-	dB
Thermal Resistance	R_{th}	Channel to Case	-	220	300	°C/W


AVAILABLE CASE STYLES: LG

Note: RF parameters for LG devices are measured on a sample basis as follows:

Lot qty.			Sample qty.	Accept/Reject
1200	or	less	125	(0,1)
1201	to	3200	200	(0,1)
3201	to	10000	315	(1,2)
10001	or	over	500	(1,2)

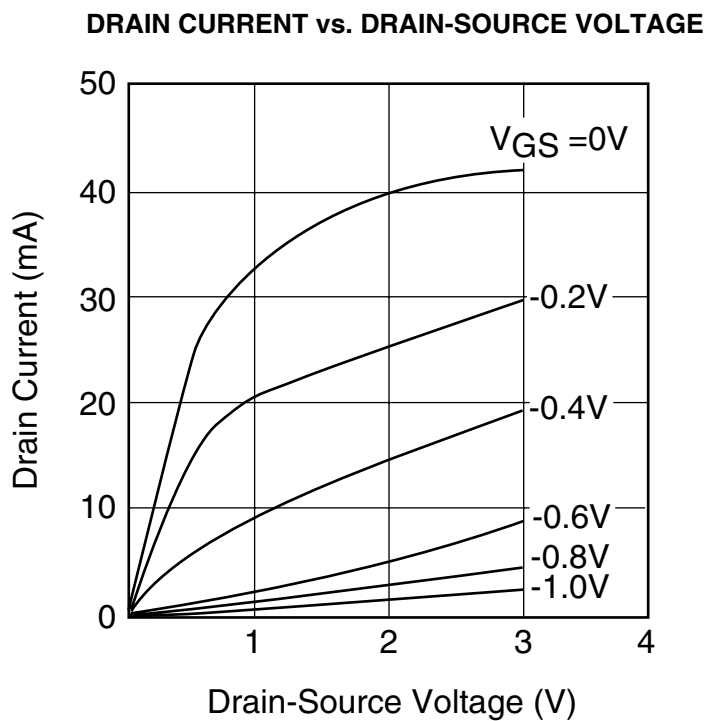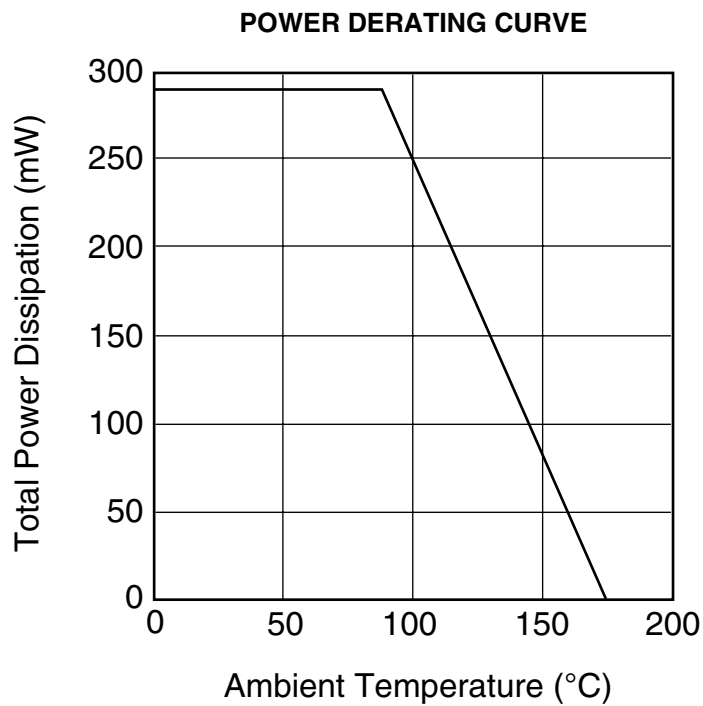

TYPICAL NOISE FIGURE CIRCLE

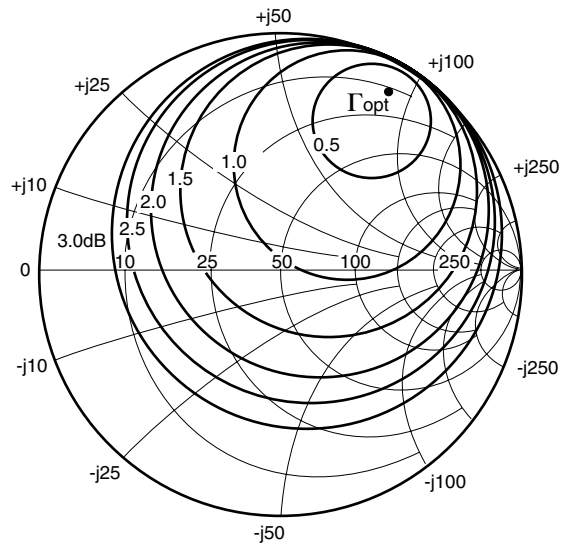

$f=4\text{GHz}$
 $V_{DS}=2\text{V}$
 $I_{DS}=10\text{mA}$


$\Gamma_{opt}=0.87 \angle 57^\circ$
 $R_n/50=0.18$
 $NF_{min}=0.30\text{dB}$

NOISE PARAMETERS

$V_{DS}=2\text{V}$, $I_{DS}=10\text{mA}$



Freq. (GHz)	Γ_{opt}		NFmin (dB)	Rn/50
	(MAG)	(ANG)		
2	0.86	31.0	0.28	0.19
4	0.87	57.0	0.30	0.18
6	0.86	83.0	0.34	0.13
8	0.81	108.0	0.39	0.09
10	0.74	132.0	0.47	0.05
12	0.63	156.0	0.55	0.03
14	0.49	179.0	0.67	0.04
16	0.33	-158.0	0.81	0.07
18	0.13	-136.0	1.00	0.11

Ga(max) AND $|S_{21}|$ vs. FREQUENCY

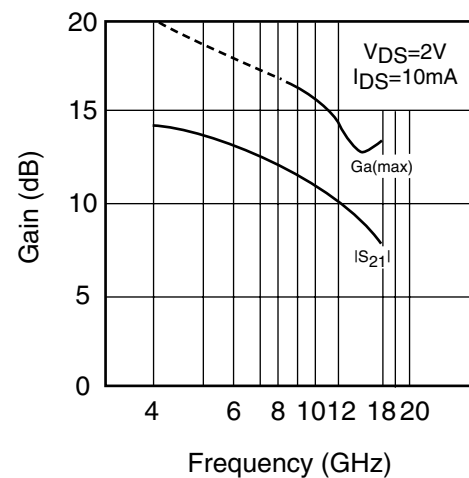

FHC40LG

Super Low Noise HEMT

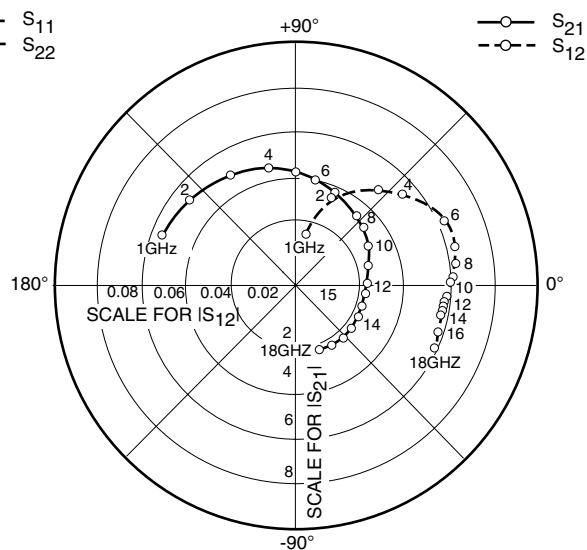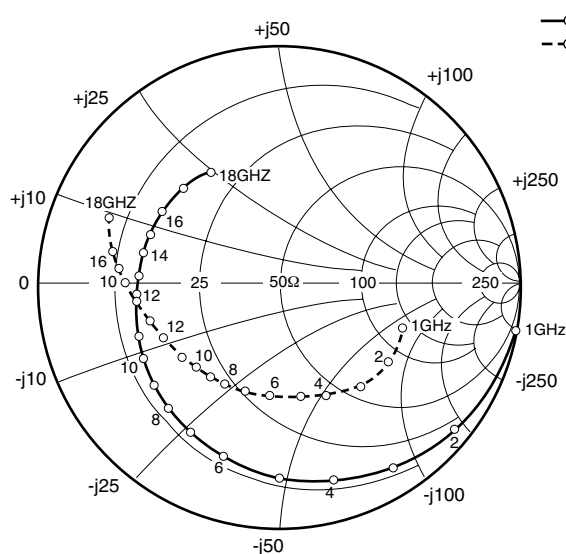


S-PARAMETERS

$V_{DS} = 2V$, $I_{DS} = 10mA$

FREQUENCY (GHZ)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1.0	0.980	-20.6	5.620	159.7	0.017	75.8	0.541	-17.8
2.0	0.942	-40.7	5.401	140.7	0.033	61.6	0.523	-35.0
3.0	0.887	-59.4	5.051	122.6	0.045	49.5	0.501	-51.2
4.0	0.838	-76.9	4.685	105.8	0.054	38.5	0.480	-66.6
5.0	0.786	-93.2	4.334	89.9	0.060	28.5	0.461	-81.3
6.0	0.742	-108.3	3.984	74.9	0.063	20.2	0.448	-95.4
7.0	0.705	-122.1	3.654	60.6	0.063	12.9	0.449	-108.9
8.0	0.672	-133.7	3.340	47.6	0.063	7.2	0.463	-120.3
9.0	0.651	-143.9	3.110	35.8	0.062	3.2	0.481	-130.1
10.0	0.633	-153.9	2.954	23.7	0.061	-0.2	0.498	-138.8
11.0	0.611	-164.1	2.786	11.8	0.059	-2.9	0.513	-147.6
12.0	0.595	-174.8	2.641	0.0	0.058	-5.1	0.535	-157.0
13.0	0.588	176.0	2.518	-11.6	0.057	-6.7	0.562	-165.3
14.0	0.579	167.6	2.412	-23.0	0.057	-7.9	0.597	-172.8
15.0	0.569	159.3	2.342	-34.6	0.057	-10.1	0.634	-179.7
16.0	0.555	150.5	2.290	-46.6	0.058	-12.9	0.667	173.6
17.0	0.536	140.3	2.272	-59.4	0.059	-17.0	0.697	166.4
18.0	0.525	129.9	2.233	-72.6	0.060	-22.4	0.727	158.8

Case Style "LG"

Metal-Ceramic Hermetic Package

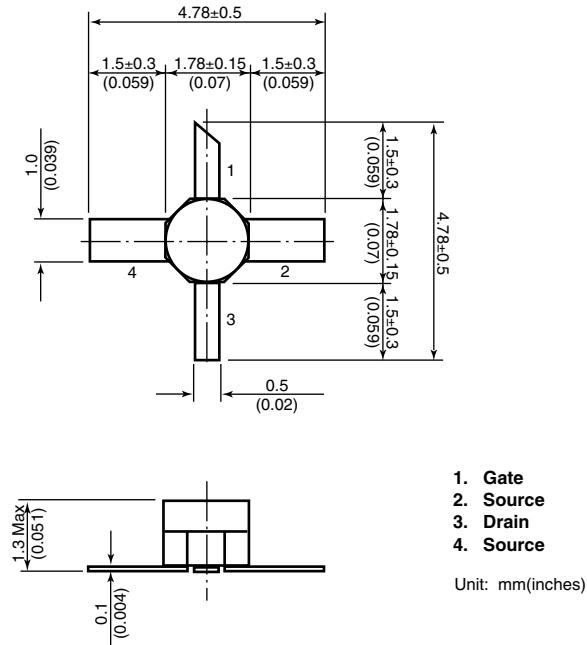

For further information please contact:

FUJITSU COMPOUND SEMICONDUCTOR, INC.
2355 Zanker Rd.
San Jose, CA 95131-1138, U.S.A.
Phone: (408) 232-9500
FAX: (408) 428-9111
www.fcsi.fujitsu.com

FUJITSU MICROELECTRONICS, LTD.
Compound Semiconductor Division
Network House
Norreys Drive
Maidenhead, Berkshire SL6 4FJ
Phone: +44 (0)1628 504800
FAX: +44 (0)1628 504888

CAUTION

Fujitsu Compound Semiconductor Products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put these products into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Fujitsu Limited reserves the right to change products and specifications without notice. The information does not convey any license under rights of Fujitsu Limited or others.

© 1998 FUJITSU COMPOUND SEMICONDUCTOR, INC.
Printed in U.S.A. FCSI0598M200

SuperHEMT™ is a trademark of Fujitsu Limited.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru