



SPECIFICATION

Item no.:

T60404-N4646-X661

K-no.: 24511

25 A Current Sensor for 5V- Supply Voltage

For electronic current measurement:
 DC, AC, pulsed, mixed ..., with a galvanic
 isolation between primary circuit
 (high power) and secondary circuit
 (electronic circuit)

Date: 28.01.2013

Customer: Standard type

Customers Part no.:

Page 1 of 2

Description	Characteristics	Applications
<ul style="list-style-type: none"> Closed loop (compensation) Current Sensor with magnetic field probe Printed circuit board mounting Casing and materials UL-listed 	<ul style="list-style-type: none"> Excellent accuracy Very low offset current Very low temperature dependency and offset current drift Very low hysteresis of offset current Short response time Wide frequency bandwidth Compact design Reduced offset ripple 	<p>Mainly used for stationary operation in industrial applications:</p> <ul style="list-style-type: none"> AC variable speed drives and servo motor drives Static converters for DC motor drives Battery supplied applications Switched Mode Power Supplies (SMPS) Power Supplies for welding applications Uninterruptible Power Supplies (UPS)

Electrical data – Ratings

I _{PN}	Primary nominal r.m.s. current	25	A
V _{out}	Output voltage @ I _P	V _{Ref} ± (0.625*I _P /I _{PN})	V
V _{out}	Output voltage @ I _P =0, T _A =25°C	V _{Ref} ± 0.005	V
V _{Ref}	External Reference voltage range	0...4	V
	Internal Reference voltage	2.5 ± 0.005	V
K _N	Turns ratio	1...3 : 2000	

Accuracy – Dynamic performance data

		min.	typ.	max.	Unit
I _{P,max}	Max. measuring range	±85			
X	Accuracy @ I _{PN} , T _A = 25°C		0.7		%
ε _L	Linearity		0.1		%
V _{out} - V _{Ref}	Offset voltage @ I _P =0, T _A = 25°C		±1.35		mV
ΔV _o / V _{Ref} / ΔT	Temperature drift of V _{out} @ I _P =0, V _{Ref} =2,5V, T _A = -40...85°C	1.4	10		ppm/°C
t _r	Response time @ 90% von I _{PN}	300			ns
Δt (I _{P,max})	Delay time at di/dt = 100 A/μs	200			ns
f	Frequency bandwidth	DC...200			kHz

General data

		min.	typ.	max.	Unit
T _A	Ambient operating temperature	-40	+85		°C
T _S	Ambient storage temperature	-40	+85		°C
m	Mass		12		g
V _C	Supply voltage	4.75	5	5.25	V
I _C	Current consumption		15		mA

Constructed and manufactured and tested in accordance with EN 61800-5-1 (Pin 1 - 6 to Pin 7 - 10)
 Reinforced insulation, Insulation material group 1, Pollution degree 2

S _{clear}	Clearance (component without solder pad)	7.4	mm	
S _{creep}	Creepage (component without solder pad)	8.0	mm	
V _{sys}	System voltage overvoltage category 3	RMS	300	V
V _{work}	Working voltage (tabel 7 acc. to EN61800-5-1) overvoltage category 2	RMS	650	V
U _{PD}	Rated discharge voltage	peak value	1320	V

Note: "According UL 508: Max. potential difference = 600 V_{AC}

Date	Name	Issue	Amendment
28.01.13	Le	83	Note added, clearance and creepage from 7 to 7.4 and 7 to 8.0. Temperature drift from typ. 3 of typ. 1.4
			Offset voltage from ±5 to ± 1.35 changed. Mechanical outline / marking with UL-sign. + issue(increased). CN-572
Hrsg.: KB-E editor	Bearb: Le. designer	KB-PM: KRe. check	freig.: HS released

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden
 Any offenders are liable to pay all relevant damages.

K-no.: 24511

25 A Current Sensor for 5V- Supply Voltage

For electronic current measurement:
 DC, AC, pulsed, mixed ... with a galvanic
 isolation between primary circuit
 (high power) and secondary circuit
 (electronic circuit)

Date: 28.01.2013

Customer: Standard type



Customers Part no.:

Page 2 of 2

Mechanical outline (mm):

General tolerances DIN ISO 2768-c

Connections:

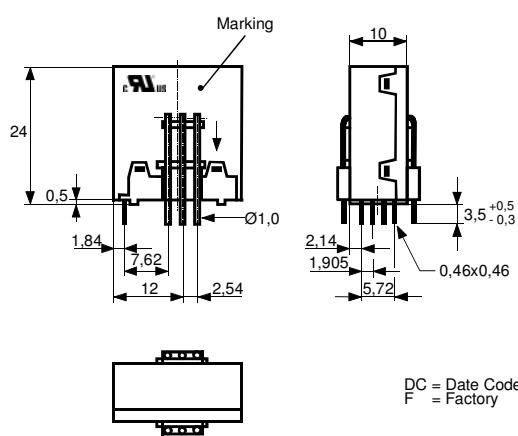
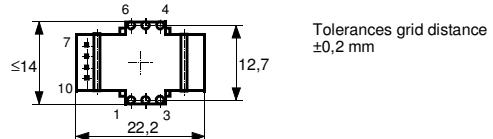


Marking:

VAC UL-sign
 4646X661-83
 DC
 F

Explanation:

DC = Date Code [Format YWW]

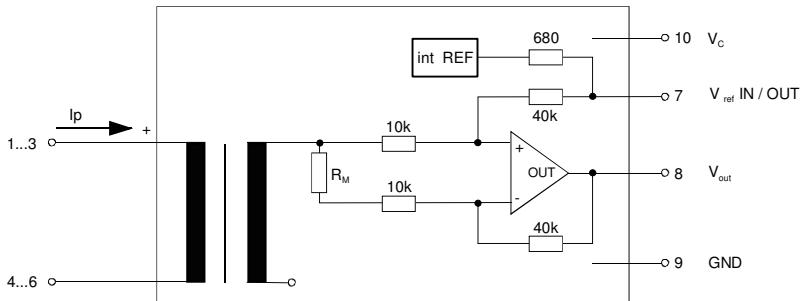DC = Date Code
F = Factory**Schematic diagram****Possibilities of wiring** (@ T_A = 85°C)

primary windings	primary current RMS	primary current maximal $\hat{I}_{P,max}$ [A]	output voltage RMS $V_{out}(I_p)$ [V]	turns ratio K _N	primary resistance R _P [mΩ]	wiring
N _P	I _P [A]					
1	25	±85	2.5±0.625	1:2000	0.33	
2	12	±42	2.5±0.600	2:2000	1.5	
3	8	±28	2.5±0.600	3:2000	3	

Temperature of the primary conductor should not exceed 110°C.

Additional information is obtainable on request.

This specification is no declaration of warranty acc. BGB §443 dar.

Hrsg.: KB-E
editorBearb: Le.
designerKB-PM: KRe.
checkfreig.: HS
released



Additional Information

Item No.: T60404-N4646-X661

K-No.: 24511	25 A Current Sensor for 5V- Supply Voltage For the electronic measurement of currents: DC, AC, pulsed, mixed ..., with a galvanic Isolation between the primary circuit (high power) and the secondary circuit	Date: 28.01.2013
--------------	---	------------------

Customer:	Customers Part No.:	Page 1 of 2
-----------	---------------------	-------------

Electrical Data

		min.	typ.	max.	Unit
V_{Ctot}	Maximum supply voltage (without function)			6	V
I_C	Supply Current with primary current		$15\text{mA} + I_p \cdot K_N + V_{out}/R_L$		mA
$I_{out,SC}$	Short circuit output current		± 20		mA
R_P	Resistance / primary winding @ $T_A=25^\circ\text{C}$		1		$\text{m}\Omega$
R_S	Secondary coil resistance @ $T_A=85^\circ\text{C}$			67	Ω
$R_{i,Ref}$	Internal resistance of Reference input			670	Ω
$R_i, (V_{out})$	Output resistance of V_{out}			1	Ω
R_L	External recommended resistance of V_{out}	1			$\text{k}\Omega$
C_L	External recommended capacitance of V_{out}			500	pF
$\Delta X_{Ti} / \Delta T$	Temperature drift of X @ $T_A = -40 \dots +85^\circ\text{C}$			40	ppm/K
$\Delta V_0 = \Delta(V_{out} - V_{Ref})$	Sum of any offset drift including:	2	6		mV
V_{ot}	Longterm drift of V_0	1			mV
V_{0T}	Temperature drift von V_0 @ $T_A = -40 \dots +85^\circ\text{C}$	1			mV
V_{0H}	Hysteresis of V_{out} @ $I_p=0$ (after an overload of $10 \times I_{PN}$)	2			mV
$\Delta V_0/\Delta V_C$	Supply voltage rejection ratio			1	mV/V
V_{oss}	Offsetripple (with 1 MHz- filter first order)			30	mV
V_{oss}	Offsetripple (with 100 kHz- filter firidt order)	3	6		mV
V_{oss}	Offsetripple (with 20 kHz- filter first order)		0.8	1.5	mV
C_k	Maximum possible coupling capacity (primary – secondary)	5	10		pF
	Mechanical stress according to M3209/3			30g	
	Settings: 10 – 2000 Hz, 1 min/Decade, 2 hours				

Inspection (Measurement after temperature balance of the samples at room temperature)

$V_{out} (I_p=I_{PN})$ (V)	M3011/6: Output voltage vs. external reference ($I_p=25\text{A}, 40-80\text{Hz}$)	$625 \pm 0.7\%$	mV
$V_{out}-V_{Ref} (I_p=0)$ (V)	M3226: Offset voltage	± 0.005	V
V_d (V)	M3014: Test voltage, rms, 1 s pin 1 – 6 vs. pin 7 – 10	1.5	kV
V_e (AQL 1/S4)	Partial discharge voltage acc.M3024 (RMS) with V_{vor} (RMS)	1400 1750	V V

Type Testing (Pin 1 - 6 to Pin 7 - 10)

V_W	HV transient test according to M3064 (1,2 μs / 50 μs -wave form)	8	kV	
V_d	Testing voltage to M3014	(5 s)	3	kV
V_e	Partial discharge voltage acc.M3024 (RMS) with V_{vor} (RMS)	1400 1750	V V	

Applicable documents

Current direction: A positive output current appears at point I_S , by primary current in direction of the arrow.
Housing and bobbin material UL-listed: Flammability class 94V-0.

Enclosures according to IEC529: IP50.

Further standards UL 508 file E317483, category NMTR2 / NMTR8

Datum	Name	Index	Amendment				
28.01.13	Le	83	Applicable documents added. CN-572				
08.12.10	Le	82	Date changed.				
Hrsg.: KB-E editor	Bearb: Le designer		KB-PM: KRe. check			freig.: HS released	

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zu widerhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden.
Any offenders are liable to pay all relevant damages.



Additional Information

Item No.: T60404-N4646-X661

K-No.: 24511	25 A Current Sensor for 5V- Supply Voltage For the electronic measurement of currents: DC, AC, pulsed, mixed ..., with a galvanic Isolation between the primary circuit (high power) and the secondary circuit	Date: 28.01.2013
--------------	---	------------------

Customer:	Customers Part No.:	Page 2 of 2
-----------	---------------------	-------------

Explanation of several of the terms used in the tablets (in alphabetical order)

t_r : Response time (describe the dynamic performance for the specified measurement range), measured as delay time at $I_p = 0,9 \cdot I_{PN}$ between a rectangular current and the output voltage $V_{out}(I_p)$

$\Delta t(I_{Pmax})$: Delay time (describe the dynamic performance for the rapid current pulse rate e.g short circuit current) measured between I_{Pmax} and the output voltage $V_{out}(I_{Pmax})$ with a primary current rise of $dI_p/dt \geq 100 \text{ A}/\mu\text{s}$.

U_{PD} Rated discharge voltage (recurring peak voltage separated by the insulation) proved with a sinusoidal voltage V_e
 $U_{PD} = \sqrt{2} * V_e / 1,5$

V_{vor} Defined voltage is the RMS value of a sinusoidal voltage with peak value of $1,875 * U_{PD}$ required for partial discharge test in IEC 61800-5-1

$$V_{vor} = 1,875 * U_{PD} / \sqrt{2}$$

V_{sys} System voltage RMS value of rated voltage according to IEC 61800-5-1

V_{work} Working voltage voltage according to IEC 61800-5-1 which occurs by design in a circuit or across insulation

V_0 : Offset voltage between V_{out} and the rated reference voltage of $V_{ref} = 2,5V$.
 $V_0 = V_{out}(0) - 2,5V$

V_{0H} : Zero variation of V_0 after overloading with a DC of tenfold the rated value

V_{0L} : Long term drift of V_0 after 100 temperature cycles in the range -40 bis 85 °C.

X: Permissible measurement error in the final inspection at RT, defined by

$$X = 100 \cdot \left| \frac{V_{out}(I_{PN}) - V_{out}(0)}{0,625V} - 1 \right| \%$$

$X_{ges}(I_{PN})$: Permissible measurement error including any drifts over the temperature range by the current measurement I_{PN}

$$X_{ges} = 100 \cdot \left| \frac{V_{out}(I_{PN}) - 2,5V}{0,625V} - 1 \right| \% \quad \text{or} \quad X_{ges} = 100 \cdot \left| \frac{V_{out}(I_{PN}) - V_{ref}}{0,625V} - 1 \right| \%$$

ε_L : Linearity fault defined by $\varepsilon_L = 100 \cdot \left| \frac{I_p}{I_{PN}} - \frac{V_{out}(I_p) - V_{out}(0)}{V_{out}(I_{PN}) - V_{out}(0)} \right| \%$

This "Additional information" is no declaration of warranty according BGB §443.

Hrsg.: KB-E editor	Bearb: Le designer	KB-PM: KRe. check			freig.: HS released
-----------------------	-----------------------	----------------------	--	--	------------------------

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zu widerhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden.
Any offenders are liable to pay all relevant damages.

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru