

LOW VOLTAGE AUDIO POWER AMPLIFIER

■ GENERAL DESCRIPTION


The **NJM2149** is an audio power amplifier designed for telephone applications.

No external coupling capacitors are required because of the differential outputs. The closed loop gain is adjusted by two external resistors, and a CD pin permit powering down with muting the input signal.


The **NJM2149** improves the tern noise reduction in switching Power Down mode and external high band noise reduction, compared with **NJM2135**.

It is suitable for portable telephone, wireless telephone, button telephone, and other speaker amplifier applications.

■ PACKAGE OUTLINE



NJM2149D



NJM2149M



NJM2149V



NJM2149R




NJM2149RB1

■ FEATURES

● Operating Voltage	+2 - +6V
● Operating Current	2.2mA typ., at $V^+=3V$
● Supply Current in Power Down Mode	0.1 μ A typ
● Output Power Exceeds 250mW	$V^+=6V, R_L=32\Omega$
● Gain Range	GVD=0-43dB, Voice Band
● Load Impedance	$R_L=8-200\Omega$
● Bipolar Technology	
● Package Outline	DIP8, DMP8, SSOP8, VSP8, TVSP8

■ PIN CONFIGURATION

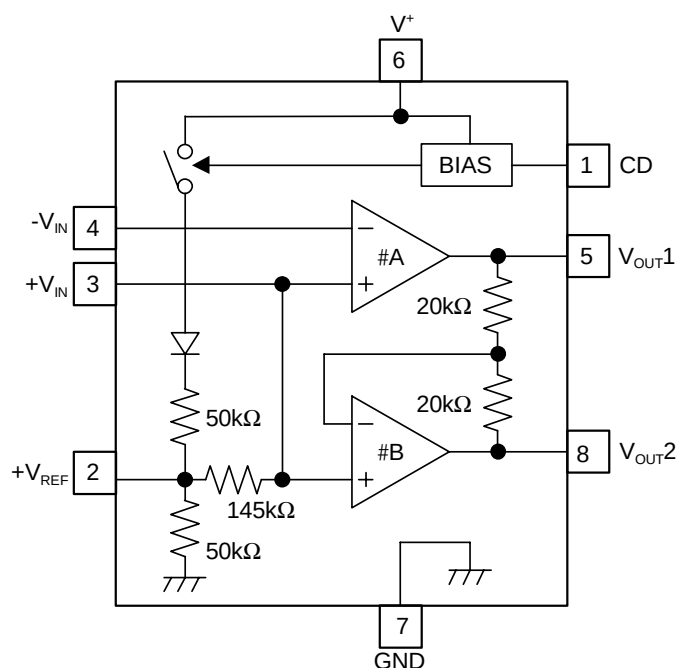

PIN FUNCTION

1. CD
2. + V_{REF}
3. + V_{IN}
4. - V_{IN}
5. V_{OUT1}
6. V^+
7. GND
8. V_{OUT2}

■ ABSOLUTE MAXIMUM RANGE

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	+7	V
Power Dissipation	P_D	(DIP8) 500 (DMP8) 500 (note1) (SSOP8) 360 (note1) (VSP8/TVSP8) 320	mW
Operating Temperature Range	Topr	-40 to +85	°C
Storage Temperature Range	Tstg	-40 to +125	°C

(note1) Mounted on PC Board

■ ELECTRICAL CHARACTERISTICS

(V⁺=6.0V, 1pin=2V, Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V^+		2.0	-	6.0	V
Operating Current	I_{CC}	$V^+=3.0V$, $R_L=\infty$, No Signal	-	2.2	3.5	mA
Operating Current at Power Down Mode	I_{CCD}	$V^+=3.0V$, $R_L=\infty$, 1pin=0.8V, No Signal	-	0.1	1.0	μA
Open Loop Gain	A_{V1}	Amp#A, f<100Hz	84	90	-	dB
Closed Loop Gain	A_{V2}	Amp#B, f=1kHz, $R_L=32\Omega$	-0.35	0	+0.35	dB
Output Power	P_{O1}	$V^+=3.0V$, $R_L=16\Omega$, THD≤10% (note2)	55	-	-	mW
	P_{O2}	$V^+=6.0V$, $R_L=32\Omega$, THD≤10% (note2)	250	-	-	mW
Total Harmonic Distortion	THD1	$V^+=6V$, $R_L=32\Omega$, $P_O=125mW$, f=1kHz, $G_{VD}=34dB$	-	0.5	1.0	%
	THD2	$V^+\geq 3V$, $R_L=8\Omega$, $P_O=20mW$, f=1kHz, $G_{VD}=12dB$	-	0.5	-	%
Power Supply Rejection Ratio (V ⁺ =3.0V-6.0V)	SVR1	$C1=\infty$, $C2=0.01\mu F$, DC	50	-	-	dB
	SVR2	$C1=0.1\mu F$, $C2=0$, f=1kHz	-	12	-	dB
	SVR3	$C1=1.0\mu F$, $C2=5.0\mu F$, f=1kHz	-	47	-	dB
Mute Attenuation	MAT	f=1kHz-20kHz, 1pin=0.8V	-	70	-	dB
Output Voltage (R _f =75kΩ, DC)	V_{O1}	$V^+=3.0V$, $R_L=16\Omega$	1.00	1.15	1.25	V
	V_{O2}	$V^+=6.0V$	-	2.60	-	V
Output High Level	V_{OH}	$I_{OUT}=-75mA$, $V^+=2.0-6.0V$	-	$V^+-1.1$	-	V
Output Low Level	V_{OL}	$I_{OUT}=75mA$, $V^+=2.0-6.0V$	-30	0.21	-	V
Output DC Offset	ΔV_O	$R_f=75k\Omega$, $R_L=32\Omega$, 5pin-8pin	-30	0	+30	mV
Input Bias Current	I_B	4pin	-	0	-200	nA
Equivalent Resistance	R_{+IN}	3pin	100	170	220	kΩ
	R_{REF}	2pin	18	26	40	kΩ
CD Input Voltage H	V_{CDH}	1pin	2.0	-	V^+	V
CD Input Voltage L	V_{CDL}	1pin	0.0	-	0.8	V
CD Input Resistance	R_{CD}	$V^+=V_{CD}=6.0V$, 1pin	50	85	175	kΩ


(note2) NJM2149M, NJM2149V, NJM2149R, NJM2149RB1: Mounted on PC Board

■ CONTROL TERMINAL EXPLANATION

CHIP DISABLE CONTROL (CD PIN)

PARAMETER	CONTROL SIGNAL	STATUS
CD OFF	H(=V _{CDH})	IC is active.
CD ON	L(=V _{CDL})	IC is standby. (with Mute)

■ APPLICATION CURCUIT

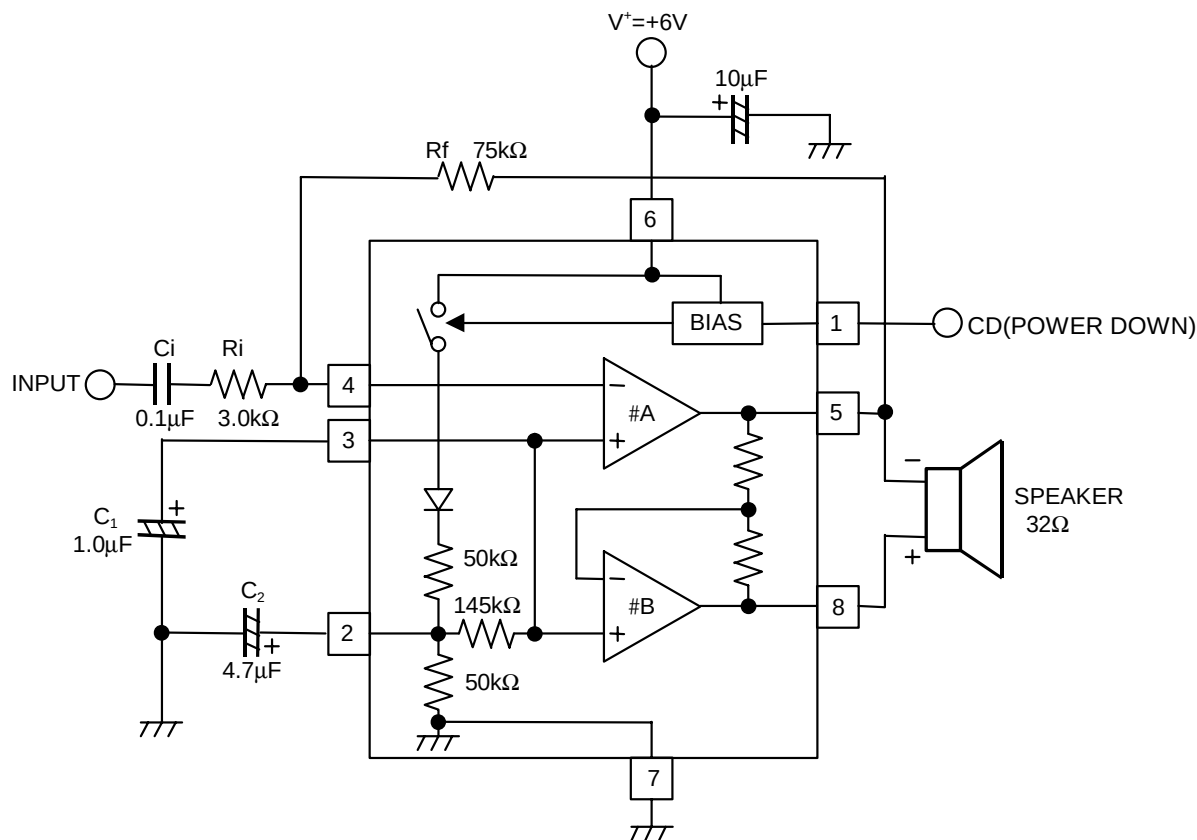

note:1.The CD terminal(1pin) should connect High level(>2.0V), when NJM2149 is active.


The standby mode, when the CD terminal is Low level(<0.8V).

2.To add the C1 and C2 capacitor, the power-supply-rejection-ratio will be improved.

When C1 is large value, C2 will be unnecessary.

3.The power-up time depend on the C1 and C2 capacitor.

4.The input current of CD terminal is as shown below figure.

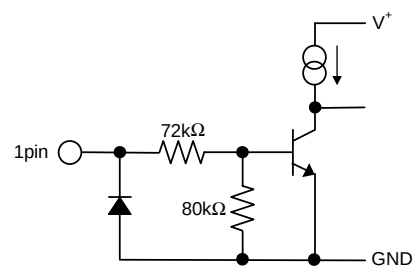


5.No connect oscillation-protect RC required.


To connect oscillation-protect RC, if the NJM2149 oscillate with PC board/stray capacitor/long speaker wire and others condition.

■ TYPICAL CHARACTERISTICS


Operating Current vs. Operating Voltage
($V_{CD}=V^+$, $T_a=25^\circ\text{C}$)

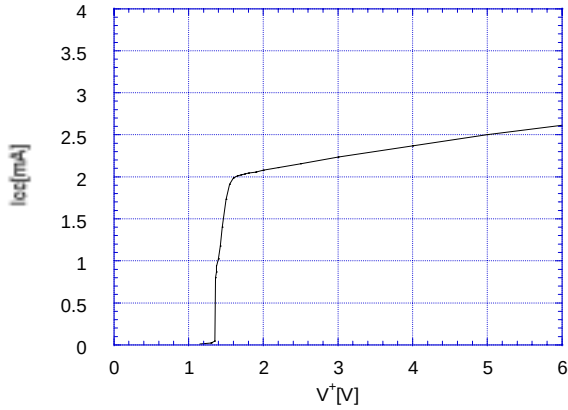


Standby Current vs. Operating Voltage
($V_{CD}=\text{GND}$, $T_a=25^\circ\text{C}$)

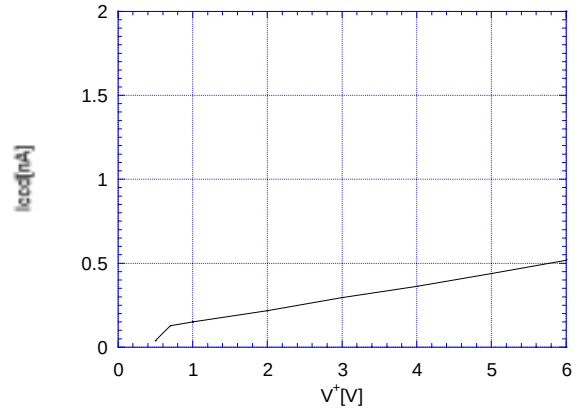


CD Sink Current vs. CD Voltage
($V^+=6\text{V}$, $T_a=25^\circ\text{C}$)

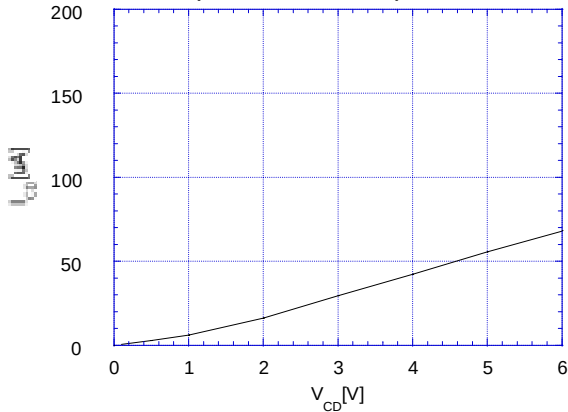


Power Dissipation vs. Output Power
($R_L=8\Omega$, $T_a=25^\circ\text{C}$)

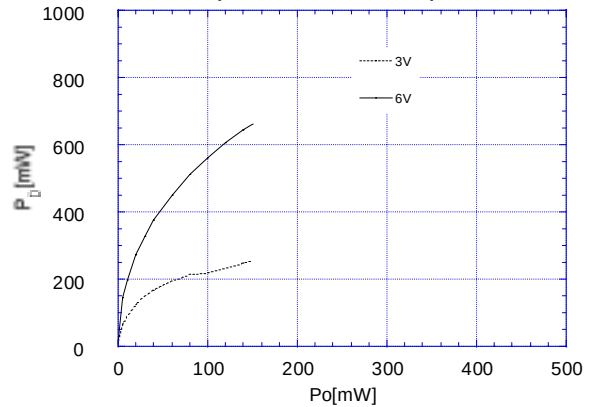

Power Dissipation vs. Output Power
($R_L=16\Omega$, $T_a=25^\circ\text{C}$)

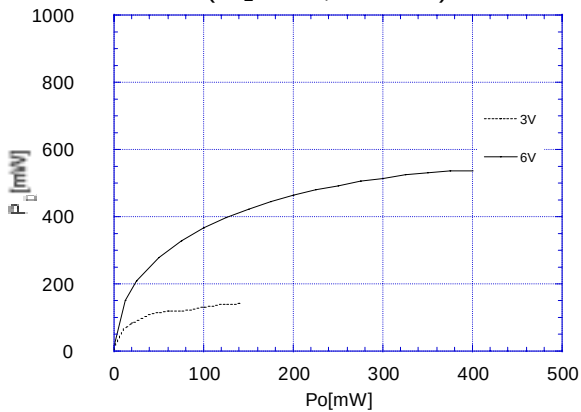


Power Dissipation vs. Output Power
($R_L=32\Omega$, $T_a=25^\circ\text{C}$)

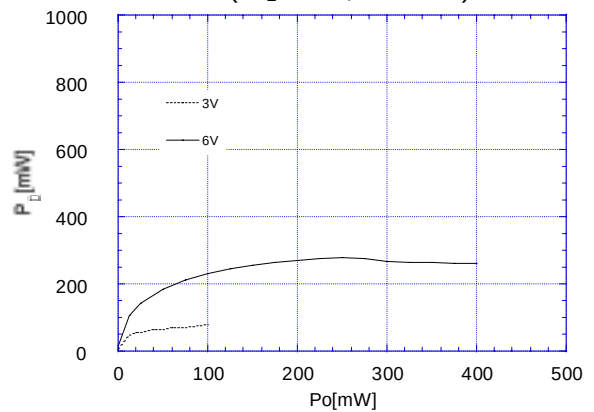


■ TYPICAL CHARACTERISTICS


Total Harmonic Distortion vs. Output Power
($f=1\text{kHz}$, $G_{VD}=34\text{dB}$, $T_a=25^\circ\text{C}$)

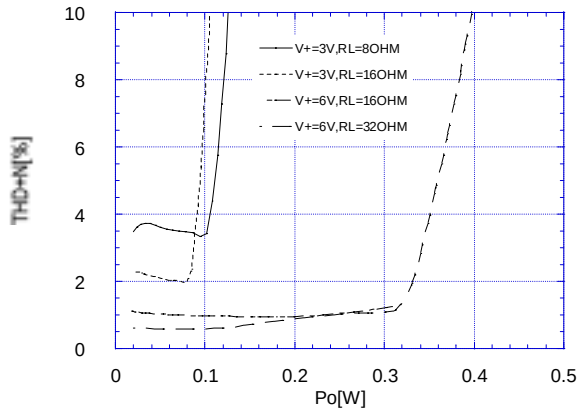


Total Harmonic Distortion vs. Output Power
($f=3\text{kHz}$, $G_{VD}=34\text{dB}$, $T_a=25^\circ\text{C}$)

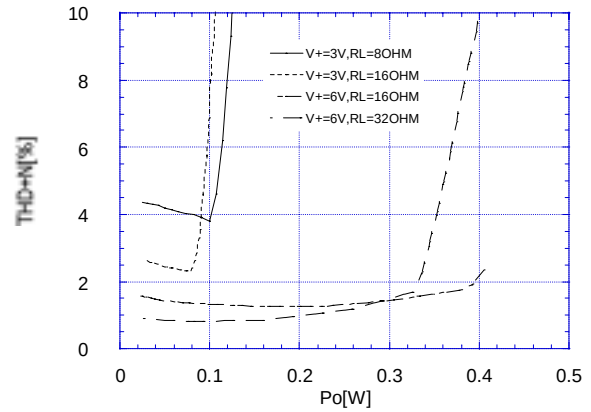


Total Harmonic Distortion vs. Output Power
($f=1.3\text{kHz}$, $G_{VD}=12\text{dB}$, $T_a=25^\circ\text{C}$)

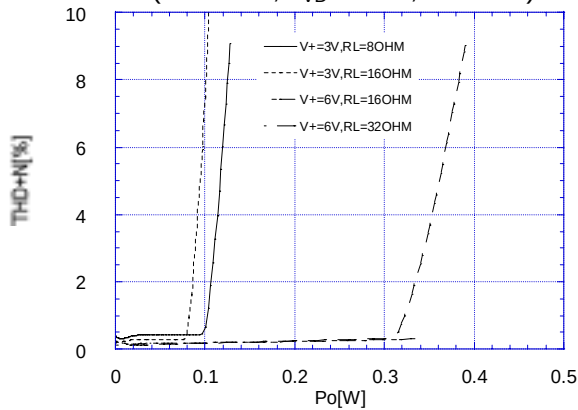

Maximum Output Swing vs. Load Current
(V^+ Side, $V^+=6\text{V}$, $T_a=25^\circ\text{C}$)

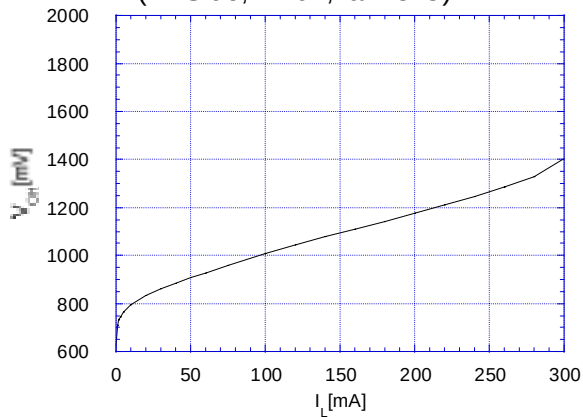


Maximum Output Swing vs. Load Current
(GND Side, $V^+=6\text{V}$, $T_a=25^\circ\text{C}$)

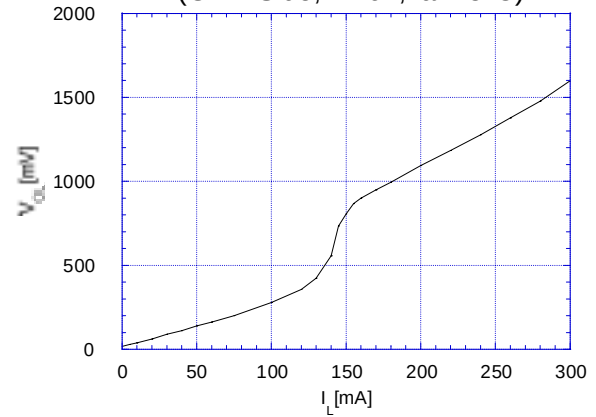


■ TYPICAL CHARACTERISTICS


Supply Voltage Rejection Ratio vs. Frequency
($V^+=6V, G_{VD}=34dB, C_2=0\mu F, T_a=25^\circ C$)

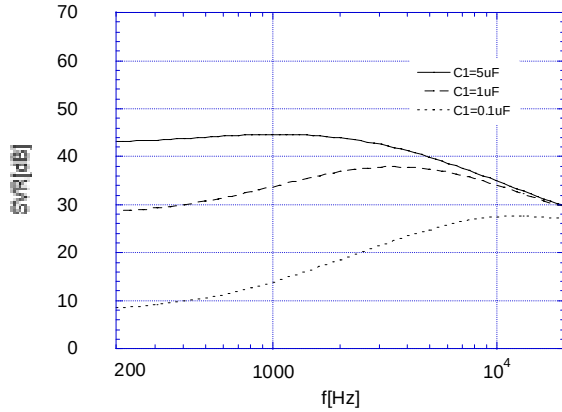


Supply Voltage Rejection Ratio vs. Frequency
($V^+=6V, G_{VD}=34dB, C_2=1\mu F, T_a=25^\circ C$)

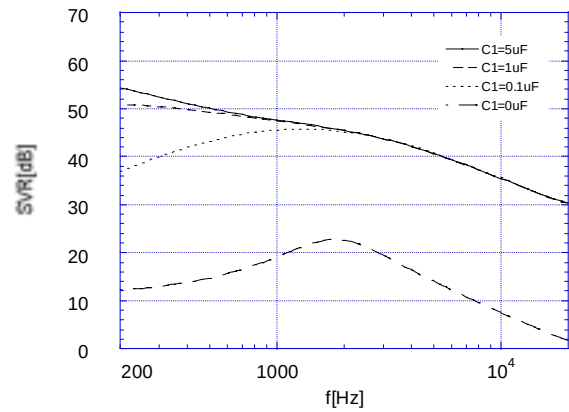


Supply Voltage Rejection Ratio vs. Frequency
($V^+=6V, G_{VD}=34dB, C_2=5\mu F, T_a=25^\circ C$)

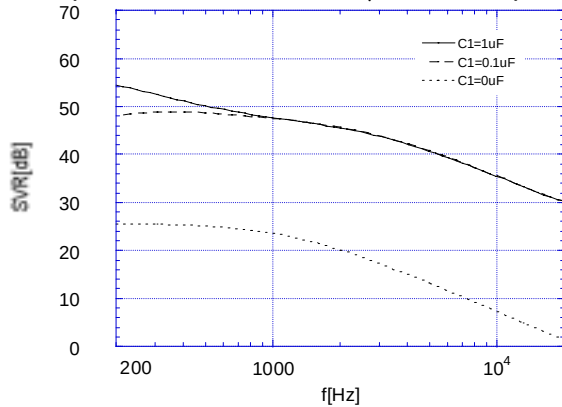


Supply Voltage Rejection Ratio vs. Frequency
($V^+=6V, G_{VD}=34dB, C_2=10\mu F, T_a=25^\circ C$)

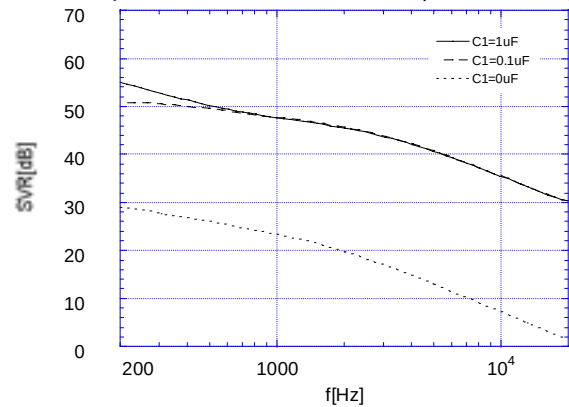

Operating Current vs. Temperature
($V^+=6V$)

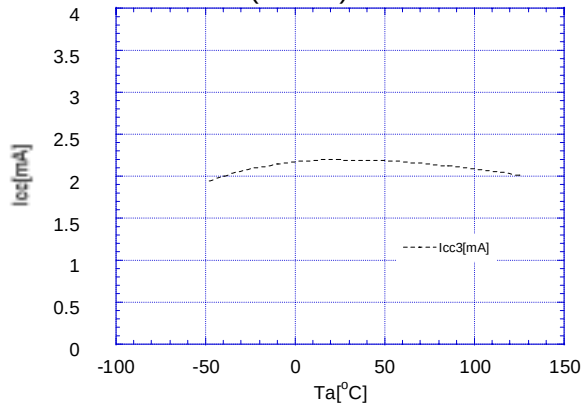


Standby Current vs. Temperature
($V^+=6V$)

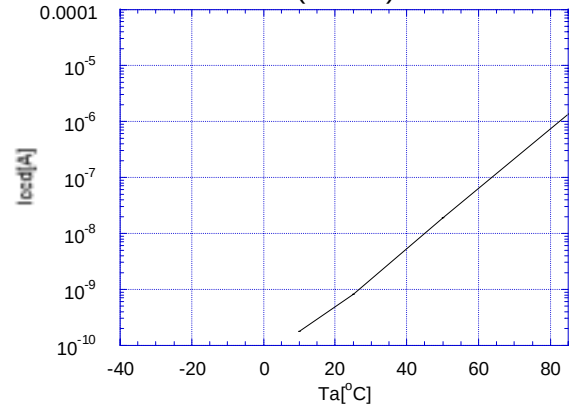


■ TYPICAL CHARACTERISTICS

Output Offset Voltage vs. Temperature
($V^+ = 6V$)

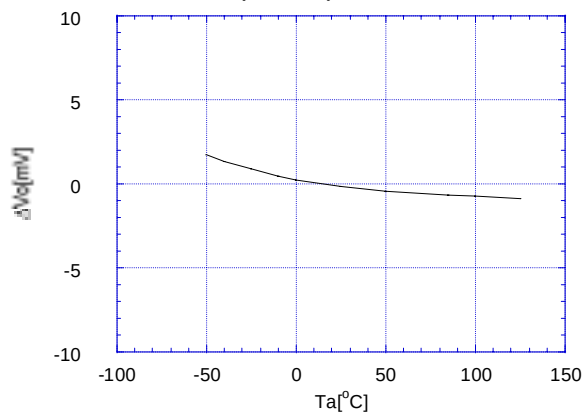

Output Power vs. Temperature
($V^+ = 6V$)

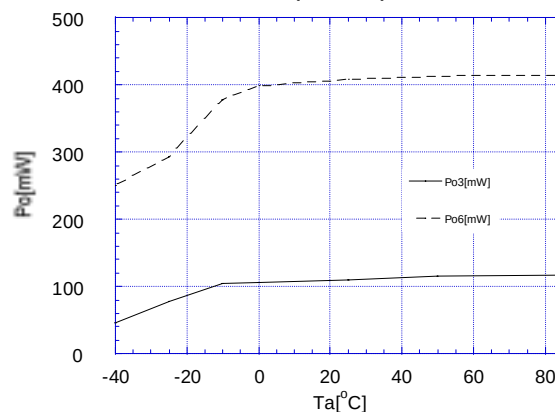

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2149D](#) [NJM2149M](#) [NJM2149RB1-TE1](#) [NJM2149V-TE2](#) [NJM2149V-TE1](#) [NJM2149R-TE1](#) [NJM2149R-TE2](#)
[NJM2149M-TE2](#) [NJM2149M-TE1](#) [NJM2149RB1-TE2](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru