

## Digital Power Management IC 2 MHz, 600 mA DC/DC with Dual 300 mA/300 mA Low $V_{IN}$ LDOs

### Features

- 2.7V to 5.5V Input Voltage Range
- 2 MHz DC/DC Converter and Two LDOs
- Integrated Power-on Reset (POR)
  - Adjustable POR Delay Time
- LOWQ Mode
  - 30  $\mu$ A Total IQ when in LOWQ Mode
- DC/DC Converter
  - Up to 600 mA of Output Current in PWM Mode
  - LOWQ Mode: NO RIPPLE Light Load Mode
  - 75  $\mu$ V<sub>RMS</sub> Output Noise in LOWQ Mode
  - 2 MHz PWM Mode Operation
  - > 90% Efficiency
- LDO1 Input Voltage Directly Connected to DC/DC Converter Output Voltage for Maximum Efficiency
  - Ideal for 1.8V to 1.5V Conversion
  - 300 mA Output Current from 1.8V Input
  - Output Voltage Down to 0.8V
- LDO2 – 300 mA Output Current Capable
- Thermal Shutdown Protection
- Current Limit Protection
- Simple, Leakage-Free Interfacing to Host MPU in Applications with Backup Power
- Tiny 16-Pin 3mm x 3mm QFN Package

### Applications

- Embedded MPU and MCU Power
- Portable and Wearable Applications
- Low-Power RF Systems
- Backup Power Systems


### General Description

The MIC2800 is a high-performance power management IC, featuring three output voltages with maximum efficiency. Integrating a 2 MHz DC/DC converter with an LDO post-regulator, the MIC2800 gives two high-efficiency outputs with a second, 300 mA LDO for maximum flexibility. The MIC2800 features a LOWQ mode, reducing the total current draw while in this mode to less than 30  $\mu$ A. In LOWQ mode, the output noise of the DC/DC converter is reduced to 75  $\mu$ V<sub>RMS</sub>, significantly lower than other converters that use a PFM light load mode that can interfere with sensitive RF circuitry.

The DC/DC converter uses small values of L and C to reduce board space but still retains efficiencies over 90% at load currents up to 600 mA.


The MIC2800 operates with very small ceramic output capacitors and inductors for stability, reducing required board space and component cost and it is available in various output voltage options in the 16-pin 3mm x 3mm QFN leadless package.

### Package Type

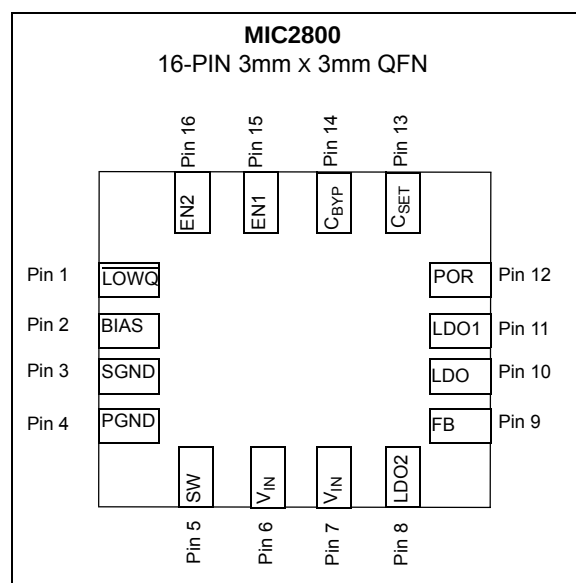


# MIC2800

## Typical Application Circuit (simplified)

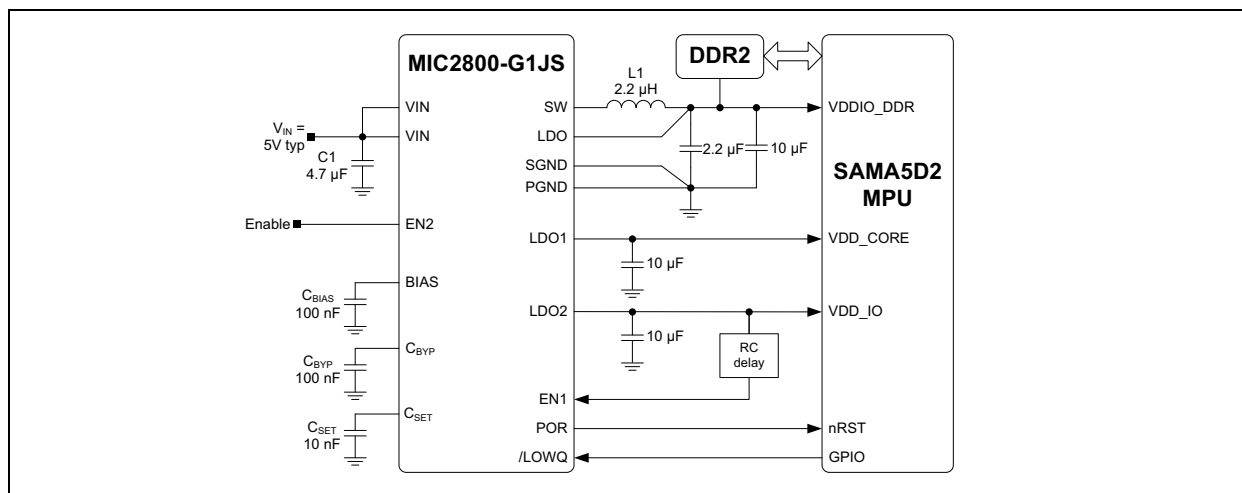

## Functional Diagram

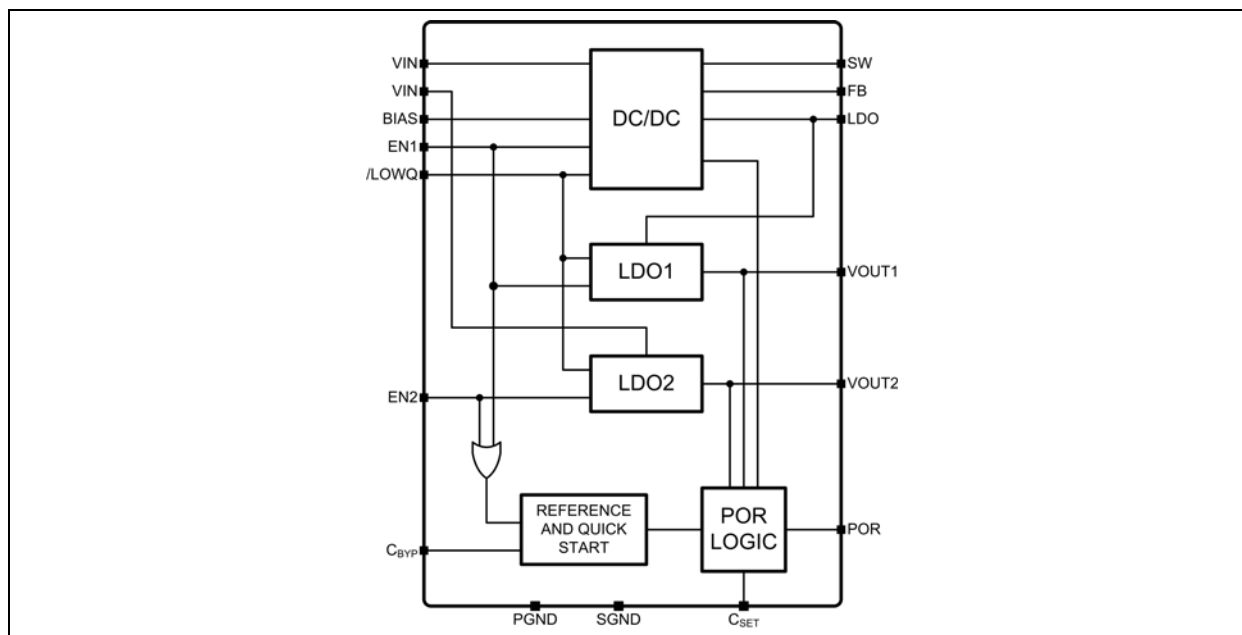

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings †

|                                         |                           |
|-----------------------------------------|---------------------------|
| Supply Voltage ( $V_{IN}$ )             | –0.3 to +6.0V             |
| Enable Input Voltage ( $V_{EN1, EN2}$ ) | –0.3V to $+(V_{IN}+0.3V)$ |
| LOWQ, POR                               | –0.3V to +6.0V            |
| Power Dissipation (Note 1)              | Internally Limited        |
| Lead Temperature (soldering, 10 sec.)   | +260°C                    |
| Storage Temperature ( $T_S$ )           | –65°C to +150°C           |
| ESD Rating (Note 2)                     | 2 kV                      |

### Operating Ratings ‡

|                                                      |                 |
|------------------------------------------------------|-----------------|
| Supply Voltage ( $V_{IN}$ )                          | +2.7V to +5.5V  |
| Enable Input Voltage ( $V_{EN1, EN2}$ )              | 0V to $V_{IN}$  |
| LOWQ, POR                                            | 0V to +5.5V     |
| Junction Temperature ( $T_J$ )                       | –40°C to +125°C |
| Junction Thermal Resistance QFN-16 ( $\theta_{JA}$ ) | +45°C/W         |

† **Notice:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

‡ **Notice:** The device is not guaranteed to function outside its operating ratings.

- 1: The maximum allowable power dissipation of any  $T_A$  (ambient temperature) is  $P_{D(max)} = (T_{J(max)} - T_A) / \theta_{JA}$ . Exceeding the maximum allowable power dissipation will result in excessive die temperature, and the regulator will go into thermal shutdown.
- 2: Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5 k $\Omega$  in series with 100 pF.

# MIC2800

**TABLE 1-1: ELECTRICAL CHARACTERISTICS (Note 1)**

**Electrical Characteristics:**  $V_{IN} = EN1 = EN2 = \overline{LOWQ} = V_{OUT}$  (Note 2) + 1V;  $C_{OUTDC/DC} = 2.2 \mu F$ ,  $C_{OUT1} = C_{OUT2} = 2.2 \mu F$ ;  $I_{OUTDC/DC} = 100 \text{ mA}$ ;  $I_{OUTLDO1} = I_{OUTLDO2} = 100 \mu A$ ;  $T_J = 25^\circ C$ , **bold** values indicate  $-40^\circ C \leq T_J \leq +125^\circ C$ ; unless noted.

| Parameter                           | Symbol                 | Min.        | Typ.       | Max.                         | Units          | Conditions                                                                                                                             |
|-------------------------------------|------------------------|-------------|------------|------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------|
| UVLO Threshold                      | UVLO <sub>TH</sub>     | <b>2.45</b> | 2.55       | <b>2.65</b>                  | V              | Rising input voltage during turn on                                                                                                    |
| UVLO Hysteresis                     | UVLO <sub>HYS</sub>    | —           | 100        | —                            | mV             |                                                                                                                                        |
| Ground Pin Current                  | I <sub>GND</sub>       | —           | 800<br>55  | 1100<br>85<br><b>95</b>      | μA             | V <sub>FB</sub> = GND (not switching);<br><br>LDO2 Only (EN1 = LOW)                                                                    |
| Ground Pin Current in Shutdown      | I <sub>GND_SHDN</sub>  | —           | 0.2        | 5                            | μA             | All EN = 0V                                                                                                                            |
| Ground Pin Current (LOWQ mode)      | I <sub>GND_LOWQ</sub>  | —           | 30<br>20   | 60<br><b>80</b><br><b>70</b> | μA<br>μA<br>μA | All channels ON, I <sub>DC/DC</sub> = I <sub>LDO1</sub> = I <sub>LDO2</sub> = 0 mA<br><br>DC/DC and LDO1 OFF; I <sub>LDO2</sub> = 0 mA |
| Overtemperature Shutdown            | T <sub>SD</sub>        | —           | 160        | —                            | °C             |                                                                                                                                        |
| Overtemperature Shutdown Hysteresis | T <sub>SDHYS</sub>     | —           | 23         | —                            | °C             |                                                                                                                                        |
| Enable Inputs (EN1; EN2; /LOWQ)     |                        |             |            |                              |                |                                                                                                                                        |
| Enable Input Voltage Logic Low      | V <sub>IH</sub>        | —           | —          | <b>0.2</b>                   | V              |                                                                                                                                        |
| Enable Input Voltage Logic High     | V <sub>IL</sub>        | <b>1.0</b>  | —          | —                            | V              |                                                                                                                                        |
| Enable Input Current                | I <sub>ENLK</sub>      | —           | 0.1        | <b>1</b>                     | μA             | V <sub>IL</sub> ≤ 0.2V                                                                                                                 |
|                                     |                        | —           | 0.1        | <b>1</b>                     | μA             | V <sub>IH</sub> ≥ 1.0V                                                                                                                 |
| Turn-on Time                        |                        |             |            |                              |                |                                                                                                                                        |
| Turn-on Time (LDO1 and LDO2)        | t <sub>TURN-ON</sub>   | —           | 240<br>120 | <b>500</b><br><b>350</b>     | μs             | EN2 = V <sub>IN</sub><br>EN1 = V <sub>IN</sub>                                                                                         |
| Turn-on Time (DC/DC)                | t <sub>TURN-ON</sub>   | —           | 83         | <b>350</b>                   | μs             | EN2 = V <sub>IN</sub> ; I <sub>LOAD</sub> = 300 mA; C <sub>BYP</sub> = 0.1 μF                                                          |
| POR Output                          |                        |             |            |                              |                |                                                                                                                                        |
| POR Threshold Voltage, Falling      | V <sub>THLOW_POR</sub> | 90          | 91         | —                            | %              | Low Threshold, % of nominal (V <sub>DC/DC</sub> or V <sub>LDO1</sub> or V <sub>LDO2</sub> ) (Flag ON)                                  |
| POR Threshold Voltage, Rising       | V <sub>THIGH_POR</sub> | —           | 96         | 99                           | %              | High Threshold, % of nominal (V <sub>DC/DC</sub> AND V <sub>LDO1</sub> AND V <sub>LDO2</sub> ) (Flag OFF)                              |
| VOL                                 | VOL <sub>POR</sub>     | —           | 10         | <b>100</b>                   | mV             | POR Output Logic Low Voltage; IL = 250 μA                                                                                              |
| IPOR                                | ILEAK <sub>POR</sub>   | —           | 0.01       | <b>1</b>                     | μA             | Flag Leakage Current, Flag OFF                                                                                                         |
| CSET INPUT                          |                        |             |            |                              |                |                                                                                                                                        |
| CSET Pin Current Source             | I <sub>CSET</sub>      | 0.75        | 1.25       | 1.75                         | μA             | V <sub>CSET</sub> = 0V                                                                                                                 |
| CSET Pin Threshold Voltage          | V <sub>TH_CSET</sub>   | —           | 1.25       | —                            | V              | POR = High                                                                                                                             |

**Note 1:** Specification for packaged product only.

**2:**  $V_{OUT}$  denotes the highest of the three output voltage.

**TABLE 1-2: ELECTRICAL CHARACTERISTICS - DC/DC CONVERTER**

**Electrical Characteristics:**  $V_{IN} = V_{OUTDC/DC} + 1V$ ;  $EN1 = V_{IN}$ ;  $EN2 = GND$ ;  $I_{OUTDC/DC} = 100\text{ mA}$ ;  $L = 2.2\text{ }\mu\text{H}$ ;  $C_{OUTDC/DC} = 2.2\text{ }\mu\text{F}$ ;  $T_J = 25^\circ\text{C}$ , **bold** values indicate  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$ ; unless noted.

| Parameter                            | Symbol                                   | Min.                           | Typ. | Max.                           | Units               | Conditions                                                                                                                                                                |
|--------------------------------------|------------------------------------------|--------------------------------|------|--------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LOWQ = High (Full Power Mode)</b> |                                          |                                |      |                                |                     |                                                                                                                                                                           |
| Output Voltage Accuracy              | $V_{OUT}$                                | $-2$<br><b><math>-3</math></b> | —    | $+2$<br><b><math>+3</math></b> | %                   | Fixed Output Voltages                                                                                                                                                     |
| Current Limit in PWM Mode            | $I_{LIM}$                                | 0.75                           | 1    | 1.6                            | A                   | $V_{OUT} = 0.9 \cdot V_{NOM}$                                                                                                                                             |
| FB pin voltage (ADJ only)            | $V_{FB}$                                 | —                              | 800  | —                              | mV                  |                                                                                                                                                                           |
| FB pin input current (ADJ only)      | $I_{FB}$                                 | —                              | 1    | 5                              | nA                  |                                                                                                                                                                           |
| Output Voltage Line Regulation       | $(\Delta V_{OUT}/V_{OUT})/\Delta V_{IN}$ | —                              | 0.2  | —                              | %/V                 | $V_{OUT} > 2.4V$ ; $V_{IN} = V_{OUT} + 300\text{ mV}$ to $5.5V$ , $I_{LOAD} = 100\text{ mA}$<br>$V_{OUT} < 2.4V$ ; $V_{IN} = 2.7V$ to $5.5V$ , $I_{LOAD} = 100\text{ mA}$ |
| Output Voltage Load Regulation       | $\Delta V_{OUT}/V_{OUT}$                 | —                              | 0.2  | 1.5                            | %                   | $20\text{ mA} < I_{LOAD} < 300\text{ mA}$                                                                                                                                 |
| Maximum Duty Cycle                   | $DC_{MAX}$                               | 100                            | —    | —                              | %                   | $V_{FB} \leq 0.4V$                                                                                                                                                        |
| High-Side Switch ON-Resistance       |                                          | —                              | 0.6  | —                              | $\Omega$            | $I_{SW} = 150\text{ mA}$ $V_{FB} = 0.7V_{FB\_NOM}$                                                                                                                        |
| Low-Side Switch ON-Resistance        |                                          |                                | 0.8  |                                |                     | $I_{SW} = -150\text{ mA}$ $V_{FB} = 1.1V_{FB\_NOM}$                                                                                                                       |
| Oscillator Frequency                 | $f_{osc}$                                | <b>1.8</b>                     | 2    | <b>2.2</b>                     | MHz                 |                                                                                                                                                                           |
| Output Voltage Noise                 | $V_N$                                    | —                              | 60   | —                              | $\mu\text{V}_{RMS}$ | $C_{OUT} = 2.2\text{ }\mu\text{F}$ ; $C_{BYP} = 0.1\text{ }\mu\text{F}$ ; 10 Hz to 100 KHz                                                                                |
| <b>LOWQ = Low (Light Load Mode)</b>  |                                          |                                |      |                                |                     |                                                                                                                                                                           |
| Output Voltage Accuracy              | $V_{OUT}$                                | $-2.0$                         | —    | $+2.0$                         | %                   | Variation from nominal $V_{OUT}$                                                                                                                                          |
|                                      |                                          | <b><math>-3.0</math></b>       |      | <b><math>+3.0</math></b>       |                     | Variation from nominal $V_{OUT}$ ; $-40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                                            |
| Output Voltage Temp. Coefficient     | $TC_{VOUT}$                              | —                              | 40   | —                              | ppm/C               |                                                                                                                                                                           |
| Line Regulation                      | $(\Delta V_{OUT}/V_{OUT})/\Delta V_{IN}$ | —                              | 0.02 | 0.3<br><b>0.6</b>              | %/V                 | $V_{IN} = V_{OUT} + 1V$ to $5.5V$ ; $I_{OUT} = 100\text{ }\mu\text{A}$                                                                                                    |
| Load Regulation                      | $\Delta V_{OUT}/V_{OUT}$                 | —                              | 0.2  | 1.5                            | %                   | $I_{OUT} = 100\text{ }\mu\text{A}$ to $50\text{ mA}$                                                                                                                      |
| Ripple Rejection                     | PSRR                                     | —                              | 50   | —                              | dB                  | $f = \text{up to } 1\text{ kHz}$ ; $C_{OUT} = 2.2\text{ }\mu\text{F}$ ; $C_{BYP} = 0.1\text{ }\mu\text{F}$                                                                |
|                                      |                                          |                                | 30   |                                |                     | $f = 20\text{ kHz}$ ; $C_{OUT} = 2.2\text{ }\mu\text{F}$ ; $C_{BYP} = 0.1\text{ }\mu\text{F}$                                                                             |
| Current Limit                        | $I_{LIM\_LOWQ}$                          | 80                             | 120  | 190                            | mA                  | $V_{OUT} = 0V$                                                                                                                                                            |

# MIC2800

**TABLE 1-3: ELECTRICAL CHARACTERISTICS - LDO 1**

**Electrical Characteristics:**  $V_{IN} = V_{OUTDC/DC}$ ;  $EN1 = V_{IN}$ ;  $EN2 = GND$ ;  $C_{OUT1} = 2.2 \mu F$ ;  $I_{OUT1} = 100 \mu A$ ;  $T_J = 25^\circ C$ , **bold** values indicate  $-40^\circ C \leq T_J \leq +125^\circ C$ ; unless noted.

| Parameter                            | Symbol                   | Min.        | Typ.        | Max.              | Units         | Conditions                                                                             |
|--------------------------------------|--------------------------|-------------|-------------|-------------------|---------------|----------------------------------------------------------------------------------------|
| <b>LOWQ = High (Full Power Mode)</b> |                          |             |             |                   |               |                                                                                        |
| Output Voltage Accuracy              | $V_{OUT}$                | -2.0        | —           | +2.0              | %             | Variation from nominal $V_{OUT}$                                                       |
|                                      |                          | <b>-3.0</b> |             | <b>+3.0</b>       |               | Variation from nominal $V_{OUT}$ ; $-40^\circ C$ to $+125^\circ C$                     |
| Output Current Capability            | $I_{OUT}$                | 300<br>120  | —           | —                 | mA            | $V_{IN} \geq 1.8V$<br>$V_{IN} \geq 1.5V$                                               |
| Load Regulation                      | $\Delta V_{OUT}/V_{OUT}$ | —           | 0.17<br>0.3 | 1.5               | %             | $I_{OUT} = 100 \mu A$ to $150 \text{ mA}$<br>$I_{OUT} = 100 \mu A$ to $300 \text{ mA}$ |
| Current Limit                        | $I_{LIM}$                | 350         | 500         | 700               | mA            | $V_{OUT} = 0V$                                                                         |
| Ripple Rejection                     | PSRR                     |             | 70          | —                 | dB            | $f = \text{up to } 1 \text{ kHz}$ ; $C_{OUT} = 2.2 \mu F$ ;<br>$C_{BYP} = 0.1 \mu F$   |
|                                      |                          |             | 44          |                   |               | $f = 20 \text{ kHz}$ ; $C_{OUT} = 2.2 \mu F$ ;<br>$C_{BYP} = 0.1 \mu F$                |
| Output Voltage Noise                 | $V_N$                    | —           | 30          | —                 | $\mu V_{RMS}$ | $C_{OUT} = 2.2 \mu F$ ; $C_{BYP} = 0.1 \mu F$ ;<br>10 Hz to 100 KHz                    |
| <b>LOWQ = Low (Light Load Mode)</b>  |                          |             |             |                   |               |                                                                                        |
| Output Voltage Accuracy              | $V_{OUT}$                | -3.0        | —           | +3.0              | %             | Variation from nominal $V_{OUT}$                                                       |
|                                      |                          | <b>-4.0</b> |             | <b>+4.0</b>       |               | Variation from nominal $V_{OUT}$ ; $-40^\circ C$ to $+125^\circ C$                     |
| Load Regulation                      | $\Delta V_{OUT}/V_{OUT}$ | —           | 0.2         | 0.5<br><b>1.0</b> | %             | $I_{OUT} = 100 \mu A$ to $10 \text{ mA}$                                               |
| Current Limit                        | $I_{LIM}$                | 50          | 85          | 125               | mA            | $V_{OUT} = 0V$                                                                         |
| Ripple Rejection                     | PSRR                     | —           | 70          | —                 | dB            | $f = \text{up to } 1 \text{ kHz}$ ; $C_{OUT} = 2.2 \mu F$ ;<br>$C_{BYP} = 0.1 \mu F$   |
|                                      |                          |             | 42          |                   |               | $f = 20 \text{ kHz}$ ; $C_{OUT} = 2.2 \mu F$ ;<br>$C_{BYP} = 0.1 \mu F$                |

**TABLE 1-4: ELECTRICAL CHARACTERISTICS - LDO2**

**Electrical Characteristics:**  $V_{IN} = V_{OUTLDO2} + 1.0V$ ;  $EN1 = GND$ ;  $EN2 = V_{IN}$ ;  $C_{OUT2} = 2.2 \mu F$ ;  $I_{OUTLDO2} = 100 \mu A$ ;  $T_J = 25^\circ C$ , **bold** values indicate  $-40^\circ C \leq T_J \leq +125^\circ C$ ; unless noted.

| Parameter                            | Symbol                                   | Min.        | Typ.                 | Max.              | Units         | Conditions                                                                                                                                   |
|--------------------------------------|------------------------------------------|-------------|----------------------|-------------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LOWQ = High (Full Power Mode)</b> |                                          |             |                      |                   |               |                                                                                                                                              |
| Output Voltage Accuracy              | $V_{OUT}$                                | -2.0        | —                    | +2.0              | %             | Variation from nominal $V_{OUT}$                                                                                                             |
|                                      |                                          | <b>-3.0</b> |                      | <b>+3.0</b>       |               | Variation from nominal $V_{OUT}$ ; $-40^\circ C$ to $+125^\circ C$                                                                           |
| Line Regulation                      | $(\Delta V_{OUT}/V_{OUT})/\Delta V_{IN}$ | —           | 0.02                 | 0.3<br><b>0.6</b> | %/V           | $V_{IN} = V_{OUT} + 1V$ to 5.5V;<br>$I_{OUT} = 100 \mu A$                                                                                    |
| Load Regulation                      | $\Delta V_{OUT}/V_{OUT}$                 | —           | 0.20<br>0.25<br>0.40 | <b>1.5</b>        | %             | $I_{OUT} = 100 \mu A$ to 150 mA<br>$I_{OUT} = 100 \mu A$ to 200 mA<br>$I_{OUT} = 100 \mu A$ to 300 mA                                        |
| Dropout Voltage                      | $V_{DO}$                                 | —           | 70<br>94<br>142      | <b>300</b>        | mV            | $I_{OUT} = 150 mA$ ; $V_{OUTLDO2} \geq 2.7V$<br>$I_{OUT} = 200 mA$ ; $V_{OUTLDO2} \geq 2.7V$<br>$I_{OUT} = 300 mA$ ; $V_{OUTLDO2} \geq 2.7V$ |
| Ripple Rejection                     | PSRR                                     | —           | 75                   | —                 | dB            | $f = \text{up to } 1 \text{ kHz}$ ; $C_{OUT} = 2.2 \mu F$ ;<br>$C_{BYP} = 0.1 \mu F$                                                         |
|                                      |                                          |             | 40                   |                   |               | $f = 20 \text{ kHz}$ ; $C_{OUT} = 2.2 \mu F$ ;<br>$C_{BYP} = 0.1 \mu F$                                                                      |
| Current Limit                        | $I_{LIM}$                                | 400         | 550                  | 850               | mA            | $V_{OUT} = 0V$                                                                                                                               |
| Output Voltage Noise                 | $V_N$                                    | —           | 25                   | —                 | $\mu V_{RMS}$ | $C_{OUT} = 2.2 \mu F$ ; $C_{BYP} = 0.1 \mu F$ ;<br>10 Hz to 100 KHz                                                                          |
| <b>LOWQ = Low (Light Load Mode)</b>  |                                          |             |                      |                   |               |                                                                                                                                              |
| Output Voltage Accuracy              | $V_{OUT}$                                | -3.0        | —                    | +3.0              | %             | Variation from nominal $V_{OUT}$                                                                                                             |
|                                      |                                          | <b>-4.0</b> |                      | <b>+4.0</b>       |               | Variation from nominal $V_{OUT}$ ; $-40^\circ C$ to $+125^\circ C$                                                                           |
| Line Regulation                      | $(\Delta V_{OUT}/V_{OUT})/\Delta V_{IN}$ | —           | 0.02                 | 0.3<br><b>0.6</b> | %/V           | $V_{IN} = V_{OUT} + 1V$ to 5.5V                                                                                                              |
| Load Regulation                      | $\Delta V_{OUT}/V_{OUT}$                 | —           | 0.2                  | <b>1.0</b>        | %             | $I_{OUT} = 100 \mu A$ to 10 mA                                                                                                               |
| Dropout Voltage                      | $V_{DO}$                                 | —           | 22                   | 35<br><b>50</b>   | mV            | $I_{OUT} = 10 mA$ ; $V_{OUTLDO2} \geq 2.7V$                                                                                                  |
| Ripple Rejection                     | PSRR                                     | —           | 75                   | —                 | dB            | $f = \text{up to } 1 \text{ kHz}$ ; $C_{OUT} = 2.2 \mu F$ ;<br>$C_{BYP} = 0.1 \mu F$                                                         |
|                                      |                                          |             | 55                   |                   |               | $f = 20 \text{ kHz}$ ; $C_{OUT} = 2.2 \mu F$ ;<br>$C_{BYP} = 0.1 \mu F$                                                                      |
| Current Limit                        | $I_{LIM}$                                | 50          | 85                   | 125               | mA            | $V_{IN} = 2.7V$ ; $V_{OUT} = 0V$                                                                                                             |

TABLE 1-5: TEMPERATURE SPECIFICATIONS (Note 1)

| Parameters                        | Sym.          | Min. | Typ. | Max. | Units | Conditions         |
|-----------------------------------|---------------|------|------|------|-------|--------------------|
| <b>Temperature Ranges</b>         |               |      |      |      |       |                    |
| Storage Temperature Range         | $T_S$         | -65  | —    | +150 | °C    |                    |
| Lead Temperature                  | —             | —    | —    | +260 | °C    | Soldering, 10 sec. |
| Junction Temperature              | $T_J$         | -40  | —    | +125 | °C    |                    |
| <b>Package Thermal Resistance</b> |               |      |      |      |       |                    |
| 16-Ld QFN                         | $\theta_{JA}$ | —    | 45   | —    | °C/W  |                    |

**Note 1:** The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e.,  $T_A$ ,  $T_J$ ,  $\theta_{JA}$ ). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum +125°C rating. Sustained junction temperatures above +125°C can impact the device reliability.

## 2.0 TYPICAL PERFORMANCE CURVES

**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

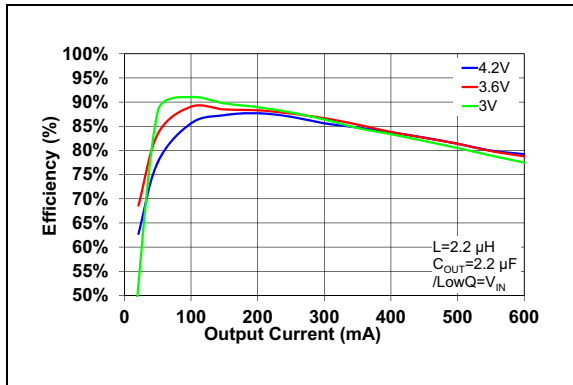


**FIGURE 2-1:** DC/DC 1.87V<sub>OUT</sub> Efficiency.

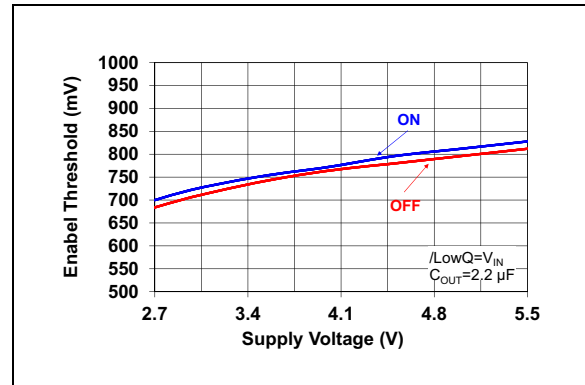


**FIGURE 2-4:** DC/DC Enable Threshold vs. Supply Voltage.

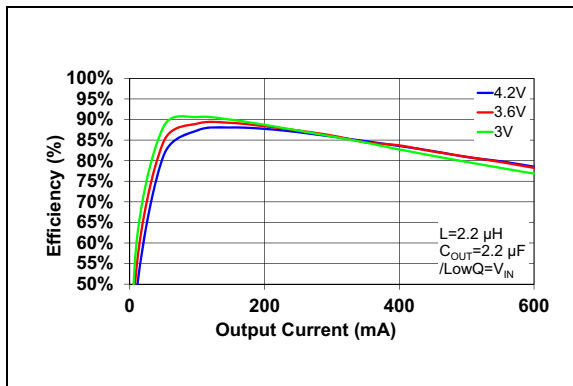


**FIGURE 2-2:** DC/DC 1.8V<sub>OUT</sub> Efficiency.

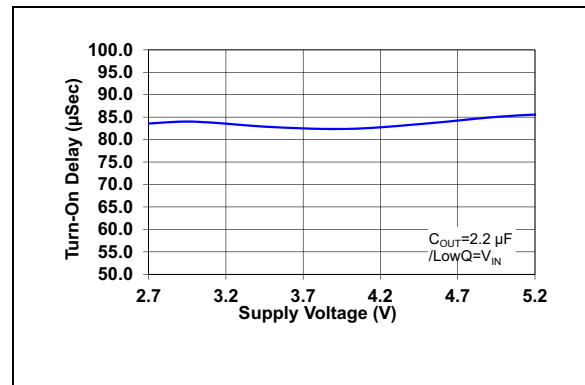


**FIGURE 2-5:** DC/DC Turn-on Delay vs. Supply Voltage.

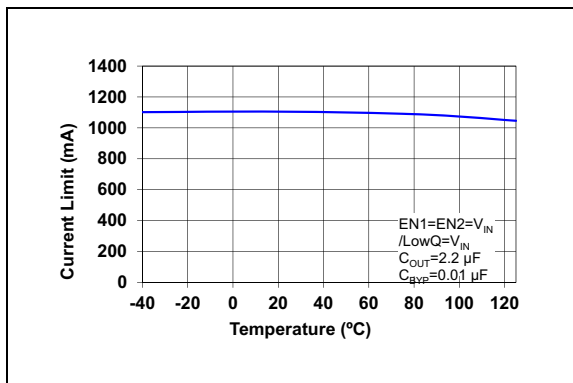


**FIGURE 2-3:** DC/DC Current Limit vs. Temperature.

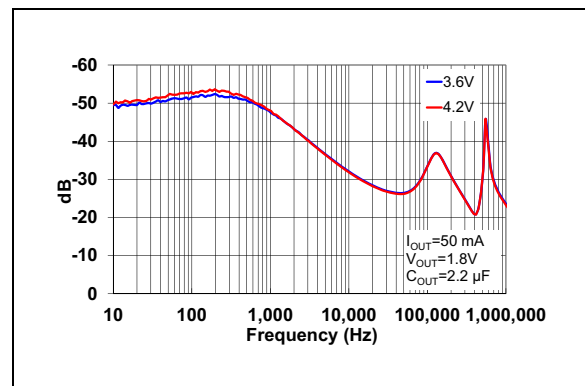


**FIGURE 2-6:** DC/DC LowQ Mode Power Supply Rejection Ratio vs. Input Voltage.

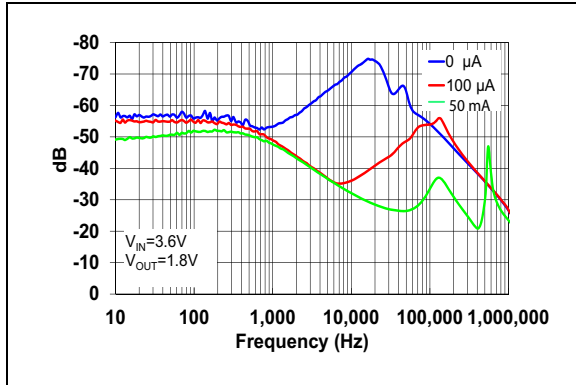


**FIGURE 2-7:** DC/DC LowQ Mode Power Rejection Ratio vs. Output Current.

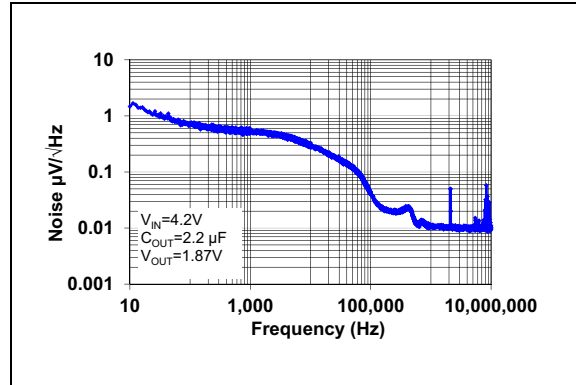


**FIGURE 2-10:** DC/DC LowQ Mode LDO Output Noise Spectral Density.

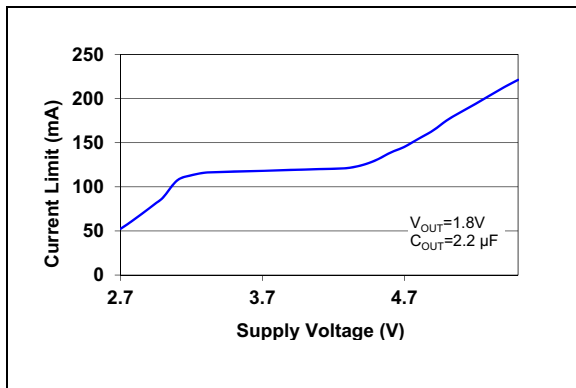


**FIGURE 2-8:** DC/DC LowQ Mode LDO Current Limit vs. Supply Voltage.

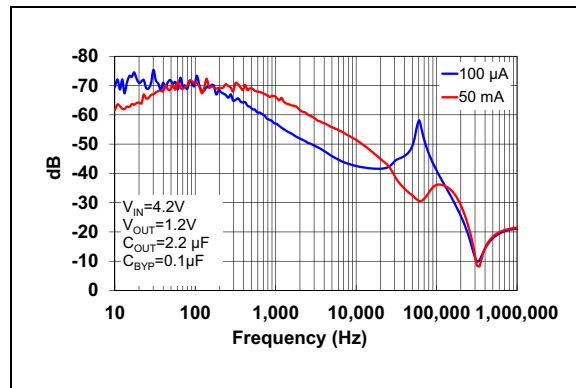


**FIGURE 2-11:** Power Supply Rejection Ratio (LDO1 LowQ Mode).

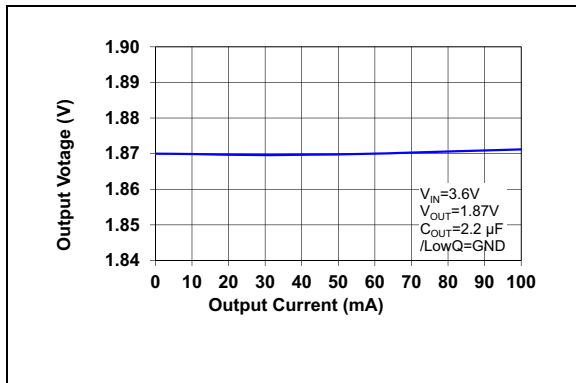


**FIGURE 2-9:** DC/DC LowQ Mode LDO Output Voltage vs. Output Current.

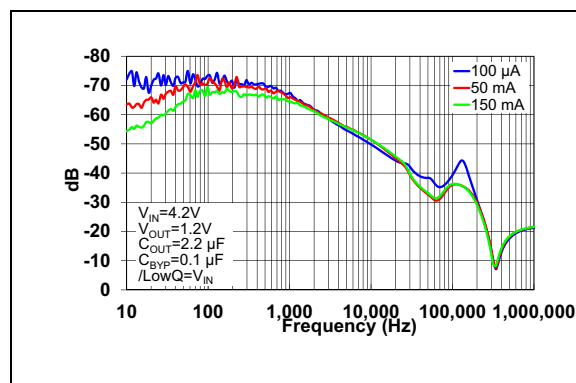


**FIGURE 2-12:** Power Supply Rejection Ratio (LDO1 Normal Mode).

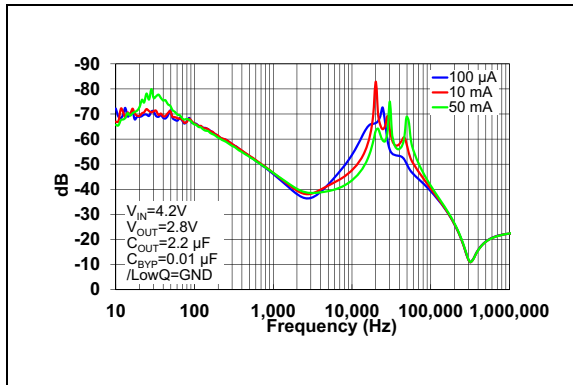


**FIGURE 2-13:** Power Supply Rejection Ratio (LDO2 LowQ Mode).

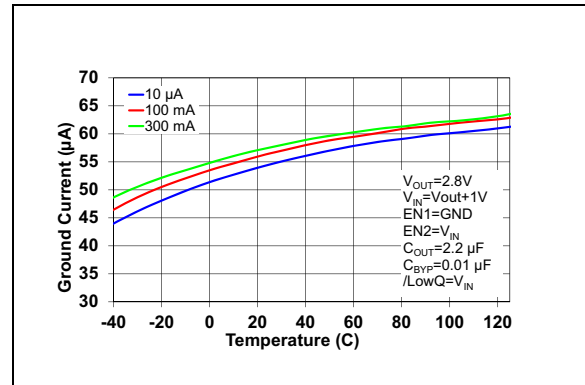


**FIGURE 2-16:** Ground Current vs. Temperature.

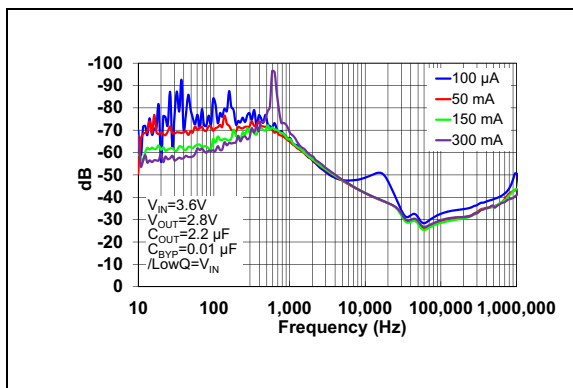


**FIGURE 2-14:** Power Supply Rejection Ratio (LDO2 Normal Mode).

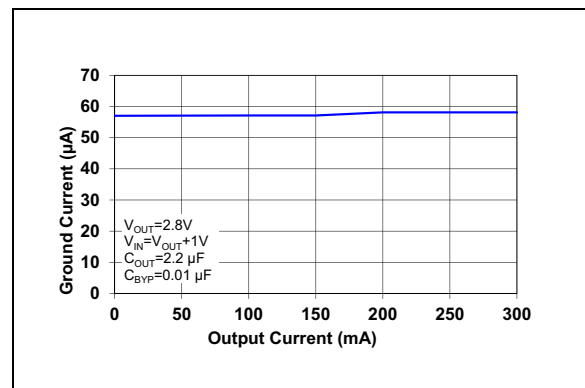


**FIGURE 2-17:** Ground Current vs. Output Current.

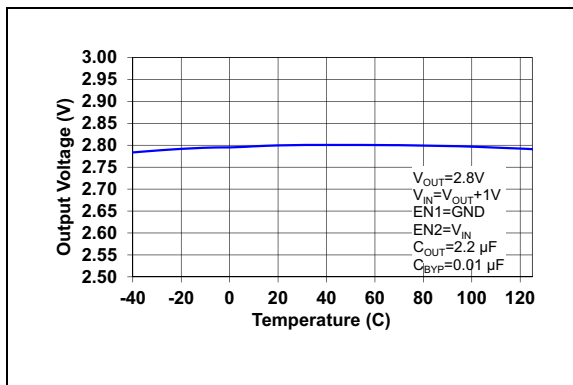


**FIGURE 2-15:** LDO2 Output Voltage vs. Temperature.

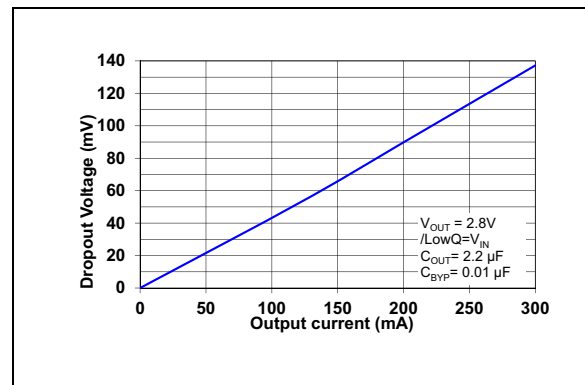


**FIGURE 2-18:** LDO2 Dropout Voltage vs. Output Current.

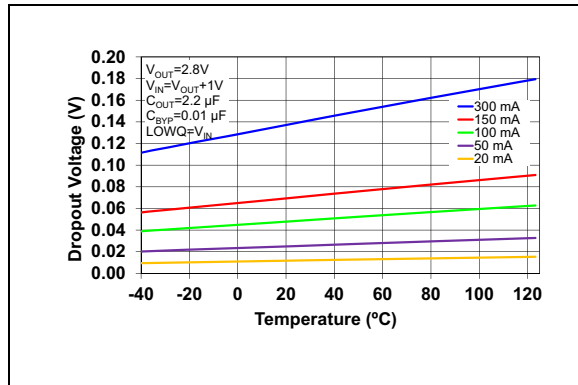


**FIGURE 2-19:** LDO 2 Dropout Voltage vs. Temperature.

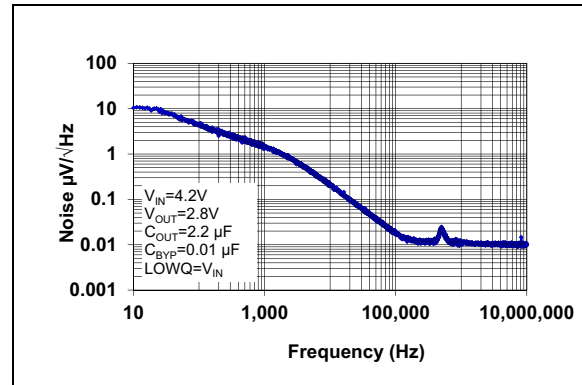


**FIGURE 2-22:** LDO2 Output Noise Spectral Density.

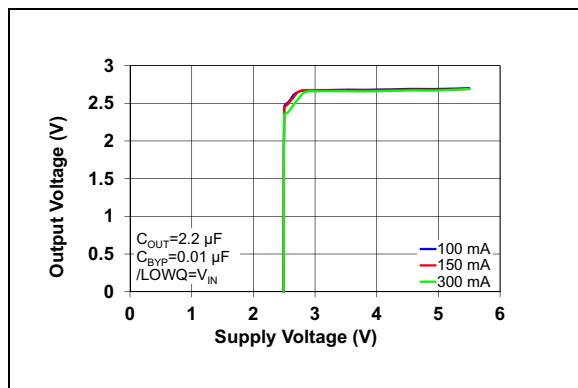


**FIGURE 2-20:** Dropout Characteristics.

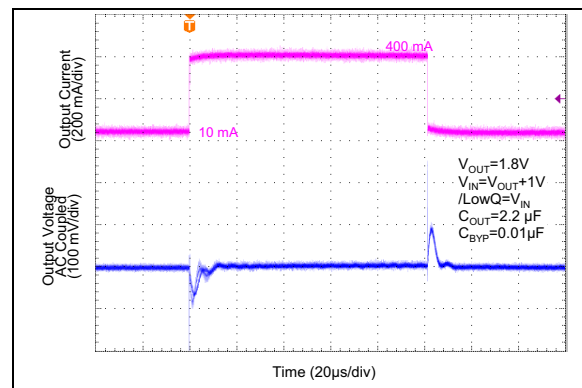


**FIGURE 2-23:** DC/DC Load Transient PWM Mode.

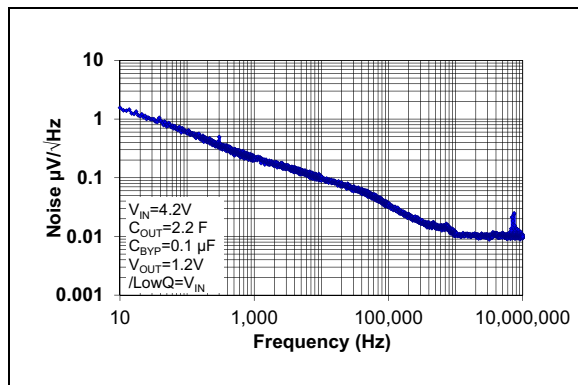


**FIGURE 2-21:** LDO1 Output Noise Spectral Density.

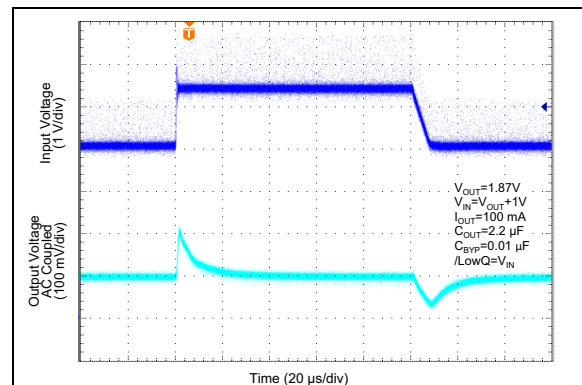


**FIGURE 2-24:** DC/DC Line Transient PWM Mode.

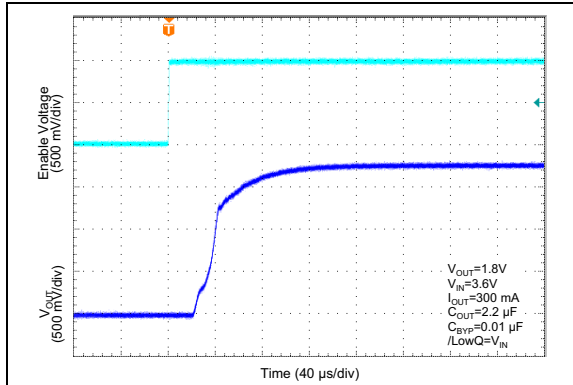


**FIGURE 2-25:** Enable Transient PWM Mode.

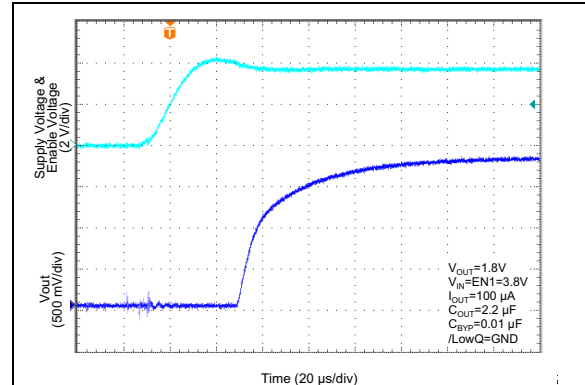


**FIGURE 2-28:** Enable Transient LowQ Mode.

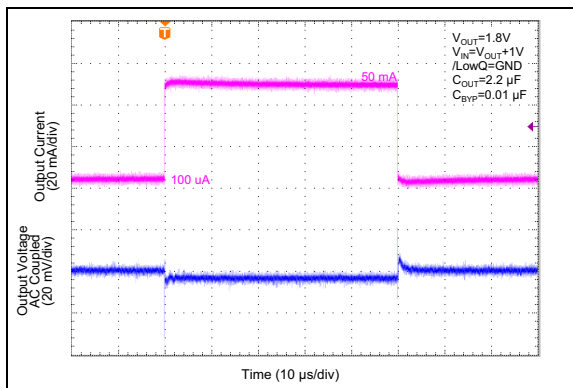


**FIGURE 2-26:** DC/DC Load Transient LowQ Mode.

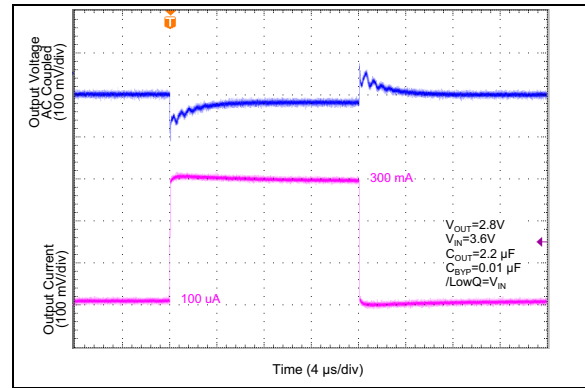


**FIGURE 2-29:** LDO2 Load Transient Normal Mode.

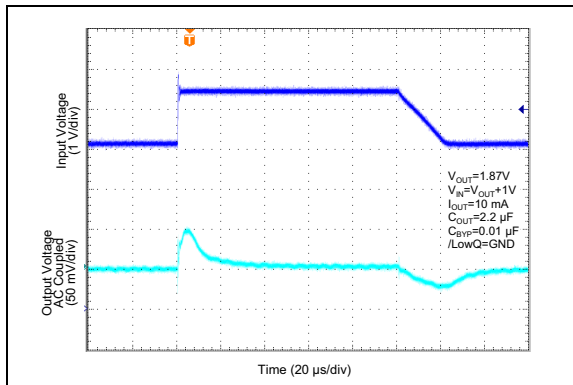


**FIGURE 2-27:** DC/DC Line Transient LowQ Mode.

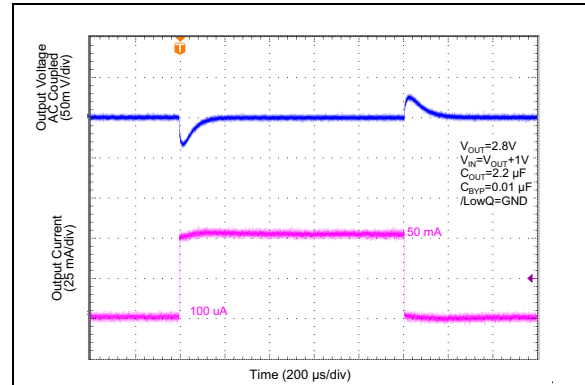


**FIGURE 2-30:** LDO Load Transient LowQ Mode.

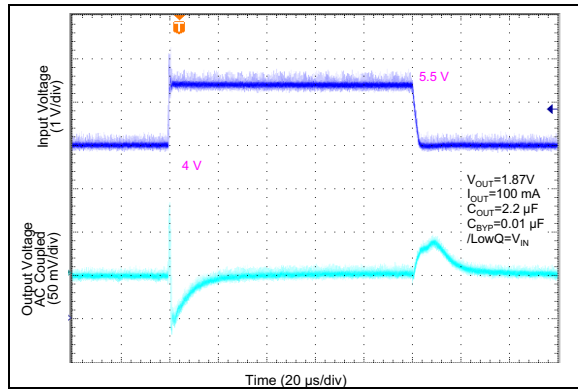


**FIGURE 2-31:** LDO2 Line Transient Normal Mode.

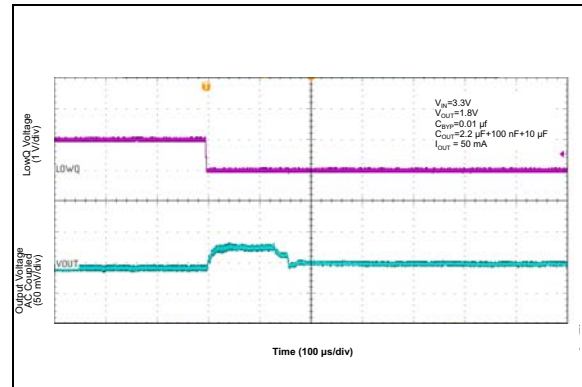


**FIGURE 2-34:** DC/DC PWM Mode to LowQ Mode Transition.

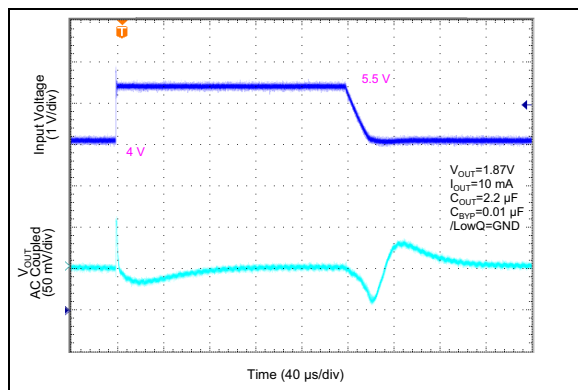


**FIGURE 2-32:** LDO2 Line Transient LowQ Mode.

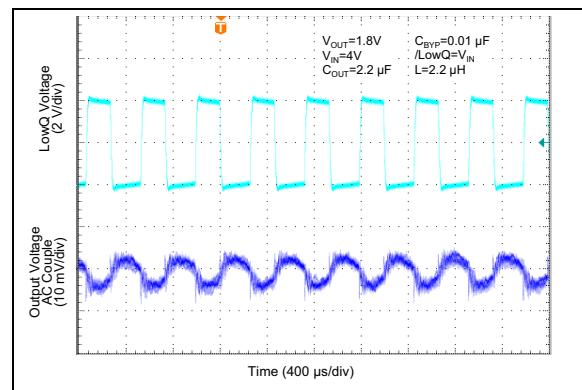


**FIGURE 2-35:** DC/DC PWM Waveform.

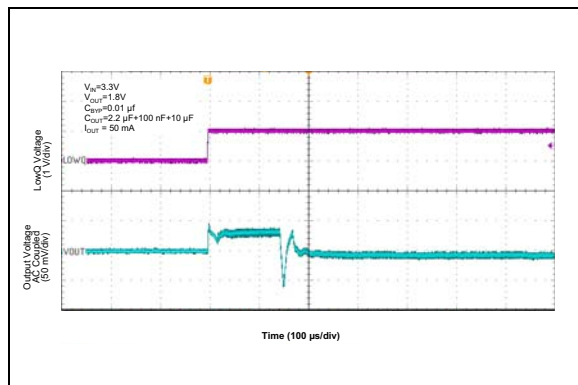


**FIGURE 2-33:** DC/DC LowQ Mode to PWM Mode Transition.

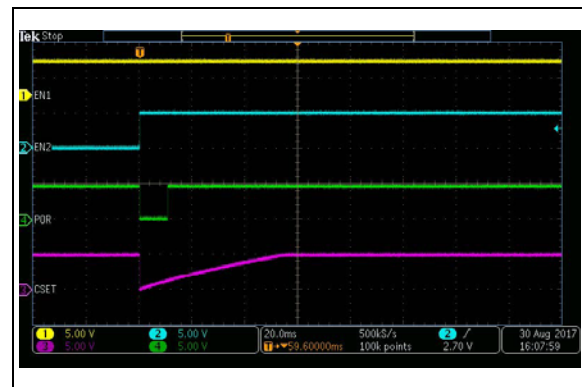


**FIGURE 2-36:** POR Behavior, EN1 = High, Low-to-High Transition on EN2.

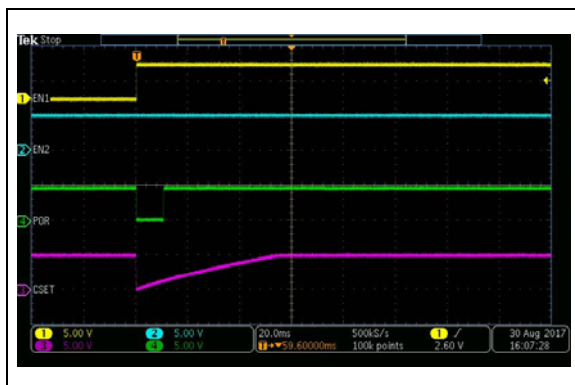


**FIGURE 2-37:** POR Behavior, EN2 = High, Low-to-High Transition on EN1.

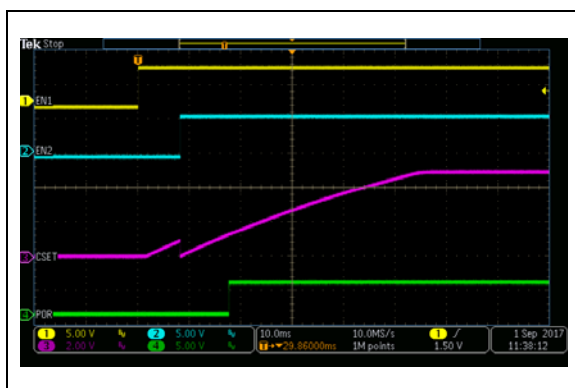


**FIGURE 2-38:**  $C_{SET}$  Pin Voltage and POR Delay Time Behavior for Correct Sequencing.

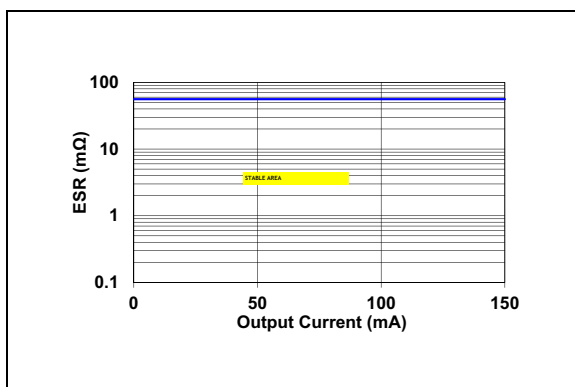


**FIGURE 2-39:** ESR vs. Load - LDO.

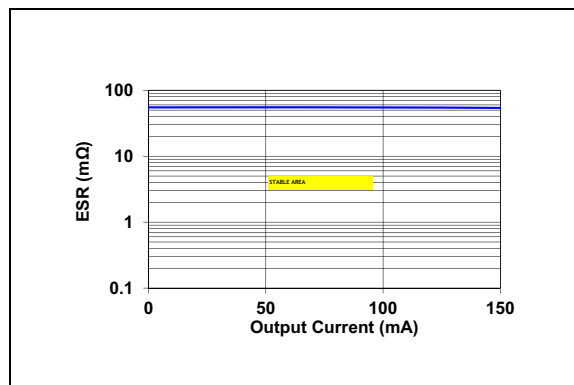


**FIGURE 2-40:** ESR vs. Load - LDO1.

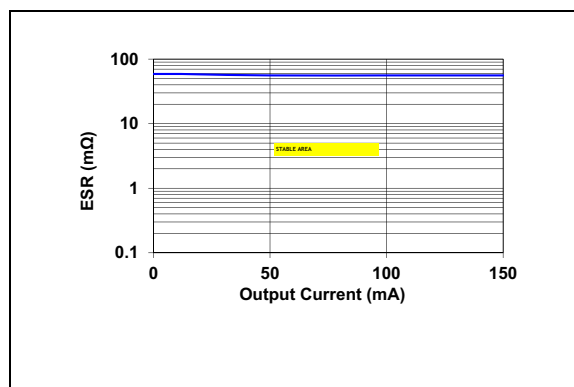


**FIGURE 2-41:** ESR vs. Load - LDO2.

# MIC2800

---

NOTES:

## 3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in [Table 3-1](#).

**TABLE 3-1: PIN FUNCTION TABLE**

| Pin Number<br>16-Pin QFN | Pin Name         | Description                                                                                                                                                                          |
|--------------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                        | LOWQ             | LOWQ Mode. Active Low Input. Logic High = Full Power Mode; Logic Low = LOWQ Mode; Do not leave floating.                                                                             |
| 2                        | BIAS             | Internal circuit bias supply. It must be decoupled to signal ground with a 0.1 $\mu$ F capacitor and should not be loaded.                                                           |
| 3                        | SGND             | Signal ground                                                                                                                                                                        |
| 4                        | PGND             | Power ground                                                                                                                                                                         |
| 5                        | SW               | Switch (Output): Internal power MOSFET output switches.                                                                                                                              |
| 6                        | V <sub>IN</sub>  | Supply Input – DC/DC. Must be tied to PIN7 externally.                                                                                                                               |
| 7                        | V <sub>IN</sub>  | Supply Input – LDO2. Must be tied to PIN6 externally.                                                                                                                                |
| 8                        | LDO2             | Output of LDO regulator 2.                                                                                                                                                           |
| 9                        | FB               | Feedback. Input to the error amplifier for DC/DC converter. For fixed output voltages connect directly to V <sub>OUT</sub> and an internal resistor network sets the output voltage. |
| 10                       | LDO              | LDO Output: Connect to V <sub>OUT</sub> of the DC/DC for LOWQ mode operation.                                                                                                        |
| 11                       | LDO1             | Output of LDO regulator 1.                                                                                                                                                           |
| 12                       | POR              | Power-on Reset Output: Open-drain output. Active low indicates an output undervoltage condition on either one of the three regulated outputs.                                        |
| 13                       | C <sub>SET</sub> | Delay Set Input: connect external capacitor to GND to set the internal delay for the POR output. When left open, there is a minimum delay. This pin cannot be grounded.              |
| 14                       | C <sub>BYP</sub> | Reference Bypass: connect external 0.1 $\mu$ F to GND to reduce output noise. May be left open.                                                                                      |
| 15                       | EN1              | Enable Input (DC/DC and LDO1). Active High Input. Logic high = On; Logic low = Off; do not leave floating.                                                                           |
| 16                       | EN2              | Enable Input (LDO 2). Active High Input. Logic high = On; Logic low = Off; do not leave floating.                                                                                    |

### 3.1 LOWQ

The LOWQ pin provides a logic level control between the internal PWM mode and the low noise linear regulator mode. With LOWQ pulled low (<0.2V), quiescent current of the device is greatly reduced by switching to a low noise linear regulator mode that has a typical IQ of 20  $\mu$ A (LDO2 ON only). In LowQ mode the LDO output can deliver 60 mA of current to the output. By placing LOWQ high (>1V), the device transitions into a constant frequency PWM buck regulator mode. This allows the device the ability to efficiently deliver up to 600 mA of output current at the same output voltage, and to support load transients generated by processor activity.

LOWQ mode also limits the output load of both LDO1 and LDO2 to 10 mA.

The ESD protection of the LOWQ pin is free from clamping diodes to the input supply rails, therefore the LOWQ signal can be driven by host I/Os under backup power domains without the risk of parasitic leakage, even if the main power to the MIC2800 is removed.

### 3.2 BIAS

The BIAS pin supplies the power to the internal control and reference circuitry. The bias is powered from AVIN through an internal 6 $\Omega$  resistor. A small 0.1  $\mu$ F ceramic capacitor is required for bypassing.

### 3.3 SGND

Signal ground (SGND) is the ground path for the biasing and control circuitry. The current loop for the signal ground should be as small as possible.

### 3.4 PGND

Power ground (PGND) is the ground path for the high current PWM mode. The current loop for the power ground should be as small as possible.

## 3.5 SW

The switch (SW) pin is the common connection between the internal power MOSFETs and connects directly to the inductor. Due to the high-speed switching on this pin, the switch node should be routed away from sensitive nodes.

## 3.6 V<sub>IN</sub>

Two input voltage pins provide power to the switch mode DC/DC and LDO2 separately. The LDO1 input voltage is provided by the DC/DC LDO pin. VIN provides power to the LDO section and the bias through an internal 6Ω resistor. Both V<sub>IN</sub> pins must be tied together.

For the switch mode DC/DC regulator, VIN provides power to the MOSFET along with current limiting sensing. Due to the high switching speeds, a 4.7 μF minimum ceramic capacitor is recommended close to VIN and the power ground (PGND) pin for bypassing.

## 3.7 LDO2

Regulated output voltage of LDO2. Power is provided by VIN. The minimum recommended output capacitance is 2.2 μF ceramic.

## 3.8 FB

Connect the feedback pin to V<sub>OUT</sub> for fixed output voltage versions. For adjustable output version, an external resistor divider is used to program the output voltage.

## 3.9 LDO

The LDO pin is the output of the LOWQ mode linear regulator and should be connected to the output of the DC/DC converter. In LOWQ mode (LOWQ < 0.2V), the LDO supplies the output current and supports the output voltage in place of the DC/DC stage. In PWM mode (LOWQ > 1V) the LDO pin provides power to LDO1.

## 3.10 LDO1

Regulated output voltage of LDO1. Input power is provided by the DC/DC switching regulator. The minimum recommended output capacitance is 2.2 μF ceramic.

## 3.11 Power-on Reset (POR)

The Power-on Reset (POR) output is an open-drain N-channel device, requiring a pull-up resistor to either the input voltage or output voltages for proper voltage levels. The POR output has a delay time that is

programmable with a capacitor from the C<sub>SET</sub> pin to ground. The delay time can be programmed to be as long as 1 second.

In steady-state conditions, the POR output is high if at least one channel (LDO2 and DC-DC, LDO1) is enabled and has reached regulation. This is equivalent to performing a logic OR operation on the status of the output voltages.

If any of the outputs is subsequently pulled out of regulation (e.g., due to a momentary overload), the POR signal goes low and it remains low as long as the affected output is out of regulation. If the affected output returns in regulation, POR is asserted high after the delay time programmed with the capacitor at the C<sub>SET</sub> pin.

The ESD protection of the POR pin is free from clamping diodes to the input supply rails. Therefore, the POR signal can be asserted to host I/Os under backup power domains or pulled up to backup power sources without the risk of parasitic leakage, even if the main power to the MIC2800 is removed.

## 3.12 C<sub>SET</sub>

The C<sub>SET</sub> pin is a current source output that charges a capacitor that sets the delay time for the Power-on Reset output from low-to-high. The delay for POR high-to-low (detecting an undervoltage on any of the outputs) is always minimal. The current source of 1.25 μA charges a capacitor up from 0V. When the capacitor reaches 1.25V, the output of the POR is allowed to go high. The delay time in microseconds is equal to the C<sub>SET</sub> capacitor value in picofarads.

### EQUATION 3-1:

$$PORDelay(\mu s) = C_{SET}(pF)$$

## 3.13 C<sub>BYP</sub>

The internal reference voltage can be bypassed with a capacitor to ground to reduce output noise and increase power supply rejection (PSRR). A quick-start feature allows for quick turn on of the output voltage. The recommended nominal bypass capacitor is 0.1 μF, but it can be increased, which will also result in an increase to the start-up time.

## 3.14 EN1, EN2

Both enable inputs are active high, requiring 1.0V for guaranteed logic HIGH level detection (V<sub>IH</sub>=1.0V MIN). EN1 provides logic control of both the DC/DC regulator and LDO1. EN2 provides logic control for LDO2 only. The enable inputs are CMOS logic and cannot be left floating.

The enable pins provide logic level control of the specified outputs. When both enable pins are in the OFF state, supply current of the device is greatly reduced (typically  $< 1 \mu\text{A}$ ). When the DC/DC regulator is in the OFF state, the output drive is placed in a “tri-stated” condition, where both the high side P-channel MOSFET and the low-side N-channel are in an OFF or nonconducting state. Do not drive either of the enable pins above the supply voltage.

## 4.0 APPLICATION INFORMATION

The MIC2800 is a digital power management IC with a single integrated buck regulator and two low dropout regulators. LDO1 is a 300 mA low dropout regulator that uses power supplied by the onboard buck regulator. LDO2 is a 300 mA low dropout regulator using the supply from the input pin. The buck regulator is a 600 mA PWM power supply that utilizes a LOWQ light load mode to maximize battery efficiency in light load conditions. This is achieved with a LOWQ control pin that, when pulled low, shuts down all the biasing and drive current for the PWM regulator, drawing only 20  $\mu$ A of operating current. This allows the output to be regulated through the LDO output, capable of providing 60 mA of output current. This method has the advantage of producing a clean, low-current, ultra-low-noise output in LOWQ mode. During LOWQ mode, the SW node becomes high-impedance, blocking current flow. Other methods of reducing quiescent current, such as Pulse Frequency Modulation (PFM) or bursting techniques may create large-amplitude, low-frequency ripple voltages that can be detrimental to system operation.

When more than 60 mA is required, the LOWQ pin can be forced high, causing the MIC2800 to enter in PWM mode. In this case, the LDO output makes a “hand-off” to the PWM regulator with virtually no variation in output voltage. The LDO output then turns off, allowing up to 600 mA of current to be efficiently supplied through the PWM output to the load.

### 4.1 Output Capacitor

LDO1 and LDO2 outputs require at least a 2.2  $\mu$ F ceramic output capacitor for stability. The DC/DC switch mode regulator requires at least a 2.2  $\mu$ F ceramic output capacitor to be stable. All output capacitor values can be increased to improve transient response. X7R/X5R dielectric type ceramic capacitors are recommended because of their temperature performance. X7R-type capacitors change capacitance by 15% over their operating temperature range and are the most stable type of ceramic capacitors. Z5U and Y5V dielectric capacitors change value by as much as 50% to 60% respectively over their operating temperature ranges and are therefore not recommended.

### 4.2 Input Capacitor

A minimum 1  $\mu$ F ceramic is recommended on the  $V_{IN}$  pin for bypassing. X5R or X7R dielectrics are recommended for the input capacitor. Y5V dielectrics lose most of their capacitance over temperature and are therefore, not recommended. A minimum 1  $\mu$ F is recommended close to the  $V_{IN}$  and PGND pins for high frequency filtering. Smaller-case-size capacitors are recommended due to their lower ESR and ESL. The

value of the input capacitor can be increased as needed to better suppress the input ripple generated by the DC/DC converter.

### 4.3 Inductor Selection

The MIC2800 is designed for use with a 2.2  $\mu$ H inductor. Proper selection should ensure the inductor can handle the maximum average and peak currents required by the load. Maximum current ratings of the inductor are generally given in two methods; permissible DC current and saturation current. Permissible DC current can be rated either for a 40°C temperature rise or a 10% to 20% loss in inductance. Ensure that the inductor selected can handle the maximum operating current. When saturation current is specified, make sure that there is enough margin that the peak current will not saturate the inductor. Peak inductor current can be calculated as follows:

EQUATION 4-1:

$$I_{PK} = I_{OUT} + \frac{V_{OUT} \left( 1 - \frac{V_{OUT}}{V_{IN}} \right)}{2 \times f \times L}$$

### 4.4 POR Delay Time

The POR signal also goes low for the duration of the delay time given by Eq. 3.1 when only one of the enable inputs (EN1, EN2) transitions from low to high, with the other being already high and the corresponding output being in regulation. This is shown in Fig. 2-36 and Fig. 2-37. At the low-to-high transition of either enable input, the  $C_{SET}$  pin capacitor is discharged to ground, and the POR delay time is restarted.


At start-up, in order to prevent a momentary high glitch of the POR signal between the first and the second enable, it is recommended to set the POR delay time longer than the maximum delay expected between the enable signals plus the turn-on time  $t_{TURN-ON}$ .

For a given delay between the enable signals, an example of correct POR delay time design is shown in Fig. 2-38. It can be seen that the  $C_{SET}$  voltage is reset to ground by the latter low-to-high enable transition before it reaches the  $V_{TH_{CSET}}$  voltage (1.25V TYP).


NOTES:

5.0 PACKAGING INFORMATION

5.1 Package Marking Information



| Part Number        | Code  |
|--------------------|-------|
| MIC2800-A4SYML-TR  | YA4S  |
| MIC2800-D24MYML-TR | YD24M |
| MIC2800-D2FMYML-TR | YD2FM |
| MIC2800-G2SYML-TR  | YG2S  |
| MIC2800-G4JYML-TR  | YG4J  |
| MIC2800-G4KYML-TR  | YG4K  |
| MIC2800-G4MYML-TR  | YG4M  |
| MIC2800-G4SYML-TR  | YG4S  |
| MIC2800-G7SYML-TR  | YG7S  |
| MIC2800-G1JJYML-TR | G1JJ  |
| MIC2800-G1JSYML-TR | G1JS  |
| MIC2800-GFMYML-TR  | YGFM  |
| MIC2800-GFSYML-TR  | YGFS  |
| MIC2800-G4SYML-TR  | YG4S  |



Refer to the [Product Identification System](#) section for information on the output voltage for each device.

**Legend:**

XX...X Product code or customer-specific information

Y Year code (last digit of calendar year)

YY Year code (last 2 digits of calendar year)

WW Week code (week of January 1 is week '01')

NNN Alphanumeric traceability code

(e3) Pb-free JEDEC® designator for Matte Tin (Sn)

\* This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package.

•, ▲, ▼ Pin one index is identified by a dot, delta up, or delta down (triangle mark).


**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.

Underbar ( \_ ) and/or Overbar ( ¯ ) symbol may not be to scale.


## TITLE

16 LEAD QFN 3.0x3.0mm COL PACKAGE OUTLINE & RECOMMENDED LAND PATTERN


|                   |                  |                    |        |
|-------------------|------------------|--------------------|--------|
| <b>DRAWING #</b>  | CQFN33-16LD-PL-1 | <b>UNIT</b>        | MM     |
| <b>Lead Frame</b> | NiPdAu           | <b>Lead Finish</b> | NiPdAu |

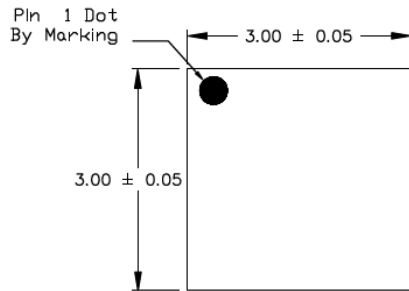

TOP VIEW

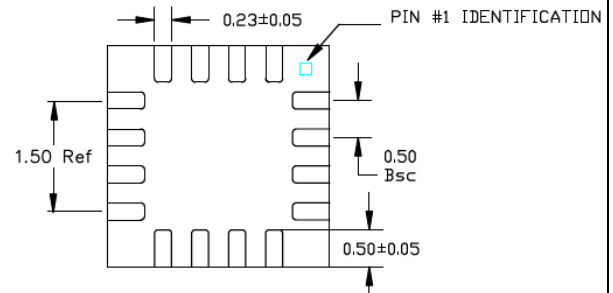

BOTTOM VIEW

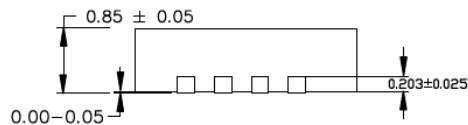

SIDE VIEW


## NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS, ANGLES ARE IN DEGREES.  
N IS THE TOTAL NUMBER OF TERMINALS.
2. MAX PACKAGE WARPAGE IS 0.05mm, MAX ALLOWABLE BURRS IS 0.076 mm  
IN ALL DIRECTIONS.
3. PIN #1 ID ON TOP WILL BE LASER/INK MARKED.


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>.

POD-Land Pattern drawing #CQFN33-16LD-PL-1


## RECOMMENDED LAND PATTERN

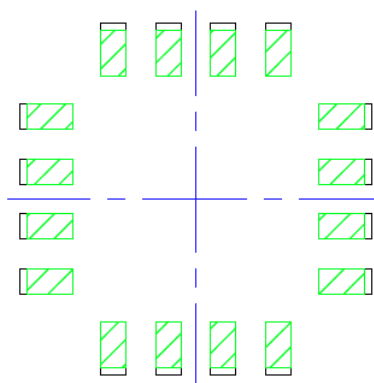

STACKED-UP

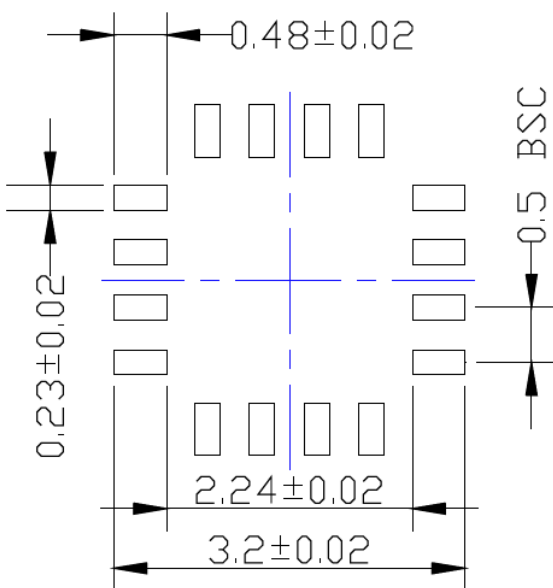

EXPOSED METAL TRACE

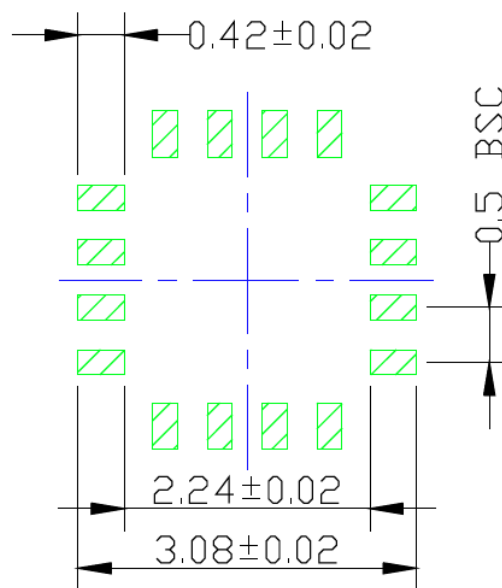

SOLDER STENCIL OPENING

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>.

NOTES:



## APPENDIX A: REVISION HISTORY

### Revision A (October 2017)

Original Release of this Document.

# MIC2800

---

NOTES:

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

| PART NO. - XX X X - XX <sup>(1)</sup>                                                                                                                                                                                                                                                                                                                |                                                         | Examples:                                                                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Device                                                                                                                                                                                                                                                                                                                                               | Output Temperature Package Tape and Reel Option Voltage |                                                                                                                                                                                                                                                                                     |
| <b>Device:</b> MIC2800: Digital Power Management IC 2 MHz, 600 mA DC/DC with Dual 300 mA/300 mA Low VIN LDOs                                                                                                                                                                                                                                         |                                                         | a) MIC2800-A4SYML-TR: Digital Power Management IC 2 MHz, 600 mA DC/DC with Dual 300 mA/300 mA Low VIN LDOs, Adjustable/1.2V/3.3V Output Voltage, -40°C to +125°C, 16LD QFN Package, Tape and Reel                                                                                   |
| <b>Output Voltages: (DC/DC, LDO1, LDO2)</b> A4S = Adjustable/1.2V/3.3V<br>D24M= 1.87V/1.2V/2.8V<br>D2FM= 1.87V/1.5V/2.8V<br>G2S = 1.8V/1.05V/3.3V<br>G4J = 1.8V/1.2V/2.5V<br>G4K = 1.8V/1.2V/2.6V<br>G4M= 1.8V/1.2V/2.8V<br>G4S = 1.8V/1.2V/3.3V<br>G7S = 1.8V/1.575V/3.3V<br>G1JJ= 1.8V/1.25V/2.5V<br>G1JS= 1.8V/1.25V/3.3V<br>G4S = 1.8V/1.2V/3.3V |                                                         | b) MIC2800-D24MYML-TR: Digital Power Management IC 2 MHz, 600 mA DC/DC with Dual 300 mA/300 mA Low VIN LDOs, 1.87V/1.2V/2.8V Output Voltage, -40°C to +125°C 16LD QFN Package, Tape and Reel                                                                                        |
| <b>Temperature:</b> Y = Pb-Free with Industrial Temperature Grade (-40°C to +125°C)                                                                                                                                                                                                                                                                  |                                                         | c) MIC2800-D2FMYML-TR: Digital Power Management IC 2 MHz, 600 mA DC/DC with Dual 300 mA/300 mA Low VIN LDOs, 1.87V/1.5V/2.8V Output Voltage, -40°C to +125°C 16LD QFN Package, Tape and Reel                                                                                        |
| <b>Package:</b> ML = 16-lead, 3x3 mm QFN, 0.85 mm thickness                                                                                                                                                                                                                                                                                          |                                                         | d) MIC2800-G2SYML-TR: Digital Power Management IC 2 MHz, 600 mA DC/DC with Dual 300 mA/300 mA Low VIN LDOs, 1.8V/1.05V/3.3V Output Voltage, -40°C to +125°C 16LD QFN Package, Tape and Reel                                                                                         |
| <b>Tape and Reel:</b> TR = Tape and Reel                                                                                                                                                                                                                                                                                                             |                                                         | e) MIC2800-G4JYML-TR: Digital Power Management IC 2 MHz, 600 mA DC/DC with Dual 300 mA/300 mA Low VIN LDOs, 1.8V/1.2V/2.5V Output Voltage, -40°C to +125°C 16LD QFN Package, Tape and Reel                                                                                          |
|                                                                                                                                                                                                                                                                                                                                                      |                                                         | <b>Note 1:</b> Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option. |

# MIC2800

---

NOTES:

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

*Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*

**QUALITY MANAGEMENT SYSTEM**  
**CERTIFIED BY DNV**  
**== ISO/TS 16949 ==**

### Trademarks

The Microchip name and logo, the Microchip logo, AnyRate, AVR, AVR logo, AVR Freaks, BeaconThings, BitCloud, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, Helder, JukeBlox, KEELOQ, KEELOQ logo, Klear, LANCheck, LINK MD, maxStylus, maxTouch, MediaLB, megaAVR, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, Prochip Designer, QTouch, RightTouch, SAM-BA, SpyNIC, SST, SST Logo, SuperFlash, tinyAVR, UNI/O, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, EtherSynch, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and Quiet-Wire are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, chipKIT, chipKIT logo, CodeGuard, CryptoAuthentication, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, Mindi, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PureSilicon, QMatrix, RightTouch logo, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2017, Microchip Technology Incorporated, All Rights Reserved.  
ISBN: 978-1-5224-2210-5

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
 2355 West Chandler Blvd.  
 Chandler, AZ 85224-6199  
 Tel: 480-792-7200  
 Fax: 480-792-7277  
 Technical Support:  
<http://www.microchip.com/support>  
 Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
 Duluth, GA  
 Tel: 678-957-9614  
 Fax: 678-957-1455

**Austin, TX**  
 Tel: 512-257-3370

**Boston**  
 Westborough, MA  
 Tel: 774-760-0087  
 Fax: 774-760-0088

**Chicago**  
 Itasca, IL  
 Tel: 630-285-0071  
 Fax: 630-285-0075

**Dallas**  
 Addison, TX  
 Tel: 972-818-7423  
 Fax: 972-818-2924

**Detroit**  
 Novi, MI  
 Tel: 248-848-4000

**Houston, TX**  
 Tel: 281-894-5983

**Indianapolis**  
 Noblesville, IN  
 Tel: 317-773-8323  
 Fax: 317-773-5453  
 Tel: 317-536-2380

**Los Angeles**  
 Mission Viejo, CA  
 Tel: 949-462-9523  
 Fax: 949-462-9608  
 Tel: 951-273-7800

**Raleigh, NC**  
 Tel: 919-844-7510

**New York, NY**  
 Tel: 631-435-6000

**San Jose, CA**  
 Tel: 408-735-9110  
 Tel: 408-436-4270

**Canada - Toronto**  
 Tel: 905-695-1980  
 Fax: 905-695-2078

### ASIA/PACIFIC

**Asia Pacific Office**  
 Suites 3707-14, 37th Floor  
 Tower 6, The Gateway  
 Harbour City, Kowloon

**Hong Kong**  
 Tel: 852-2943-5100  
 Fax: 852-2401-3431

**Australia - Sydney**  
 Tel: 61-2-9868-6733  
 Fax: 61-2-9868-6755

**China - Beijing**  
 Tel: 86-10-8569-7000  
 Fax: 86-10-8528-2104

**China - Chengdu**  
 Tel: 86-28-8665-5511  
 Fax: 86-28-8665-7889

**China - Chongqing**  
 Tel: 86-23-8980-9588  
 Fax: 86-23-8980-9500

**China - Dongguan**  
 Tel: 86-769-8702-9880

**China - Guangzhou**  
 Tel: 86-20-8755-8029

**China - Hangzhou**  
 Tel: 86-571-8792-8115  
 Fax: 86-571-8792-8116

**China - Hong Kong SAR**  
 Tel: 852-2943-5100  
 Fax: 852-2401-3431

**China - Nanjing**  
 Tel: 86-25-8473-2460  
 Fax: 86-25-8473-2470

**China - Qingdao**  
 Tel: 86-532-8502-7355  
 Fax: 86-532-8502-7205

**China - Shanghai**  
 Tel: 86-21-3326-8000  
 Fax: 86-21-3326-8021

**China - Shenyang**  
 Tel: 86-24-2334-2829  
 Fax: 86-24-2334-2393

**China - Shenzhen**  
 Tel: 86-755-8864-2200  
 Fax: 86-755-8203-1760

**China - Wuhan**  
 Tel: 86-27-5980-5300  
 Fax: 86-27-5980-5118

**China - Xian**  
 Tel: 86-29-8833-7252  
 Fax: 86-29-8833-7256

### ASIA/PACIFIC

**China - Xiamen**  
 Tel: 86-592-2388138  
 Fax: 86-592-2388130

**China - Zhuhai**  
 Tel: 86-756-3210040  
 Fax: 86-756-3210049

**India - Bangalore**  
 Tel: 91-80-3090-4444  
 Fax: 91-80-3090-4123

**India - New Delhi**  
 Tel: 91-11-4160-8631  
 Fax: 91-11-4160-8632

**India - Pune**  
 Tel: 91-20-3019-1500

**Japan - Osaka**  
 Tel: 81-6-6152-7160  
 Fax: 81-6-6152-9310

**Japan - Tokyo**  
 Tel: 81-3-6880-3770  
 Fax: 81-3-6880-3771

**Korea - Daegu**  
 Tel: 82-53-744-4301  
 Fax: 82-53-744-4302

**Korea - Seoul**  
 Tel: 82-2-554-7200  
 Fax: 82-2-558-5932 or  
 82-2-558-5934

**Malaysia - Kuala Lumpur**  
 Tel: 60-3-6201-9857  
 Fax: 60-3-6201-9859

**Malaysia - Penang**  
 Tel: 60-4-227-8870  
 Fax: 60-4-227-4068

**Philippines - Manila**  
 Tel: 63-2-634-9065  
 Fax: 63-2-634-9069

**Singapore**  
 Tel: 65-6334-8870  
 Fax: 65-6334-8850

**Taiwan - Hsin Chu**  
 Tel: 886-3-5778-366  
 Fax: 886-3-5770-955

**Taiwan - Kaohsiung**  
 Tel: 886-7-213-7830

**Taiwan - Taipei**  
 Tel: 886-2-2508-8600  
 Fax: 886-2-2508-0102

**Thailand - Bangkok**  
 Tel: 66-2-694-1351  
 Fax: 66-2-694-1350

### EUROPE

**Austria - Wels**  
 Tel: 43-7242-2244-39  
 Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
 Tel: 45-4450-2828  
 Fax: 45-4485-2829

**Finland - Espoo**  
 Tel: 358-9-4520-820

**France - Paris**  
 Tel: 33-1-69-53-63-20  
 Fax: 33-1-69-30-90-79

**Germany - Garching**  
 Tel: 49-8931-9700

**Germany - Haan**  
 Tel: 49-2129-3766400

**Germany - Heilbronn**  
 Tel: 49-7131-67-3636

**Germany - Karlsruhe**  
 Tel: 49-721-625370

**Germany - Munich**  
 Tel: 49-89-627-144-0  
 Fax: 49-89-627-144-44

**Germany - Rosenheim**  
 Tel: 49-8031-354-560

**Israel - Ra'anana**  
 Tel: 972-9-744-7705

**Italy - Milan**  
 Tel: 39-0331-742611  
 Fax: 39-0331-466781

**Italy - Padova**  
 Tel: 39-049-7625286

**Netherlands - Drunen**  
 Tel: 31-416-690399  
 Fax: 31-416-690340

**Norway - Trondheim**  
 Tel: 47-7289-7561

**Poland - Warsaw**  
 Tel: 48-22-3325737

**Romania - Bucharest**  
 Tel: 40-21-407-87-50

**Spain - Madrid**  
 Tel: 34-91-708-08-90  
 Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
 Tel: 46-31-704-60-40

**Sweden - Stockholm**  
 Tel: 46-8-5090-4654

**UK - Wokingham**  
 Tel: 44-118-921-5800  
 Fax: 44-118-921-5820

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Microchip:

[MIC2800-GFSYML TR](#) [MIC2800-D2FMYML TR](#) [MIC2800-D24MYML TR](#) [MIC2800-G4JYML TR](#) [MIC2800-G4MYML TR](#) [MIC2800-G4KYML TR](#) [MIC2800-GFMYML TR](#) [MIC2800-A4SYML TR](#) [MIC2800-G7SYML TR](#) [MIC2800-G4SYML TR](#) [MIC2800-D24MYML-TR](#) [MIC2800-GFSYML-TR](#) [MIC2800-G4MYML-TR](#) [MIC2800-GFMYML-TR](#) [MIC2800-A4SYML-TR](#) [MIC2800-G4KYML-TR](#) [MIC2800-G4JYML-TR](#) [MIC2800-D2FMYML-TR](#) [MIC2800-G4SYML-TR](#) [MIC2800-G7SYML-TR](#) [MIC2800-G2SYML-TR](#) [MIC2800-G8SYML-TR](#) [MIC2800-G1JSYML-TR](#) [MIC2800-G1JJYML-TR](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)