### ±1°C Accurate, 1.8V Digital Temperature Sensor

#### **Features**


- 1MHz, 2-wire I<sup>2</sup>C™ Interface
- User Selectable Measurement Resolution:
  - +0.5°C, +0.25°C, +0.125°C, +0.0625°C
- · User Programmable Temperature Limits:
  - Temperature Window Limit
  - Critical Temperature Limit
- User Programmable Temperature Alert Output
- Specified V<sub>DD</sub> Range: 1.7V to 3.6V
- Operating Current: 100 μA (typical)
- Available Package: 8-Pin TDFN

#### **Temperature Sensor Features**

- Temperature-to-Digital Converter (°C)
- · Sensor Accuracy (Grade B):
  - $\pm 0.2$ °C/ $\pm 1$ °C (typ./max.)  $\rightarrow$  +75°C to +95°C
  - $\pm 0.5$ °C/ $\pm 2$ °C (typ./max.)  $\rightarrow +40$ °C to +125°C
  - $\pm 1^{\circ}\text{C/}\pm 3^{\circ}\text{C}$  (typ./max.)  $\rightarrow$  -40°C to +125°C

#### **Typical Applications**

- Temperature sensing for Solid State Drive (SSD)
- General Purpose Temperature Datalog
- · General Purpose
- · Industrial Applications
- · Industrial Freezers and Refrigerators
- · Food Processing
- Personal Computers and Servers
- · PC Peripherals
- · Consumer Electronics
- Handheld/Portable Devices



#### **Description**

Microchip Technology Inc.'s MCP9844 digital temperature sensor converts temperature from -40°C to +125°C to a digital word. It provides an accuracy of ±0.2°C/±1°C (typical/maximum) from +75°C to +95°C with an operating voltage of 1.7V to 3.6V.

The MCP9844 digital temperature sensor comes with user programmable registers that provide flexibility for temperature sensing applications. The registers allow user selectable settings such as Shutdown or Low-Power modes, and the specification of temperature event boundaries. When the temperature changes beyond the specified event boundary limits, the MCP9844 outputs an Alert signal at the Event pin. The user has the option of setting the temperature event output signal polarity as either an active-low or active-high comparator output for the thermostat operation, or as a temperature event interrupt output for microprocessor-based systems.

This sensor has an industry standard I<sup>2</sup>C Fast Mode Plus compatible 1 MHz serial interface.

#### **Package Types**

8-Pin 2x3 TDFN *									
	1 0 8								
A1	2 EP 7	Event							
A2	3 <sup>9</sup> 6 4 5	SCL							
GND	4 5	SDA							
* Includes Expose	* Includes Exposed Thermal Pad (EP); see Table 3-1.								

# 1.0 ELECTRICAL CHARACTERISTICS

### **Absolute Maximum Ratings †**

V <sub>DD</sub>	4.0V
Voltage at all Input/Output pins	. GND – 0.3V to 4.0V
Pin A0	GND – 0.3V to 11V
Storage temperature	65°C to +150°C
Ambient temp. with power applied	40°C to +125°C
Junction Temperature (T <sub>J</sub> )	+150°C
ESD protection on all pins (HBM:MM)	(4 kV:200V)
Latch-Up Current at each pin (25°C)	±200 mA

**†Notice:** Stresses above those listed under "Maximum ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

#### TEMPERATURE SENSOR DC CHARACTERISTICS

Parameters	Sym	Min	Тур	Max	Unit	Conditions
Temperature Sensor Accuracy						
+75°C < T <sub>A</sub> ≤ +95°C	T <sub>ACY</sub>	-1.0	±0.2	+1.0	°C	V <sub>DD</sub> = 1.8V
$+40^{\circ}\text{C} < \text{T}_{\text{A}} \le +125^{\circ}\text{C}$		-2.0	±0.5	+2.0	°C	
$-40$ °C < T <sub>A</sub> $\leq$ $+125$ °C		-3.0	±1	+3.0	°C	
<b>Temperature Conversion Time</b>						
0.5°C/bit	t <sub>CONV</sub>	_	30	_	ms	
0.25°C/bit		_	65	125	ms	15 s/sec (typical) (See <b>Section 5.2.4</b> )
0.125°C/bit		_	130		ms	
0.0625°C/bit		_	260	_	ms	
Power Supply						
Specified Voltage Range	$V_{DD}$	1.7	1	3.6	V	
Operating Current	I <sub>DD_TS</sub>	_	100	500	μA	
Shutdown Current	I <sub>SHDN</sub>	_	0.2	1	μΑ	T <sub>A</sub> = 85°C
Power On Reset (POR)	V <sub>POR_TS</sub>	_	1.5		V	Threshold for falling V <sub>DD</sub> voltage
Settling time after POR	t <sub>POR</sub>	_	_	1	ms	For warm and cold power cycles
Power Supply Rejection,	Δ°C	_	0.2		°C	V <sub>DD</sub> = 1.7V to 3.6V
V <sub>DD</sub> = 1.7V, 2.5V, 3.3V		_	±1	1	°C	$V_{DD\_AC} = V_{DD} + 150 \text{ mV}_{PP\ AC}$ (0 to 1 MHz) and $T_A = +25^{\circ}\text{C}$ ,
<b>Event Output (Open-Drain outp</b>	out, external	pull-u	p resist	or requir	ed), se	e Section 5.2.3
High-level Current (leakage)	I <sub>OH</sub>	_		1	μA	$V_{OH} = V_{DD}$
Low-level Voltage	V <sub>OL</sub>	_	_	0.4	V	I <sub>OL</sub> = 3 mA (Active-Low, Pull-up Resistor)
Thermal Response, from +25°C	(Air) to +12	25°C (o	il bath)		•	
TDFN-8	t <sub>RES</sub>	_	0.7	_	s	Time to 63% (89°C)

### INPUT/OUTPUT PIN DC CHARACTERISTICS

<b>Electrical Specifications:</b> Unless otherwise indicated, $V_{DD}$ = 1.7V to 3.6V, GND = Ground and $T_A$ = -40°C to +125°C.									
Parameters	Sym	Min	Тур	Max	Units	Conditions			
Serial Input/Output (SCL, SDA, A0, A1, A2)									
Input									
High-level Voltage	V <sub>IH</sub>	0.7V <sub>DD</sub>	_	_	V				
Low-level Voltage	$V_{IL}$	_	_	0.3V <sub>DD</sub>	V				
Input Current	I <sub>IN</sub>	_	_	±5	μA	SDA and SCL only			
Input Impedance (A0, A1, A2)	Z <sub>IN</sub>	_	1	_	MΩ	$V_{IN} > V_{IH}$			
Input Impedance (A0, A1, A2)	Z <sub>IN</sub>	_	200	_	kΩ	$V_{IN} < V_{IL}$			
Output (SDA only)									
Low-level Voltage	$V_{OL}$	_	_	0.4	V	I <sub>OL</sub> = 3 mA			
High-level Current (leakage)	I <sub>OH</sub>	_	_	1	μΑ	$V_{OH} = V_{DD}$			
Low-level Current	I <sub>OL</sub>	3	_	20	mA	V <sub>OL</sub> = 0.4V, V <sub>DD</sub> ≥ 2.2V			
		6	_	_	mA	V <sub>OL</sub> = 0.6V			
Capacitance	C <sub>IN</sub>	_	5	_	pF				
SDA and SCL Inputs									
Hysteresis	V <sub>HYST</sub>	_	0.05V <sub>DD</sub>	_	V				
Spike Suppression	T <sub>SP</sub>	_	_	50	ns				

### **TEMPERATURE CHARACTERISTICS**

<b>Electrical Specifications:</b> Unless otherwise indicated, $V_{DD}$ = 1.7V to 3.6V, GND = Ground, and $T_A$ = -40°C to +125°C.										
Parameters	Sym	Min	Тур	Max	Units	Conditions				
Temperature Ranges										
Specified Temperature Range	T <sub>A</sub>	-40	_	+125	°C	Note 1				
Operating Temperature Range	T <sub>A</sub>	-40	_	+125	°C					
Storage Temperature Range	T <sub>A</sub>	-65	_	+150	°C					
Thermal Package Resistances										
Thermal Resistance, 8L-TDFN	$\theta_{JA}$	_	52.5	_	°C/W					

**Note 1:** Operation in this range must not cause T<sub>J</sub> to exceed Maximum Junction Temperature (+150°C).


#### SERIAL INTERFACE TIMING SPECIFICATIONS

**Electrical Specifications:** Unless otherwise indicated, GND = Ground,  $T_A = -40^{\circ}C$  to +125°C, and  $C_L = 80$  pF Note 1.

		V <sub>DD</sub> = 1.7	V <sub>DD</sub> = 1.7V to 3.6V		V <sub>DD</sub> = 2.2V to 3.6V				
		100 kHz		400 kHz		1000 kHz			
Parameters	Sym	Min	Max	Min	Max	Min	Max	Units	
2-Wire I <sup>2</sup> C™ Interface									
Serial port frequency (Note 2, 4)	f <sub>SCL</sub>	10	100	10	400	10	1000	kHz	
Low Clock (Note 2)	$t_{LOW}$	4700	_	1300		500	1	ns	
High Clock	t <sub>HIGH</sub>	4000	_	600	_	260	_	ns	
Rise time (Note 5)	t <sub>R</sub>	_	1000	20	300	_	120	ns	
Fall time (Note 5)	t <sub>F</sub>	20	300	20	300	_	120	ns	
Data in Setup time (Note 3)	t <sub>SU:DAT</sub>	250	_	100	_	50	_	ns	
Data in Hold time (Note 6)	t <sub>HD:DI</sub>	0	_	0	_	0	_	ns	
Data out Hold time (Note 4)	t <sub>HD:DO</sub>	200	900	200	900	0	350	ns	
Start Condition Setup time	t <sub>SU:STA</sub>	4700	_	600	_	260	_	ns	
Start Condition Hold time	t <sub>HD:STA</sub>	4000	_	600	_	260	_	ns	
Stop Condition Setup time	t <sub>SU:STO</sub>	4000	_	600	_	260	_	ns	
Bus Idle/Free	t <sub>B-FREE</sub>	4700	_	1300	_	500	_	ns	
Time out	t <sub>OUT</sub>	25	35	25	35	25	35	ms	
Bus Capacitive load	C <sub>b</sub>	_	_	_	400	_	100	pf	

- Note 1: All values referred to V<sub>IL MAX</sub> and V<sub>IH MIN</sub> levels.
   2: If t<sub>LOW</sub> > t<sub>OUT</sub>, the temperature sensor I<sup>2</sup>C™ interface will time out. A Repeat Start command is required for communication.
  - 3: This device can be used in a Standard mode  $I^2C$ -bus system, but the requirement  $t_{SU:DAT} \ge 250$  ns must be met. This device does not stretch SCL Low period. It outputs the next data bit to the SDA line within t<sub>R</sub> MAX + t<sub>SU:DAT MIN</sub> = 1000 ns + 250 ns = 1250 ns (according to the Standard-mode I<sup>2</sup>C-bus specification) before the SCL line is released.
  - 4: As a transmitter, the device provides internal minimum delay time  $t_{HD:DAT\;MIN}$  to bridge the undefined region (min. 200 ns) of the falling edge of SCL  $t_{F\,MAX}$  to avoid unintended generation of Start or Stop
  - Characterized but not production tested.
  - 6: As a receiver, SDA should not be sampled at the falling edge of SCL. SDA can transition t<sub>HD:DI</sub> 0 ns after SCL toggles Low.

#### TIMING DIAGRAM

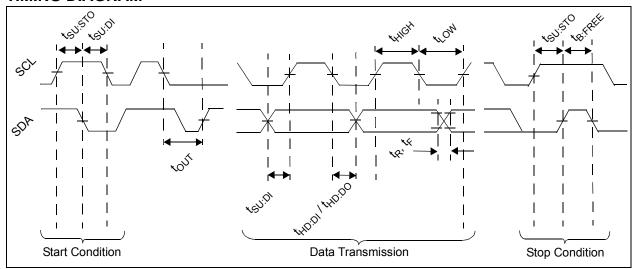

#### 2.0 TYPICAL PERFORMANCE CURVES

**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

**Note:** Unless otherwise indicated,  $V_{DD}$  = 1.7V to 3.6V, GND = Ground, SDA/SCL pulled-up to  $V_{DD}$ , and  $T_A$  = -40°C to +125°C.






FIGURE 2-1: Temperature Accuracy.



**FIGURE 2-2:** Temperature Accuracy Histogram,  $T_A = +85$  °C.



**FIGURE 2-3:** Temperature Accuracy Histogram,  $T_A = +25$  °C.




FIGURE 2-4: Supply Current Vs. Temperature.






FIGURE 2-5: Shutdown Current Vs. Temperature.




**FIGURE 2-6:** Power-on Reset Threshold Voltage Vs. Temperature.


**Note:** Unless otherwise indicated,  $V_{DD}$  = 1.7V to 3.6V, GND = Ground, SDA/SCL pulled-up to  $V_{DD}$ , and  $T_A$  = -40°C to +125°C.



**FIGURE 2-7:** Event Output and SDA  $V_{OL}$  Vs. Temperature.



**FIGURE 2-8:** Temperature Conversion Rate Vs. Temperature.



**FIGURE 2-9:** Power Supply Noise Rejection: Normalized Temperature Vs. Power Supply Frequency.





FIGURE 2-10: SDA I<sub>OL</sub> Vs. Temperature.



**FIGURE 2-11:** Line Regulation: Change in Temperature Accuracy Vs. Change in  $V_{DD}$ .




FIGURE 2-12: I<sup>2</sup>C<sup>TM</sup> Protocol Time-out Vs. Temperature.

#### 3.0 PIN DESCRIPTION

The descriptions of the pins are listed in Table 3-1.

TABLE 3-1: PIN FUNCTION TABLES

MCP9844	Symbol	Description				
TDFN	Symbol	Description				
1	A0	Slave Address				
2	A1	Slave Address				
3	A2	Slave Address				
4	GND	Ground				
5	SDA	Serial Data Line				
6	SCL	Serial Clock Line				
7	Event	Temperature Alert Output				
8	$V_{DD}$	Power Pin				
9	EP	Exposed Thermal Pad (EP); can be connected to GND.				

#### 3.1 Address Pins (A0, A1, A2)

These pins are device address input pins.

The address pins correspond to the Least Significant bits (LSb) of the address bits. The Most Significant bits (MSb) are A6, A5, A4, A3. Refer to Table 3-2.

TABLE 3-2: MCP9844 ADDRESS BYTE

Device	Ad	ddres	s Co	Slave Address			
	A6	A5	<b>A4</b>	А3	A2	A1	A0
Sensor	0	0	1	1	X <sup>1</sup>	X <sup>1</sup>	X <sup>1</sup>

Note 1: User selectable address is shown by X, where X is '1' or '0' for V<sub>DD</sub> and GND, respectively

All address pins have an internal pull-down resistor.

#### 3.2 Ground Pin (GND)

The GND pin is the system ground pin.

#### 3.3 Serial Data Line (SDA)

The SDA is a bidirectional input/output pin used to serially transmit data to/from the host controller. This pin requires a pull-up resistor. (See **Section 4.0 "Serial Communication"**.)

#### 3.4 Serial Clock Line (SCL)

The SCL is a clock input pin. All communication and timing is relative to the signal on this pin. The clock is generated by the host or master controller on the bus. (See Section 4.0 "Serial Communication".)

# 3.5 Temperature Alert, Open-Drain Output (Event)

The MCP9844 temperature Event output pin is an open-drain output. The device outputs a signal when the ambient temperature goes beyond the user programmed temperature limit. (See Section 5.2.3 "Event Output Configuration".)

#### 3.6 Power Pin $(V_{DD})$

 $V_{\text{DD}}$  is the power pin. The operating voltage range, as specified in the DC electrical specification table, is applied on this pin.

#### 3.7 Exposed Thermal Pad (EP)

There is an internal electrical connection between the Exposed Thermal Pad (EP) and the GND pin; they can be connected to the same potential on the Printed Circuit Board (PCB). This provides better thermal conduction from the PCB to the die.

# MCP9844

**NOTES:** 

#### 4.0 SERIAL COMMUNICATION

# 4.1 2-Wire Standard Mode I<sup>2</sup>C<sup>™</sup> Protocol-Compatible Interface

The MCP9844 serial clock input (SCL) and the bidirectional serial data line (SDA) form a 2-wire bidirectional Standard mode I<sup>2</sup>C compatible communication port (refer to the Input/Output Pin DC Characteristics table and the Serial Interface Timing Specifications table).

The following MCP9844 bus protocol is defined in Table 4-1.

TABLE 4-1: MCP9844 SERIAL BUS PROTOCOL DESCRIPTIONS

	T
Term	Description
Master	The device that controls the serial bus, typically a microcontroller.
Slave	The device addressed by the master, such as the MCP9844.
Transmitter	Device sending data to the bus.
Receiver	Device receiving data from the bus.
START	A unique signal from the master to initiate serial interface with a slave.
STOP	A unique signal from the master to terminate serial interface from a slave.
Read/Write	A read or write to the MCP9844 registers.
ACK	A receiver Acknowledges (ACK) the reception of each byte by polling the bus.
NAK	A receiver Not-Acknowledges (NAK) or releases the bus to show End-of-Data (EOD).
Busy	Communication is not possible because the bus is in use.
Not Busy	The bus is in the Idle state, both SDA and SCL remain high.
Data Valid	SDA must remain stable before SCL becomes high in order for a data bit to be considered valid. During normal data transfers, SDA only changes state while SCL is low.

#### 4.1.1 DATA TRANSFER

Data transfers are initiated by a Start condition (START), followed by a 7-bit device address and a read/write bit. An Acknowledge (ACK) from the slave confirms the reception of each byte. Each access must be terminated by a Stop condition (STOP).

Repeated communication is initiated after  $t_{B\text{-}FREE}$ .

This device does not support sequential register read/write. Each register needs to be addressed using the Register Pointer.

This device supports the Receive Protocol. The register can be specified using the pointer for the initial read. Each repeated read or receive begins with a Start condition and address byte. The MCP9844 retain the previously selected register. Therefore, they output data from the previously specified register (repeated pointer specification is not necessary).

#### 4.1.2 MASTER/SLAVE

The bus is controlled by a master device (typically a microcontroller) that controls the bus access and generates the Start and Stop conditions. The MCP9844 is a slave device and does not control other devices in the bus. Both master and slave devices can operate as either transmitter or receiver. However, the master device determines which mode is activated.

#### 4.1.3 START/STOP CONDITION

A high-to-low transition of the SDA line (while SCL is high) is the Start condition. All data transfers must be preceded by a Start condition from the master. A low-to-high transition of the SDA line (while SCL is high) signifies a Stop condition.

If a Start or Stop condition is introduced during data transmission, the MCP9844 releases the bus. All data transfers are ended by a Stop condition from the master.

#### 4.1.4 ADDRESS BYTE

Following the Start condition, the host must transmit an 8-bit address byte to the MCP9844. The address for the MCP9844 temperature sensor is '0011,A2,A1,A0' in binary, where the A2, A1 and A0 bits are set externally by connecting the corresponding pins to  $V_{DD}$  '1' or GND '0'. The 7-bit address transmitted in the serial bit stream must match the selected address for the MCP9844 to respond with an ACK. Bit 8 in the address byte is a read/write bit. Setting this bit to '1' commands a read operation, while '0' commands a write operation (see Figure 4-1).




FIGURE 4-1: Device Addressing.

### MCP9844

#### 4.1.5 DATA VALID

After the Start condition, each bit of data in the transmission needs to be settled for a time specified by  $t_{SU-DATA}$  before SCL toggles from low-to-high (see Serial Interface Timing Specifications table).

#### 4.1.6 ACKNOWLEDGE (ACK/NAK)

Each receiving device, when addressed, is obliged to generate an ACK bit after the reception of each byte. The master device must generate an extra clock pulse for ACK to be recognized.

The acknowledging device pulls down the SDA line for  $t_{SU-DATA}$  before the low-to-high transition of SCL from the master. SDA also needs to remain pulled down for  $t_{H-DATA}$  after a high-to-low transition of SCL.

During read, the master must signal an End-of-Data (EOD) to the slave by not generating an ACK bit (NAK) once the last bit has been clocked out of the slave. In this case, the slave will leave the data line released to enable the master to generate the Stop condition.

#### 4.1.7 TIME OUT (T<sub>OUT</sub>)

If the SCL stays low or high for time specified by  $t_{\rm OUT}$ , the MCP9844 resets the serial interface. This dictates the minimum clock speed as specified in the specification.

### 5.0 FUNCTIONAL DESCRIPTION

The MCP9844 temperature sensors consist of a band-gap type temperature sensor, a Delta-Sigma Analog-to-Digital Converter ( $\Sigma\Delta$  ADC), user programmable

registers and a 2-wire I<sup>2</sup>C protocol compatible serial interface. Figure 5-1 shows a block diagram of the register structure.

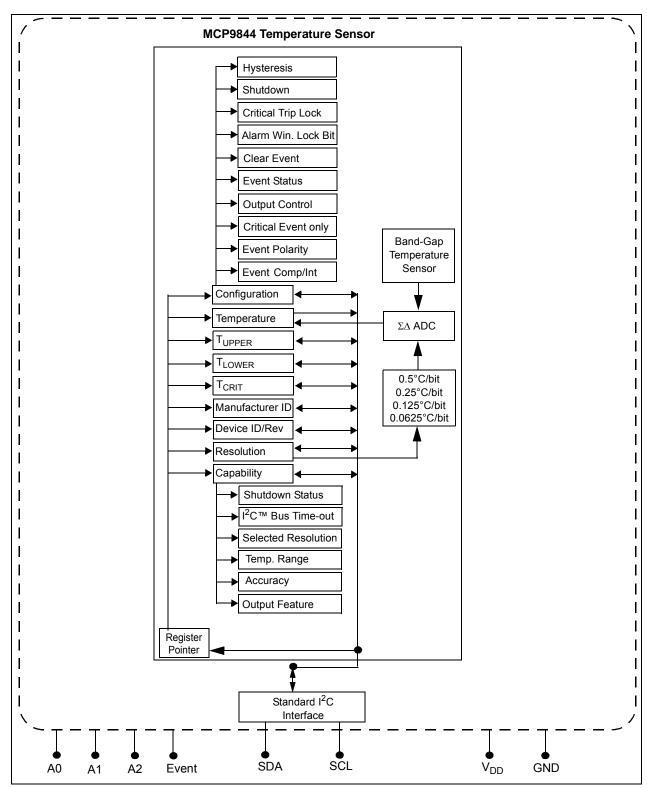


FIGURE 5-1: Functional Block Diagram.

#### 5.1 Registers

The MCP9844 device has several registers that are user accessible. These registers include the Capability register, Configuration register, Event Temperature Upper-Boundary and Lower-Boundary Trip registers, Critical Temperature Trip register, Temperature register, Manufacturer Identification register and Device Identification register.

The Temperature register is read-only and is used to access the ambient temperature data. The data is loaded in parallel to this register after t<sub>CONV</sub>. The Event Temperature Upper-Boundary and Lower-Boundary Trip registers are read/writes. If the ambient temperature drifts beyond the user-specified limits, the MCP9844 device outputs a signal using the Event pin to Section 5.2.3 "Event **Output** Configuration"). In addition, the Critical Temperature Trip register is used to provide an additional critical temperature limit.

The Capability register is used to provide bits describing the MCP9844's capability in measurement resolution, measurement range and device accuracy. The device Configuration register provides access to configure the MCP9844's various features. These registers are described in further detail in the following sections.

The registers are accessed by sending a Register Pointer to the MCP9844 using the serial interface. This is an 8-bit write-only pointer. However, the four Least Significant bits are used as pointers and all unused bits (bits 7-4) need to be cleared or set to '0'. Register 5-1 describes the pointer or the address of each register.

#### REGISTER 5-1: REGISTER POINTER (WRITE ONLY)

W-0	W-0	W-0	W-0	W-0	W-0	W-0	W-0		
	_	_	_	Pointer Bits					
bit 7							bit 0		

Legend:			
R = Readable bit	W = Writable bit	U = Unimplemented bit	r, read as '0'
-n = Value at POR	'1' = Bit is set	'0' = Bit is cleared	x = Bit is unknown

bit 7-4 Writable Bits: Write '0'

bit 3-0 **Pointer Bits:** 

> 0000 = Capability register

0001 = Configuration register (CONFIG)

Event Temperature Upper-Boundary Trip register (Tupper) 0010 = 0011 = Event Temperature Lower-Boundary Trip register (T<sub>LOWER</sub>)

0100 = Critical Temperature Trip register (T<sub>CRIT</sub>)

0101 = Temperature register  $(T_A)$ 

0110 = Manufacturer ID register 0111 = Device ID/Revision register

Reserved 1000 =

1001 = Resolution register

1xxx =Reserved (This device has additional registers that are reserved for test and calibration. If

these registers are accessed, the device may not perform according to the specification.)

TABLE 5-1: BIT ASSIGNMENT SUMMARY FOR ALL TEMPERATURE SENSOR REGISTERS (SEE SECTION 5.3)

Register	MSB/		<u>,                                      </u>	Bit A	ssignmer	nt			
Pointer (Hex)	LSB	7	6	5	4	3	2	1	0
0x00	MSB	0	0	0	0	0	0	0	0
	LSB	SHDN Status	t <sub>OUT</sub> Range	1	Reso	lution	Range	Accuracy	Event
0x01	MSB	0	0	0	0	0	Hys	teresis	SHDN
	LSB	Crt Loc	Win Loc	Int Clr	Evt Stat	Evt Cnt	Evt Sel	Evt Pol	Evt Mod
0x02	MSB	0	0	0	SIGN	2 <sup>7</sup> °C	2 <sup>6</sup> °C	2 <sup>5</sup> °C	2 <sup>4</sup> °C
	LSB	2 <sup>3</sup> °C	2 <sup>2</sup> °C	2 <sup>1</sup> °C	2 <sup>0</sup> °C	2 <sup>-1</sup> °C	2 <sup>-2</sup> °C	0	0
0x03	MSB	0	0	0	SIGN	2 <sup>7</sup> °C	2 <sup>6</sup> °C	2 <sup>5</sup> °C	2 <sup>4</sup> °C
	LSB	2 <sup>3</sup> °C	2 <sup>2</sup> °C	2 <sup>1</sup> °C	2 <sup>0</sup> °C	2 <sup>-1</sup> °C	2 <sup>-2</sup> °C	0	0
0x04	MSB	0	0	0	SIGN	2 <sup>7</sup> °C	2 <sup>6</sup> °C	2 <sup>5</sup> °C	2 <sup>4</sup> °C
	LSB	2 <sup>3</sup> °C	2 <sup>2</sup> °C	2 <sup>1</sup> °C	2 <sup>0</sup> °C	2 <sup>-1</sup> °C	2 <sup>-2</sup> °C	0	0
0x05	MSB	$T_A \ge T_{CRIT}$	T <sub>A</sub> > T <sub>UPPER</sub>	$T_A < T_{LOWER}$	SIGN	2 <sup>7</sup> °C	2 <sup>6</sup> °C	2 <sup>5</sup> °C	2 <sup>4</sup> °C
	LSB	2 <sup>3</sup> °C	2 <sup>2</sup> °C	2 <sup>1</sup> °C	2 <sup>0</sup> °C	2 <sup>-1</sup> °C	2 <sup>-2</sup> °C	2 <sup>-3</sup> °C	2 <sup>-4</sup> °C
0x06	MSB	0	0	0	0	0	0	0	0
	LSB	0	1	0	1	0	1	0	0
0x07	MSB	0	0	0	0	0	1	1	0
	LSB	0	0	0	0	0	0	0	1
0x08	MSB	0	0	0	0	0	1	1	0
	LSB	0	0	0	0	0	0	0	1
0x09	MSB	0	0	0	0	0	0	0	0
	LSB	0	0	0	0	0	0	Resol	ution

#### 5.1.1 CAPABILITY REGISTER

This is a read-only register used to identify the temperature sensor capability. For example, the MCP9844 device is capable of providing temperature at 0.25°C resolution, measuring temperature below and above 0°C, providing ±1°C and ±2°C accuracy over the active and monitor temperature ranges (respectively) and providing user programmable temperature event boundary trip limits. Register 5-2 describes the Capability register. These functions are described in further detail in the following sections.

#### REGISTER 5-2: CAPABILITY REGISTER (READ-ONLY) → ADDRESS '0000 0000'b

U-0	U-0	U-0	U-0	U-0	U-0	U-0	U-0
_	_	_	ı	_			_
bit 15							bit 8

R-1	R-1	R-1	R-0	R-1	R-1	R-1	R-1
SHDN Status	t <sub>OUT</sub> Range	_	Reso	lution	Meas Range	Accuracy	Temp Alarm
bit 7							bit 0

#### Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'

-n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

#### bit 15-8 **Unimplemented:** Read as '0'

#### bit 7 Event output status during Shutdown (SHDN Status):

- 0 = Event output remains in previous state. If the output asserts before shutdown command, it remains asserted during shutdown.
- 1 = Event output de-asserts during shutdown. After shutdown, it takes t<sub>CONV</sub> to re-assert the event output (power-up default)

#### bit 6 I<sup>2</sup>C Bus time-out (t<sub>OUT</sub> Range):

- 0 = Bus time-out range is 10 ms to 60 ms
- 1 = Bus time-out range is 25 ms to 35 ms (power-up default)

#### bit 5 **Unimplemented:** Read as '1'

#### bit 4-3 **Resolution:**

 $00 = 0.5^{\circ}C$ 

01 = 0.25°C (power-up default)

10 = 0.125°C

11 = 0.0625°C

These bits reflect the selected resolution (see Section 5.2.4 "Temperature Resolution")

#### bit 2 Temperature Measurement Range (Meas. Range):

0 = T<sub>A</sub> = 0 (decimal) for temperature below 0°C

1 = The part can measure temperature below 0°C (power-up default)

#### REGISTER 5-2: CAPABILITY REGISTER (READ-ONLY) → ADDRESS '0000 0000'b (CONTINUED)

#### bit 1 Accuracy:

- 0 = Accuracy  $\rightarrow$  ±2°C from +75°C to +95°C (Active Range) and ±3°C from +40°C to +125°C (Monitor Range)
- 1 = Accuracy → ±1°C from +75°C to +95°C (Active Range) and ±2°C from +40°C to +125°C (Monitor Range)

#### bit 0 **Temperature Alarm:**

- 0 = No defined function (This bit will never be cleared or set to '0')
- 1 = The part has temperature boundary trip limits (T<sub>UPPER</sub>/T<sub>LOWER</sub>/T<sub>CRIT</sub> registers) and a temperature event output (JC 42.4 required feature)

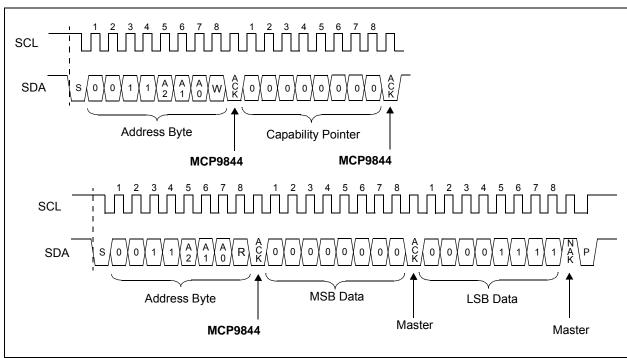


FIGURE 5-2: Timing Diagram for Reading the Capability Register (See Section 4.0 "Serial Communication").

### 5.1.2 SENSOR CONFIGURATION REGISTER (CONFIG)

The MCP9844 device has a 16-bit Configuration register (CONFIG) that allows the user to set various functions for a robust temperature monitoring system. Bits 10 through 0 are used to select the event output boundary hysteresis, device Shutdown or Low-Power mode, temperature boundary and critical temperature lock, and temperature event output enable/disable. In addition, the user can select the event output condition (output set for  $T_{\rm UPPER}$  and  $T_{\rm LOWER}$  temperature boundary or  $T_{\rm CRIT}$  only), read event output status and set event output polarity and mode (Comparator Output or Interrupt Output mode).

The temperature hysteresis bits 10 and 9 can be used to prevent output chatter when the ambient temperature gradually changes beyond the user specified temperature boundary (see Section 5.2.2 "Temperature Hysteresis (T<sub>HYST</sub>)"). The Continuous

Conversion or Shutdown mode is selected using bit 8. In Shutdown mode, the band gap temperature sensor circuit stops converting temperature and the Ambient Temperature register ( $T_A$ ) holds the previous successfully converted temperature data (see Section 5.2.1 "Shutdown Mode"). Bits 7 and 6 are used to lock the user-specified boundaries  $T_{UPPER}$ ,  $T_{LOWER}$  and  $T_{CRIT}$  to prevent an accidental rewrite. Bits 5 through 0 are used to configure the temperature Event output pin. All functions are described in Register 5-3 (see Section 5.2.3 "Event Output Configuration").

#### REGISTER 5-3: CONFIGURATION REGISTER (CONFIG) → ADDRESS `0000 0001'b

U-0	U-0	U-0	U-0	U-0	R/W-0	R/W-0	R/W-0
_	_	_	_	_	T <sub>H</sub>	′ST	SHDN
bit 15							bit 8

R/W-0	R/W-0	R/W-0	R-0	R/W-0	R/W-0	R/W-0	R/W-0
Crit. Lock	Win. Lock	Int. Clear	Event Stat.	Event Cnt.	Event Sel.	Event Pol.	Event Mod.
bit 7							bit 0

#### Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'

-n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

#### bit 15-11 **Unimplemented:** Read as '0'

#### bit 10-9 T<sub>UPPER</sub> and T<sub>LOWER</sub> Limit Hysteresis (T<sub>HYST</sub>):

 $00 = 0^{\circ}C$  (power-up default)

 $01 = 1.5^{\circ}C$ 

 $10 = 3.0^{\circ}C$ 

11 = 6.0°C

(Refer to Section 5.2.3 "Event Output Configuration")

This bit can not be altered when either of the lock bits are set (bit 6 and bit 7).

This bit can be programmed in Shutdown mode.

#### bit 8 Shutdown Mode (SHDN):

0 = Continuous Conversion (power-up default)

1 = Shutdown (Low-Power mode)

In shutdown, all power-consuming activities are disabled, though all registers can be written to or read. Event output will de-assert.

This bit cannot be set '1' when either of the lock bits is set (bit 6 and bit 7). However, it can be cleared '0' for Continuous Conversion while locked (Refer to Section 5.2.1 "Shutdown Mode").

#### REGISTER 5-3: CONFIGURATION REGISTER (CONFIG) → ADDRESS \0000 0001'b

#### bit 7 T<sub>CRIT</sub> Lock Bit (Crit. Lock):

- 0 = Unlocked. T<sub>CRIT</sub> register can be written. (power-up default)
- 1 = Locked. T<sub>CRIT</sub> register can not be written

When enabled, this bit remains set '1' or locked until cleared by internal reset (Section 5.3 "Summary of Power-on Default"). This bit does not require a double-write.

This bit can be programmed in Shutdown mode.

#### bit 6 T<sub>UPPER</sub> and T<sub>LOWER</sub> Window Lock Bit (Win. Lock):

- 0 = Unlocked. T<sub>UPPER</sub> and T<sub>LOWER</sub> registers can be written. (power-up default)
- 1 = Locked.  $T_{UPPER}$  and  $T_{LOWER}$  registers can not be written

When enabled, this bit remains set '1' or locked until cleared by power-on Respell (Section 5.3 "Summary of Power-on Default"). This bit does not require a double-write.

This bit can be programmed in Shutdown mode.

#### bit 5 Interrupt Clear (Int. Clear) Bit:

- 0 = No effect (power-up default)
- 1 = Clear interrupt output. When read this bit returns '0'

This bit clears the Interrupt flag which de-asserts event output. In Shutdown mode, the event output is always de-asserted. Therefore, setting this bit in Shutdown mode clears the interrupt after the device returns to normal operation.

#### bit 4 Event Output Status (Event Stat.) Bit:

- 0 = Event output is not asserted by the device (power-up default)
- 1 = Event output is asserted as a comparator/Interrupt or critical temperature output

In Shutdown mode this bit will clear because event output is always de-asserted in shutdown mode.

#### bit 3 Event Output Control (Event Cnt.) Bit:

- 0 = Event output Disabled (power-up default)
- 1 = Event output Enabled

This bit can not be altered when either of the lock bits is set (bit 6 and bit 7).

This bit can be programmed in Shutdown mode, but event output will remain de-asserted.

#### bit 2 Event Output Select (Event Sel.) Bit:

- $0 = \text{Event output for } T_{\text{UPPER}}, T_{\text{LOWER}} \text{ and } T_{\text{CRIT}} \text{ (power-up default)}$
- 1 =  $T_A \ge T_{CRIT}$  only. ( $T_{UPPER}$  and  $T_{LOWER}$  temperature boundaries are disabled.)

When the Alarm Window Lock bit is set, this bit cannot be altered until unlocked (bit 6).

This bit can be programmed in Shutdown mode, but event output will remain de-asserted.

#### bit 1 Event Output Polarity (Event Pol.) Bit:

- 0 = Active low (power-up default. Pull-up resistor required)
- 1 = Active-high

This bit cannot be altered when either of the lock bits is set (bit 6 and bit 7).

This bit can be programmed in Shutdown mode, but event output will remain de-asserted, see Section 5.2.3 "Event Output Configuration"

#### bit 0 Event Output Mode (Event Mod.) Bit:

- 0 = Comparator output (power-up default)
- 1 = Interrupt output

This bit cannot be altered when either of the lock bits is set (bit 6 and bit 7).

This bit can be programmed in Shutdown mode, but event output will remain de-asserted.

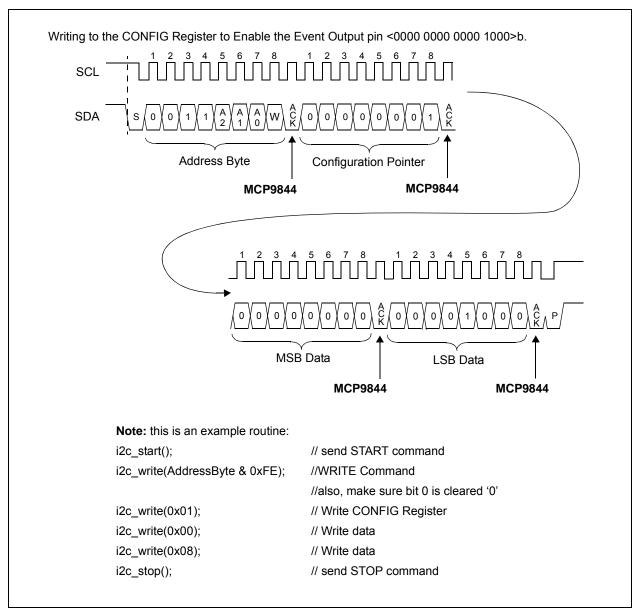


FIGURE 5-3: Timing Diagram for Writing to the Configuration Register (See Section 4.0 "Serial Communication".

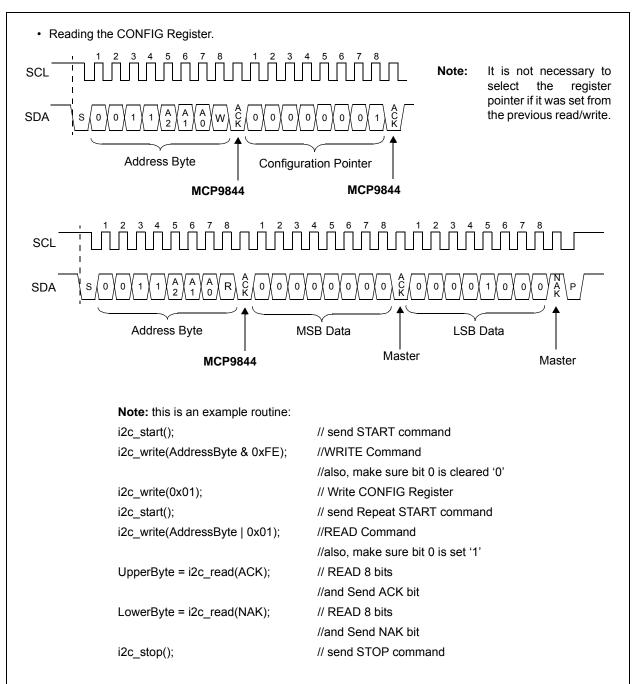


FIGURE 5-4: Timing Diagram for Reading from the Configuration Register (See Section 4.0 "Serial Communication").

# 5.1.3 UPPER/LOWER/CRITICAL TEMPERATURE LIMIT REGISTERS

 $(T_{UPPER}/T_{LOWER}/T_{CRIT})$ 

The MCP9844 device has a 16-bit read/write Event Output Temperature Upper-Boundary Trip register (T<sub>UPPER</sub>), a 16-bit Lower-Boundary Trip register (T<sub>LOWER</sub>) and a 16-bit Critical Boundary Trip register (T<sub>CRIT</sub>) that contains 11-bit data in two's complement format (0.25°C). This data represents the maximum and minimum temperature boundary or temperature window that can be used to monitor ambient temperature. If this feature is enabled (Section 5.1.2 "Sensor Configuration Register (CONFIG)") and the ambient temperature exceeds the specified boundary or window, the MCP9844 asserts an event output. (Refer to Section 5.2.3 "Event **Output** Configuration").

# REGISTER 5-4: UPPER/LOWER/CRITICAL TEMPERATURE LIMIT REGISTER ( $T_{UPPER}/T_{LOWER}/T_{CRIT}$ ) $\rightarrow$ ADDRESS `0000 0010'b/`0000 0011'b/`0000 0100'b (Note 1)

U-0	U-0	U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
_	_	_	Sign	2 <sup>7</sup> °C	2 <sup>6</sup> °C	2 <sup>5</sup> °C	2 <sup>4</sup> °C
bit 15							bit 8

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	U-0	U-0
2 <sup>3</sup> °C	2 <sup>2</sup> °C	2 <sup>1</sup> °C	2 <sup>0</sup> °C	2 <sup>-1</sup> °C	2 <sup>-2</sup> °C	_	_
bit 7							bit 0

#### Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'

-n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

bit 15-13 **Unimplemented:** Read as '0'

bit 12 Sign:


 $\begin{array}{ll} \textbf{0} = & T_A \geq 0^{\circ}C \\ \textbf{1} = & T_A < 0^{\circ}C \end{array}$ 

bit 11-2 T<sub>UPPER</sub>/T<sub>LOWER</sub>/T<sub>CRIT</sub>:

Temperature boundary trip data in two's complement format.

bit 1-0 **Unimplemented:** Read as '0'

Note 1: This table shows two 16-bit registers for T<sub>UPPER</sub>, T<sub>LOWER</sub> and T<sub>CRIT</sub> located at '0000 0010b', '0000 0011b' and '0000 0100b', respectively.

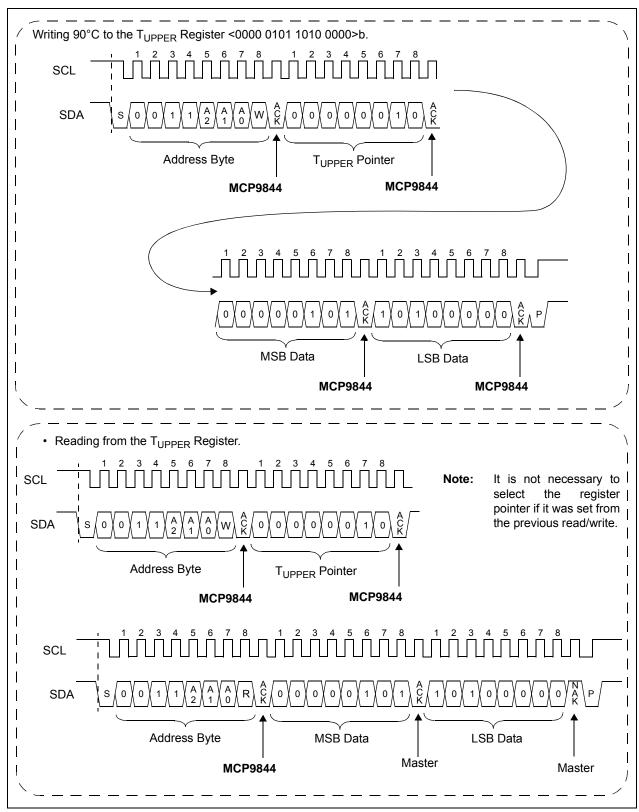

**FIGURE 5-5:** Timing Diagram for Writing and Reading from the T<sub>UPPER</sub> Register (See Section 4.0 "Serial Communication").

### 5.1.4 AMBIENT TEMPERATURE REGISTER $(T_A)$

The MCP9844 device uses a band gap temperature sensor circuit to output analog voltage proportional to absolute temperature. An internal  $\Delta\Sigma$  ADC is used to convert the analog voltage to a digital word. The converter resolution is set to 0.25°C + sign (11-bit data). The digital word is loaded to a 16-bit read-only Ambient Temperature register  $(T_A)$  that contains 11-bit temperature data in two's complement format.

The  $T_A$  register bits (bits 12 through 0) are double-buffered. Therefore, the user can access the register while, in the background, the MCP9844 performs an analog-to-digital conversion. The temperature data from the  $\Delta\Sigma$  ADC is loaded in parallel to the  $T_A$  register at  $t_{CONV}$  refresh rate.

In addition, the  $T_A$  register uses three bits (bits 15, 14 and 13) to reflect the Event pin state. This allows the user to identify the cause of the event output trigger (see Section 5.2.3 "Event Output Configuration"); bit 15 is set to '1' if  $T_A$  is greater than or equal to  $T_{CRIT}$ , bit 14 is set to '1' if  $T_A$  is greater than  $T_{UPPER}$  and bit 13 is set to '1' if  $T_A$  is less than  $T_{LOWER}$ .

The  $T_A$  register bit assignment and boundary conditions are described in Register 5-5.

#### REGISTER 5-5: AMBIENT TEMPERATURE REGISTER ( $T_A$ ) $\rightarrow$ ADDRESS '0000 0101'b (Note 1)

R-0	R-0	R-0	R-0	R-0	R-0	R-0	R-0
T <sub>A</sub> vs. T <sub>CRIT</sub>	T <sub>A</sub> vs. T <sub>UPPER</sub>	T <sub>A</sub> vs. T <sub>LOWER</sub>	SIGN	2 <sup>7</sup> °C	2 <sup>6</sup> °C	2 <sup>5</sup> °C	2 <sup>4</sup> °C
bit 15							bit 8

R-0	R-0	R-0	R-0	R-0	R-0	R-0	R-0
2 <sup>3</sup> °C	2 <sup>2</sup> °C	2 <sup>1</sup> °C	2 <sup>0</sup> °C	2 <sup>-1</sup> °C	2 <sup>-2</sup> °C	2 <sup>-3</sup> °C	2 <sup>-4</sup> °C
bit 7							bit 0

Legend:			
R = Readable bit	W = Writable bit	U = Unimplemented bit	t, read as '0'
-n = Value at POR	'1' = Bit is set	'0' = Bit is cleared	x = Bit is unknown

bit 15 
$$T_{A}$$
 vs.  $T_{CRIT}^{(1)}$  Bit:  $0 = T_{A} < T_{CRIT}$   $1 = T_{A} \ge T_{CRIT}$  bit 14  $T_{A}$  vs.  $T_{UPPER}^{(1)}$  Bit:  $0 = T_{A} \le T_{UPPER}$   $1 = T_{A} > T_{UPPER}$  bit 13  $T_{A}$  vs.  $T_{LOWER}^{(1)}$  Bit:  $0 = T_{A} \ge T_{LOWER}$   $1 = T_{A} < T_{LOWER}$  bit 12 SIGN Bit:  $0 = T_{A} \ge 0^{\circ}$ C  $1 = T_{A} < 0^{\circ}$ C

bit 11-0 Ambient Temperature (T<sub>A</sub>) Bits: (Note 2)

12-bit Ambient Temperature data in two's complement format.

Note 1: Bits 15, 14 and 13 are not affected by the status of the event output configuration (bits 5 to 0 of CONFIG) (Register 5-3).

2: Bits 2, 1, and 0 may remain clear '0' depending on the status of the resolution register. The power-up default is 0.25°C/bit, bits 1 and 0 remain clear '0'.

#### 5.1.4.1 T<sub>A</sub> bits to Temperature Conversion

To convert the  $T_A$  bits to decimal temperature, the upper three boundary bits 15, 14 and 13) must be masked out. Then determine the sign bit (bit 12) to check positive or negative temperature, shift the bits accordingly and combine the upper and lower bytes of the 16-bit register. The upper byte contains data for temperatures greater than 32°C while the lower byte contains data for temperature less than 32°C, including fractional data. When combining the upper and lower bytes, the upper byte must be right-shifted by 4 bits (or multiply by  $2^4$ ), and the lower byte must be left-shifted by 4 bits (or multiply by  $2^{14}$ ). Adding the results of the shifted values provides the temperature data in decimal format, see Equation 5-1.


The temperature bits are in two's compliment format; therefore, positive temperature data and negative temperature data are computed differently. Equation 5-1 shows the temperature computation. The example instruction code outlined in Figure 5-6 shows the communication flow. Additionally, refer to Figure 5-7 for the timing diagram.

# EQUATION 5-1: BYTES TO TEMPERATURE CONVERSION

```
Temperature \geq 0°C
T_A = (UpperByte \times 2^4 + LowerByte \times 2^{-4})
Temperature < 0°C
T_A = 256 - (UpperByte \times 2^4 + LowerByte \times 2^{-4})
Where:
T_A = \text{Ambient Temperature (°C)}
UpperByte = T_A \text{ bit 15 to bit 8}
LowerByte = T_A \text{ bit 7 to bit 0}
```

```
This example routine assumes the variables and I<sup>2</sup>C communication subroutines are predefined:
                                                 // send START command
i2c start():
i2c_write(AddressByte & 0xFE);
                                                 //WRITE Command
                                                 //also, make sure bit 0 is cleared '0'
i2c write(0x05);
                                                 // Write TA Register Address
i2c_start();
                                                 //Repeat START
i2c_write(AddressByte | 0x01);
                                                 // READ Command
                                                 //also, make sure bit 0 is Set '1'
UpperByte = i2c_read(ACK);
                                                 // READ 8 bits
                                                 //and Send ACK bit
LowerByte = i2c read(NAK);
                                                 // READ 8 bits
                                                 //and Send NAK bit
                                                 // send STOP command
i2c_stop();
//Convert the temperature data
//First Check flag bits
if ((UpperByte & 0x80) == 0x80){
                                                 //T_A \ge T_{CRIT}
if ((UpperByte & 0x40) == 0x40){
                                                 //T_A > T_{UPPFR}
if ((UpperByte & 0x20) == 0x20){
                                                 //T_A < T_{LOWER}
UpperByte = UpperByte & 0x1F;
                                                 //Clear flag bits
if ((UpperByte & 0x10) == 0x10){
                                                 /\!/T_A < 0^{\circ}C
     UpperByte = UpperByte & 0x0F;
                                                 //Clear SIGN
     Temperature = 256 - (UpperByte x 16 + LowerByte / 16);
}else
                                                 //T_A \ge 0^{\circ}C
     Temperature = (UpperByte x 16 + LowerByte / 16);
                                                 //Temperature = Ambient Temperature (°C)
```

FIGURE 5-6: Example Instruction Code.

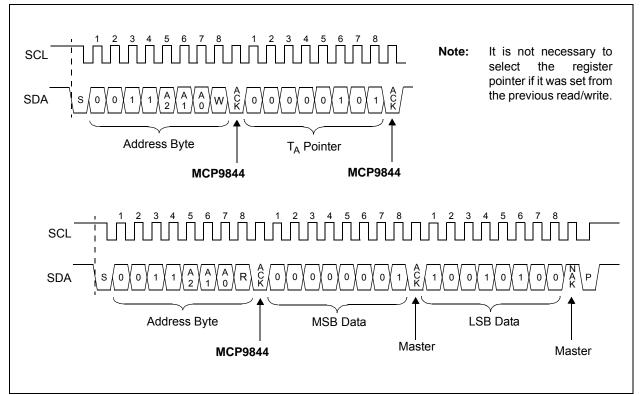

**FIGURE 5-7:** Timing Diagram for Reading  $+25.25^{\circ}$ C Temperature from the  $T_A$  Register (See Section 4.0 "Serial Communication").

#### 5.1.5 MANUFACTURER ID REGISTER

This register is used to identify the manufacturer of the device in order to perform manufacturer specific operations. The Manufacturer ID for the MCP9844 is 0x0054 (hexadecimal).

REGISTER 5-6: MANUFACTURER ID REGISTER (READ-ONLY) → ADDRESS 10000 0110/b

R-0	R-0	R-0	R-0	R-0	R-0	R-0	R-0		
Manufacturer ID									
bit 15							bit 8		

R-0	R-1	R-0	R-1	R-0	R-1	R-0	R-0						
Manufacturer ID													
bit 7													

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'

-n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

#### bit 15-0 **Device Manufacturer Identification Number**

It is not necessary to Note: select the register pointer if it was set from the previous read/write. SDA Address Byte Manuf. ID Pointer MCP9844 MCP9844 SCL **SDA** MSB Data LSB Data Address Byte Master MCP9844 Master

FIGURE 5-8: Timing Diagram for Reading the Manufacturer ID Register (See Section 4.0 "Serial Communication").

### 5.1.6 DEVICE ID AND REVISION REGISTER

The Device ID and Revision register located at address pointer 0x08 is used to identify Microchip devices. The upper byte of these registers is used to specify the device identification and the lower byte is used to specify device silicon revision. The device ID for the MCP9844 is 0x06 (hex) and the silicon revision is 0x00.

The revision (Lower Byte) begins with 0x00 (hex) for the first release, with the number being incremented as revised versions are released.

### REGISTER 5-7: TSE2004AV DEVICE ID AND DEVICE REVISION (READ-ONLY) → ADDRESS \ \cdot \cdot

R-0	R-0	R-0	R-0	R-0	R-1	R-1	R-0	
Device ID								
bit 15							bit 8	

R-0	R-0	R-0	R-0	R-0	R-0	R-0	R-1
Device Revision							
bit 7 bit 0							

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'

-n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

bit 15-8 **Device ID:** Bit 15 to bit 8 are used for device ID

bit 7-0 **Device Revision:** Bit 7 to bit 0 are used for device revision

#### 5.1.7 RESOLUTION REGISTER

This register allows the user to change the sensor resolution (see **Section 5.2.4** "**Temperature Resolution**"). The POR default resolution is 0.25°C. The selected resolution is also reflected in the Capability register (see Register 5-2).

#### Note:

In order to prevent accidentally writing the resolution register to a higher resolution and exceeding the maximum temperature conversion time of  $t_{CONV}$  = 125 ms, a Shutdown command (using the CONFIG register) is required to change the resolution register. The device must be in Shutdown mode to change the resolution.

#### REGISTER 5-8: RESOLUTION REGISTER → '0000 1001'b

R/W-0	U-0						
			_	_			
bit 15							bit 8

U-0	U-0	U-0	U-0	U-0	U-0	R/W-0	R/W-1
Resolution							
bit 7 bit							

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'

-n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-2 **Unimplemented:** Read as '0'

bit 1-0 Resolution:

00 = LSb = 0.5°C ( $t_{CONV} = 30$  ms typical)

01 = LSb = 0.25°C (power up default,  $t_{CONV}$  = 65 ms typical)

10 = LSb =  $0.125^{\circ}$ C (t<sub>CONV</sub> = 130 ms typical)

11 = LSb = 0.0625°C ( $t_{CONV} = 260$  ms typical)

#### 5.2 SENSOR FEATURE DESCRIPTION

#### 5.2.1 SHUTDOWN MODE

Shutdown mode disables all power-consuming activities (including temperature sampling operations) while leaving the serial interface active. This mode is selected by setting bit 8 of CONFIG to '1'. In this mode, the device consumes I<sub>SHDN</sub>. It remains in this mode until bit 8 is cleared '0' to enable Continuous Conversion mode, or until power is recycled.

The Shutdown bit (bit 8) cannot be set to '1' while bits 6 and 7 of CONFIG (Lock bits) are set to '1'. However, it can be cleared '0' or returned to Continuous Conversion while locked.

In Shutdown mode, all registers can be read or written. However, the serial bus activity increases the shutdown current

If the device is shutdown while the Event pin is asserted, then the event output will be de-asserted during shutdown. It will remain de-asserted until the device is enabled for normal operation. Once the device is enabled, it takes  $t_{CONV}$  before the device reasserts the event output.

## 5.2.2 TEMPERATURE HYSTERESIS (T<sub>HYST</sub>)

A hysteresis of 0°C, 1.5°C, 3°C or 6°C can be selected for the  $T_{UPPER}$ ,  $T_{LOWER}$  and  $T_{CRIT}$  temperate boundaries using bits 10 and 9 of CONFIG. The hysteresis applies for decreasing temperature only (hot to cold), or as temperature drifts below the specified limit

The hysteresis bits can not be changed if either of the lock bits, bits 6 and 7 of CONFIG, are set to '1'.

The  $T_{UPPER}$ ,  $T_{LOWER}$  and  $T_{CRIT}$  boundary conditions are described graphically in Figure 5-9.

#### 5.2.3 EVENT OUTPUT CONFIGURATION

The event output can be enabled using bit 3 of CONFIG (Event Output Control bit) and can be configured as either a comparator output or as Interrupt Output mode using bit 0 of CONFIG (Event mode). The polarity can also be specified as an active-high or active-low using bit 1 of CONFIG (event polarity). The event output requires a pull-up resistor to function.

These configurations are designed to serve processors with Low-to-High or High-to-Low edge triggered inputs. With active-high configuration, when the event output de-asserts, power will be dissipated across the pull-up resistor.

When the ambient temperature increases above the critical temperature limit, the event output is forced to a comparator output (regardless of bit 0 of CONFIG). When the temperature drifts below the critical temperature limit minus hysteresis, the event output automatically returns to the state specified by bit 0 of CONFIG.

The status of the event output can be read using bit 4 of CONFIG (Event status). This bit can not be set to '1' in Shutdown mode.

Bit 7 and 6 of the CONFIG register can be used to lock the  $T_{UPPER}$ ,  $T_{LOWER}$  and  $T_{CRIT}$  registers. The bits prevent false triggers at the event output due to an accidental rewrite to these registers.

The event output can also be used as a critical temperature output using bit 2 of CONFIG (critical output only). When this feature is selected, the event output becomes a comparator output. In this mode, the interrupt output configuration (bit 0 of CONFIG) is ignored.

#### 5.2.3.1 Comparator Mode

Comparator mode is selected using bit 0 of CONFIG. In this mode, the event output is asserted as active-high or active-low using bit 1 of CONFIG. Figure 5-9 shows the conditions that toggle the event output.

If the device enters Shutdown mode with asserted event output, the output will de-assert. It will remain de-asserted until the device enters Continuous Conversion mode and after the first temperature conversion is completed,  $t_{CONV}$ . After the initial temperature conversion,  $T_A$  must satisfy the  $T_{UPPER}$  or  $T_{LOWER}$  boundary conditions in order for event output to be asserted.

Comparator mode is useful for thermostat type applications, such as turning on a cooling fan or triggering a system shutdown when the temperature exceeds a safe operating range.

#### 5.2.3.2 Interrupt Mode

In Interrupt mode, the event output is asserted as active-high or active-low (depending on the polarity configuration) when  $T_A$  drifts above or below  $T_{UPPER}$  and  $T_{LOWER}$  limits. The output is de-asserted by setting bit 5 (Interrupt Clear) of CONFIG. If the device enters Shutdown mode with asserted event output, the output will de-assert. It will remain de-asserted until the device enters Continuous Conversion mode and after the first temperature conversion is completed,  $t_{CONV}$ . If the interrupt clear bit (Bit 5) is never set, then the event output will re-assert after the first temperature conversion.

In addition, if  $T_A >= T_{CRIT}$ , the event output is forced as Comparator mode and asserts until  $T_A < T_{CRIT} - T_{HYST}$ . While the event output is asserted, the user must send a Clear Interrupt command (bit 5 of CONFIG) for the event output to de-assert when the temperature drops below the critical limit,  $T_A < T_{CRIT} - T_{HYST}$ . Otherwise, the event output remains asserted (see Figure 5-9 for a graphical description). Switching from Interrupt mode to Comparator mode also de-asserts event output.

This mode is designed for interrupt driven microcontroller based systems. The microcontroller receiving the interrupt will have to acknowledge the interrupt by setting bit 5 of the CONFIG register from the MCP9844.

#### 5.2.4 TEMPERATURE RESOLUTION

The MCP9844 device is capable of providing temperature data with 0.5°C to 0.0625°C resolution. The Resolution can selected using the Resolution register (Register 5-8) which is located in address '00001001'b. This address location is not specified in JEDEC Standard JC42.4. However, it provides additional flexibility while being functionally compatible with JC42.4 and provides a 0.25°C resolution at 125 ms (max.). In order to prevent accidentally changing the resolution and exceeding the 125 ms conversion time, the device must be in Shutdown mode to change this register. The selected resolution can be read by the user using bit 4 and bit 3 of the Capability register (Register 5-2). A 0.25°C resolution is set as POR default by the factory.

TABLE 5-2: TEMPERATURE CONVERSION TIME

Resolution	t <sub>CONV</sub> (ms)	Samples/sec (typical)
0.5°C	30	33
0.25°C (Power-up default)	65	15
0.125°C	130	8
0.0625°C	260	4

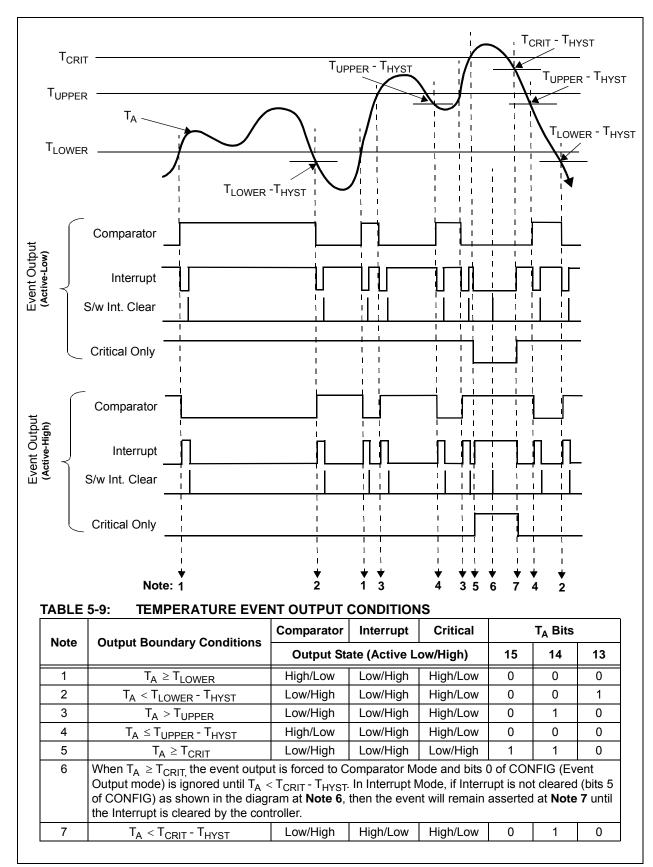


FIGURE 5-9: Event Output Condition.

### 5.3 Summary of Power-on Default

The MCP9844 has an internal Power-on Reset (POR) circuit. If the power supply voltage  $V_{DD}$  glitches down to the  $V_{POR\_TS}$  and  $V_{POR\_EE}$  thresholds, the device resets the registers to the power-on default settings.

Table 5-3 shows the power-on default summary for the temperature sensor.

TABLE 5-3: MCP9844 TEMPERATURE SENSOR POWER-ON RESET DEFAULTS

	Registers	Default Beginter	Power-up Default Register Description		
Address (Hexadecimal)	Register Name	Default Register Data (Hexadecimal)			
0x00	Capability	0x00EF	Event output de-asserts in shutdown I <sup>2</sup> C time out 25 ms to 35 ms.  Accepts V <sub>HV</sub> at A0 Pin 0.25°C Measurement Resolution Measures temperature below 0°C  ±1°C accuracy over active range Temperature event output		
0x01	CONFIG	0x0000	Comparator mode Active-Low output Event and critical output Output disabled Event not asserted Interrupt cleared Event limits unlocked Critical limit unlocked Continuous conversion 0°C Hysteresis		
0x02	T <sub>UPPER</sub>	0x0000	0°C		
0x03	T <sub>LOWER</sub>	0x0000	0°C		
0x04	T <sub>CRIT</sub>	0x0000	0°C		
0x05	T <sub>A</sub>	0x0000	0°C		
0x06	Manufacturer ID	0x0054	_		
0x07	Reserved	0x0601	_		
80x0	Microchip Device ID/ Device Revision	0x0601	_		
0x09	Resolution	0x0001	Most Significant bit is set by default 0.25°C Measurement Resolution		

# MCP9844

**NOTES:** 

#### 6.0 APPLICATIONS INFORMATION

#### 6.1 Layout Considerations

The MCP9844 device does not require any additional components besides the master controller in order to measure temperature. However, it is recommended that a decoupling capacitor of 0.1  $\mu F$  to 1  $\mu F$  be used between the  $V_{DD}$  and GND pins. A high-frequency ceramic capacitor is recommended. It is necessary for the capacitor to be located as close as possible to the power and ground pins of the device in order to provide effective noise protection.

In addition, good PCB layout is key for better thermal conduction from the PCB temperature to the sensor die. For good temperature sensitivity, add a ground layer under the device pins as shown in Figure 6-1.

#### 6.2 Thermal Considerations

A potential for self-heating errors can exist if the MCP9844 SDA, SCLK and event lines are heavily loaded with pull-ups (high current). Typically, the self-heating error is negligible because of the relatively small current consumption of the MCP9844. A temperature accuracy error of approximately 0.5°C could result from self-heating if the communication pins sink/source the maximum current specified.

For example, if the event output is loaded to maximum  $I_{\text{OL}}$ , Equation 6-1 can be used to determine the effect of self-heating.

#### EQUATION 6-1: EFFECT OF SELF-HEATING

$$\begin{split} T_{A} &= \theta_{JA}(V_{DD} \bullet I_{DD} + V_{OL\_Event} \bullet I_{OL\_Event} + V_{OL\_SDA} \bullet I_{OL\_SDA}) \\ \text{Where:} \\ &\qquad \qquad T_{\Delta} &= T_{J\_} T_{A} \\ &\qquad \qquad T_{J} &= \text{Junction Temperature} \\ &\qquad \qquad T_{A} &= \text{Ambient Temperature} \\ &\qquad \qquad \theta_{JA} &= \text{Package Thermal Resistance} \\ &\qquad \qquad V_{OL\_Event, SDA} &= \text{Event and SDA Output V}_{OL} \\ &\qquad \qquad (0.4 \ V_{max}) \\ &\qquad \qquad I_{OL\_Event, SDA} &= \text{Event and SDA Output I}_{OL} \\ &\qquad \qquad (3 \ \text{mA}_{max} \ \text{and } 20 \ \text{mA}_{max}, \\ &\qquad \qquad \text{respectively}) \end{split}$$

At room temperature (T<sub>A</sub> = +25°C) with maximum I<sub>DD</sub> = 500  $\mu$ A and V<sub>DD</sub> = 3.6V, the self-heating due to power dissipation T<sub> $\Delta$ </sub> is 0.58°C for the TDFN-8 package.

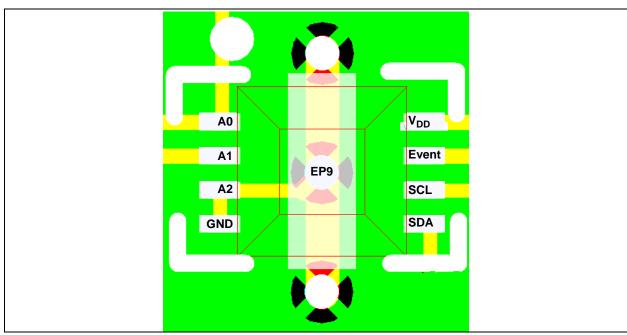


FIGURE 6-1: TDFN Package Layout.

# MCP9844

**NOTES:** 

#### 7.0 **PACKAGING INFORMATION**


#### 7.1 **Package Marking Information**

#### 8-Lead TDFN (2x3) (MCP9844)



Part Number	Code
MCP9844T-BE/MNY	ABS

Example:



Legend: XX...X Customer-specific information

Υ Year code (last digit of calendar year) ΥY Year code (last 2 digits of calendar year) WW Week code (week of January 1 is week '01')

NNN Alphanumeric traceability code


(e3) Pb-free JEDEC designator for Matte Tin (Sn)

This package is Pb-free. The Pb-free JEDEC designator (@3) can be found on the outer packaging for this package.

In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.

### 8-Lead Plastic Dual Flat, No Lead Package (MN) – 2x3x0.75mm Body [TDFN]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

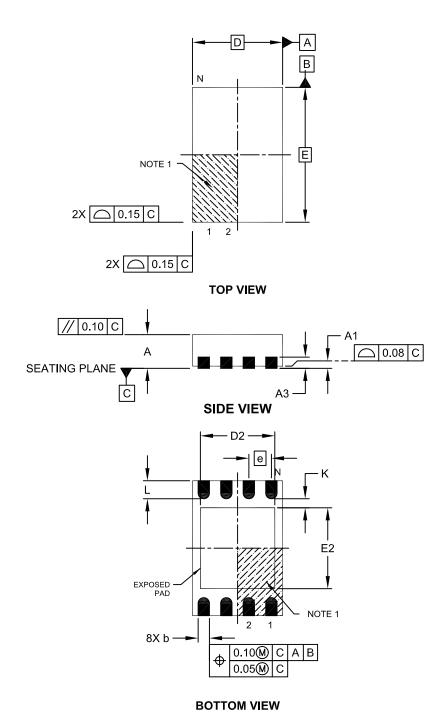

Microchip Technology Drawing No. C04-129C Sheet 1 of 2

### 8-Lead Plastic Dual Flat, No Lead Package (MN) – 2x3x0.75mm Body [TDFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging



	Units			MILLIMETERS			
Dimension	MIN	NOM	MAX				
Number of Pins	8						
Pitch	е		0.50 BSC				
Overall Height	Α	0.70	0.75	0.80			
Standoff	A1	0.00	0.02	0.05			
Contact Thickness	A3	0.20 REF					
Overall Length	D	2.00 BSC					
Overall Width	Е	3.00 BSC					
Exposed Pad Length	D2	1.20	ı	1.60			
Exposed Pad Width	E2	1.20	ı	1.60			
Contact Width	b	0.20	0.25	0.30			
Contact Length	L	0.25	0.30	0.45			
Contact-to-Exposed Pad	K	0.20	=	-			

#### Notes:

- 1. Pin 1 visual index feature may vary, but must be located within the hatched area.
- 2. Package may have one or more exposed tie bars at ends.
- 3. Package is saw singulated
- 4. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing No. C04-129C Sheet 2 of 2  $\,$ 

#### 8-Lead Plastic Dual Flat, No Lead Package (MN) – 2x3x0.75 mm Body [TDFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

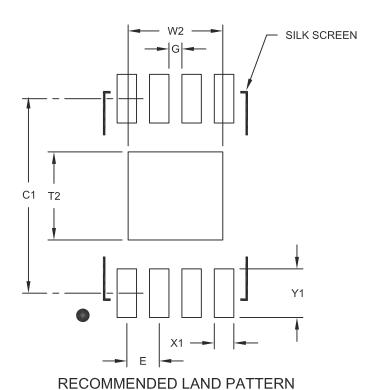

MILLIMETERS Units **Dimension Limits** MIN NOM MAX 0.50 BSC Contact Pitch Ε Optional Center Pad Width W2 1.46 Optional Center Pad Length T2 1.36 3.00 Contact Pad Spacing C1 Contact Pad Width (X8) X1 0.30 Contact Pad Length (X8) Υ1 0.75 Distance Between Pads G 0.20

#### Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2129A

### APPENDIX A: REVISION HISTORY

### Revision A (March 2012)

• Original Release of this Document.

# MCP9844

**NOTES:** 

#### PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

PART NO. Package **Device** Temperature

Range

Device: MCP9844T: Single Op Amp (Tape and Reel)

Temperature Range: E = -40°C to +125°C (Extended)

Package: MNY\* = Plastic Dual Flat, No Lead, (2x3 TDFN),

8-lead (TDFN)

 $^{\star}$  Y = Nickel palladium gold manufacturing designator. Only available on the TDFN package.

Examples:

a) MCP9844T-BE/MNY:

Tape and Reel, Extended Temp., 8LD 2x3 TDFN pkg.

# MCP9844

**NOTES:** 

#### Note the following details of the code protection feature on Microchip devices:

- · Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our
  knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data
  Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

# QUALITY MANAGEMENT SYSTEM CERTIFIED BY DNV = ISO/TS 16949=

#### **Trademarks**

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, PIC<sup>32</sup> logo, rfPIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Hampshire, HI-TECH C, Linear Active Thermistor, MTP, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

Analog-for-the-Digital Age, Application Maestro, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, HI-TIDE, In-Circuit Serial Programming, ICSP, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mTouch, Omniscient Code Generation, PICC, PICC-18, PICDEM, PICDEM.net, PICkit, PICtail, REAL ICE, rfLAB, Select Mode, SQI, Serial Quad I/O, Total Endurance, TSHARC, UniWinDriver, WiperLock, ZENA and Z-Scale are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

GestIC and ULPP are registered trademarks of Microchip Technology Germany II GmbH & Co. & KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2013, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

Printed on recycled paper.

ISBN: 9781620770740

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.



### **Worldwide Sales and Service**

#### **AMERICAS**

Corporate Office 2355 West Chandler Blvd.

Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:

http://www.microchip.com/

support

Web Address: www.microchip.com

Atlanta

Duluth, GA Tel: 678-957-9614 Fax: 678-957-1455

**Boston** 

Westborough, MA Tel: 774-760-0087 Fax: 774-760-0088

Chicago Itasca, IL

Tel: 630-285-0071 Fax: 630-285-0075

Cleveland

Independence, OH Tel: 216-447-0464 Fax: 216-447-0643

**Dallas** 

Addison, TX Tel: 972-818-7423 Fax: 972-818-2924

Detroit

Farmington Hills, MI Tel: 248-538-2250 Fax: 248-538-2260

Indianapolis Noblesville, IN

Tel: 317-773-8323 Fax: 317-773-5453

Los Angeles

Mission Viejo, CA Tel: 949-462-9523 Fax: 949-462-9608

Santa Clara

Santa Clara, CA Tel: 408-961-6444 Fax: 408-961-6445

Toronto

Mississauga, Ontario,

Canada

Tel: 905-673-0699 Fax: 905-673-6509

#### ASIA/PACIFIC

**Asia Pacific Office** 

Suites 3707-14, 37th Floor Tower 6, The Gateway Harbour City, Kowloon Hong Kong

Tel: 852-2401-1200 Fax: 852-2401-3431

Australia - Sydney

Tel: 61-2-9868-6733 Fax: 61-2-9868-6755

China - Beijing

Tel: 86-10-8569-7000 Fax: 86-10-8528-2104

China - Chengdu

Tel: 86-28-8665-5511 Fax: 86-28-8665-7889

China - Chongqing

Tel: 86-23-8980-9588 Fax: 86-23-8980-9500

China - Hangzhou

Tel: 86-571-2819-3187 Fax: 86-571-2819-3189

China - Hong Kong SAR

Tel: 852-2943-5100 Fax: 852-2401-3431

China - Nanjing

Tel: 86-25-8473-2460 Fax: 86-25-8473-2470

China - Qingdao

Tel: 86-532-8502-7355 Fax: 86-532-8502-7205

China - Shanghai

Tel: 86-21-5407-5533 Fax: 86-21-5407-5066

China - Shenyang

Tel: 86-24-2334-2829 Fax: 86-24-2334-2393

China - Shenzhen

Tel: 86-755-8864-2200 Fax: 86-755-8203-1760

China - Wuhan

Tel: 86-27-5980-5300 Fax: 86-27-5980-5118

China - Xian

Tel: 86-29-8833-7252 Fax: 86-29-8833-7256

China - Xiamen

Tel: 86-592-2388138 Fax: 86-592-2388130

China - Zhuhai

Tel: 86-756-3210040 Fax: 86-756-3210049

#### ASIA/PACIFIC

India - Bangalore

Tel: 91-80-3090-4444 Fax: 91-80-3090-4123

India - New Delhi

Tel: 91-11-4160-8631 Fax: 91-11-4160-8632

India - Pune

Tel: 91-20-2566-1512 Fax: 91-20-2566-1513

Japan - Osaka

Tel: 81-6-6152-7160 Fax: 81-6-6152-9310

Japan - Tokyo

Tel: 81-3-6880- 3770 Fax: 81-3-6880-3771

Korea - Daegu

Tel: 82-53-744-4301 Fax: 82-53-744-4302

Korea - Seoul

Tel: 82-2-554-7200 Fax: 82-2-558-5932 or 82-2-558-5934

Malaysia - Kuala Lumpur

Tel: 60-3-6201-9857 Fax: 60-3-6201-9859

Malaysia - Penang

Tel: 60-4-227-8870 Fax: 60-4-227-4068

Philippines - Manila

Tel: 63-2-634-9065 Fax: 63-2-634-9069

Singapore

Tel: 65-6334-8870 Fax: 65-6334-8850

Taiwan - Hsin Chu

Tel: 886-3-5778-366 Fax: 886-3-5770-955

Taiwan - Kaohsiung

Tel: 886-7-213-7828 Fax: 886-7-330-9305

Taiwan - Taipei

Tel: 886-2-2508-8600 Fax: 886-2-2508-0102

Thailand - Bangkok

Tel: 66-2-694-1351 Fax: 66-2-694-1350

#### **EUROPE**

Austria - Wels

Tel: 43-7242-2244-39 Fax: 43-7242-2244-393

Denmark - Copenhagen

Tel: 45-4450-2828 Fax: 45-4485-2829

France - Paris

Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

**Germany - Munich** 

Tel: 49-89-627-144-0 Fax: 49-89-627-144-44

Italy - Milan

Tel: 39-0331-742611 Fax: 39-0331-466781

Netherlands - Drunen

Tel: 31-416-690399 Fax: 31-416-690340

Spain - Madrid

Tel: 34-91-708-08-90 Fax: 34-91-708-08-91

**UK - Wokingham** Tel: 44-118-921-5869 Fax: 44-118-921-5820

11/29/12



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

#### Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru