

Type AFK $-55\text{ }^{\circ}\text{C}$ to $105\text{ }^{\circ}\text{C}$

SMT Aluminum Electrolytic Capacitors - Lowest E.S.R., $105\text{ }^{\circ}\text{C}$

Low Impedance and Long-Life for Filtering, Bypassing and Power Supply Decoupling



Type AFK Capacitors are the best and by a wide margin. With 40% to 60% lower impedance, 30% to 50% smaller case size and more than twice the life compared to low-ESR type AFC, the Type AFK also excels at cold performance down to $-55\text{ }^{\circ}\text{C}$. In addition, this terrific low-impedance performance, approaching low-ESR tantalum capacitors, is at a significant cost savings compared to tantalum. The vertical cylindrical cases facilitate automatic mounting and reflow soldering into the same footprint of like-rated tantalum capacitors except without the need for voltage derating.

Highlights

- $+105\text{ }^{\circ}\text{C}$, Up to 5000 Hour Load Life
- Capacitance Range: $3.3\text{ }\mu\text{F}$ to $6800\text{ }\mu\text{F}$
- Voltage Range: 6.3 Vdc to 100 Vdc

Specifications

- Operating Temperature:** $-55\text{ }^{\circ}\text{C}$ to $+105\text{ }^{\circ}\text{C}$
Rated Voltage: 6.3, 10, 16, 25, 35, 50, 63, 80 & 100 Vdc
Capacitance: $3.3\text{ }\mu\text{F}$ to $6800\text{ }\mu\text{F}$
Capacitance Tolerance: $\pm 20\%$ @ 120 Hz and $+20\text{ }^{\circ}\text{C}$
Leakage Current: 0.01 CV or $3\text{ }\mu\text{A}$ @ $+20\text{ }^{\circ}\text{C}$, after two minutes (whichever is greater)

Ripple Current Multiplier:

| Frequency | 50/60 Hz | 120 Hz | 1 kHz | 10 kHz | 100 kHz |
|-----------|----------|--------|-------|--------|---------|
| | 0.70 | .075 | 0.90 | 0.95 | 1.00 |

Dissipation Factor:

| 6.3V | 10 V | 16 V | 25 V | 35 V | 50 V | 63 V | 80 V | 100 V |
|------|------|------|------|------|------|------|------|-------|
| 0.26 | 0.19 | 0.16 | 0.14 | 0.12 | 0.1 | 0.08 | 0.08 | 0.07 |

Add 0.02 per 1000 μF for values greater than 1000

- Life Test:** 2000 h @ $105\text{ }^{\circ}\text{C}$, 4.0 — 10.0 mm dia.
 5000 h @ $105\text{ }^{\circ}\text{C}$, 12.5 — 18.0 mm dia.
 Δ Capacitance $\pm 30\%$
 DF: $\leq 200\%$ of limit
 DCL: $\leq 100\%$ of limit

- Shelf Test:** 1000 h @ $105\text{ }^{\circ}\text{C}$
 Δ Capacitance $\pm 30\%$
 DF: $\leq 200\%$ of limit
 DCL: $\leq 100\%$ of limit

AFK Series Marking



Outline Drawing



Case Dimensions

| Case Code | D $\pm .05$ | L | A ± 0.2 | H (max) | I (ref) | W | P (ref) | K (mm) |
|-----------|-------------|----------------|-------------|---------|---------|----------------|---------|---------------------|
| B | 4.0 | 5.8 ± 0.3 | 4.3 | 5.5 | 1.8 | 0.65 ± 0.1 | 1.0 | $0.35 + 0.15/-0.20$ |
| C | 5.0 | 5.8 ± 0.3 | 5.3 | 6.5 | 2.2 | 0.65 ± 0.1 | 1.5 | $0.35 + 0.15/-0.20$ |
| D | 6.3 | 5.8 ± 0.3 | 6.6 | 7.8 | 2.6 | 0.65 ± 0.1 | 1.8 | $0.35 + 0.15/-0.20$ |
| X | 6.3 | 7.9 ± 0.3 | 6.6 | 7.8 | 2.6 | 0.65 ± 0.1 | 1.8 | $0.35 + 0.15/-0.20$ |
| E | 8.0 | 6.2 ± 0.3 | 8.3 | 9.5 | 3.4 | 0.65 ± 0.1 | 2.2 | $0.35 + 0.15/-0.20$ |
| F | 8.0 | 10.2 ± 0.3 | 8.3 | 10.0 | 3.4 | 0.90 ± 0.2 | 3.1 | 0.70 ± 0.20 |
| G | 10.0 | 10.2 ± 0.3 | 10.3 | 12.0 | 3.5 | 0.90 ± 0.2 | 4.6 | 0.70 ± 0.20 |
| H | 12.5 | 13.5 ± 0.5 | 13.5 | 15.0 | 4.7 | 0.90 ± 0.3 | 4.4 | 0.70 ± 0.30 |
| P | 16.0 | 16.5 ± 0.5 | 17.0 | 19.0 | 5.5 | 1.2 ± 0.3 | 6.7 | 0.70 ± 0.30 |
| R | 18.0 | 16.5 ± 0.5 | 19.0 | 21.0 | 6.7 | 1.2 ± 0.3 | 6.7 | 0.70 ± 0.30 |

Type AFK **-55 °C to 105 °C**

SMT Aluminum Electrolytic Capacitors - Lowest E.S.R., 105 °C

Ratings Table

| Cap (μ F) | Catalog Part Number | Max. DCL 2 min (μ A) | Max. Dissipation Factor @120 Hz/20 °C | Max. ESR @100 kHz/20 °C (Ω) | Impedance @ 100 kHz/20 °C (Ω) | Max. Ripple Current @ 100 kHz/105 °C (mA) | Case Code | Size D x L (mm) | Quantity per Reel |
|--------------------------------|------------------------|------------------------------------|--|---|--|--|--------------|-----------------------|----------------------|
| 6.3 Vdc (8 Vdc Surge) | | | | | | | | | |
| 22 | AFK226M06B12T | 3.0 | 0.26 | 1.350 | 1.350 | 90 | B | 4 x 5.8 | 2000 |
| 47 | AFK476M06B12T | 3.0 | 0.26 | 1.350 | 1.350 | 90 | B | 4 x 5.8 | 2000 |
| 47 | AFK476M06C12T | 3.0 | 0.26 | 0.700 | 0.700 | 160 | C | 5 x 5.8 | 1000 |
| 100 | AFK107M06C12T | 6.3 | 0.26 | 0.700 | 0.700 | 160 | C | 5 x 5.8 | 1000 |
| 100 | AFK107M06D16T | 6.3 | 0.26 | 0.360 | 0.360 | 240 | D | 6.3 x 5.8 | 1000 |
| 220 | AFK227M06D16T | 13.9 | 0.26 | 0.360 | 0.360 | 240 | D | 6.3 x 5.8 | 1000 |
| 330 | AFK337M06X16T | 20.8 | 0.26 | 0.340 | 0.340 | 280 | X | 6.3 x 7.7 | 900 |
| 330 | AFK337M06E16T | 20.8 | 0.26 | 0.260 | 0.260 | 300 | E | 8 x 6.2 | 1000 |
| 470 | AFK477M06F24T | 29.6 | 0.26 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 1000 | AFK108M06F24T | 63.0 | 0.26 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 1500 | AFK158M06G24T | 94.5 | 0.26 | 0.080 | 0.080 | 850 | G | 10 x 10.2 | 500 |
| 3300 | AFK338M06H32T | 207.9 | 0.30 | 0.060 | 0.060 | 1100 | H | 12.5 x 13.5 | 200 |
| 6800 | AFK688M06P44T | 428.4 | 0.36 | 0.035 | 0.035 | 1800 | P | 16 x 16.5 | 125 |
| 10 Vdc (13 Vdc Surge) | | | | | | | | | |
| 22 | AFK226M10B12T | 3.0 | 0.19 | 1.350 | 1.350 | 90 | B | 4 x 5.8 | 2000 |
| 33 | AFK336M10B12T | 3.3 | 0.19 | 1.350 | 1.350 | 90 | B | 4 x 5.8 | 2000 |
| 33 | AFK336M10C12T | 3.3 | 0.19 | 0.700 | 0.700 | 160 | C | 5 x 5.8 | 1000 |
| 150 | AFK157M10D16T | 15.0 | 0.19 | 0.360 | 0.360 | 240 | D | 6.3 x 5.8 | 1000 |
| 220 | AFK227M10X16T | 22.0 | 0.19 | 0.340 | 0.340 | 280 | X | 6.3 x 7.7 | 900 |
| 220 | AFK227M10E16T | 22.0 | 0.19 | 0.260 | 0.260 | 300 | E | 8 x 6.2 | 1000 |
| 330 | AFK337M10F24T | 33.0 | 0.19 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 470 | AFK477M10F24T | 47.0 | 0.19 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 680 | AFK687M10F24T | 68.0 | 0.19 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 1000 | AFK108M10G24T | 100.0 | 0.19 | 0.080 | 0.080 | 850 | G | 10 x 10.2 | 500 |
| 2200 | AFK228M10H32T | 220.0 | 0.21 | 0.060 | 0.060 | 1100 | H | 12.5 x 13.5 | 200 |
| 4700 | AFK478M10P44T | 470.0 | 0.25 | 0.035 | 0.035 | 1800 | P | 16 x 16.5 | 125 |
| 6800 | AFK688M10R44T | 680.0 | 0.29 | 0.033 | 0.033 | 2060 | R | 18 x 16.5 | 125 |
| 16 Vdc (20 Vdc Surge) | | | | | | | | | |
| 10 | AFK106M16B12T | 3.0 | 0.16 | 1.350 | 1.350 | 90 | B | 4 x 5.8 | 2000 |
| 22 | AFK226M16B12T | 3.5 | 0.16 | 1.350 | 1.350 | 90 | B | 4 x 5.8 | 2000 |
| 22 | AFK226M16C12T | 3.5 | 0.16 | 0.700 | 0.700 | 160 | C | 5 x 5.8 | 1000 |
| 47 | AFK476M16C12T | 7.5 | 0.16 | 0.700 | 0.700 | 160 | C | 5 x 5.8 | 1000 |
| 47 | AFK476M16D16T | 7.5 | 0.16 | 0.360 | 0.360 | 240 | D | 6.3 x 5.8 | 1000 |
| 68 | AFK686M16D16T | 10.9 | 0.19 | 0.360 | 0.360 | 240 | D | 6.3 x 5.8 | 1000 |
| 100 | AFK107M16D16T | 16.0 | 0.16 | 0.360 | 0.360 | 240 | D | 6.3 x 5.8 | 1000 |
| 150 | AFK157M16X16T | 24.0 | 0.16 | 0.340 | 0.340 | 280 | X | 6.3 x 7.7 | 900 |
| 220 | AFK227M16X16T | 35.2 | 0.16 | 0.340 | 0.340 | 280 | X | 6.3 x 7.7 | 900 |
| 220 | AFK227M16E16T | 35.2 | 0.16 | 0.260 | 0.260 | 300 | E | 8 x 6.2 | 1000 |
| 330 | AFK337M16F24T | 52.8 | 0.16 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 470 | AFK477M16F24T | 75.2 | 0.16 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 680 | AFK687M16G24T | 108.8 | 0.16 | 0.080 | 0.080 | 850 | G | 10 x 10.2 | 500 |
| 1500 | AFK158M16H32T | 240.0 | 0.16 | 0.060 | 0.060 | 1100 | H | 12.5 x 13.5 | 200 |
| 3300 | AFK338M16P44T | 528.0 | 0.20 | 0.035 | 0.035 | 1800 | P | 16 x 16.5 | 125 |
| 4700 | AFK478M16R44T | 752.0 | 0.22 | 0.033 | 0.033 | 2060 | R | 18 x 16.5 | 125 |

Type AFK **-55 °C to 105 °C**

SMT Aluminum Electrolytic Capacitors - Lowest E.S.R., 105 °C

| Cap (µF) | Catalog Part Number | Max. DCL 2 min (µA) | Max. Dissipation Factor @120 Hz/20 °C | Max. ESR @100 kHz/20 °C (Ω) | Impedance @ 100 kHz/20 °C (Ω) | Max. Ripple Current @ 100 kHz/105 °C (mA) | Case Code | Size D x L (mm) | Quantity per Reel |
|--------------------------------|------------------------|------------------------------|--|--------------------------------------|-------------------------------------|--|--------------|-----------------------|----------------------|
| 25 Vdc (31 Vdc Surge) | | | | | | | | | |
| 10 | AFK106M25B12T | 3.0 | 0.14 | 1.350 | 1.350 | 90 | B | 4 x 5.8 | 2000 |
| 22 | AFK226M25C12T | 5.5 | 0.14 | 0.700 | 0.700 | 160 | C | 5 x 5.8 | 1000 |
| 33 | AFK336M25C12T | 8.3 | 0.14 | 0.700 | 0.700 | 160 | C | 5 x 5.8 | 1000 |
| 33 | AFK336M25D16T | 8.3 | 0.14 | 0.360 | 0.360 | 240 | D | 6.3 x 5.8 | 1000 |
| 47 | AFK476M25D16T | 11.8 | 0.14 | 0.360 | 0.360 | 240 | D | 6.3 x 5.8 | 1000 |
| 68 | AFK686M25D16T | 17.0 | 0.14 | 0.360 | 0.360 | 240 | D | 6.3 x 5.8 | 1000 |
| 100 | AFK107M25X16T | 25.0 | 0.14 | 0.340 | 0.340 | 280 | X | 6.3 x 7.7 | 900 |
| 100 | AFK107M25E16T | 25.0 | 0.14 | 0.260 | 0.260 | 300 | E | 8 x 6.2 | 1000 |
| 150 | AFK157M25F24T | 37.5 | 0.14 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 220 | AFK227M25F24T | 55.0 | 0.14 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 330 | AFK337M25F24T | 82.5 | 0.14 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 470 | AFK477M25G24T | 117.5 | 0.14 | 0.080 | 0.080 | 850 | G | 10 x 10.2 | 500 |
| 1000 | AFK108M25H32T | 250.0 | 0.14 | 0.060 | 0.060 | 1100 | H | 12.5 x 13.5 | 200 |
| 1500 | AFK158M25P44T | 375.0 | 0.14 | 0.035 | 0.035 | 1800 | P | 16 x 16.5 | 125 |
| 2200 | AFK228M25P44T | 550.0 | 0.16 | 0.035 | 0.035 | 1800 | P | 16 x 16.5 | 125 |
| 3300 | AFK338M25R44T | 825.0 | 0.18 | 0.033 | 0.033 | 2060 | R | 18 x 16.5 | 125 |
| 35 Vdc (44 Vdc Surge) | | | | | | | | | |
| 4.7 | AFK475M35B12T | 3.0 | 0.12 | 1.350 | 1.350 | 90 | B | 4 x 5.8 | 2000 |
| 10 | AFK106M35B12T | 3.5 | 0.12 | 1.350 | 1.350 | 90 | B | 4 x 5.8 | 2000 |
| 10 | AFK106M35C12T | 3.5 | 0.12 | 0.700 | 0.700 | 160 | C | 5 x 5.8 | 1000 |
| 22 | AFK226M35C12T | 7.7 | 0.12 | 0.700 | 0.700 | 160 | C | 5 x 5.8 | 1000 |
| 33 | AFK336M35D16T | 11.6 | 0.12 | 0.360 | 0.360 | 240 | D | 6.3 x 5.8 | 1000 |
| 47 | AFK476M35D16T | 16.5 | 0.12 | 0.360 | 0.360 | 240 | D | 6.3 x 5.8 | 1000 |
| 68 | AFK686M35X16T | 23.8 | 0.12 | 0.340 | 0.340 | 280 | X | 6.3 x 7.7 | 900 |
| 100 | AFK107M35X16T | 35.0 | 0.12 | 0.340 | 0.340 | 280 | X | 6.3 x 7.7 | 900 |
| 100 | AFK107M35F24T | 35.0 | 0.12 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 150 | AFK157M35F24T | 52.5 | 0.12 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 220 | AFK227M35F24T | 77.0 | 0.12 | 0.160 | 0.160 | 600 | F | 8 x 10.2 | 500 |
| 330 | AFK337M35G24T | 115.5 | 0.12 | 0.080 | 0.080 | 850 | G | 10 x 10.2 | 500 |
| 470 | AFK477M35H32T | 164.5 | 0.12 | 0.060 | 0.060 | 1100 | H | 12.5 x 13.5 | 200 |
| 680 | AFK687M35H32T | 238.0 | 0.12 | 0.060 | 0.060 | 1100 | H | 12.5 x 13.5 | 200 |
| 1000 | AFK108M35P44T | 350.0 | 0.12 | 0.035 | 0.035 | 1800 | P | 16 x 16.5 | 125 |
| 1500 | AFK158M35P44T | 525.0 | 0.12 | 0.035 | 0.035 | 1800 | P | 16 x 16.5 | 125 |
| 50 Vdc (63 Vdc Surge) | | | | | | | | | |
| 4.7 | AFK475M50B12T | 3.0 | 0.10 | 2.900 | 2.900 | 60 | B | 4 x 5.8 | 2000 |
| 10 | AFK106M50C12T | 5.0 | 0.10 | 1.520 | 1.520 | 85 | C | 5 x 5.8 | 1000 |
| 10 | AFK106M50D16T | 5.0 | 0.10 | 0.880 | 0.880 | 165 | D | 6.3 x 5.8 | 1000 |
| 22 | AFK226M50D16T | 11.0 | 0.10 | 0.880 | 0.880 | 165 | D | 6.3 x 5.8 | 1000 |
| 33 | AFK336M50X16T | 16.5 | 0.10 | 0.680 | 0.680 | 195 | X | 6.3 x 7.7 | 900 |
| 33 | AFK336M50E16T | 16.5 | 0.10 | 0.680 | 0.680 | 195 | E | 8 x 6.2 | 1000 |
| 47 | AFK476M50X16T | 23.5 | 0.10 | 0.680 | 0.680 | 195 | X | 6.3 x 7.7 | 900 |
| 47 | AFK476M50E16T | 23.5 | 0.10 | 0.680 | 0.680 | 195 | E | 8 x 6.2 | 1000 |
| 100 | AFK107M50F24T | 50.0 | 0.10 | 0.340 | 0.340 | 350 | F | 8 x 10.2 | 500 |

Type AFK -55 °C to 105 °C

SMT Aluminum Electrolytic Capacitors - Lowest E.S.R., 105 °C

| Cap (µF) | Catalog Part Number | Max. DCL 2 min (µA) | Max. Dissipation Factor @120 Hz/20 °C | Max. ESR @100 kHz/20 °C (Ω) | Impedance @ 100 kHz/20 °C (Ω) | Max. Ripple Current @ 100 kHz/105 °C (mA) | Case Code | Size D x L (mm) | Quantity per Reel |
|----------------------------------|---------------------|---------------------|---------------------------------------|-----------------------------|-------------------------------|---|-----------|-----------------|-------------------|
| 50 Vdc (63 Vdc Surge) | | | | | | | | | |
| 150 | AFK157M50G24T | 75.0 | 0.10 | 0.180 | 0.180 | 670 | G | 10 x 10.2 | 500 |
| 220 | AFK227M50G24T | 110.0 | 0.10 | 0.180 | 0.180 | 670 | G | 10 x 10.2 | 500 |
| 330 | AFK337M50H32T | 165.0 | 0.10 | 0.120 | 0.120 | 900 | H | 12.5 x 13.5 | 200 |
| 390 | AFK397M50H32T | 195.0 | 0.10 | 0.120 | 0.120 | 900 | H | 12.5 x 13.6 | 200 |
| 470 | AFK477M50P44T | 235.0 | 0.10 | 0.073 | 0.073 | 1610 | P | 16 x 16.5 | 125 |
| 560 | AFK567M50P44T | 280.0 | 0.10 | 0.073 | 0.073 | 1610 | P | 16 x 16.5 | 125 |
| 680 | AFK687M50P44T | 340.0 | 0.10 | 0.073 | 0.073 | 1610 | P | 16 x 16.5 | 125 |
| 1000 | AFK108M50P44T | 500.0 | 0.10 | 0.073 | 0.073 | 1610 | P | 16 x 16.5 | 125 |
| 63 Vdc (75 Vdc Surge) | | | | | | | | | |
| 4.7 | AFK475M63C12T | 3.0 | 0.08 | 3.000 | 3.000 | 50 | C | 5 x 5.8 | 1000 |
| 10 | AFK106M63D16T | 6.3 | 0.08 | 1.500 | 1.500 | 80 | D | 6.3 x 5.8 | 1000 |
| 22 | AFK226M63X16T | 13.9 | 0.08 | 1.200 | 1.200 | 120 | X | 6.3 x 7.7 | 900 |
| 22 | AFK226M63E16T | 13.9 | 0.08 | 1.200 | 1.200 | 120 | E | 8 x 6.2 | 1000 |
| 33 | AFK336M63F24T | 20.8 | 0.08 | 0.650 | 0.650 | 250 | F | 8 x 10.2 | 500 |
| 47 | AFK476M63F24T | 29.6 | 0.08 | 0.650 | 0.650 | 250 | F | 8 x 10.2 | 500 |
| 68 | AFK686M63G24T | 42.8 | 0.08 | 0.350 | 0.350 | 400 | G | 10 x 10.2 | 500 |
| 100 | AFK107M63G24T | 63.0 | 0.08 | 0.350 | 0.350 | 400 | G | 10 x 10.2 | 500 |
| 150 | AFK157M63H32T | 94.5 | 0.08 | 0.160 | 0.160 | 800 | H | 12.5 x 13.5 | 200 |
| 220 | AFK227M63H32T | 138.6 | 0.08 | 0.160 | 0.160 | 800 | H | 12.5 x 13.5 | 200 |
| 470 | AFK477M63P44T | 296.1 | 0.08 | 0.082 | 0.082 | 1410 | P | 16 x 16.5 | 125 |
| 680 | AFK687M63R44T | 428.4 | 0.08 | 0.080 | 0.080 | 1690 | R | 18 x 16.5 | 125 |
| 80 Vdc (100 Vdc Surge) | | | | | | | | | |
| 3.3 | AFK335M80C12T | 3.0 | 0.08 | 5.00 | 5.00 | 25 | C | 5 x 5.8 | 1000 |
| 4.7 | AFK475M80D16T | 3.8 | 0.08 | 3.00 | 3.00 | 40 | D | 6.3 x 5.8 | 1000 |
| 10.0 | AFK106M80X16T | 8.0 | 0.08 | 2.40 | 2.40 | 60 | X | 6.3 x 7.7 | 900 |
| 10.0 | AFK106M80E16T | 8.0 | 0.08 | 2.40 | 2.40 | 60 | E | 8 x 6.2 | 1000 |
| 22.0 | AFK226M80F24T | 17.6 | 0.08 | 1.30 | 1.30 | 130 | F | 8 x 10.2 | 500 |
| 33.0 | AFK336M80F24T | 26.4 | 0.08 | 1.30 | 1.30 | 130 | F | 8 x 10.2 | 500 |
| 47.0 | AFK476M80G24T | 37.6 | 0.08 | 0.70 | 0.70 | 200 | G | 10 x 10.2 | 500 |
| 68.0 | AFK686M80H32T | 54.4 | 0.08 | 0.32 | 0.32 | 500 | H | 12.5 x 13.5 | 200 |
| 100.0 | AFK107M80H32T | 80.0 | 0.08 | 0.32 | 0.32 | 500 | H | 12.5 x 13.5 | 200 |
| 150.0 | AFK157M80H32T | 120.0 | 0.08 | 0.32 | 0.32 | 500 | H | 12.5 x 13.5 | 200 |
| 330.0 | AFK337M80P44T | 264.0 | 0.08 | 0.17 | 0.17 | 793 | P | 16 x 16.5 | 125 |
| 470.0 | AFK477M80R44T | 376.0 | 0.08 | 0.15 | 0.15 | 917 | R | 18 x 16.5 | 125 |
| 100 Vdc (125 Vdc Surge) | | | | | | | | | |
| 22.0 | AFK226M2AF24T | 22.0 | 0.07 | 1.30 | 1.30 | 130 | F | 8 x 10.2 | 500 |
| 33.0 | AFK336M2AG24T | 33.0 | 0.07 | 0.70 | 0.70 | 200 | G | 10 x 10.2 | 500 |
| 47.0 | AFK476M2AH32T | 47.0 | 0.07 | 0.32 | 0.32 | 500 | H | 12.5 x 13.5 | 200 |
| 68.0 | AFK686M2AH32T | 68.0 | 0.07 | 0.32 | 0.32 | 500 | H | 12.5 x 13.5 | 200 |
| 100.0 | AFK107M2AP44T | 100.0 | 0.07 | 0.17 | 0.17 | 793 | P | 16 x 16.5 | 125 |
| 150.0 | AFK157M2AP44T | 150.0 | 0.07 | 0.17 | 0.17 | 793 | P | 16 x 16.5 | 125 |
| 220.0 | AFK227M2AR44T | 220.0 | 0.07 | 0.15 | 0.15 | 917 | R | 18 x 16.5 | 125 |
| 330.0 | AFK337M2AR44T | 330.0 | 0.07 | 0.15 | 0.15 | 917 | R | 18 x 16.5 | 125 |

Type AFK -55°C to 105°C

SMT Aluminum Electrolytic Capacitors - Lowest E.S.R., 105°C

Part Numbering System

| AFK | 106 | M | 16 | B | 12T | -F |
|---------------------------|----------------------------|-----------------------|--------------|--------------|-------------------|----------------|
| Type | Capacitance | Capacitance Tolerance | Voltage Code | Case Code | Packaging Code | RoHS Compliant |
| 105 = 1.0 μF | 106 = 10.0 μF | M = $\pm 20\%$ | 06 = 6.3 Vdc | 35 = 35 Vdc | 12 = Carrier tape | |
| 107 = 100.0 μF | 108 = 1000.0 μF | | 10 = 10 Vdc | 50 = 50 Vdc | Width (mm) | |
| | | | 16 = 16 Vdc | 63 = 63 Vdc | T = Tape & Reel | |
| | | | 25 = 25 Vdc | 80 = 80 Vdc | B = Bulk | |
| | | | | 2A = 100 Vdc | | |

Typical Performance Curves

Capacitance vs. Temperature and Frequency

3300 μF /6.3Vdc (12.5 x 13.5 mm)



Capacitance vs. Temperature & Frequency

100 μF @ 16 Vdc (6.3 X 5.8 mm)



Type AFK -55 °C to 105 °C


SMT Aluminum Electrolytic Capacitors - Lowest E.S.R., 105 °C

Typical Performance Curves

ESR vs. Temperature and Frequency
3300 μF @ 6.3 Vdc (12.5 X 13.5 mm)



ESR vs. Temperature and Frequency
100 μF @ 16 Vdc (6.3 X 5.8 mm)

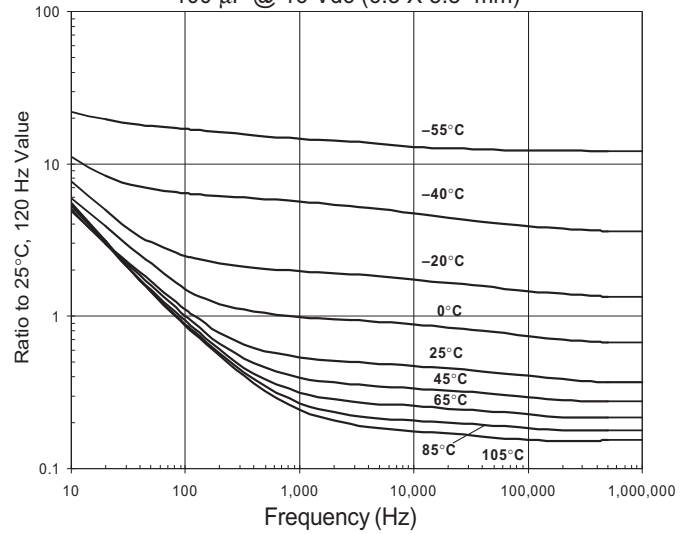

Impedance vs Temperature and Frequency
3300 μF / 6.3 V (12.5 x 13.5mm)




Impedance vs. Temperature and Frequency
100 μF @ 16 Vdc (6.3 X 5.8 mm)



Capacitance Change vs. Time
(AFK Series Typical Performance)



Dissipation Factor vs. Temperature

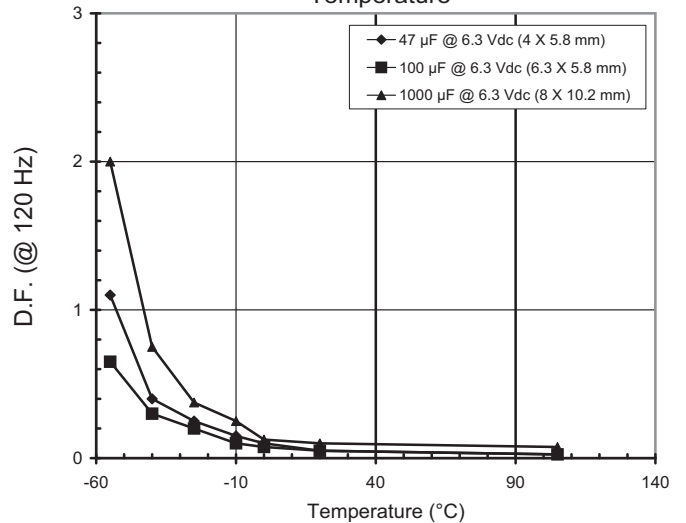

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru