


MIL-STD-1553 Transformers

Single Ratio THT QPL Pulse Transformers

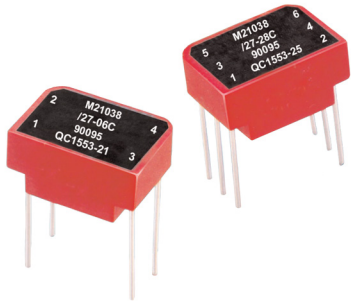

- ☑ Qualified for use in QPL MIL-STD-1553 applications
- ☑ Single ratio packages (see Schematics)
- ☑ MSL: 1
- ☑ Designed, built, and tested to MIL-PRF-21038 Levels* C, M, and T
- ☑ Package C is 4-lead; package D is 6-lead (center tap)
- ☑ Built in ISO 9001 facility
- ☑ Applicable specifications

- MIL-STD-1553B
- MIL-STD-202
- MIL-PRF-21038
- ISO 9001

- * ■ **Level C** - for high reliability commercial/industrial applications
- **Level M** - for general purpose military applications
- **Level T** - for high reliability critical military applications

Summary Performance Specifications

| | |
|---------------------------------|-------------------|
| Impedance | (see table below) |
| Droop | ≤ 20% |
| Overshoot | ±IV MAX |
| Common Mode Rejection (CMR) | ≥ 45dB |
| Frequency Range (no load) | 75kHz to 1MHz |
| Operating Temperature Range | -55°C to 130°C |
| Weight | ≤ 5 grams |
| Insulation Resistance (MIN) | 10K MΩ @ 250Vdc |
| Dielectric Withstanding Voltage | 100Vrms |


Characteristics

| Line | Level | Military Designation No. | Pulse Part No. | Package | Height (in. MAX) | Terminals | Ratio (±3%) | RDC (Ω MAX) | Impedance (Ω MIN) |
|------|-------|--------------------------|----------------|---------|------------------|-----------|-------------|---------------------|-------------------|
| 1 | C | M21038/27-05C | QC1553-20 | C | .250 | 1-2:4-3 | 1:1.41 | 1-2 2.2 4-3 2.7 | (4-3) 3,000 |
| 2 | M | M21038/27-05 | Q1553-20 | | | | | | |
| 3 | T | M21038/27-05T | QT1553-20 | | | | | | |
| 4 | C | M21038/27-06C | QC1553-21 | D | .250 | 1-5:6.2 | 1CT:1CT | 1-5 2.5 6-2 2.8 | (6-2) 3,000 |
| 5 | M | M21038/27-06 | Q1553-21 | | | | | | |
| 6 | T | M21038/27-06T | QT1553-21 | | | | | | |
| 7 | C | M21038/27-07C | QC1553-22 | D | .250 | 1-5:6.2 | 1CT:1.41CT | 1-5 2.2 6-2 2.7 | (6-2) 3,000 |
| 8 | M | M21038/27-07 | Q1553-22 | | | | | | |
| 9 | T | M21038/27-07T | QT1553-22 | | | | | | |
| 10 | C | M21038/27-08C | QC1553-23 | D | .250 | 1-5:6.2 | 1CT:1.66CT | 1-5 1.5 6-2 2.4 | (6-2) 3,000 |
| 11 | M | M21038/27-08 | Q1553-23 | | | | | | |
| 12 | T | M21038/27-08T | QT1553-23 | | | | | | |
| 13 | C | M21038/27-09C | QC1553-24 | D | .250 | 1-5:6.2 | 1CT:2CT | 1-5 1.3 6-2 2.6 | (6-2) 3,000 |
| 14 | M | M21038/27-09 | Q1553-24 | | | | | | |
| 15 | T | M21038/27-09T | QT1553-24 | | | | | | |
| 16 | C | M21038/27-28C | QC1553-25* | D | .250 | 1-5:6.2 | 1CT:1.5CT | 1-3 0.90 6-2 2.5 | (6-2) 3,000 |
| 17 | M | M21038/27-28 | Q1553-25* | | | | | | |
| 18 | T | M21038/27-28T | QT1553-25* | | | | | | |
| 19 | C | M21038/27-29C | QC1553-51* | D | .250 | 1-5:6.2 | 1CT:1.79CT | 1-5 0.90 6-2 2.5 | (6-2) 3,000 |
| 20 | M | M21038/27-29 | Q1553-51* | | | | | | |
| 21 | T | M21038/27-29T | QT1553-51* | | | | | | |
| 22 | C | M21038/27-30C | QC1553-52* | D | .250 | 1-5:6.2 | 1CT:2.5CT | 1-5 1.0 6-2 2.8 | (6-2) 3,000 |
| 23 | M | M21038/27-30 | Q1553-52* | | | | | | |
| 24 | T | M21038/27-30T | QT1553-52* | | | | | | |


*NOTE: Designed for transceivers utilizing a single supply voltage (+5V).

MIL-STD-1553 Transformers


Single Ratio THT QPL Pulse Transformers



Package C

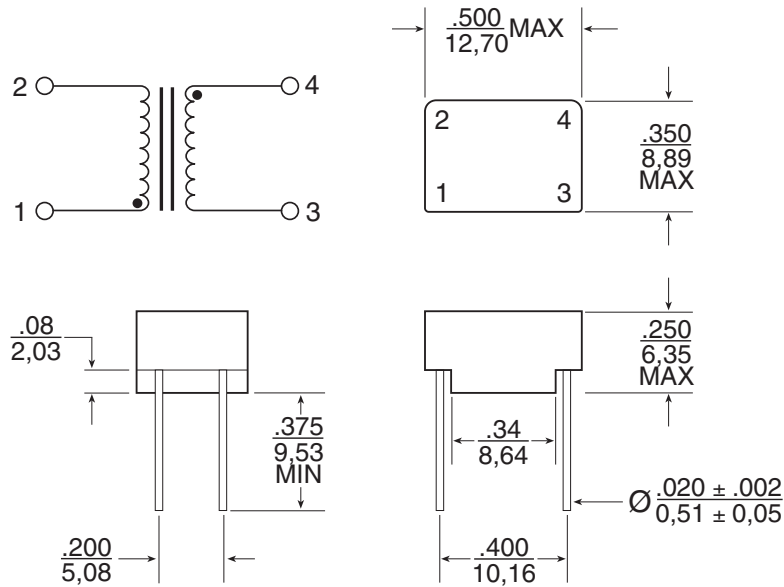

Package D

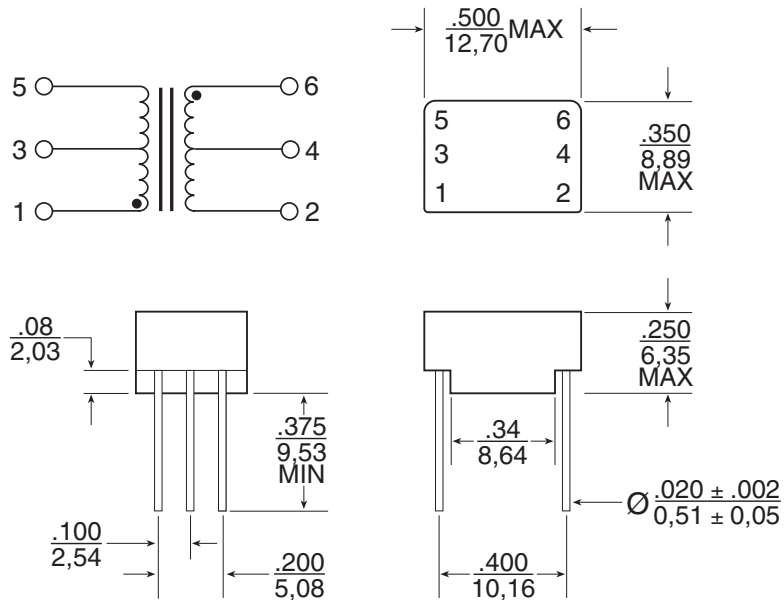

Notes:

1. All dimensions are in inches.
2. Tolerances: .xx = +.010, .xxx = +.008
3. All specifications and dimensions are subject to change without notice.

MIL-PRF-21038/27 Inspection, Sampling, Testing

| Table 1 — Group A Inspection | | | | | |
|------------------------------|---------------|---|--------------------|---|--------------------|
| Level “C”*** | | Level “M” | | Level “T” | |
| Tests | Sampling Plan | Tests | Sampling Plan | Tests | Sampling Plan |
| N/A | N/A | Electrical Characteristics per MIL-PRF-21038/27 | Sample per Table 3 | Thermal Shock | 100% |
| N/A | N/A | Visual and Mechanical Inspection | Sample per Table 3 | Winding Continuity | 100% |
| N/A | N/A | N/A | N/A | Electrical Characteristics per MIL-PRF-21038/27 | 100% |
| N/A | N/A | N/A | N/A | Impedance | Sample per Table 3 |
| N/A | N/A | N/A | N/A | Visual and Mechanical Inspection | Sample per Table 3 |

| Table 2 — Group B Inspection | | | | | |
|------------------------------|---------------|---------------------------------|--------------------|---------------------------------|--------------------|
| Level “C”*** | | Level “M” | | Level “T” | |
| Tests | Sampling Plan | Tests | Sampling Plan | Tests | Sampling Plan |
| N/A | N/A | Dielectric Withstanding Voltage | Sample per Table 3 | Dielectric Withstanding Voltage | Sample per Table 3 |
| N/A | N/A | Insulation Resistance | Sample per Table 3 | Insulation Resistance | Sample per Table 3 |

| Table 3 — Sampling Plans for Group A and Group B Inspections | | |
|--|-------------------------------|---------|
| Lot Size | Group A, Group II Inspections | Group B |
| 1 to 5 | All | All |
| 6 to 13 | All | 5 |
| 14 to 50 | 13 | 5 |
| 51 to 90 | 13 | 7 |
| 91 to 150 | 13 | 11 |
| 151 to 280 | 20 | 13 |
| 281 to 500 | 29 | 16 |
| 501 to 1200 | 34 | 19 |
| 1,201 to 3,200 | 42 | 23 |
| 3,201 to 10,000 | 50 | 29 |

****NOTE:** Parts ordered to Level C are certified to comply with MIL-PRF-21038 Level C, however testing is performed per manufacturer’s internal requirements and sampling rates.

For More Information

Pulse North America Headquarters
 Two Pearl Buck Court
 Bristol, PA 19007
 U.S.A.

Pulse Europe
 Zeppelinstrasse 15
 71083 Herrenberg
 Germany

Pulse China Headquarters
 B402, Shenzhen Academy of
 Aerospace Technology Bldg.
 10th Kejinan Road
 High-Tech Zone
 Nanshan District
 Shenzhen, PR China 518057
 Tel: 86 755 33966678
 Fax: 86 755 33966700

Pulse North China
 Room 2704/2705
 Super Ocean Finance Ctr.
 2067 Yan An Road West
 Shanghai 200336
 China

Tel: 86 21 62787060
 Fax: 86 2162786973

Pulse South Asia
 135 Joo Seng Road
 #03-02
 PM Industrial Bldg.
 Singapore 368363

Tel: 65 6287 8998
 Fax: 65 6287 8998

Pulse North Asia
 3F No. 198, Zhongyuan Road
 Zhongli City
 Taoyuan County (32068)
 Taiwan

Tel: 886 3 4356768
 Fax: 886 3 4356823

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2013. Pulse Electronics, Inc. All rights reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru