


PAGE 1/3


ISSUE 1334C

SERIES ECO 7/16

PART NUMBER **R185A166200**

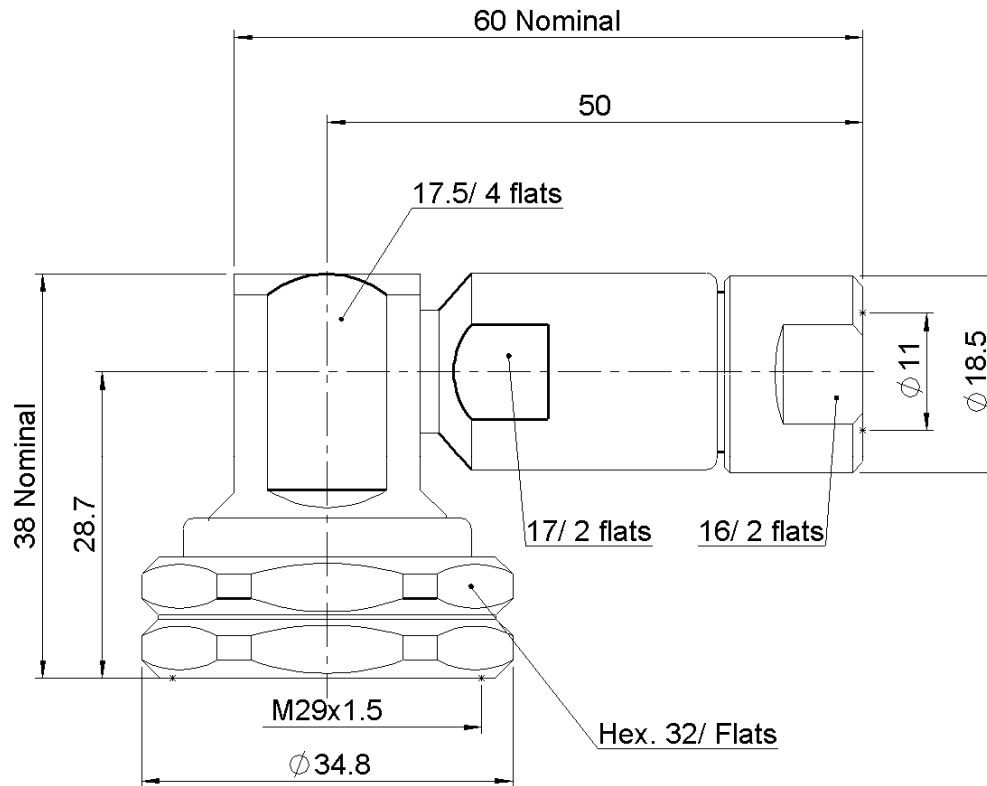

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
Body	BRASS	BBR
Center contact	BRONZE	SILVER
Outer contact		
Insulator	PTFE	
Gasket	SILICONE RUBBER	
Others parts	BRASS	BBR
-	-	-
-	-	-

PAGE 2/3

ISSUE 1334C

SERIES ECO 7/16

PART NUMBER R185A166200

PACKAGING

Standard	Unit	Other
20	Contact us	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-3	GHz
VSWR	1.2 + 0.0000	x F(GHz) Maxi
Insertion loss	0.05	√F(GHz) dB Maxi
RF leakage	- (NA)	- F(GHz) dB Maxi
Voltage rating	900	Veff Maxi
Dielectric withstanding voltage	1500	Veff mini
Insulation resistance	5000	MΩ mini

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	200	N mini
Axial force – Opposite end	100	N mini
Torque	NA	N.cm mini
Recommended torque		
Mating	3000	N.cm
Panel nut	NA	N.cm
Clamp nut	950	N.cm
A/F clamp nut	16.0000	mm
Mating life	100	Cycles mini
Weight	145.9000	g

ENVIRONMENTAL

Operating temperature	-40/+85	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

SPECIFICATION

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	8	26	0	0	0	0

Assembly instruction:

Recommended cable(s)

FSJ2-50-3/8"HELIAX

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	250	N mini
- torque	NA	N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.



OTHER CHARACTERISTICS

Watertightness:IP67

Components

Body

Nut




1

- Strip the Jacket of the cable.
- Do not damage the outer conductor.
- Remove impurities such as copper scraps and burrs on the end surface of the cable.


Outer conductor

Jacket

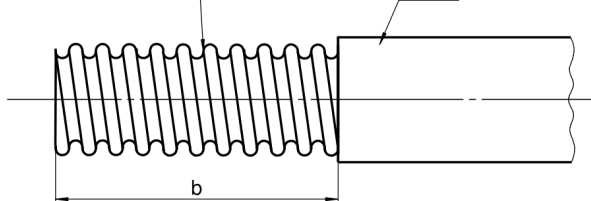

3

- Screw connector body onto the nut tightly.
- Screw the body, keeping the nut and cable fixing while tightening.
- Recommended coupling torque: 950 N.cm

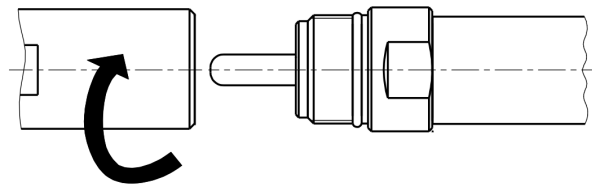

2


- Screw the nut onto the outer conductor of the cable tightly, and cut down the outer conductor and the dielectric against the edge of nut.
- Trim the end of the cable inner conductor..
- Clean the inner conductor of the cable, keeping no copper bits and dust etc.

Inner conductor

Nut

Chamfer

a

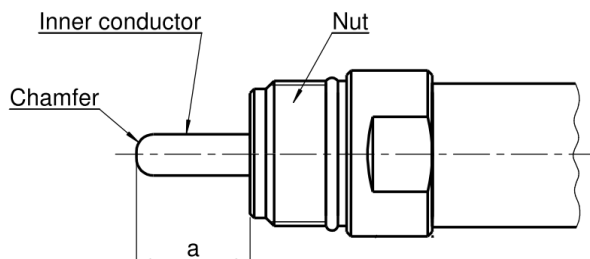

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru