

# Analog Absolute Pressure Sensor

KP229F0711

TurboMAP

Data Sheet

Revision 1.0, 2018-04-26

Sense & Control

## Table of Contents

|          |                               |           |
|----------|-------------------------------|-----------|
| <b>1</b> | <b>Product Description</b>    | <b>5</b>  |
| 1.1      | Features                      | 5         |
| 1.2      | Target Applications           | 5         |
| <b>2</b> | <b>Functional Description</b> | <b>6</b>  |
| 2.1      | Pin Configuration             | 7         |
| 2.2      | Pin Description               | 7         |
| 2.3      | Block Diagram                 | 8         |
| 2.4      | Transfer Function             | 9         |
| 2.5      | Accuracy                      | 10        |
| 2.5.1    | Ratiometric Error             | 10        |
| 2.5.2    | Overall Accuracy              | 10        |
| 2.6      | Output Voltage versus Load    | 12        |
| 2.7      | Timing Properties             | 13        |
| <b>3</b> | <b>Specification</b>          | <b>14</b> |
| 3.1      | Application Circuit Example   | 14        |
| 3.2      | Absolute Maximum Ratings      | 15        |
| 3.3      | Operating Range               | 16        |
| 3.4      | Characteristics               | 17        |
| <b>4</b> | <b>Package Information</b>    | <b>19</b> |
| 4.1      | PG-DSOF-8-16 Outline          | 19        |
| 4.2      | Identification Code           | 20        |
| <b>5</b> | <b>Revision History</b>       | <b>21</b> |



List of Tables

|         |                                      |    |
|---------|--------------------------------------|----|
| Table 1 | Pin Description . . . . .            | 7  |
| Table 2 | Transfer function . . . . .          | 9  |
| Table 3 | Ratiometric Error . . . . .          | 10 |
| Table 4 | Accuracy . . . . .                   | 11 |
| Table 5 | Component Values . . . . .           | 14 |
| Table 6 | Absolute Maximum Ratings . . . . .   | 15 |
| Table 7 | Operating Range . . . . .            | 16 |
| Table 8 | Electrical Characteristics . . . . . | 17 |
| Table 9 | Transfer Function . . . . .          | 18 |



List of Figures

|           |                                                             |    |
|-----------|-------------------------------------------------------------|----|
| Figure 1  | Pin configuration (top view, figure not to scale) . . . . . | 7  |
| Figure 2  | Functional block diagram . . . . .                          | 8  |
| Figure 3  | Transfer function . . . . .                                 | 9  |
| Figure 4  | Ratiometric error . . . . .                                 | 10 |
| Figure 5  | Accuracy for pressure acquisition . . . . .                 | 11 |
| Figure 6  | Maximum output voltage limit with pull-down load. . . . .   | 12 |
| Figure 7  | Minimum output voltage limit with pull-up load . . . . .    | 12 |
| Figure 8  | Power-up time . . . . .                                     | 13 |
| Figure 9  | Response and stabilization time. . . . .                    | 13 |
| Figure 10 | Application circuit example. . . . .                        | 14 |
| Figure 11 | Package outline . . . . .                                   | 19 |
| Figure 12 | Identification code . . . . .                               | 20 |




## 1 Product Description

The KP229F0711 is a miniaturized Analog Manifold Air Pressure Sensor IC based on a capacitive principle. It is surface micromachined with a monolithic integrated signal conditioning circuit implemented in BiCMOS technology.

The sensor converts a pressure into an analog output signal. The calibrated transfer function converts a pressure of 20 kPa to 250 kPa into a voltage range of 0.40 V to 4.65 V.

The chip is packaged in a “green” SMD housing. The sensor has been primarily developed for measuring manifold air pressure, but can also be used in other application fields. The high accuracy and the high sensitivity of the device makes it a perfect fit for advanced automotive applications as well as in industrial and consumer applications.

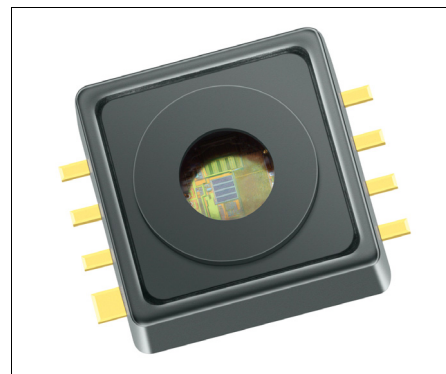

**PG-DSOF-8-16**

### 1.1 Features

Following features are supported by the KP229F0711:

- High precision pressure sensing ( $\pm 3.4$  kPa)
- Ratiometric analog output
- Large temperature range (-40 °C to 140 °C)
- Broken wire detection
- Clamping
- “Green” 8 pin SMD housing
- Automotive qualified

### 1.2 Target Applications

The KP229F0711 is defined for use in following target applications:

- Automotive applications (manifold air pressure measurement)
- Industrial control
- Consumer applications
- Medical applications
- Weather stations
- Altimeters

| Product Name                    | Product Type | Ordering Code | Package      |
|---------------------------------|--------------|---------------|--------------|
| Analog Absolute Pressure Sensor | KP229F0711   | SP002428754   | PG-DSOF-8-16 |

---

**Functional Description**

## **2 Functional Description**

The pressure is detected by an array of capacitive surface micromachined sensor cells. The sensor cell output is amplified, temperature compensated and linearized to obtain an output voltage that is proportional to the applied pressure.

The transfer function for linearization is computed in the digital part of the sensor using a third order polynomial calculation. The transfer function is created from the following parameters:

- Minimum and maximum rated pressure
- Voltage level at minimum and maximum rated pressure
- Clamping levels

The output is analog and ratiometric with respect to the supply voltage.

All parameters needed for the complete calibration algorithm — such as offset, gain, temperature coefficients of offset and gain, and linearization parameters — are determined after assembly. The parameters are stored in an integrated E<sup>2</sup>PROM. The E<sup>2</sup>PROM content is protected with forward error correction (a one bit error is detected and corrected, errors of more than one bit are detected and the output signal is switched to ground potential).

### **Clamping**

The output voltage is limited internally to two clamping threshold levels. Based on this feature, the open bond detection (OBD) is simplified and improved.

### **Open Bond Detection**

The open bond detection, in conjunction with the clamping levels, eases the implementation of error and malfunction detection strategies (e.g. for On-Board Diagnosis requirements). The microcontroller can sample the output of the sensor and compare it with programmed overvoltage and undervoltage limits. When the sensor's output voltage exceeds those limits, a broken wire condition is identified.

When the chip is not powered properly, the JFET transistors of the broken wire detection stage are self-conducting. For example, if the GND connection is interrupted, the output is drawn strongly to VDD. Similarly, if the VDD connection is broken, the output is drawn to GND.

## Functional Description

### 2.1 Pin Configuration

Figure 1 shows the pin configuration.

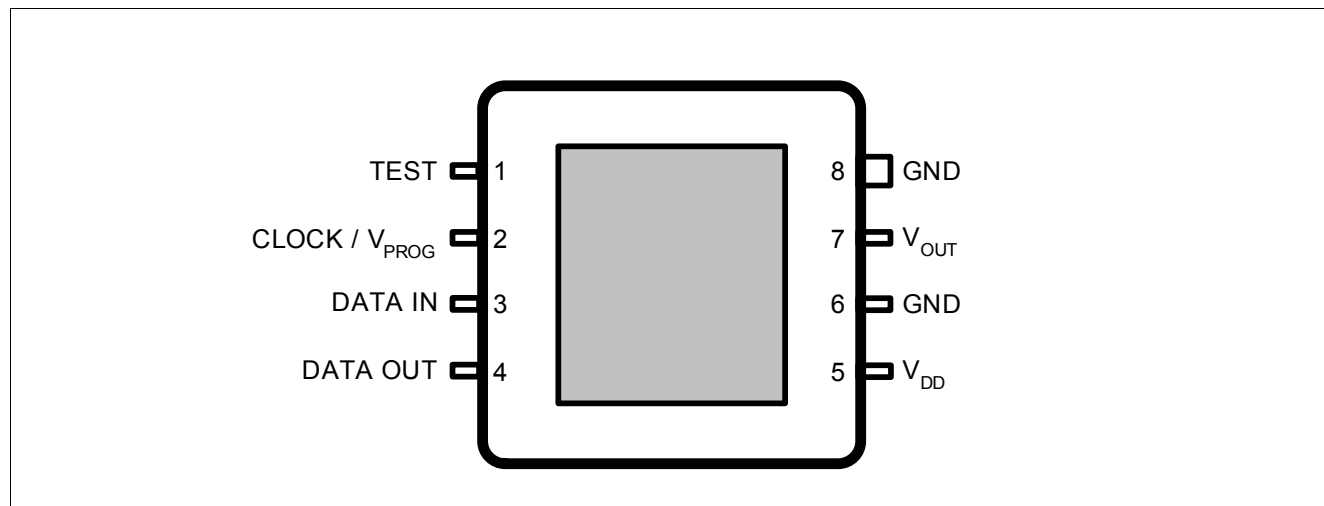


Figure 1 Pin configuration (top view, figure not to scale)

### 2.2 Pin Description

Table 1 shows the pin description.

Table 1 Pin Description

| Pin No. | Name                      | Function                                                             |
|---------|---------------------------|----------------------------------------------------------------------|
| 1       | TEST                      | Test pin <sup>1)</sup>                                               |
| 2       | CLOCK / V <sub>PROG</sub> | External clock for communication / programming voltage <sup>1)</sup> |
| 3       | DATA IN                   | Serial data input pin <sup>1)</sup>                                  |
| 4       | DATA OUT                  | Serial data output pin <sup>1)</sup>                                 |
| 5       | V <sub>DD</sub>           | Supply voltage                                                       |
| 6       | GND                       | Circuit ground potential <sup>2)</sup>                               |
| 7       | V <sub>OUT</sub>          | Analog pressure signal output                                        |
| 8       | GND                       | Circuit ground potential <sup>2)</sup>                               |

- 1) Digital pins are used only during calibration and test. It is recommended to leave these pins floating (in case of an open GND connection, the floating pins prevent from a cross grounding through the corresponding ESD diodes).
- 2) It is recommended to connect both GND pins.

## Functional Description

### 2.3 Block Diagram

Figure 2 shows the functional block diagram.

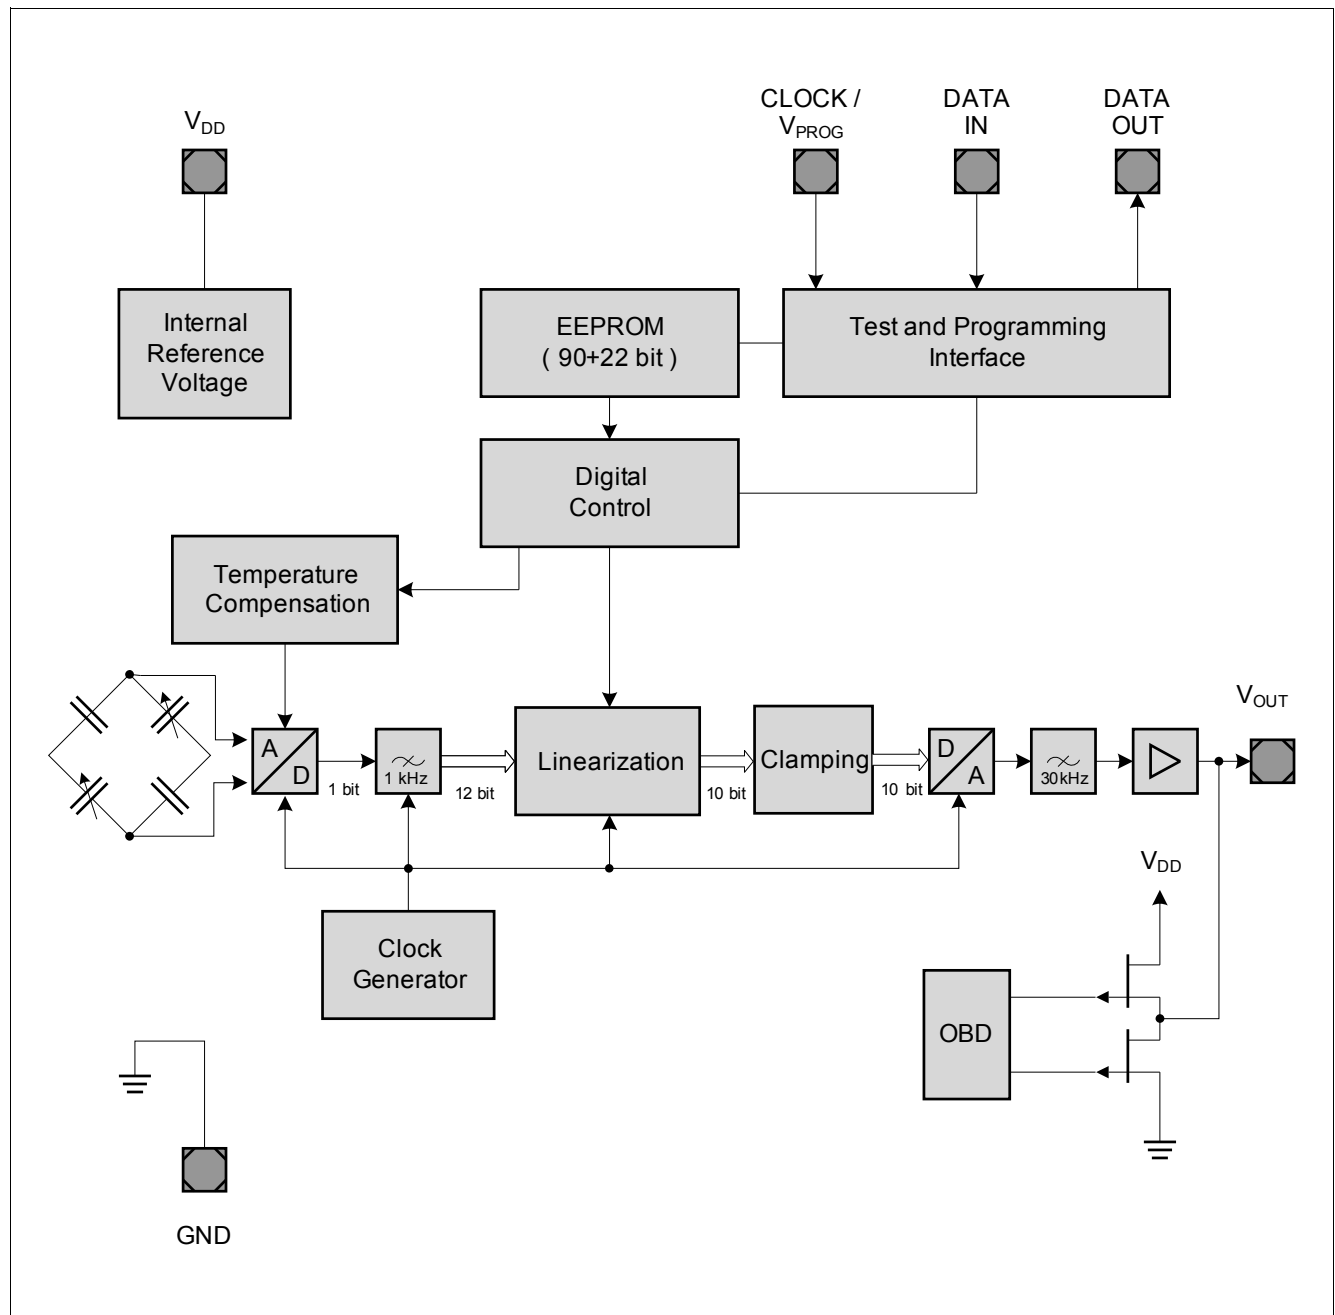


Figure 2 Functional block diagram



Functional Description

2.4 Transfer Function

The KP229F0711 device is fully calibrated on delivery. The sensor has a linear transfer function between the applied pressure and the output signal:

$$V_{OUT} = V_{DD} \times (a \times P + b)$$

The output signal is ratiometric. Gain **a** and offset **b** are determined during calibration in order to generate the required transfer function.

Calibrated Transfer Function

The following calibration is adjusted with the parameters **a** and **b**:

Table 2 Transfer function

| Pressure   |        |      | Output Voltage @ $V_{DD} = V_{DD,Typ}$ |        |      | Gain and Offset |         |       |
|------------|--------|------|----------------------------------------|--------|------|-----------------|---------|-------|
| Symbol     | Values | Unit | Symbol                                 | Values | Unit | Symbol          | Value   | Unit  |
| $p_{IN,1}$ | 20     | kPa  | $V_{OUT,1}$                            | 0.40   | V    | $a$             | 0.00370 | 1/kPa |
| $p_{IN,2}$ | 250    | kPa  | $V_{OUT,2}$                            | 4.65   | V    | $b$             | 0.00609 | –     |

Note: The points  $p_{IN,1}/V_{OUT,1}$  and  $p_{IN,2}/V_{OUT,2}$  define the calibrated transfer function and not the operating range. The operating pressure range is defined by the parameter 2.4 “Ambient operating pressure range” on Page 16

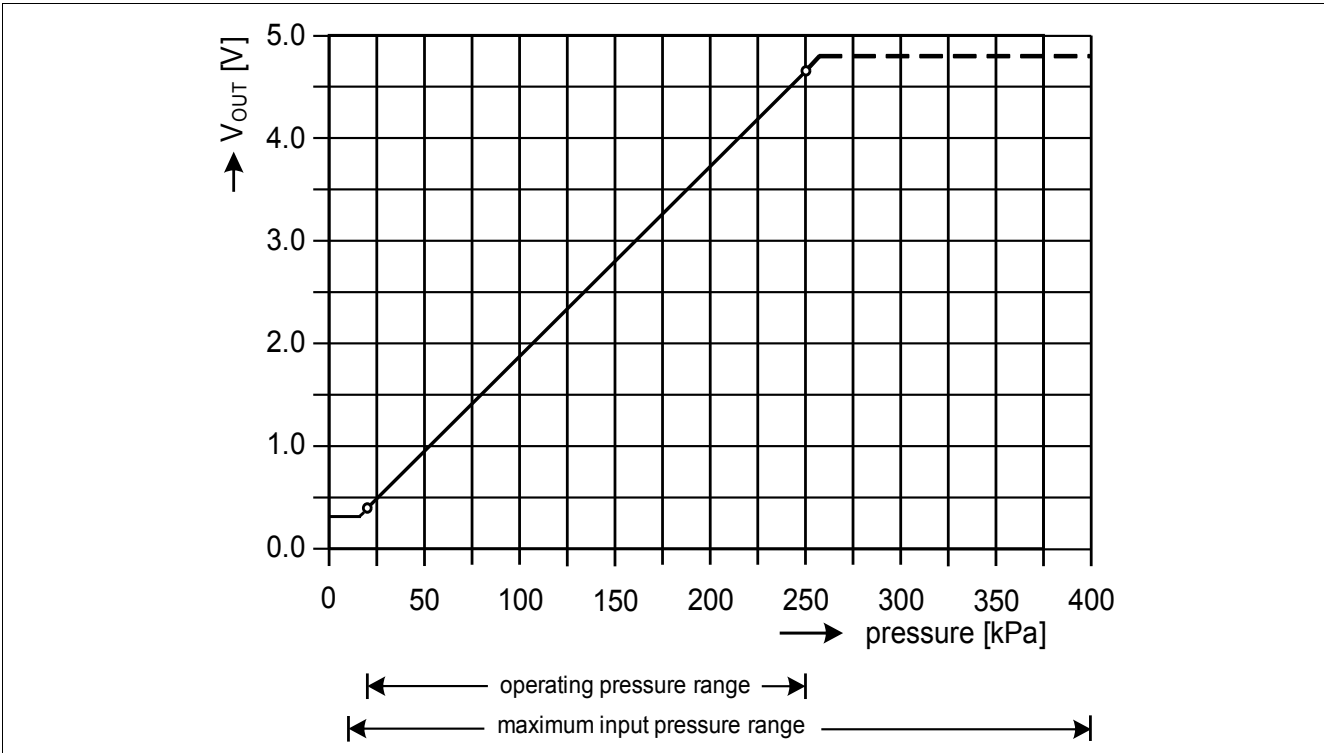


Figure 3 Transfer function

Note: The application circuitry determines the current driven by the device and thus may have an impact on the output voltage delivered by the sensor.

## Functional Description

### 2.5 Accuracy

The accuracy of the KP229F0711 sensor is influenced by the supply voltage (ratiometric error) as well as by pressure, temperature and aging effects. The specified value, calculated with the transfer function, represents the theoretical value (see [Figure 3](#)). The error equals the deviation between the measured output voltage value and the specified output voltage value.

#### 2.5.1 Ratiometric Error


Ideally the sensor is ratiometric - the output ( $V_{OUT}$ ) scales by the same ratio that  $V_{DD}$  increases or decreases. The ratiometric error is defined as the difference between the ratio that  $V_{DD}$  changed and the ratio that  $V_{OUT}$  changed, expressed as a percentage.

$$E_{RAT} (\%) = \frac{V_{OUT}(@V_{DD}) - V_{OUT}(@5V) \times \frac{V_{DD}}{5V}}{5V} \times 100\%$$

The output voltage  $V_{OUT}$  is ratiometric to  $V_{DD}$ .  $V_{DD}$  must be in the operating range provided in [Table 7](#).

**Table 3 Ratiometric Error**

| Supply voltage (V) | Max. ratiometric error ( $E_{RAT}$ in % of $V_{DD, Typ}$ ) |
|--------------------|------------------------------------------------------------|
| $V_{DD, Min}$      | $\pm 0.5$                                                  |
| $V_{DD, Typ}$      | 0                                                          |
| $V_{DD, Max}$      | $\pm 0.5$                                                  |

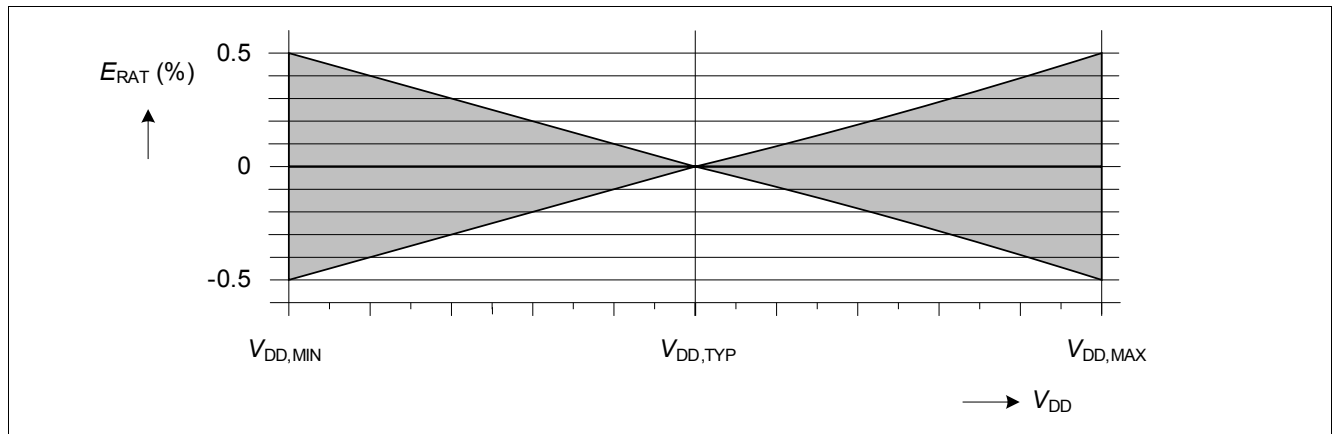

**Figure 4 Ratiometric error**

#### 2.5.2 Overall Accuracy

Overall accuracy covers the entire pressure and temperature range from different sources of error including the following:

- **Pressure:**

Output deviation from target transfer function over the specified pressure range

- **Temperature:**

Output deviation over the temperature range

## Functional Description

- **Aging:**


Parameter drift over life time

*Note: Ratiometric signal error is not included in the overall accuracy. For error measurements, the supply voltage must have the nominal value ( $V_{DD} = V_{DD,Typ}$ ).*

The error band is determined by three continuous lines through four relevant breakpoints.

**Table 4 Accuracy**

| Temperature [°C] | Error [kPa] | Error Multiplier |
|------------------|-------------|------------------|
| -40              | ±5.1        | 1.5              |
| 10               | ±3.4        | 1.0              |
| 85               | ±3.4        | 1.0              |
| 130              | ±5.1        | 1.5              |

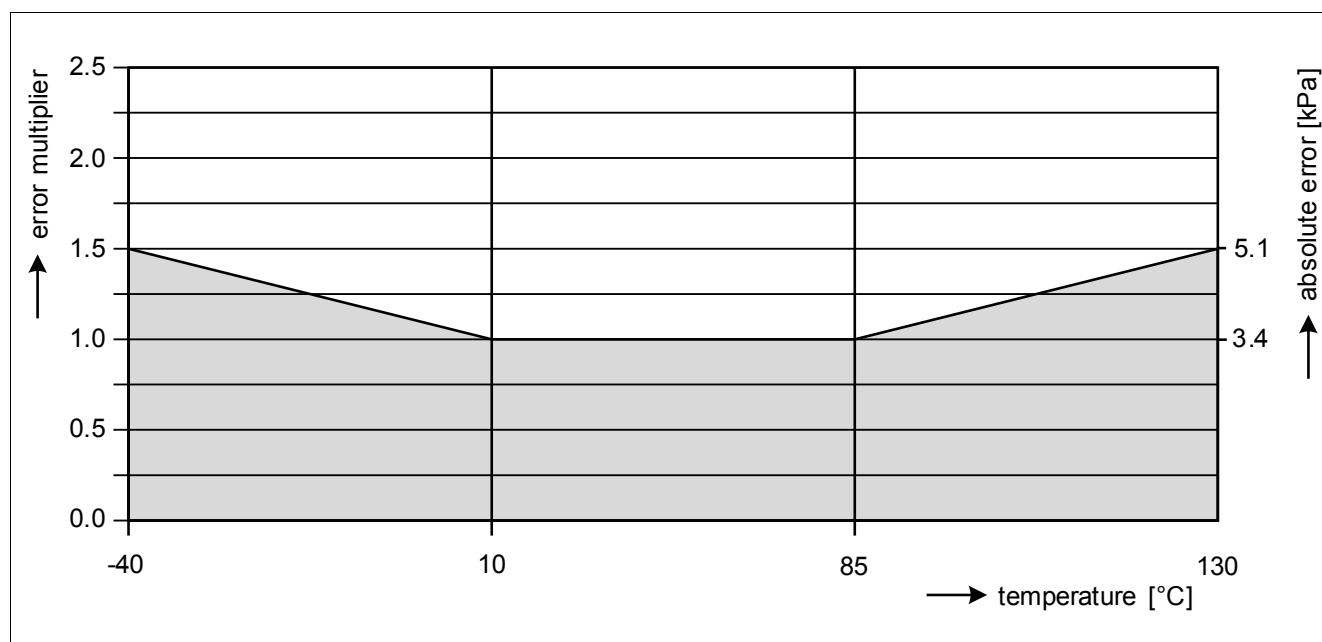


**Figure 5 Accuracy for pressure acquisition**

## Functional Description


### 2.6 Output Voltage versus Load

The output voltage limits depend on:

- The value of the external load resistor.
- The type of connection (pull-up or pull-down).

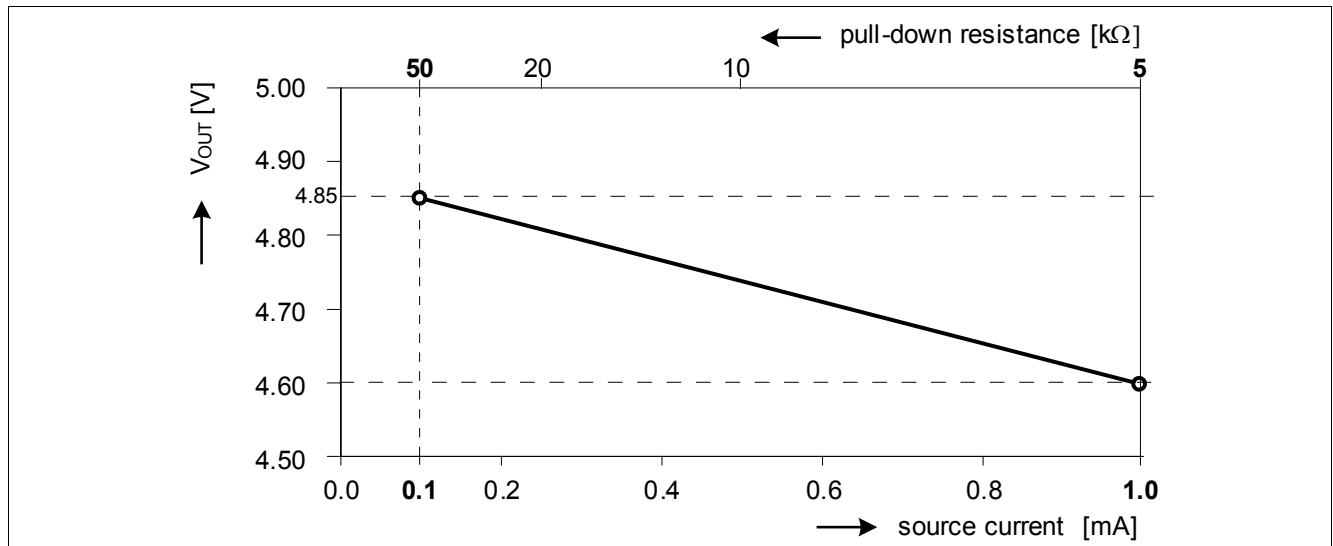

**Figure 6** Maximum output voltage limit with pull-down load

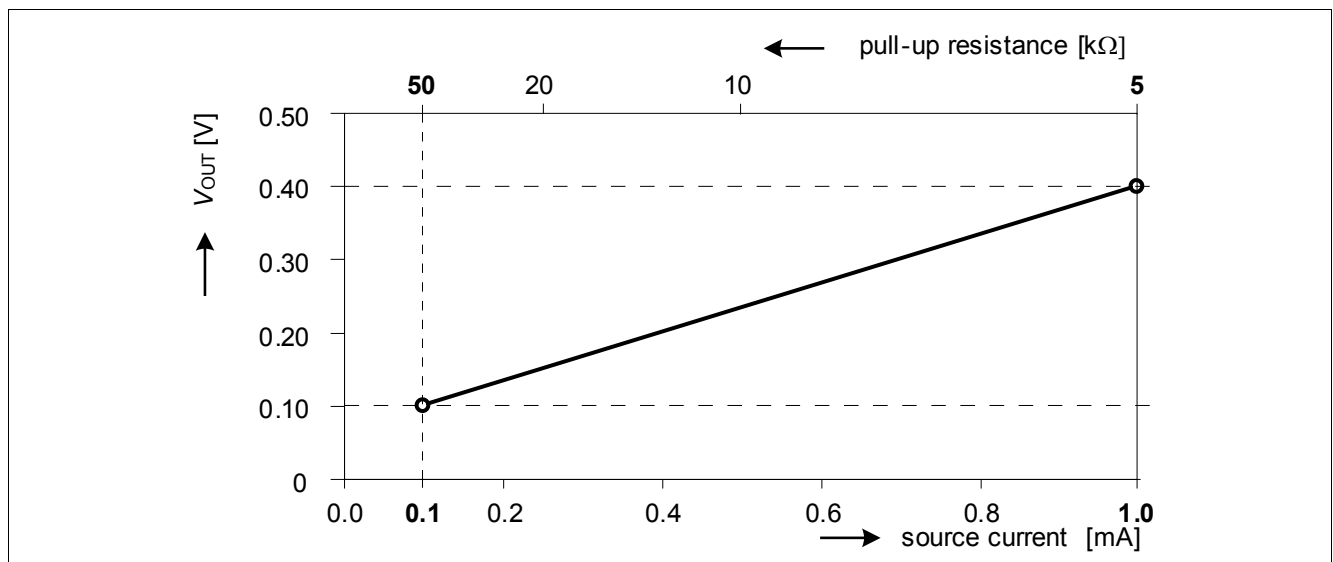

**Figure 7** Minimum output voltage limit with pull-up load

*Note: The values in the diagrams are valid for the entire specified temperature range.  
The two diagrams above do not take into account clamping levels. In case clamping levels are implemented, the output voltage is clamped accordingly.*

## Functional Description

### 2.7 Timing Properties

#### Power-up Time

The power-up time  $t_{UP}$  is defined as the maximum time between the supply voltage reaching its operating range and the output voltage reaching 90% of its final value (assuming pin  $V_{OUT}$  open and constant input pressure).

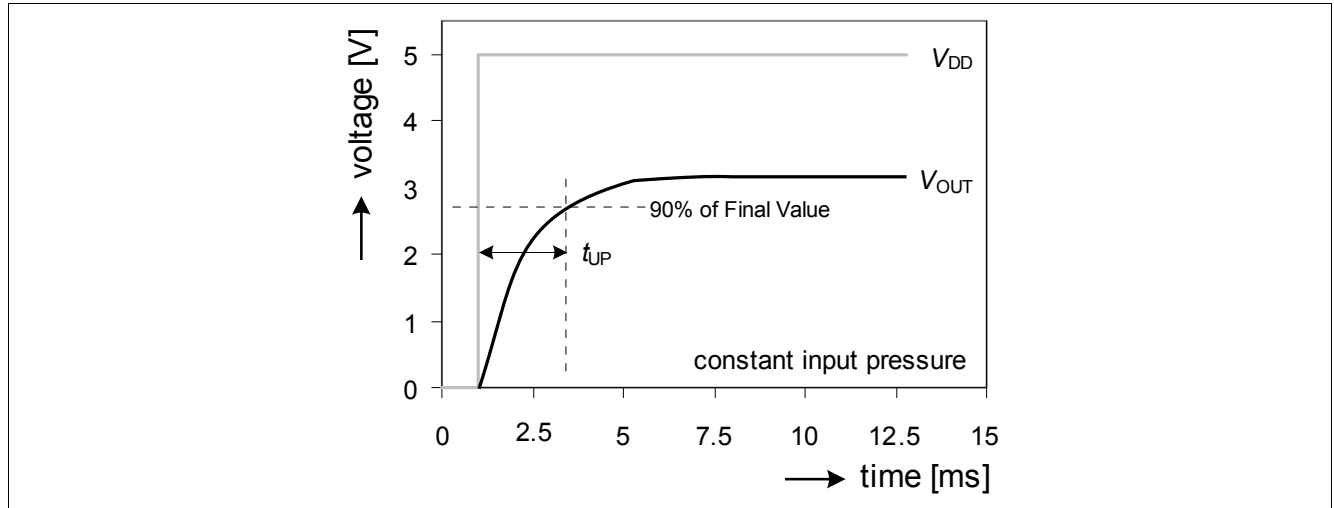


Figure 8 Power-up time

#### Response Time and Stabilization Time

The response time  $t_R$  is defined as the time required by the output to change from 10% to 90% of its final value after a specified pressure step (assuming pin  $V_{OUT}$  open).

The stabilization time  $t_S$  is defined as the time required by the output to meet the specified accuracy after the pressure has been stabilized (assuming pin  $V_{OUT}$  open).

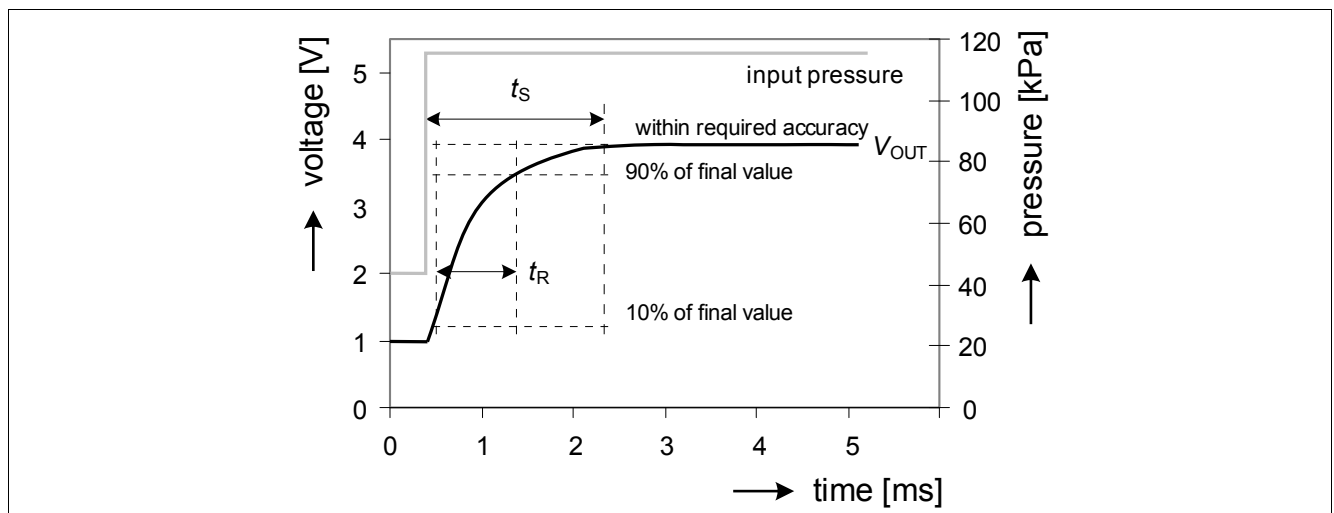


Figure 9 Response and stabilization time

*Note: The values in the diagrams are valid for the entire specified temperature range.*

## Specification


### 3 Specification

#### 3.1 Application Circuit Example

It is recommended to protect the pressure sensor IC against overload and electro-magnetic interferences (as shown in [Figure 10](#)).

The output circuit acts as a low-pass decoupling filter between the sensor IC output and the A/D input of the microcontroller.

The shown application circuit example considers an increased cable length between the sensor and the microcontroller. A combined location on a PCB with reduced distance between the sensor and the controller allows a reduction of the numbers of the passive components (e.g.  $C_2$ ,  $R_1$  and  $R_2$  can be omitted).

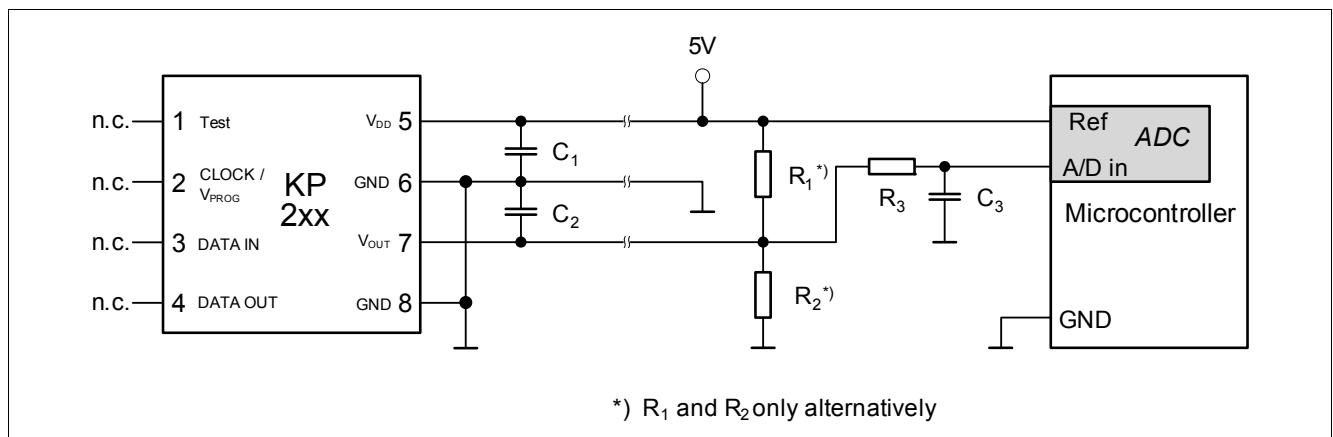

**Figure 10** Application circuit example

*Note: It is recommended to leave the digital pins  $CLOCK/V_{PROG}$ ,  $DATA IN$  and  $DATA OUT$  floating (in case of an open GND connection, the floating pins prevent from a cross grounding through the corresponding ESD diodes).*

**Table 5** Component Values

| Component                 | Symbol | Values |      |      | Unit       |
|---------------------------|--------|--------|------|------|------------|
|                           |        | Min.   | Typ. | Max. |            |
| Pull-Up Resistor          | $R_1$  | 5      | 59   | 100  | k $\Omega$ |
| Pull-Down Resistor        | $R_2$  | 5      | 59   | 100  | k $\Omega$ |
| Low Pass Resistor         | $R_3$  | 3.9    | 22   | 100  | k $\Omega$ |
| Supply Blocking Capacitor | $C_1$  | 10     | 100  | 100  | nF         |
| Output Blocking Capacitor | $C_2$  | 0      | 100  | 100  | nF         |
| Low Pass Capacitor        | $C_3$  | 10     | 100  | 100  | nF         |

## Specification

### 3.2 Absolute Maximum Ratings

**Table 6 Absolute Maximum Ratings**

| Parameter                                  | Symbol         | Values             |      |            | Unit       | Note or Test Condition                                                         | Number |
|--------------------------------------------|----------------|--------------------|------|------------|------------|--------------------------------------------------------------------------------|--------|
|                                            |                | Min.               | Typ. | Max.       |            |                                                                                |        |
| Supply voltage                             | $V_{DD\_max}$  | -0.3               | —    | 6.5        | V          | —                                                                              | 1.1    |
|                                            |                | —                  | —    | 16.5       | V          | 1 h @ 70°C                                                                     |        |
|                                            |                | -6.5 <sup>1)</sup> | —    | —          | V          | Limited time: Max. 300 s                                                       |        |
| Output voltage                             | $V_{OUT}$      | -0.3               | —    | VDD+0.3    | V          | —                                                                              | 1.2    |
| Voltage on<br>CLOCK/ $V_{PROG}$ pin        | $V_{CLK}$      | —                  | —    | 20         | V          | —                                                                              | 1.3    |
| Voltage on<br>DATA IN &<br>DATA_OUT pins   | $V_{DATA}$     | —                  | —    | 5          | V          | —                                                                              | 1.4    |
| Storage temperature                        | $T_S$          | -60                | —    | 150        | °C         | —                                                                              | 1.5    |
| Thermal resistance                         | $R_{thJA}$     | —                  | —    | 180        | K/W        | Thermal resistance<br>between the die and<br>ambient; according to<br>JESD51-2 | 1.6    |
| Maximum input<br>pressure                  | $p_{amb\_max}$ | 10                 | —    | 400<br>600 | kPa<br>kPa | Limited time: Max. 300 s                                                       | 1.7    |
| ESD robustness<br>(HBM: 1.5 kΩ,<br>100 pF) | $V_{ESD}$      | —                  | —    | 2          | kV         | According to<br>EIA / JESD22-A114-E                                            | 1.8    |

1) Reverse polarity;  $I_{DD} < 300$  mA

**Attention:** Stresses above the max. values listed in [Table 6](#) may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the integrated circuit.

## Specification

### 3.3 Operating Range

The following operating conditions must not be exceeded in order to ensure correct operation of the device. All parameters specified in the following sections refer to these operating conditions, unless noted otherwise.

**Table 7 Operating Range**

| Parameter                        | Symbol     | Values |      |      | Unit  | Note or Test Condition                      | Number |
|----------------------------------|------------|--------|------|------|-------|---------------------------------------------|--------|
|                                  |            | Min.   | Typ. | Max. |       |                                             |        |
| Supply voltage                   | $V_{DD}$   | 4.5    | 5.0  | 5.5  | V     | V <sub>OUT</sub> is ratiometric to $V_{DD}$ | 2.1    |
| Output current on $V_{OUT}$ pin  | $I_{OUT}$  | –      | –    | 1    | mA    | pull-down resistor used                     | 2.2    |
|                                  |            | -1     | –    | –    | mA    | pull-up resistor used                       |        |
| Operating temperature            | $T_a$      | -40    | –    | 140  | °C    |                                             | 2.3    |
| Ambient operating pressure range | $p_{amb}$  | 20     | –    | 250  | kPa   |                                             | 2.4    |
| Lifetime <sup>1)</sup>           | $t_{live}$ | 15     | –    | –    | years |                                             | 2.5    |

1) The life time shall be considered as anticipation with regard to the product that shall not extend the agreed warranty period.



## Specification

### 3.4 Characteristics

**Table 8 Electrical Characteristics**

| Parameter                                          | Symbol       | Values |      |                   | Unit                                   | Note or Test Condition                                          | Number |
|----------------------------------------------------|--------------|--------|------|-------------------|----------------------------------------|-----------------------------------------------------------------|--------|
|                                                    |              | Min.   | Typ. | Max.              |                                        |                                                                 |        |
| Output voltage range                               | $V_{OUT\_R}$ | 0.10   | —    | 4.85              | V                                      | See also section <b>“Output Voltage versus Load” on Page 12</b> | 3.1    |
| Supply current                                     | $I_{DD}$     | —      | 8    | 10                | mA                                     | During power up a peak supply current of max. 22 mA is possible | 3.2    |
| Output referred noise                              | $V_{NOISE}$  | —      | —    | 2.5<br>1.8        | mV <sub>RMS</sub><br>mV <sub>RMS</sub> | Frequency > 1 kHz <sup>1)</sup><br>Frequency < 1 kHz            | 3.3    |
| Response time <sup>2)</sup>                        | $t_R$        | —      | 0.65 | 1.0 <sup>3)</sup> | ms                                     | 10% to 90% of the final output value                            | 3.4    |
| Stabilization time <sup>2)</sup>                   | $t_S$        | —      | —    | 10                | ms                                     | For full accuracy                                               | 3.5    |
| Power-up time <sup>2)</sup>                        | $t_{UP}$     | —      | —    | 5                 | ms                                     | 90% of the final output value                                   | 3.6    |
| Broken wire: Diagnosis response time <sup>4)</sup> | $t_{OBD}$    | —      | —    | 1                 | ms                                     |                                                                 | 3.7    |
| OBD transistor on resistance                       | $R_{DSON}$   | —      | —    | 160               | $\Omega$                               |                                                                 | 3.8    |

1) 200 measurements in sequence, bandwidth limited to 40kHz

2) More details in section **“Timing Properties” on Page 13**

3) The maximum response time considers a maximal value of 100nF for the output blocking capacitor  $C_2$  and a maximum pressure pulse equivalent 4.0V output change

4) In the event of a broken wire (broken VDD line or broken GND line), the output changes to certain voltage levels within the broken wire response time. The OBD ranges are determined by the application circuitry

## Specification

**Table 9 Transfer Function**

| Parameter                                 | Symbol                 | Values |      |      | Unit    | Note or Test Condition                     | Number |
|-------------------------------------------|------------------------|--------|------|------|---------|--------------------------------------------|--------|
|                                           |                        | Min.   | Typ. | Max. |         |                                            |        |
| Sensitivity                               | $S$                    | —      | 18.5 | —    | mV /kPa |                                            | 4.1    |
| Accuracy pressure (overall) <sup>1)</sup> | $acc_p$                | -3.4   | —    | 3.4  | kPa     | 10°C up to 85 °C                           | 4.2    |
|                                           |                        | -5.1   | —    | 5.1  | kPa     | @ -40°C                                    |        |
|                                           |                        | -5.1   | —    | 5.1  | kPa     | @ 130°C                                    |        |
| Ratiometric error <sup>2)</sup>           | $E_{\text{RAT}}$       | -25    | —    | 25   | mV      |                                            | 4.3    |
| Lower clamping level                      | $V_{\text{Cl\_low}}$   | —      | 0.3  | —    | V       |                                            | 4.4    |
| Upper clamping level                      | $V_{\text{Cl\_high}}$  | —      | 4.8  | —    | V       |                                            | 4.5    |
| Clamping level error                      | $\Delta V_{\text{Cl}}$ | -30    | —    | 30   | mV      | Accuracy of lower and upper clamping level | 4.6    |

1) More details in section [“Overall Accuracy” on Page 10](#)

2) More details in section [“Ratiometric Error” on Page 10](#)




## Package Information

### Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

## 4.2 Identification Code

The identification code is provided in a machine readable format. The date and sales code are provided in human readable format.

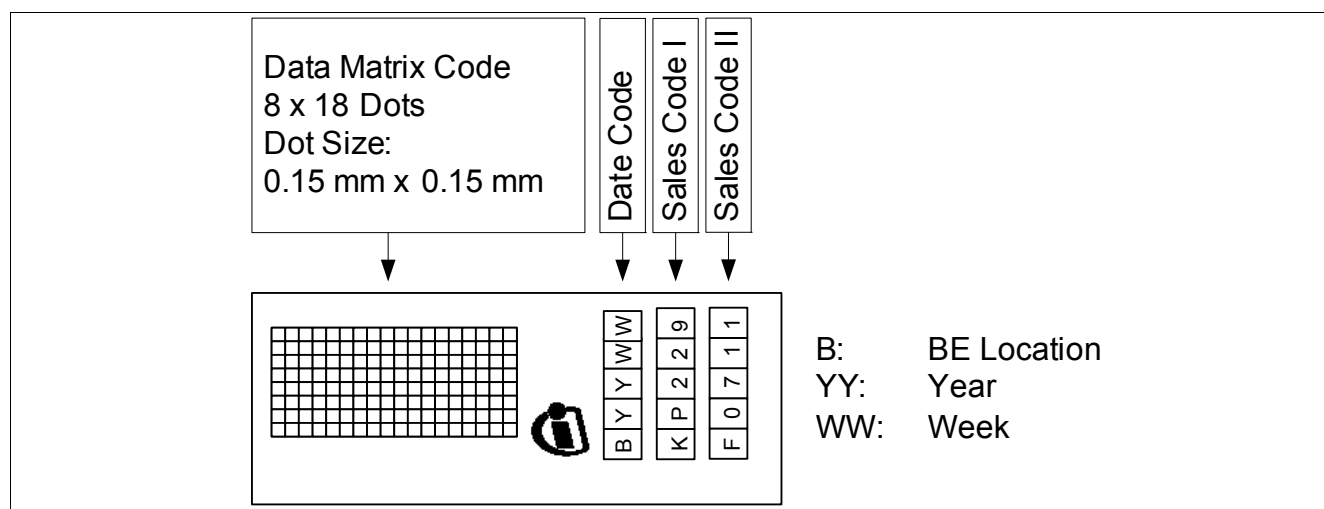

**Figure 12 Identification code**

The identification code for the KP229F0711 is on the same side of the package as pin 8 (GND).



Revision History

5 Revision History

| Revision History         |                                                  |
|--------------------------|--------------------------------------------------|
| Page or Item             | Subjects (major changes since previous revision) |
| Revision 1.0, 2018-04-26 |                                                  |
|                          | change document status from target to final      |
|                          |                                                  |
|                          |                                                  |
|                          |                                                  |
|                          |                                                  |
|                          |                                                  |

#### Trademarks of Infineon Technologies AG

AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, CoolMOST™, CoolSET™, CORECONTROL™, CROSSAVE™, DAVET™, DI-POL™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPIM™, EconoPACK™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, I<sup>2</sup>RF™, ISOFACE™, IsoPACK™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OptiMOS™, ORIGAT™, POWERCODE™, PRIMARION™, PrimePACK™, PrimeSTACK™, PRO-SIL™, PROFET™, RASIC™, ReverSave™, SatRIC™, SIEGET™, SINDRION™, SIPMOST™, SmartLEWIS™, SPOC™, SOLID FLASH™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™.

#### Other Trademarks

Advance Design System™ (ADS) of Agilent Technologies, AMBA™, ARM™, MULTI-ICE™, KEIL™, PRIMECELL™, REALVIEW™, THUMB™,  $\mu$ Vision™ of ARM Limited, UK. AUTOSAR™ is licensed by AUTOSAR development partnership. Bluetooth™ of Bluetooth SIG Inc. CAT-iq™ of DECT Forum. COLOSSUS™, FirstGPS™ of Trimble Navigation Ltd. EMV™ of EMVCo, LLC (Visa Holdings Inc.). EPCOST™ of Epcos AG. FLEXGO™ of Microsoft Corporation. FlexRay™ is licensed by FlexRay Consortium. HYPERTERMINAL™ of Hilgraeve Incorporated. IEC™ of Commission Electrotechnique Internationale. IrDA™ of Infrared Data Association Corporation. ISO™ of INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. MATLAB™ of MathWorks, Inc. MAXIM™ of Maxim Integrated Products, Inc. MICROTEC™, NUCLEUS™ of Mentor Graphics Corporation. MIPI™ of MIPI Alliance, Inc. MIPS™ of MIPS Technologies, Inc., USA. muRata™ of MURATA MANUFACTURING CO., MICROWAVE OFFICE™ (MWO) of Applied Wave Research Inc., OmniVision™ of OmniVision Technologies, Inc. Openwave™ Openwave Systems Inc. RED HAT™ Red Hat, Inc. RFMD™ RF Micro Devices, Inc. SIRIUS™ of Sirius Satellite Radio Inc. SOLARIS™ of Sun Microsystems, Inc. SPANSION™ of Spansion LLC Ltd. Symbian™ of Symbian Software Limited. TAIYO YUDEN™ of Taiyo Yuden Co. TEAKLITE™ of CEVA, Inc. TEKTRONIX™ of Tektronix Inc. TOKO™ of TOKO KABUSHIKI KAISHA TA. UNIX™ of X/Open Company Limited. VERILOG™, PALLADIUM™ of Cadence Design Systems, Inc. VLYNQ™ of

[www.infineon.com](http://www.infineon.com)

**Edition 2018-04-26**

**Published by**

**Infineon Technologies AG  
81726 Munich, Germany**

**© 2014 Infineon Technologies AG.**

**All Rights Reserved.**

**Do you have a question about any  
aspect of this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference**

#### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

#### Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

#### Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office. Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)