

Features

- Low Voltage Operation: 2.5 V
- Low Harmonics: < -65 dBc at +34 dBm & 1 GHz
- Low Insertion Loss: 0.65 dB @ 1 GHz
- High Isolation: 23 dB @ 2 GHz
- 0.5 micron GaAs PHEMT Process
- Lead-Free 4mm 16-lead PQFN Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- 260°C Reflow Compatible
- RoHS* Compliant Version of MASWSS0118

Description

M/A-COM's MASW-008566 is a GaAs PHEMT MMIC single pole four throw (SP4T) high power switch in a low cost 4 mm 16-lead PQFN package. The MASW-008566 is ideally suited for applications where high power, low control voltage, low insertion loss, high isolation, small size, and low cost are required.

Typical applications are for GSM and DCS handset systems that connect separate transmit and receive functions to a common antenna, as well as other handset and related applications. This part can be used in all systems operating up to 3.0 GHz requiring high power at low control voltage.


The MASW-008566 is fabricated using a 0.5 micron gate length GaAs PHEMT process. The process features full passivation for performance and reliability.

Ordering Information^{1,2}

| Part Number | Package |
|--------------------|-----------------|
| MASW-008566-TR3000 | 3000 piece reel |
| MASW-008566-001SMB | Sample Board |

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

Functional Schematic

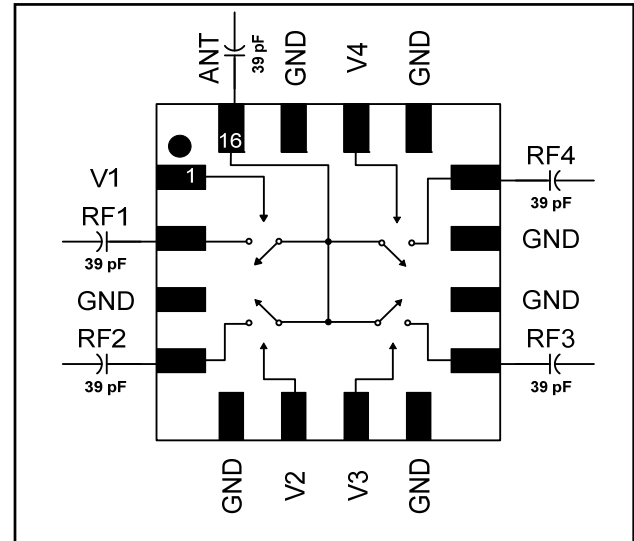

Pin Configuration

| Pin No. | Pin Name | Description |
|---------|---------------------|--------------|
| 1 | V1 | Control 1 |
| 2 | RF1 | RF Port 1 |
| 3 | GND | RF Ground |
| 4 | RF2 | RF Port 2 |
| 5 | GND | RF Ground |
| 6 | V2 | Control 2 |
| 7 | V3 | Control 3 |
| 8 | GND | RF Ground |
| 9 | RF3 | RF Port 3 |
| 10 | GND | RF Ground |
| 11 | GND | RF Ground |
| 12 | RF4 | RF Port 4 |
| 13 | GND | RF Ground |
| 14 | V4 | Control 4 |
| 15 | GND | RF Ground |
| 16 | ANT | Antenna Port |
| 17 | Paddle ³ | RF Ground |

3. The exposed pad centered on the package bottom must be connected to RF and DC ground.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

GaAs SP4T 2.5 V High Power Switch DC - 3.0 GHz

Rev. V1

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50 \Omega$ ⁴

| Parameter | Test Conditions | Units | Min. | Typ. | Max. |
|-----------------------------|-----------------------------------------------------------------------------------|---------------|------|------|------|
| Insertion Loss ⁵ | DC – 1 GHz | dB | — | 0.65 | 0.85 |
| | 1 – 2 GHz | dB | — | 0.80 | 1.00 |
| | 2 - 3 GHz | dB | — | 1.00 | — |
| Isolation | DC – 1 GHz | dB | 27 | 29.0 | — |
| | 1 – 2 GHz | dB | 21 | 23.0 | — |
| | 2 - 3 GHz | dB | — | 18.5 | — |
| Return Loss | DC – 3 GHz | dB | — | 20 | — |
| IP3 | Two Tone +26 dBm, 5 MHz Spacing, > 50 MHz $V_C = 0 \text{ V} / 2.5 \text{ V}$ | dBm | — | 57 | — |
| IP2 | Two Tone +26 dBm, 5 MHz Spacing, > 50 MHz $V_C = 0 \text{ V} / 2.5 \text{ V}$ | dBm | — | 81 | — |
| P.1dB | $V_C = 0 \text{ V} / 2.5 \text{ V}$ | dBm | — | 38 | — |
| 2 nd Harmonic | 1 GHz, $P_{IN} = +34 \text{ dBm}$, $V_C = 0 \text{ V} / 2.5 \text{ V}$ | dBc | — | -80 | -71 |
| 3 rd Harmonic | 1 GHz, $P_{IN} = +34 \text{ dBm}$, $V_C = 0 \text{ V} / 2.5 \text{ V}$ | dBc | — | -68 | -65 |
| Trise, Tfall | 10% RF to 90% RF, 90% to 10% RF, $V_C = 0 \text{ V} / 2.5 \text{ V}$ | μS | — | 0.2 | — |
| Ton, Toff | 50% control to 90% RF, 50% control to 10% RF, $V_C = 0 \text{ V} / 2.5 \text{ V}$ | μS | — | 0.2 | — |
| Transients | | mV | — | 35 | — |
| Control Current | $V_C = 0 \text{ V} / 2.5 \text{ V}$, 34 dBm | μA | — | 10 | 50 |

4. External DC blocking capacitors are required on all RF ports.

5. Insertion Loss can be optimized by varying the DC blocking capacitor value, e.g. 1000 pF for 100 - 500 MHz, 39 pF for 0.5 - 3 GHz.

Absolute Maximum Ratings^{6,7}

| Parameter | Absolute Maximum |
|-----------------------------------------------|---------------------------------------------|
| Input Power (0.5 - 3.0 GHz, 2.5 V Control) | +38 dBm |
| Voltage | ± 8.5 volts |
| Operating Temperature | -40°C to $+85^\circ\text{C}$ |
| Storage Temperature | -65°C to $+150^\circ\text{C}$ |

6. Exceeding any one or combination of these limits may cause permanent damage to this device.

7. M/A-COM does not recommend sustained operation near these survivability limits.

Truth Table^{8,9}


| V1 | V2 | V3 | V4 | ANT-RF1 | ANT-RF2 | ANT-RF3 | ANT-RF4 |
|----|----|----|----|---------|---------|---------|---------|
| 1 | 0 | 0 | 0 | On | Off | Off | Off |
| 0 | 1 | 0 | 0 | Off | On | Off | Off |
| 0 | 0 | 1 | 0 | Off | Off | On | Off |
| 0 | 0 | 0 | 1 | Off | Off | Off | On |

8. Differential voltage, V (state 1) -V (state 2), must be 2.5 V minimum.


9. 0 = -5 V to +2.5 V, 1 = -2.5 V to +5 V

Typical Performance Curves


Insertion Loss vs. Temperature

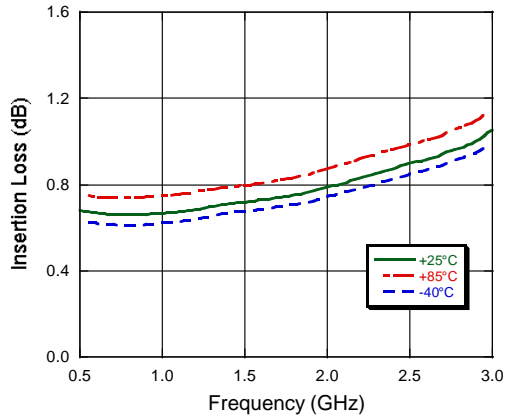


Isolation vs. Temperature

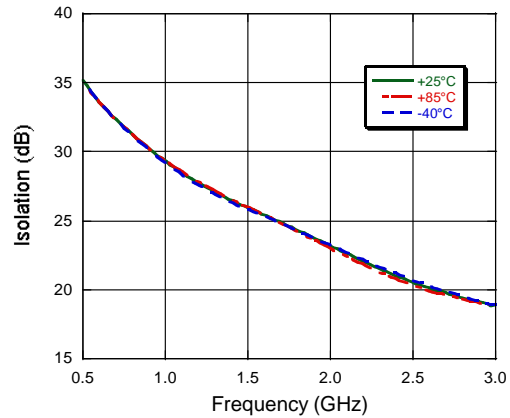


1 GHz 2nd Harmonic Rejection

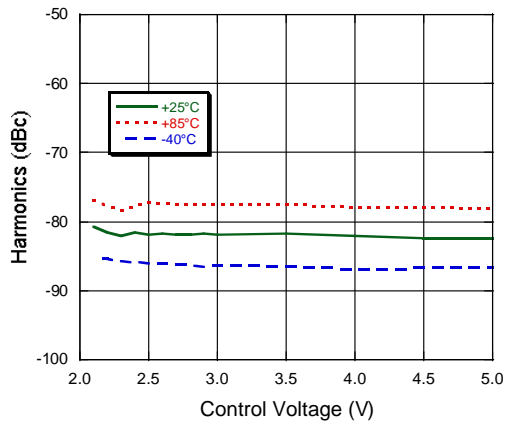

1 GHz 3rd Harmonic Rejection

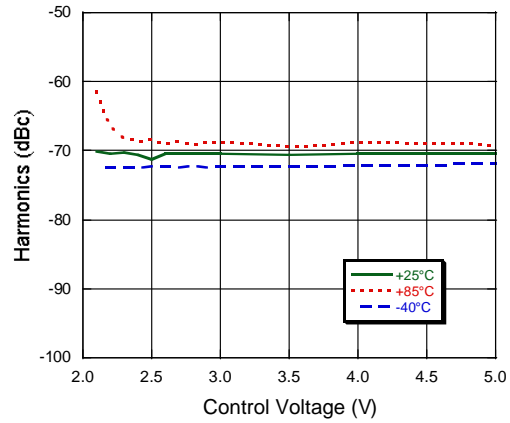

Lead-Free 4 mm 16-Lead PQFN†

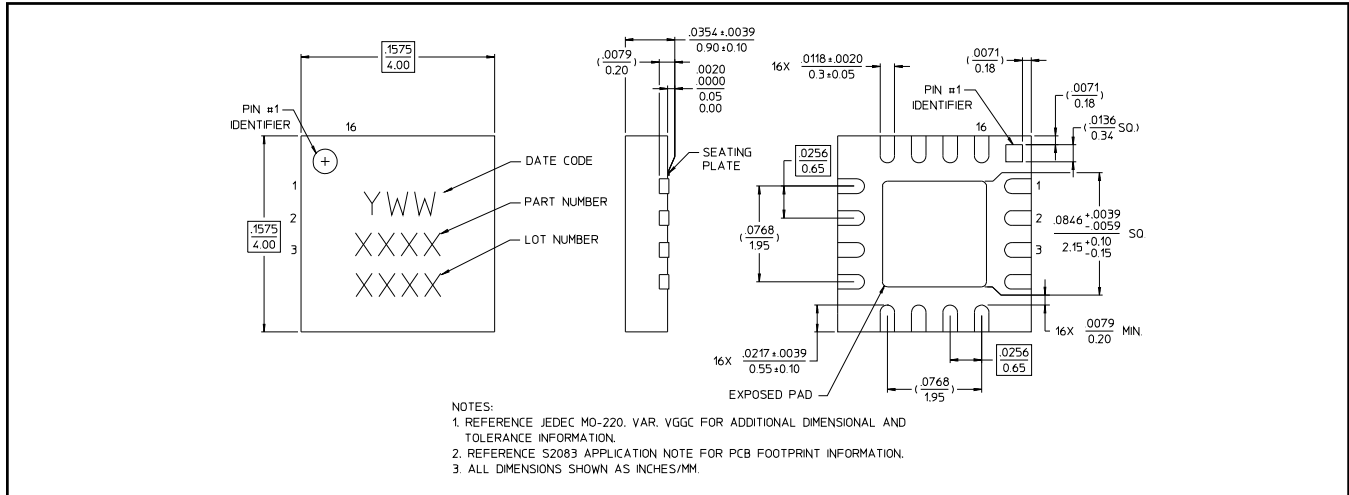

† Reference Application Note M538 for lead-free solder reflow recommendations.
Meets JEDEC moisture sensitivity level 1 requirements.

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru