


PTVA101K02EV


Thermally-Enhanced High Power RF LDMOS FET 1000 W, 50 V, 1030 / 1090 MHz

Description

The PTVA101K02EV LDMOS FET is designed for use in power amplifier applications in the 1030 MHz / 1090 MHz frequency band. Features include high gain and thermally-enhanced package with bolt-down flange. Manufactured with Wolfspeed's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.

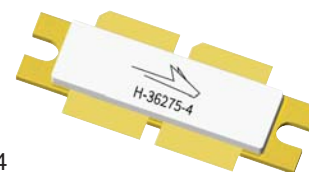

PTVA101K02EV
Package H-36275-4

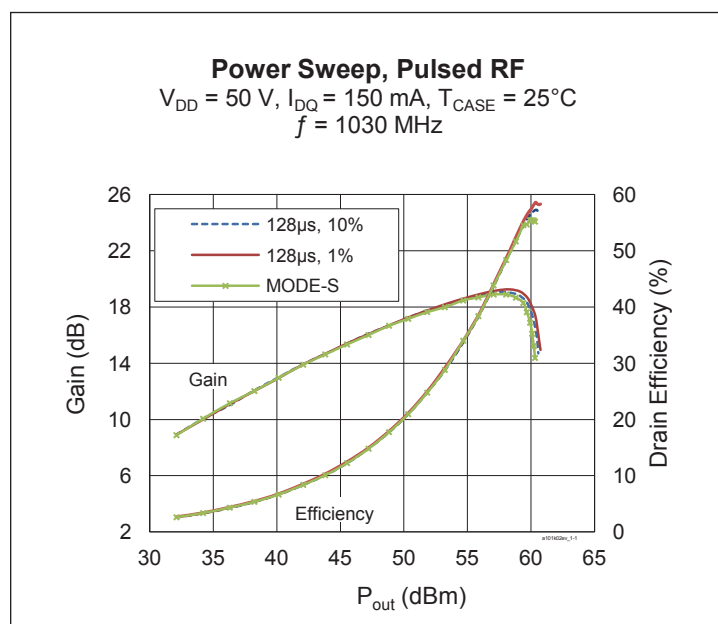

Features

- Broadband input matching
- High gain and efficiency
- Integrated ESD protection
- Human Body Model Class 2 (per ANSI/ESDA/ JEDEC JS-001)
- Low thermal resistance
- Pb-free and RoHS compliant
- Capable of withstanding a 10:1 load mismatch (all phase angles) at 1000 W under MODE-S pulse condition, (32µS ON / 18µS OFF) X 80, LTDF = 6.4%.

RF Characteristics

Pulsed RF Performance (tested in Wolfspeed test fixture)

$V_{DD} = 50\text{ V}$, $I_{DQ} = 0.15\text{ A}$, $P_{OUT} = 900\text{ W}$, $f = 1030\text{ MHz}$, 128 µs pulse width, 10% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	17	18	21	dB
Drain Efficiency	η_D	62	65	—	%

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

RF Characteristics

Typical RF Performance (not subject to production test, verified by design/characterization in Wolfspeed test fixture)
 $V_{DD} = 50\text{ V}$, $I_{DQ} = 75\text{ mA}$ per side, Input signal ($t_r = 5\text{ ns}$, $t_f = 6.5\text{ ns}$), $T_{CASE} = 25^\circ\text{C}$, class AB test

Mode of operation	f (MHz)	IRL (dB)	P _{1dB}			P _{3dB}			P _{droop(pulse)} dB @ 1000 W	t _r (ns)	t _f (ns)
			Gain (dB)	Eff (%)	P _{OUT} (W)	Gain (dB)	Eff (%)	P _{OUT} (W)			
128 μs , 10%	1030	20	18	56	980	16	57	1090	0.18	7	8
128 μs , 1%	1030	20	18.1	57	1010	16.1	58	1130	0.16	7	8
MODE-S (32 μs ON / 18 μs OFF)X80, LTDF=6.4%	1030	20	17.9	54	930	14.9	55	1060	0.45	7	8
128 μs , 10%	1090	13	18.3	59	920	16.2	60	1050	0.16	7	8
128 μs , 1%	1090	14	18.4	60	950	16.4	61	1080	0.17	7	8

DC Characteristics (each side)

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	105	—	—	V
Drain Leakage Current	$V_{DS} = 50\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1	μA
	$V_{DS} = 105\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	10	μA
On-State Resistance	$V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.1	—	Ω
Operating Gate Voltage	$V_{DS} = 50\text{ V}$, $I_{DQ} = 150\text{ mA}$	V_{GS}	3	3.35	4	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1.0	μA

Maximum Ratings



Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	105	V
Gate-Source Voltage	V_{GS}	-6 to +12	V
Operating Voltage	V_{DD}	0 to +55	V
Junction Temperature	T_J	225	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150	$^\circ\text{C}$
Thermal Resistance ($T_{CASE} = 70^\circ\text{C}$, 1000 W, MODE-S)	$R_{\theta JC}$	0.16	$^\circ\text{C/W}$




Ordering Information

Type and Version	Order Code	Package and Description	Shipping
PTVA101K02EV V1 R0	PTVA101K02EV-V1-R0	H-36275-4, bolt-down	Tape & Reel, 50pcs
PTVA101K02EV V1 R250	PTVA101K02EV-V1-R250	H-36275-4, bolt-down	Tape & Reel, 250pcs



Typical RF Performance (tested with LTN/PTVA101K02EV V1 test fixture, 1030 MHz)

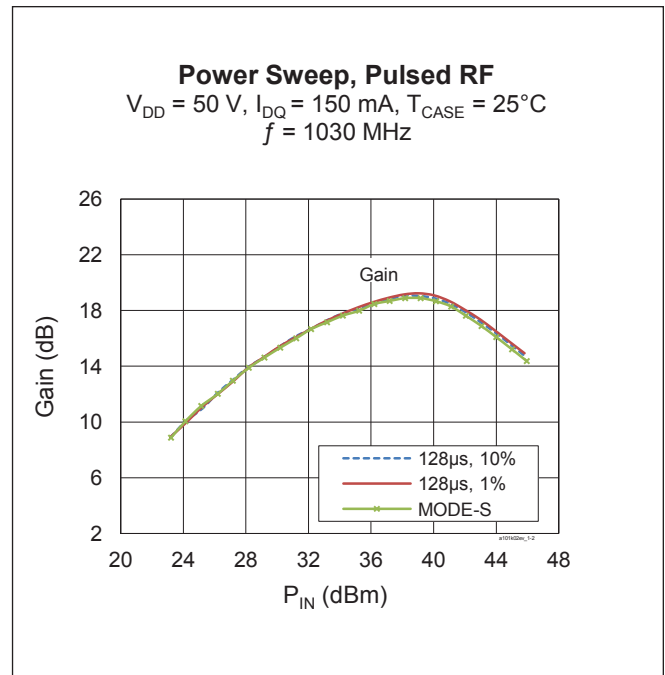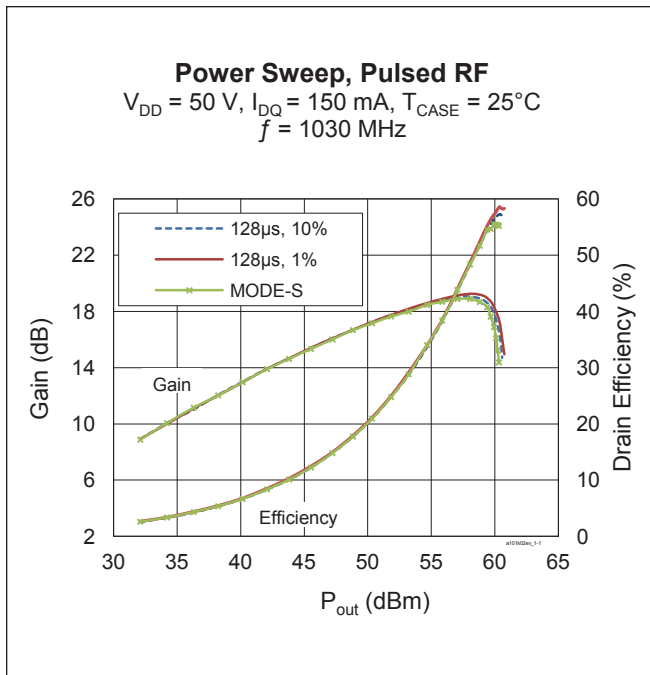


Typical RF Performance (cont.) (tested with LTN/PTVA101K02EV V1 test fixture, 1030 MHz)

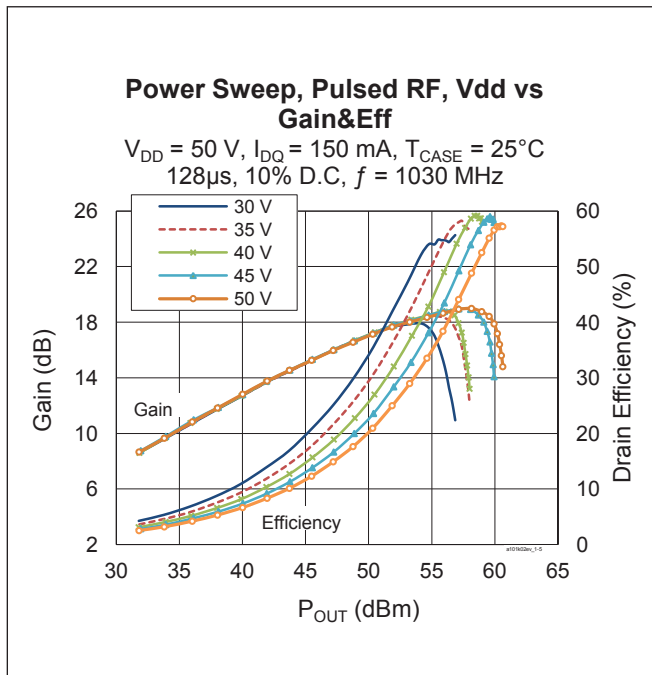

Typical RF Performance (tested with LTN/PTVA101K02EV E6 test fixture, 1090 MHz)

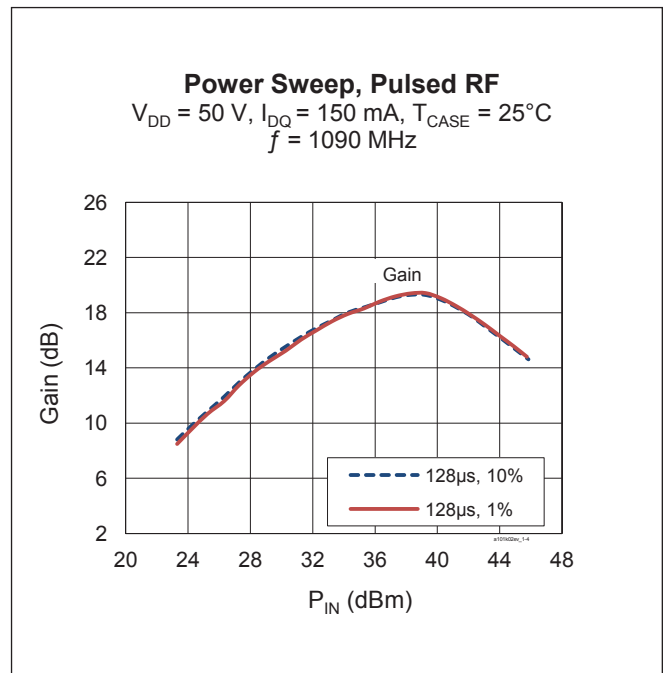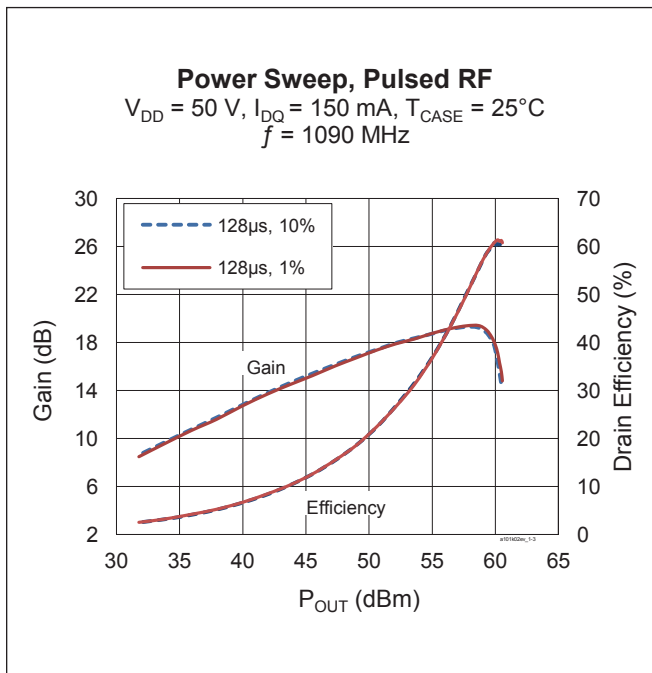

Broadband Circuit Impedance

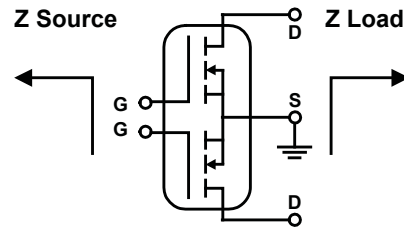

Freq [MHz]	Z Source Ω		Z Load Ω	
	R	jX	R	jX
1030	2.00	1.51	1.48	0.07
1090	2.35	0.64	1.12	-0.28

Note: Measurement on single side.


Load Pull Performance

Each Side Load Pull Performance –16 μ s pulse width, 10% duty cycle, class AB, $V_{DD} = 50$ V, 100 mA

Freq [MHz]	Max Output Power					Max Efficiency					Z Optimum					
	P _{OUT} [dBm]	P _{OUT} [W]	Eff [%]	Gain [dB]	Z _{Load} [Ω]	P _{OUT} [dBm]	P _{OUT} [W]	Eff [%]	Gain [dB]	Z _{Load} [Ω]	P _{OUT} [dBm]	P _{OUT} [W]	Eff [%]	Gain [dB]	Z _{Load} [Ω]	Z _{Source} [Ω]
960	58.10	645.65	61.90	16.46	1.14 - j0.08	56.00	398.11	72.20	18.68	0.79 + j0.69	57.50	562.34	68.00	17.50	0.91 + j0.33	1.41 - j1.62
1030	57.80	602.56	55.60	16.00	0.91 - j0.08	56.00	398.11	71.00	18.80	0.71 + j0.66	57.10	512.86	65.00	17.50	0.78 + j0.34	1.76 - j2.12
1090	57.90	616.60	61.80	16.95	0.95 + j0.27	56.20	416.87	69.80	18.68	0.83 + j0.90	57.40	549.54	65.70	17.73	0.87 + j0.62	2.34 - j2.39
1150	57.36	544.50	50.52	15.80	1.11 + j0.12	56.90	489.78	65.00	17.63	0.94 + j0.76	57.20	524.81	61.20	17.00	1.01 + j0.48	3.21 - j1.47
1215	57.26	532.11	53.90	15.60	1.20 + j0.01	55.40	346.74	62.30	17.46	0.59 + j0.81	56.70	467.74	58.45	16.60	0.88 + j0.49	2.37 - j0.84



Reference Circuit (LTN/PTVA101K02EV V1 test fixture, 1030 MHz)

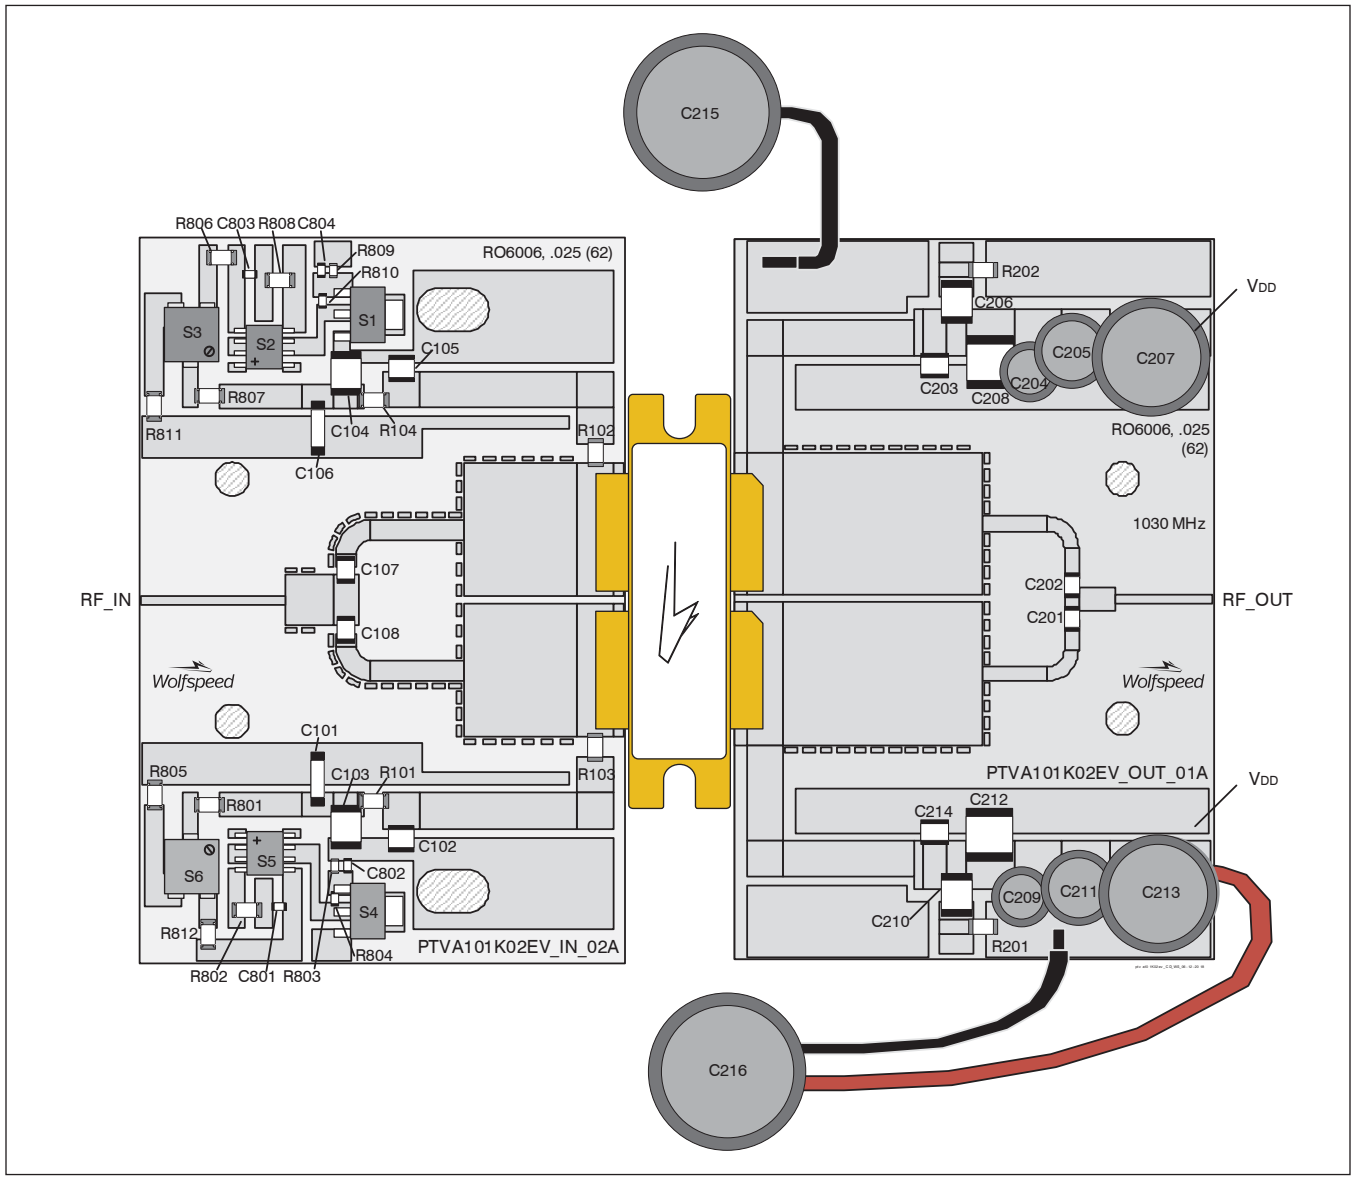

Reference circuit assembly diagram (not to scale)*


Reference Circuit (cont.)**Reference Circuit Assembly**

DUT	Test Fixture Part No.	PCB	Frequency (MHz)
PTVA101K02EV	LTN/PTVA101K02EV V1	Rogers 6006, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 6.15$	1030 MHz
PTVA101K02EV	LTN/PTVA101K02EV E4	Rogers 6006, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 6.15$	1090 MHz
PTVA101K02EV	LTN/PTVA101K02EV E6	Rogers 3010, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$	1090 MHz
PTVA101K02EV	LTN/PTVA101K02EV E8	Rogers 3010, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$	1030 MHz

Components Information

Component	Description	Suggested Manufacturer	P/N
Input			
C101, C106	Capacitor, 10 μ F	TDK Corporation	C5750X5R1H106K230KA
C102, C105, C107, C108	Capacitor, 39 pF	ATC	ATC100B390KW500XB
C103, C104	Capacitor, 1 μ F	TDK Corporation	C4532X7R2A105M230KA
C801, C802, C803, C804	Capacitor, 1000 pF	Panasonic Electronic Components	ECJ-1VB1H102K
R101, R104, R801, R807	Resistor, 10 Ohm	Panasonic Electronic Components	ERJ-8GEYJ100V
R102, R103	Resistor, 100 Ohm	Panasonic Electronic Components	ERJ-8GEYJ101V
R802, R808	Resistor, 6200 Ohm	Panasonic Electronic Components	ERJ-8GEYJ623V
R803, R809	Resistor, 1300 Ohm	Panasonic Electronic Components	ERJ-3GEYJ132V
R804, R810	Resistor, 1200 Ohm	Panasonic Electronic Components	ERJ-3GEYJ122V
R805, R806, R811, R812	Resistor, 2000 Ohm	Panasonic Electronic Components	ERJ-8GEYJ202V
S1, S4	Transistor	Infineon Technologies	BCP56
S2, S5	Voltage regulator	National Semiconductor	LM7805
S3, S6	Potentiometer, 2k ohm	Bourns Inc.	3224W-202ECT-ND
Output			
C201, C202, C203, C214	Capacitor, 39 pF	ATC	ATC100B390KW500XB
C204, C209	Capacitor, 100 μ F	Panasonic Electronic Components	EEV-HD1V101P
C205, C211	Capacitor, 22 μ F	Cornell Dubilier Electronics (CDE)	SEK220M100ST
C206, C210	Capacitor, 1 μ F	TDK Corporation	C4532X7R2A105M230KA
C207, C213	Capacitor, 100 μ F	Cornell Dubilier Electronics (CDE)	SK101M100ST
C208, C212	Capacitor, 10 μ F	TDK Corporation	C5750X5R1H106K230KA
C215, C216	Capacitor, 6800 μ F	Panasonic Electronic Components	ECO-S2AP682EA
R201, R202	Resistor, 5600 Ohm	Panasonic Electronic Components	ERJ-8GEYJ562V

Package Outline Specifications

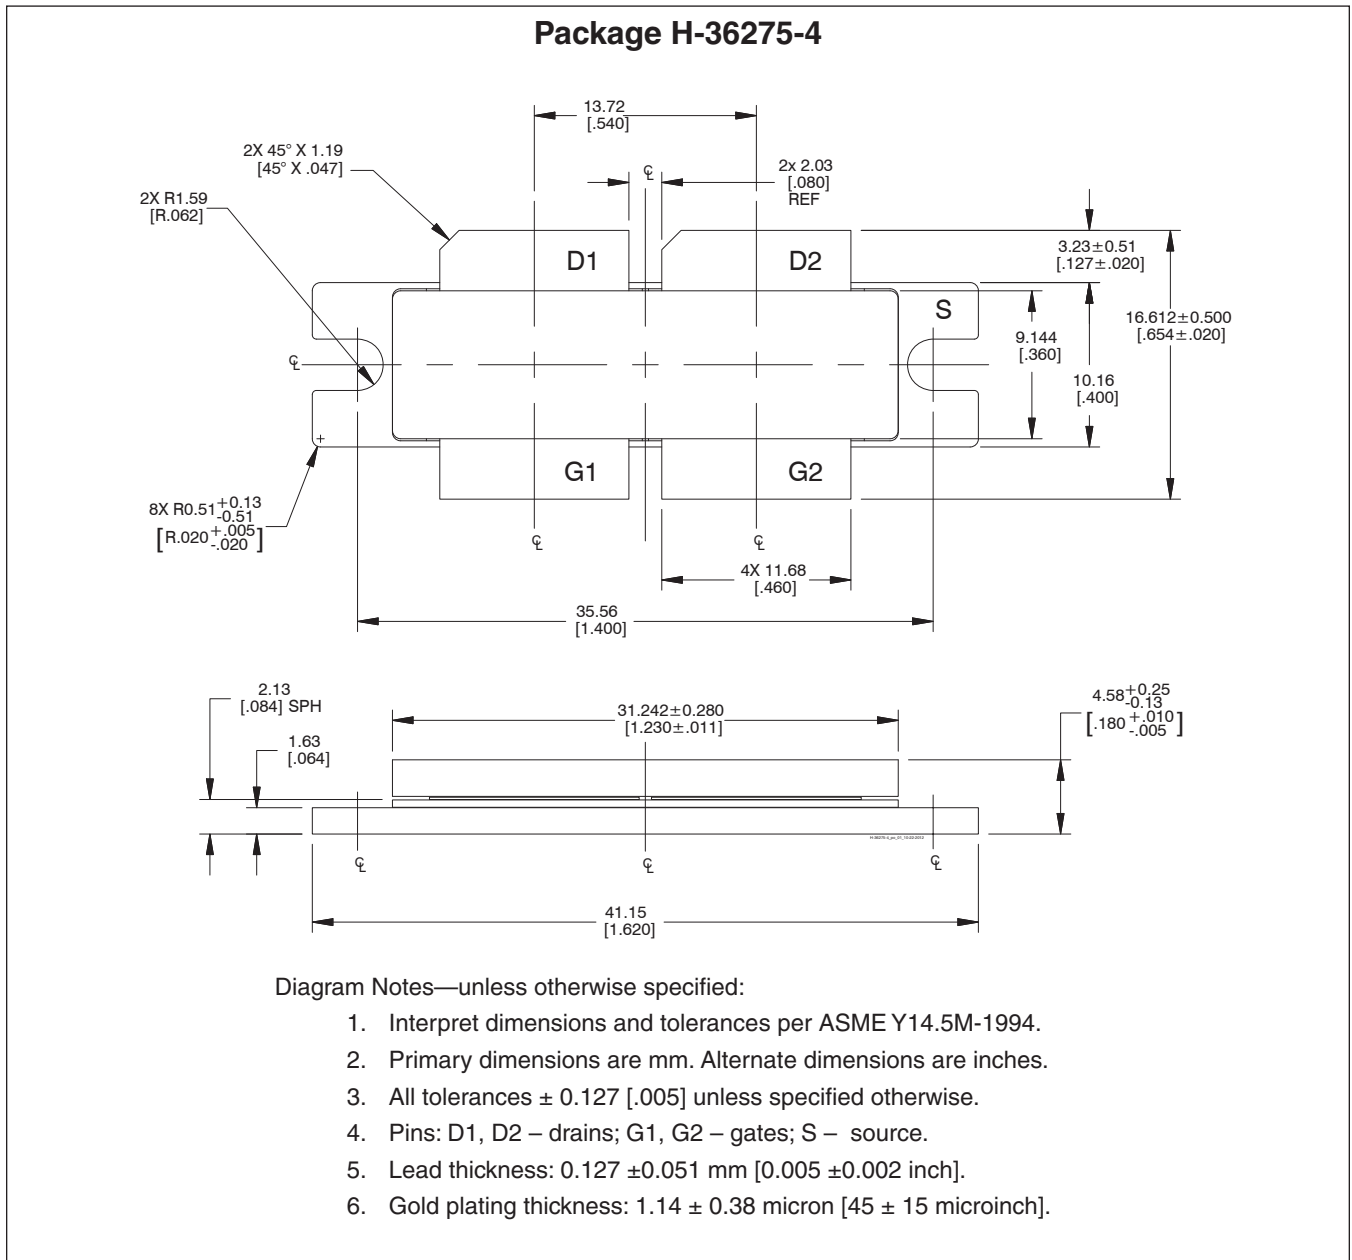

Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2012-06-07	Preliminary	All	Data Sheet reflects preliminary specification
02	2013-04-15	Production	1	Data Sheet reflects released product specification
02.1	2016-04-19	Production	1, 2	Added ESD rating, updated ordering information
02.2	2017-02-09	Production	2	Updated operating voltage and junction temperature
03	2018-06-12	Production	All	Converted to Wolfspeed Data Sheet

For more information, please contact:

4600 Silicon Drive
 Durham, North Carolina, USA 27703
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com
 919.407.7816

Notes

Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru