

4

3

2

1

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

-,-

REVISIONS


© COPYRIGHT - By - ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISED PER ECO-17-013991	22SEP2017	RG	SH



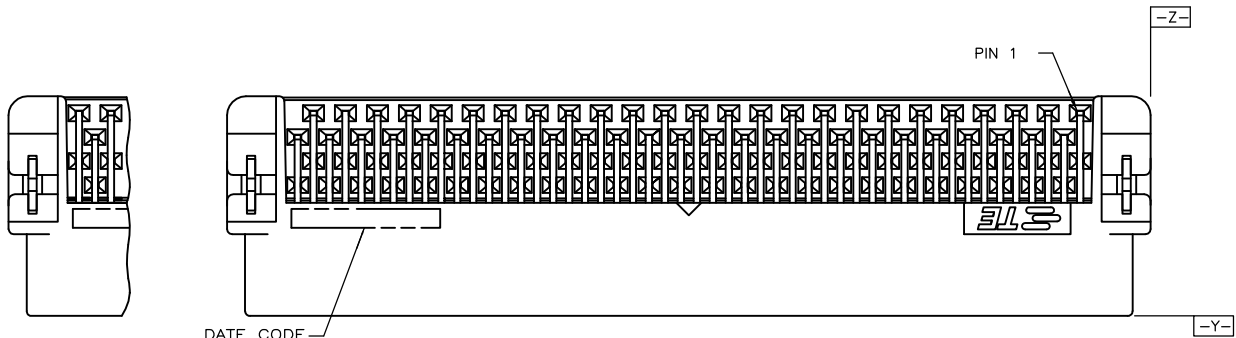


FOR 50 AND 130 POSITIONS ONLY

FOR 40, 60, 68, 80, 100, 120, 140, 160, 180 AND 200 POSITIONS ONLY

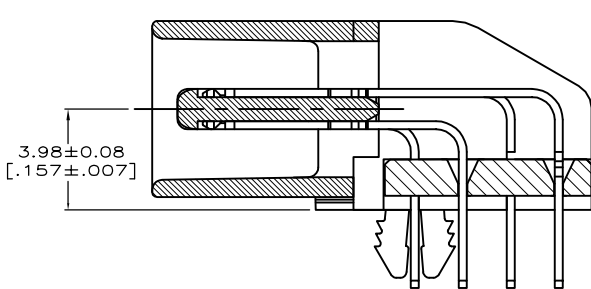


SECTION D-D
SCALE 8:1

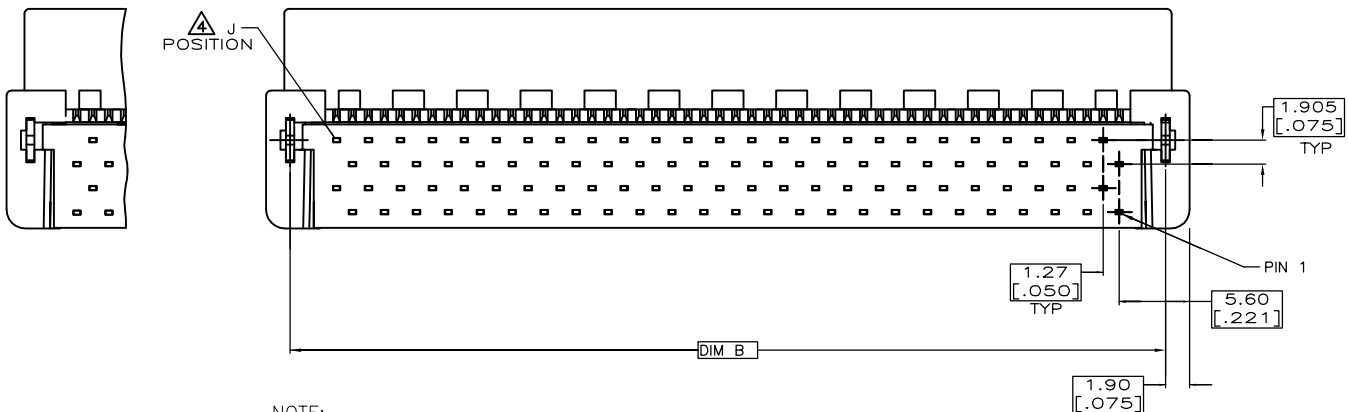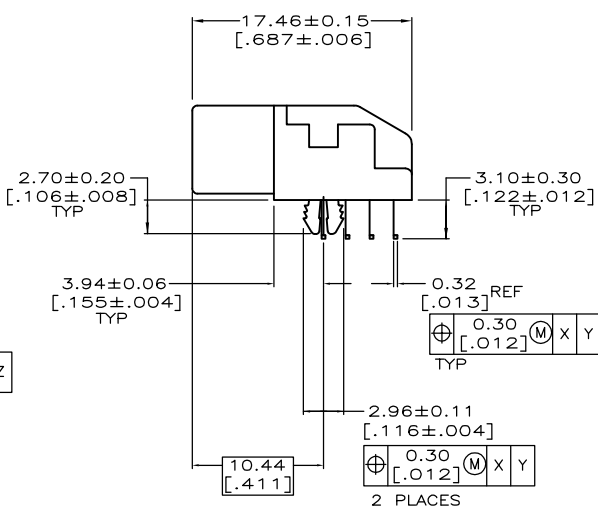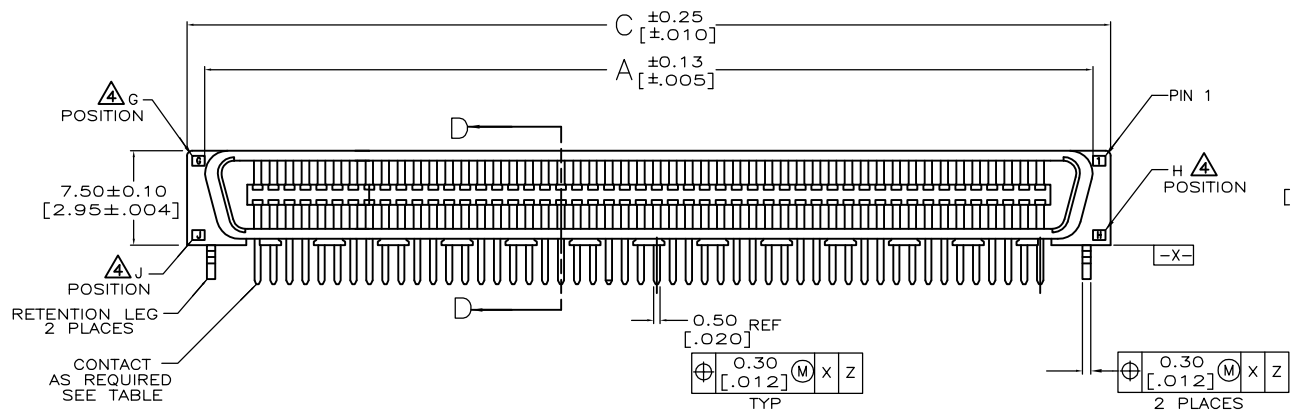

- NOTE:
- MATERIAL:
HOUSING: LCP, UL 94V-0, BLACK COLOR.
CONTACTS: BRASS.
BOARDLOCKS: BRASS.
 - FINISH:
CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA, 3.81µm [150µ"] MIN. MATTE-TIN ON SOLDER TAIL, OVER 1.27µm [50µ"] MIN. NICKEL UNDERPLATED.
BOARDLOCKS: 3.81µm [150µ"] MIN. TIN-Cu OVER 1.27µm [50µ"] MIN. UNDERPLATED.
 - WAVE SOLDER CAPABLE TO 265°C PER TEST SPEC. 109-202, CONDITION B.
- △ G, J, H INDICATE NUMBER OF POSITION MARKED ON ASSEMBLY. ALSO SEE TABLE.
- △ GOLD FLASH OVER 0.762µm [30µ"] MIN. PALLADIUM-NICKEL PLATED.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm
TOLERANCES UNLESS OTHERWISE SPECIFIED:



0 PLC	± -
1 PLC	± 0.25
2 PLC	± 0.2
3 PLC	± -
4 PLC	± -
ANGLES	± -

MATERIAL

SEE NOTE

FINISH

SEE NOTE

DWN	F. YANG	31MAR2009
CHK	S. CHIEN	31MAR2009
APVD	W. KODAMA	31MAR2009
PRODUCT SPEC	108-57876	
APPLICATION SPEC	-	
WEIGHT	0	
CUSTOMER DRAWING		



TE Connectivity

PLUG ASSEMBLY, R/A,
BTB, CHAMP .050, SERIES I

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1734099	-
SCALE	-	SHEET 1 of 5	REV H



E1 OBSOLETE	136.93 [5.891]	133.13 [5.241]	134.07 [5.278]	100	200	101	GOLD FLASH	5-1734099-8	200
							0.381µm[15µ"]	3-1734099-8	
							△	1-1734099-8	
E1 OBSOLETE	111.53 [4.391]	107.73 [4.241]	108.67 [4.278]	80	160	81	GOLD FLASH	5-1734099-6	160
							0.381µm[15µ"]	3-1734099-6	
							△	1-1734099-6	
E1 OBSOLETE	98.83 [3.891]	95.03 [3.741]	95.97 [3.778]	70	140	71	GOLD FLASH	5-1734099-4	140
							0.381µm[15µ"]	3-1734099-4	
							△	1-1734099-4	
E1 OBSOLETE	86.13 [3.391]	82.33 [3.241]	83.27 [3.278]	20	120	61	GOLD FLASH	5-1734099-2	120
							0.381µm[15µ"]	3-1734099-2	
							△	1-1734099-2	
E1 OBSOLETE	73.43 [2.891]	69.63 [2.741]	70.57 [2.778]	50	100	51	GOLD FLASH	5-1734099-0	100
							0.381µm[15µ"]	3-1734099-0	
							△	1-1734099-0	
E1 OBSOLETE	60.73 [2.391]	56.93 [2.241]	57.87 [2.278]	40	80	41	GOLD FLASH	4-1734099-8	80
							0.381µm[15µ"]	2-1734099-8	
							△	1734099-8	
E1 OBSOLETE	53.11 [2.091]	49.31 [1.941]	50.25 [1.978]	34	68	35	GOLD FLASH	4-1734099-7	68
							0.381µm[15µ"]	2-1734099-7	
							△	1734099-7	
E1 OBSOLETE	48.03 [1.891]	44.23 [1.741]	45.17 [1.778]	30	60	31	GOLD FLASH	4-1734099-6	60
							0.381µm[15µ"]	2-1734099-6	
							△	1734099-6	
E1 OBSOLETE	41.68 [1.641]	37.88 [1.491]	38.82 [1.528]	25	50	26	GOLD FLASH	4-1734099-5	50
							0.381µm[15µ"]	2-1734099-5	
							△	1734099-5	
E1 OBSOLETE	35.33 [1.391]	31.53 [1.241]	32.47 [1.278]	20	40	21	GOLD FLASH	4-1734099-4	40
							0.381µm[15µ"]	2-1734099-4	
							△	1734099-4	
C	B	A	G△	J△	H△		GOLD PLATED	PART NUMBER	POS.

THIS DRAWING IS UNPUBLISHED.




RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

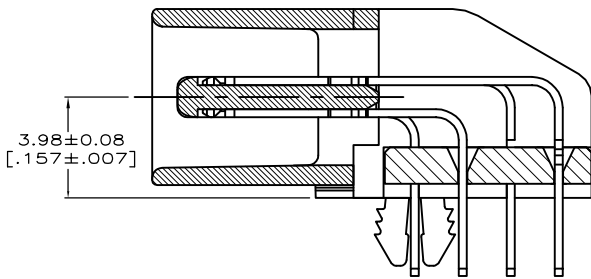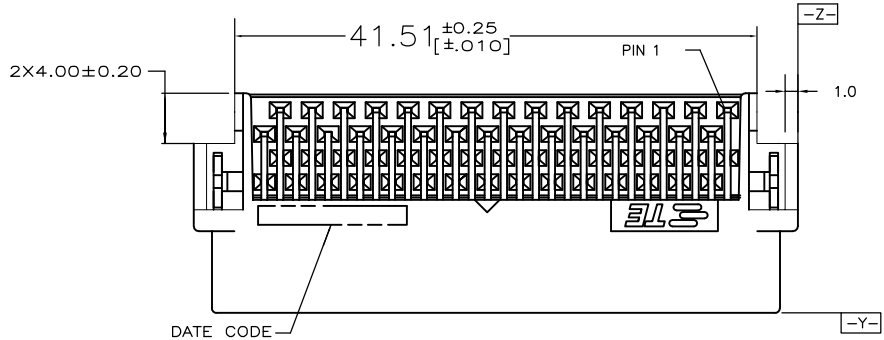

SECTION D-D
SCALE 8:1

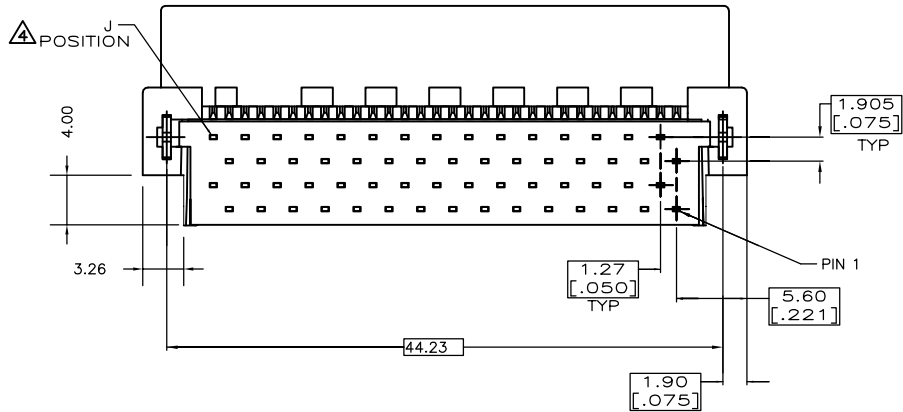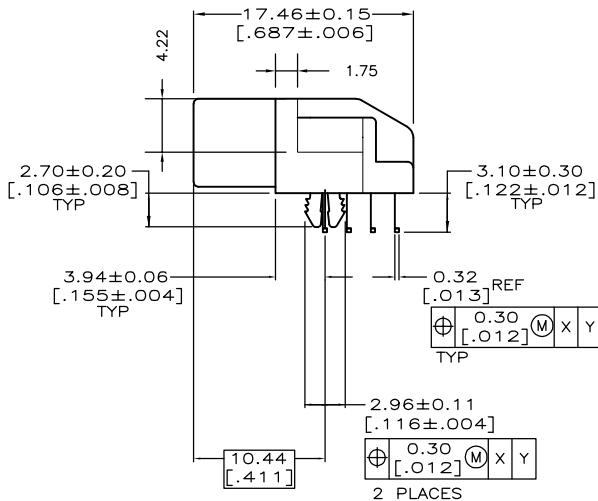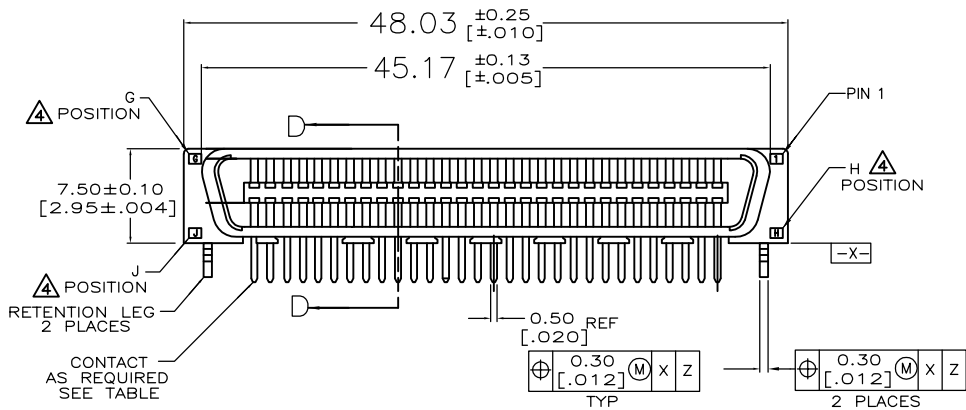

30	60	31	GOLD FLASH	9-1734099-6	
			0.381um[15u"]	8-1734099-6	60
			Δ	7-1734099-6	
G	J	A	H	GOLD PLATED	PART NUMBER
					POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
SEE NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.25
2 PLC ± 0.2
3 PLC ± -
4 PLC ± -
ANGLES ± -

FINISH
SEE NOTE

DWN
F. YANG
31MAR2009

CHK
S. CHIEN
31MAR2009

APVD
W. KODAMA
31MAR2009

PRODUCT SPEC
108-57876

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
PLUG ASSEMBLY, R/A,
BTB, CHAMP .050, SERIES I

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-1734099


RESTRICTED TO
-

SCALE
-



SHEET
2 of 5

REV
H


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		REVISIONS	
© COPYRIGHT — By —		ALL RIGHTS RESERVED.		P	LTR
				DESCRIPTION	
				DATE	DWN
				APVD	
				—	—
				—	—




FOR 50, AND 130
POSITIONS ONLY

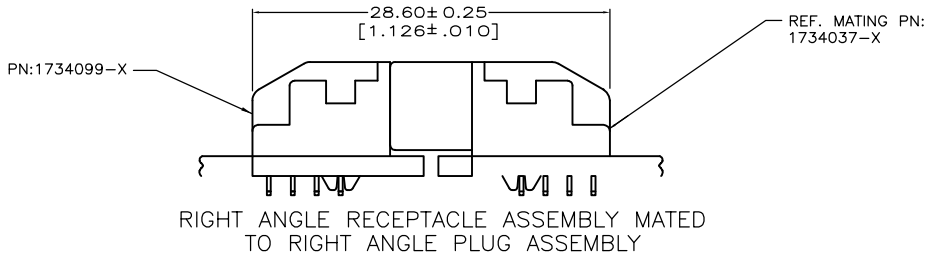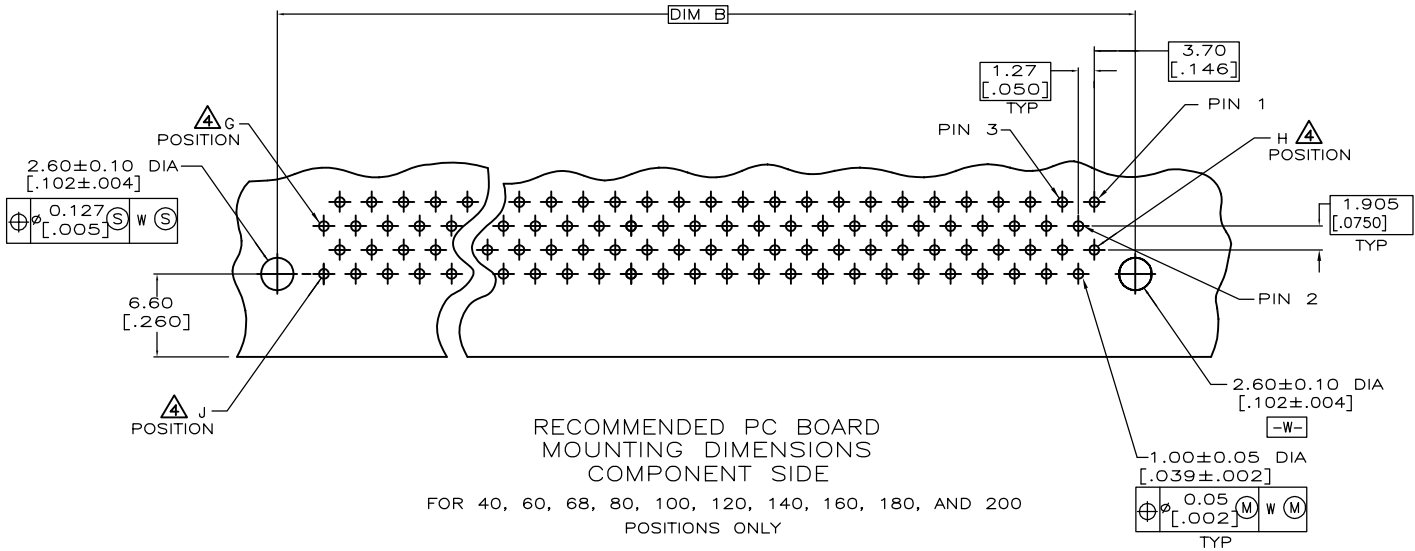

RIGHT ANGLE RECEPTACLE ASSEMBLY MATED
TO RIGHT ANGLE PLUG ASSEMBLY

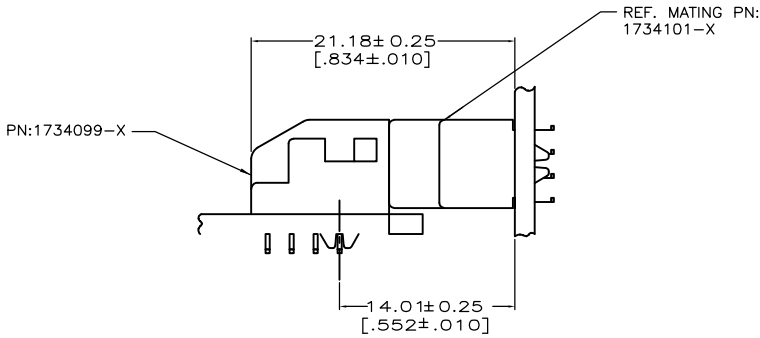

RIGHT ANGLE RECEPTACLE ASSEMBLY MATED
TO VERTICAL PLUG ASSEMBLY

THIS DRAWING IS A CONTROLLED DOCUMENT.			TE Connectivity	
DIMENSIONS: mm  MATERIAL			NAME	
			PLUG ASSEMBLY, R/A, BTB, CHAMP .050, SERIES I	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± — FINISH			PRODUCT SPEC	
			APPLICATION SPEC	
WEIGHT			SIZE	RESTRICTED TO
			CAGE CODE	DRAWING NO
			A300779	C-1734099
CUSTOMER DRAWING			SCALE	SHEET
			—	3 of 5
				REV
				H

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

D

D

C


C

B

B

A

A

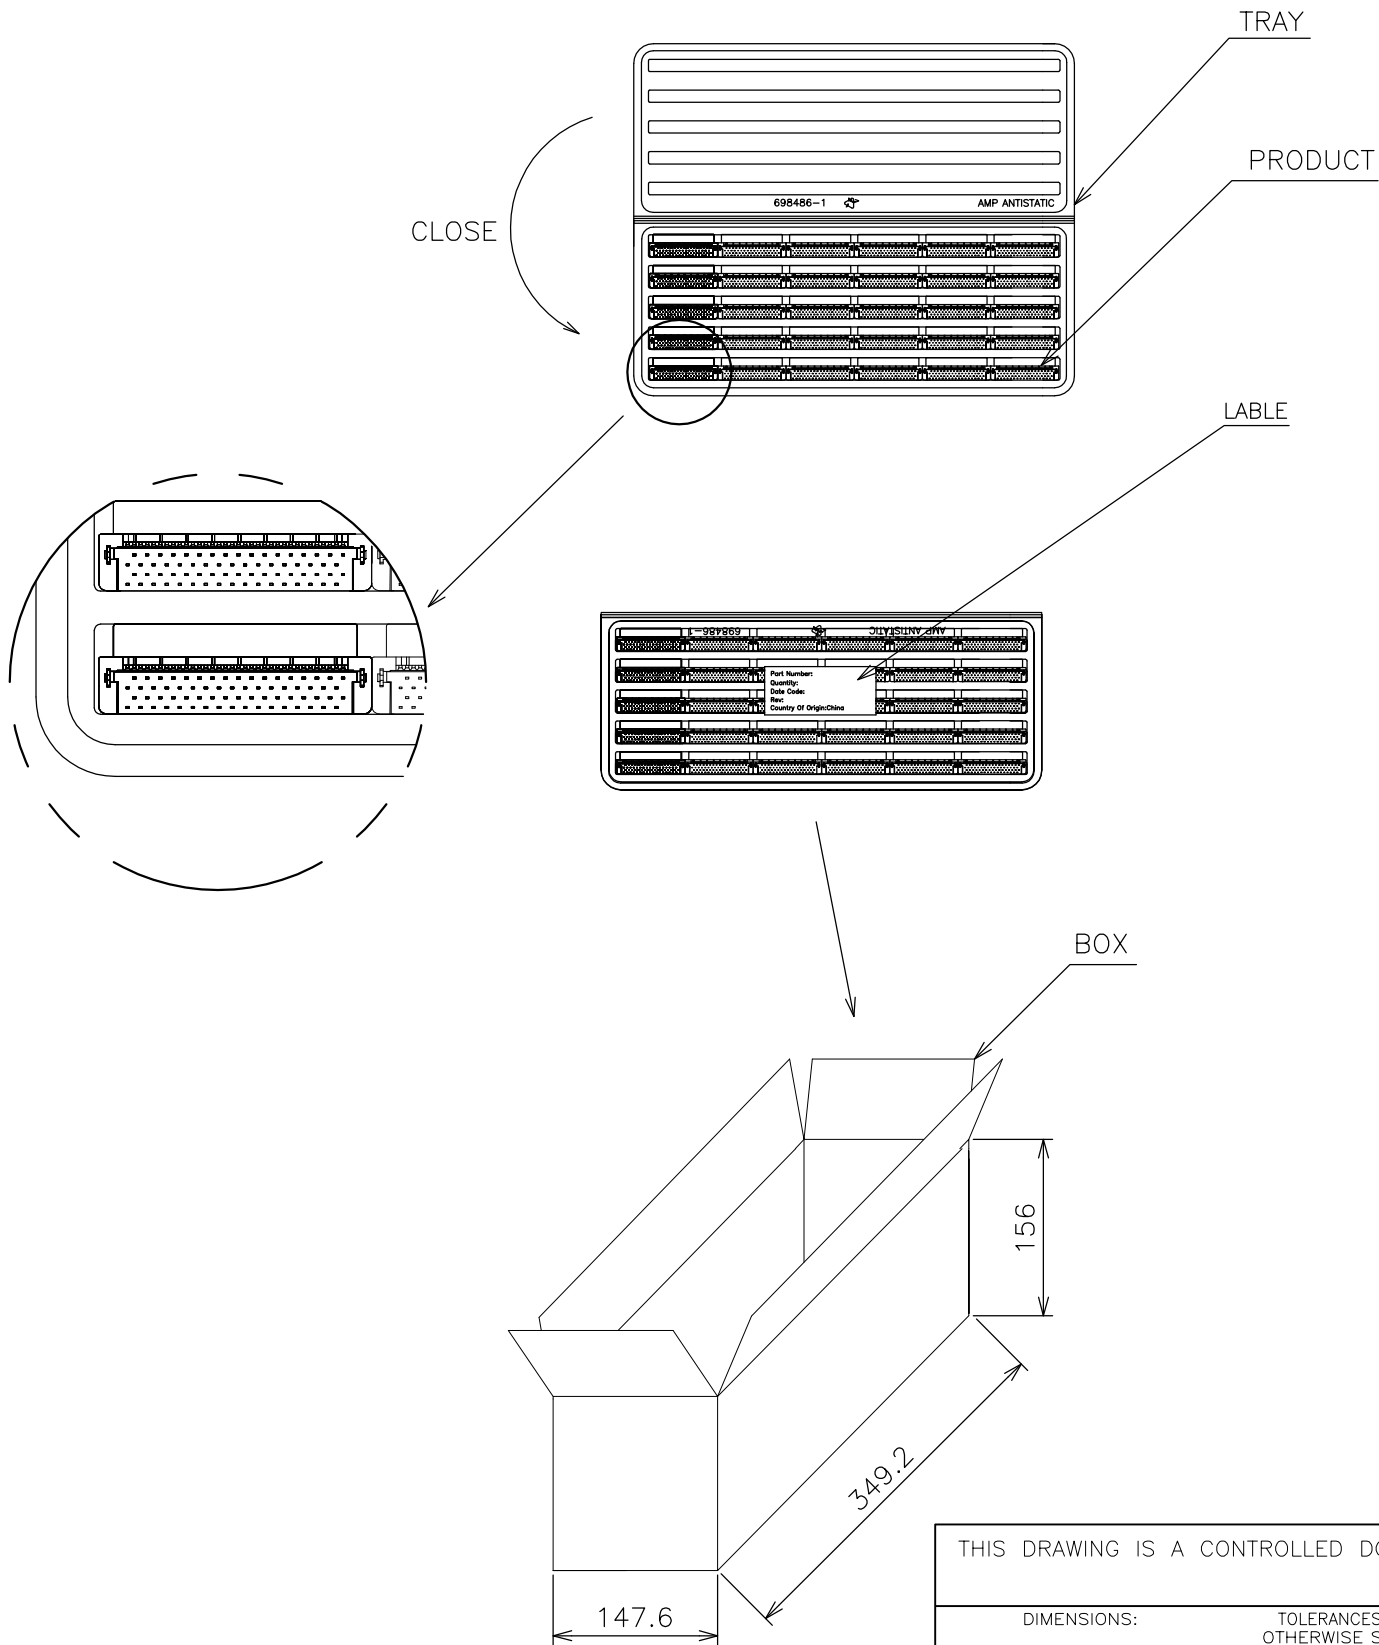

E1	OBSOLETE							5-1734099-8
			10	10	100	1.40	2.35	3-1734099-8
		200						1-1734099-8
E1	OBSOLETE	160	10	10	100	1.18	2.13	5-1734099-6
								3-1734099-6
								1-1734099-6
E1	OBSOLETE	140	15	10	150	1.59	2.46	5-1734099-4
								3-1734099-4
								1-1734099-4
E1	OBSOLETE	120	15	10	150	1.20	2.15	5-1734099-2
								3-1734099-2
								1-1734099-2
E1	OBSOLETE	68	30	10	300	1.69	2.64	4-1734099-7
								2-1734099-7
								1734099-7
E1	OBSOLETE	60	30	10	300	1.53	2.48	4-1734099-6
								2-1734099-6
								1734099-6
E1	OBSOLETE	50	35	10	350	1.58	2.56	4-1734099-5
								2-1734099-5
								1734099-5
E1	OBSOLETE	40	45	10	450	1.71	2.66	4-1734099-4
								2-1734099-4
								1734099-4
	POS.	Q'TY/ TRAY	TRAY/ BOX	Q'TY/ BOX	N/W (KG)	G/W (KG)	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	—	STE TE Connectivity			
DIMENSIONS:		CHK	—				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	—	NAME			
mm		PRODUCT SPEC	—				
0 PLC ± —		APPLICATION SPEC	—	PLUG ASSEMBLY, R/A, BTB, CHAMP .050, SERIES I			
1 PLC ± —		WEIGHT	—				
2 PLC ± —		CUSTOMER DRAWING		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
3 PLC ± —				A3	00779	C-1734099	—
4 PLC ± —				SCALE		SHEET	REV
ANGLES ± —				—		5 of 5	H
MATERIAL							
FINISH							

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru