




Features

- Standard or high torque option
- Long life carbon element
- Plain or knurled shaft option
- Brass bushing
- Metal shaft
- Audio or linear taper options
- Variety of resistance values

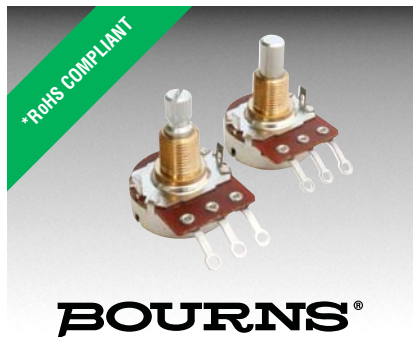

PDA24 - 24 mm Long Life Potentiometer

Electrical Characteristics

Taper.....Audio, linear
Standard Resistance
.....from 10K to 1M ohms
Standard Resistance Tolerance... $\pm 15\%$


Environmental Characteristics

Operating Temperature
..... -10°C to $+70^{\circ}\text{C}$
Power Rating
Linear Taper 0.5 watt
Audio Taper 0.25 watt
Maximum Operating Voltage
Linear Taper 500 V
Audio Taper 250 V
Rotational Noise 100 mV max.


Mechanical Characteristics

Mechanical Angle $300^{\circ} \pm 5^{\circ}$
Rotational Torque
Standard 20 to 40 g-cm
High 70 to 100 g-cm
Stop Strength 7 kg-cm min.
Rotational Life
.....200,000 shaft revolutions
Soldering Condition
Manual Soldering
..... 300°C within 3 seconds
Wave Soldering
..... 260°C within 5 seconds
Hardware One flat washer and
mounting nut supplied per
potentiometer with bushing

Derating Curve




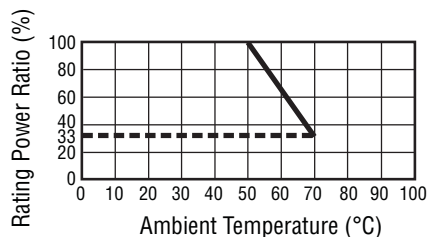


Circuit



Product Dimensions





PDA241-xx00,
PDA241-xx01

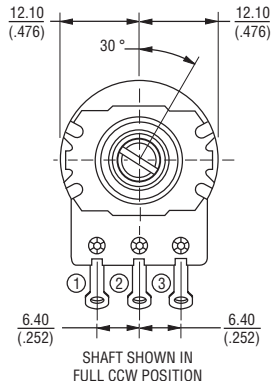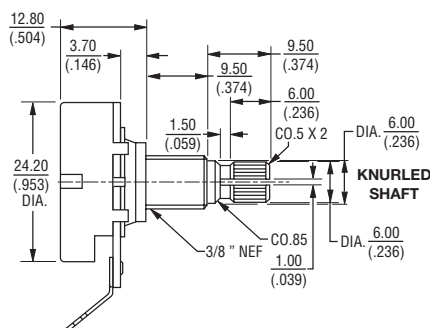

TOLERANCES:
UNDER $\frac{10.0}{(.394)} = \pm 0.3$ $\frac{10.0 \sim 100}{(.394 \sim 3.937)} = \pm 0.5$
(± 0.012) (± 0.020)

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

PDA241-xx02

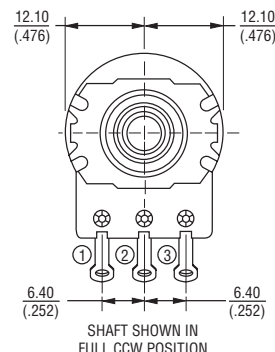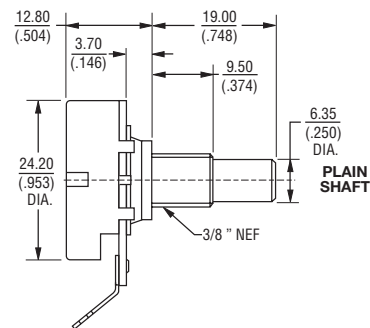

TOLERANCES:
UNDER $\frac{10.0}{(.394)} = \pm 0.3$ $\frac{10.0 \sim 100}{(.394 \sim 3.937)} = \pm 0.5$
(± 0.012) (± 0.020)

Additional Features

- Long life
- Long solder lugs
- $\pm 15\%$ resistance tolerance
- Anti-rotation pins
- RoHS compliant*



Applications

- Electric guitars
- Bass guitars
- Guitar amplifiers

PDA24 - 24 mm Long Life Potentiometer

BOURNS®

Tapers

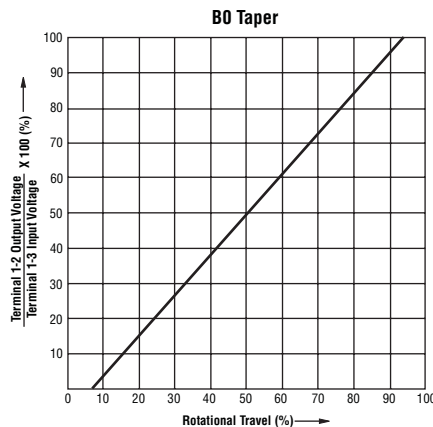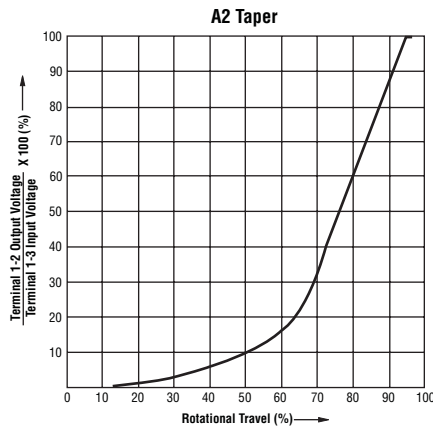

Standard Resistance Table

Resistance (Ohms)	Resistance Code
10,000	103
25,000	253
50,000	503
100,000	104
250,000	254
300,000	304
500,000	504
1,000,000	105

How To Order

PDA24 1 - SRT 01 - 504 A2

Model _____

Number of Units _____
1 = Single

Torque Option _____
Standard = SRT
High = HRT

Configuration _____
00 = Knurled Shaft (18 Teeth) / Long Solder Lugs
01 = Knurled Shaft (24 Teeth) / Long Solder Lugs
02 = Plain Shaft / Long Solder Lugs

Resistance Code (See Table) _____

Resistance Taper (See Taper Charts) _____

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

Europe: Tel: +41-41 768 5555 • Fax: +41-41 768 5510

The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700

www.bourns.com

REV. 08/10

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru