Product data sheet

### **1** General description

The CBT3244A provides eight bits of high-speed TTL-compatible bus switching in a standard '244 device pinout. The low ON-state resistance of the switch allows connections to be made with minimal propagation delay.

The CBT3244A device is organized as two 4-bit low-impedance switches with separate output-enable ( $\overline{OE}$ ) inputs. When  $\overline{OE}$  is LOW, the switch is on and data can flow from port A to port B, or vice versa. When  $\overline{OE}$  is HIGH, the switch is open and high-impedance state exists between the two ports.

The CBT3244A is characterized for operation from -40 °C to +85 °C.

### 2 Features and benefits

- Standard '244-type pinout
- 5  $\Omega$  switch connection between two ports
- · TTL compatible control input levels
- Latch-up protection exceeds 500 mA per JESD78
- ESD protection:
  - HBM JESD22-A114 exceeds 2000 V
  - MM JESD22-A115 exceeds 200 V
  - CDM JESD22-C101 exceeds 1000 V

### **3** Ordering information

#### Table 1. Ordering information


Type number	Package						
	Temperature range	Name	Description	Version			
CBT3244ABQ	-40 °C to + 85 °C	DHVQFN20	plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 20 terminals; body 2.5 × 4.5 × 0.85 mm	SOT764-1			
CBT3244APW	-40 °C to + 85 °C	TSSOP20	plastic thin shrink small outline package; 20 leads; body width 4.4 mm	SOT360-1			
CBT3244ADB	-40 °C to + 85 °C	SSOP20	plastic shrink small outline package; 20 leads; body width 5.3 mm	SOT339-1			
CBT3244AD	-40 °C to + 85 °C	SO20	plastic small outline package; 20 leads; body width 7.5 mm	SOT163-1			

# nexperia

### 4 Marking


Table 2. Marking codes				
Type number	Marking code			
CBT3244ABQ	CT3244A			
CBT3244APW	СТ3244А			
CBT3244ADB	СТ3244А			
CBT3244AD	CBT3244AD			

## 5 Functional diagram

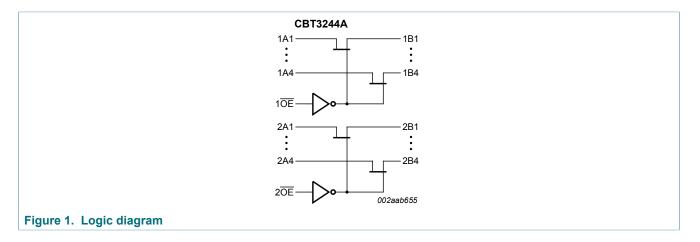

### 6 Pinning information

### 6.1 Pinning

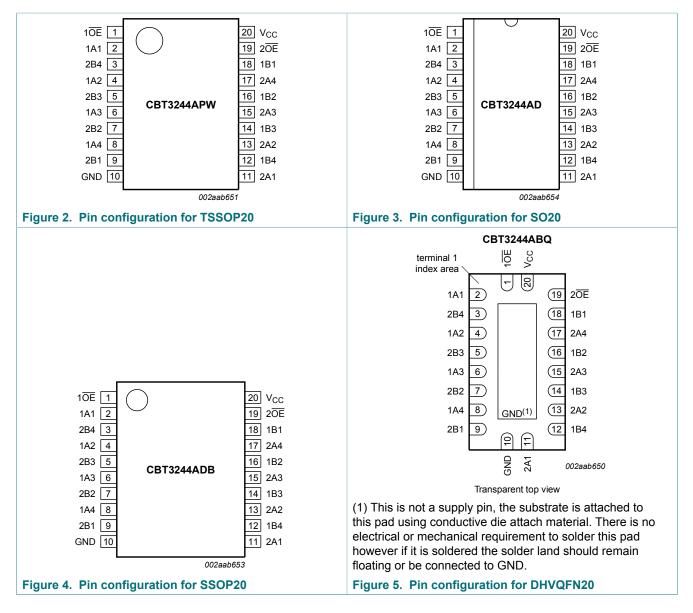

### 6.2 Pin description

Table 3. Pin description						
Symbol	Pin	Description				
10E, 20E	1, 19	output enable (active LOW)				
1A1, 1A2, 1A3, 1A4, 2A1, 2A2, 2A3, 2A4	2, 4, 6, 8, 11, 13, 15, 17	inputs				
1B1, 1B2, 1B3, 1B4, 2B1, 2B2, 2B3, 2B4	18, 16, 14, 12, 9, 7, 5, 3	outputs				
GND	10	ground (0 V)				
V <sub>CC</sub>	20	positive supply voltage				

#### **Functional description** 7

Table 4. Function selection <sup>[1]</sup>					
Inputs		Outputs			
1 <del>0E</del>	2 <del>0E</del>	1An, 1Bn	2An, 2Bn		
L	L	1An = 1Bn	2An = 2Bn		
L	Н	1An = 1Bn	Z		
Н	L	Z	2An = 2Bn		
Н	Н	Z	Z		

H = HIGH voltage level; L = LOW voltage level; Z = high-impedance OFF state [1]

#### **Limiting values** 8

#### Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).<sup>[1]</sup>

Symbol	Parameter	Conditions		Min	Мах	Unit
V <sub>CC</sub>	supply voltage			-0.5	+7.0	V
VI	input voltage		[2]	-1.2	+7.0	V
Vo	output voltage	output in OFF or HIGH state	[2]	-0.5	+7.0	V
l <sub>IK</sub>	input clamping current	V <sub>1</sub> < 0 V		-	-18	mA
I <sub>OK</sub>	output clamping current	V <sub>O</sub> < 0 V		-	-50	mA
I <sub>O</sub>	output current	output in LOW state		-	128	mA
T <sub>stg</sub>	storage temperature			-65	+150	°C

The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which [1] are detrimental to reliability. The maximum junction temperature of this integrated circuit should not exceed 150 °C.

The input and output voltage ratings may be exceeded if the input and output current ratings are observed. [2]

#### **Recommended operating conditions** 9

#### Table 6. Operating conditions

Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Тур	Мах	Unit
V <sub>CC</sub>	supply voltage		4.5	-	5.5	V
T <sub>amb</sub>	ambient temperature	operating in free-air	-40	-	+85	°C

### **10 Static characteristics**

#### Table 7. Static characteristics

 $T_{amb}$  = -40 °C to +85 °C. Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Тур <sup>[1]</sup>	Мах	Unit
V <sub>IK</sub>	input clamping voltage	V <sub>CC</sub> = 4.5 V; I <sub>I</sub> = -18 mA		-	-	-1.2	V
V <sub>IH</sub>	HIGH-state input voltage			2.0	-	-	V
V <sub>IL</sub>	LOW-state input voltage			-	-	0.8	V
l <sub>l</sub>	input leakage current	$V_{CC}$ = 5.5 V; $V_{I}$ = $V_{CC}$ or GND		-	-	±1	μA
I <sub>CC</sub>	supply current	$V_{CC}$ = 5.5 V; I <sub>O</sub> = 0 mA; V <sub>I</sub> = V <sub>CC</sub> or GND		-	1	3	μA
ΔI <sub>CC</sub>	additional supply current	per input; V <sub>CC</sub> = 5.5 V; one input at 3.4 V; other inputs at V <sub>CC</sub> or GND	[2]	-	-	2.5	mA
Ci	input capacitance	control pins; $V_1 = 3 V \text{ or } 0 V$ ; $n\overline{OE} = V_{CC}$		-	3	-	pF
C <sub>I/O</sub>	input/output capacitance	$\overline{OE} = V_{CC} = 5.0 V$		-	3	-	pF
R <sub>on</sub>	ON-state resistance	V <sub>CC</sub> = 4.5 V; V <sub>I</sub> = 0 V; I <sub>I</sub> = 64 mA	[3]	-	4	7	Ω
		V <sub>CC</sub> = 4.5 V; V <sub>I</sub> = 0 V; I <sub>I</sub> = 30 mA		-	4	7	Ω
		V <sub>CC</sub> = 4.5 V; V <sub>I</sub> = 2.4 V; I <sub>I</sub> = 15 mA		-	8	15	Ω

[1] [2] [3] All typical values are measured at  $V_{CC}$  = 5 V;  $T_{amb}$  = 25 °C. This is the increase in supply current for each input that is at the specified TTL voltage level rather than  $V_{CC}$  or GND. Measured by the voltage level between the A and the B terminals at the indicated current through the switch. ON-state resistance is determined by the

lowest voltage of the two (A or B) terminals.

### **11 Dynamic characteristics**

#### Table 8. Dynamic characteristics

 $T_{amb}$  = -40 °C to +85 °C; Voltages are referenced to GND (ground = 0 V); for test circuit see Figure 8.

Symbol	Parameter	Conditions	Min	Тур	Мах	Unit
t <sub>pd</sub>	propagation delay	nAn to nBn, or nBn to nAn; [1] [2] $V_{CC} = 5.0 V \pm 0.5 V$ ; see Figure 6	-	-	0.25	ns
t <sub>en</sub>	enable time	$n\overline{OE}$ to nAn or nBn; [3] V <sub>CC</sub> = 5.0 V ± 0.5 V; see Figure 7	1.0	-	5.6	ns
t <sub>dis</sub>	disable time	$n\overline{OE}$ to nAn or nBn; [4] V <sub>CC</sub> = 5.0 V ± 0.5 V; see Figure 7	1.0	-	6.0	ns

This parameter is warranted but not production tested. The propagation delay is based on the RC time constant of the typical ON-state resistance of the [1] switch and a load capacitance of 50 pF, when driven by an ideal voltage source (zero output impedance).

[2] [3] [4]  $t_{\text{pd}}$  is the same as  $t_{\text{PHL}}$  and  $t_{\text{PLH}}.$ 

 $t_{en}$  is the same as  $t_{PZH}$  and  $t_{PZL}$ .

 $t_{\text{dis}}$  is the same as  $t_{\text{PHZ}}$  and  $t_{\text{PLZ}}$ 

### 11.1 Waveforms and test circuit

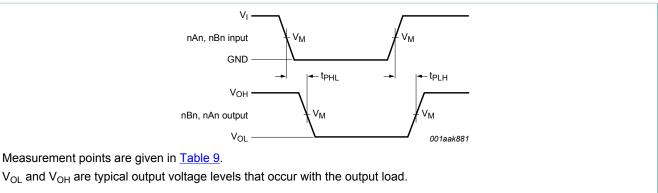


Figure 6. The data input (A) to output (nYn) propagation delay times

# **CBT3244A**

#### Octal bus switch with quad output enables

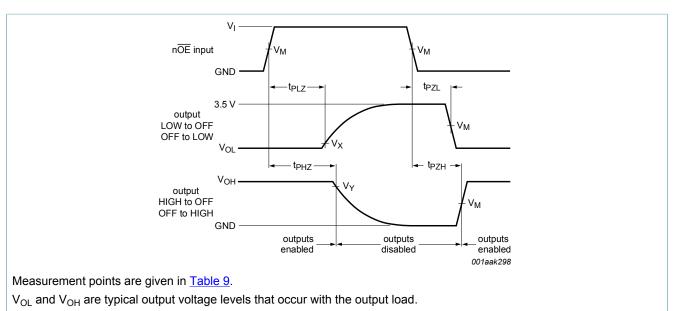



Figure 7. Enable and disable times

#### Table 9. Measurement points

Input		Output			
VI	V <sub>M</sub>	V <sub>M</sub>	V <sub>X</sub>	V <sub>Y</sub>	
3.0 V	1.5 V	1.5 V	V <sub>OL</sub> + 0.3 V	V <sub>OH</sub> - 0.3 V	

# **CBT3244A**

#### Octal bus switch with quad output enables

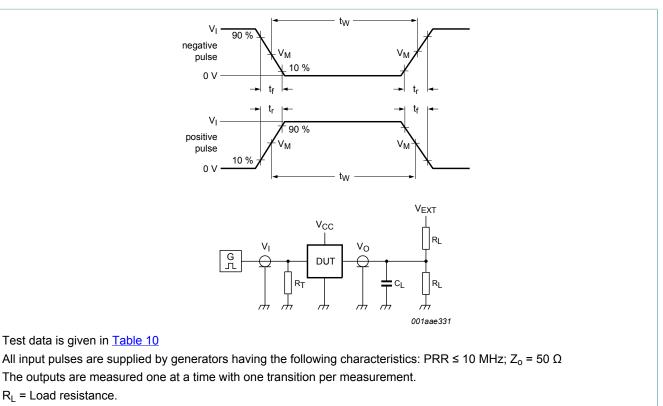

 $C_L$  = Load capacitance including jig and probe capacitance.

 $R_T$  = Termination resistance should be equal to the output impedance  $Z_0$  of the pulse generator.

V<sub>EXT</sub> = External voltage for measuring switching times.

Figure 8. Test circuit for measuring switching times

#### Table 10. Test data

Input		Load		V <sub>EXT</sub>		
VI	t <sub>r</sub> , t <sub>f</sub>	CL	RL	t <sub>PLH</sub> , t <sub>PHL</sub>	t <sub>PZH</sub> , t <sub>PHZ</sub>	t <sub>PZL</sub> , t <sub>PLZ</sub>
V <sub>CC</sub>	≤ 2.5 ns	50 pF	500 Ω	open	open	7 V

Octal bus switch with quad output enables

### **12 Package outline**


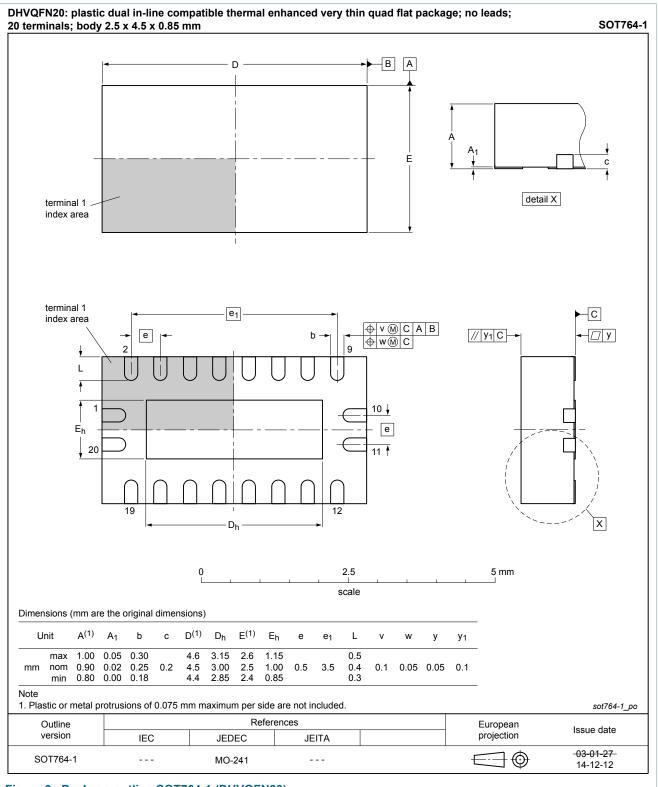



Figure 9. Package outline SOT764-1 (DHVQFN20)

CBT3244A

#### Octal bus switch with quad output enables

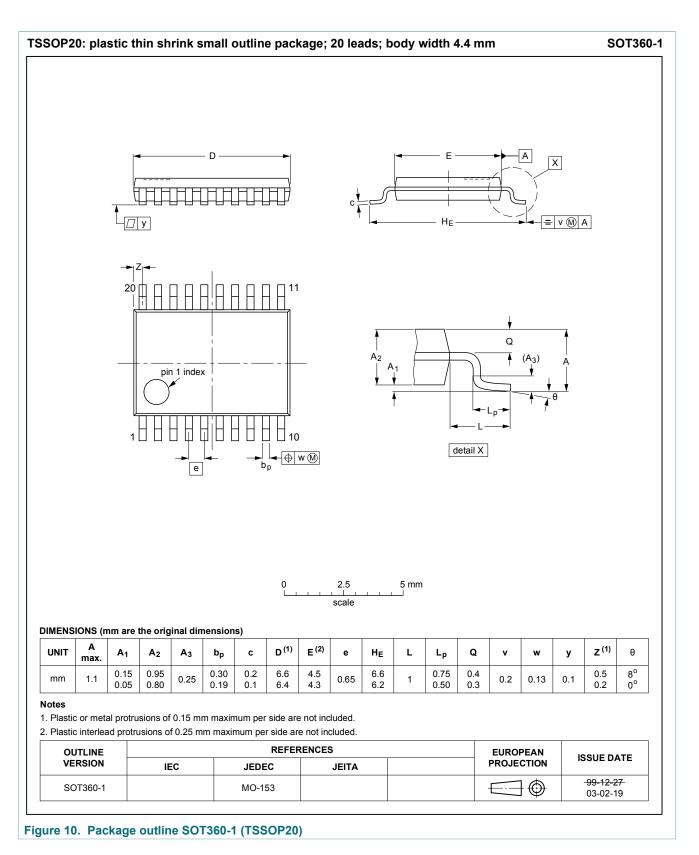


#### Octal bus switch with quad output enables

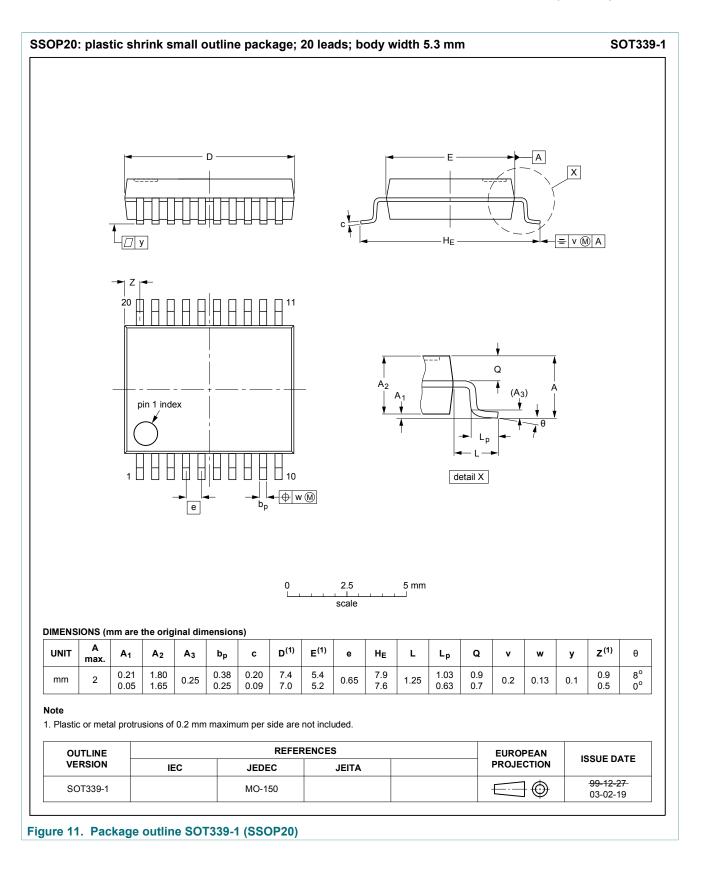

# **CBT3244A**

#### Octal bus switch with quad output enables

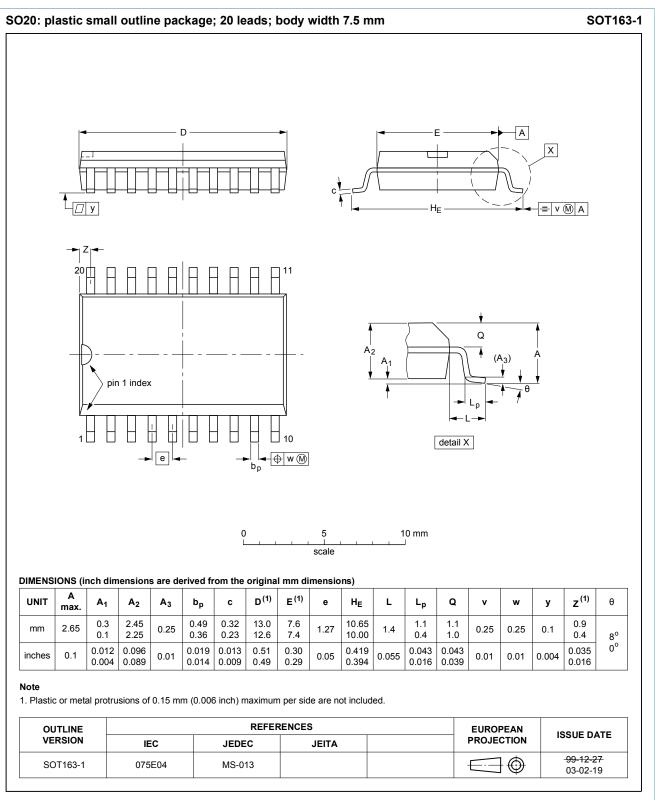

#### Figure 12. Package outline SOT163-1 (SO20)

CBT3244A Product data sheet

### **13 Abbreviations**

Table 11. Abbreviations			
Acronym	Description		
CDM	Charged Device Model		
DUT	Device Under Test		
ESD	ElectroStatic Discharge		
НВМ	Human Body Model		
MM	Machine Model		
PRR	Pulse Rate Repetition		
TTL	Transistor-Transistor Logic		

# 14 Revision history

Table 12. Revision history						
Document ID	Release date	Data sheet status	Change notice	Supersedes		
CBT3244A v.3	20170908	Product data sheet	-	CBT3244A v.2		
Modifications:	<ul> <li>The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia.</li> <li>Legal texts have been adapted to the new company name where appropriate.</li> <li>Type number CBT3244ADS removed.</li> </ul>					
CBT3244A v.2	20050915	Product data sheet	-	CBT3244A v.1		
Modifications:	<ul> <li>The format of this data sheet has been redesigned to comply with the new presentation and information standard of Philips Semiconductors.</li> <li>added DHVQFN20 package option.</li> <li><u>Section 2</u>, 5th bullet: changed from 'exceeds 1000 V HBM' to 'exceeds 2000 V HBM'</li> <li>added <u>Section 13</u> Abbreviations</li> </ul>					
CBT3244A v.1	20040526	Product data sheet	-	-		

### 15 Legal information

### 15.1 Data sheet status

Document status <sup>[1][2]</sup>	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

Please consult the most recently issued document before initiating or completing a design. [1]

The term 'short data sheet' is explained in section "Definitions".

[2] [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

### **15.2 Definitions**

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 15.3 Disclaimers

Limited warranty and liability - Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia. In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia

Right to make changes - Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use - Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale - Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer

No offer to sell or license - Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

#### Octal bus switch with quad output enables

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications. In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications beyond Nexperia's specifications such uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer

design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### **15.4 Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

# **CBT3244A**

### Octal bus switch with quad output enables

### Contents

1	General description	1
2	Features and benefits	1
3	Ordering information	1
4	Marking	
5	Functional diagram	2
6	Pinning information	
6.1	Pinning	
6.2	Pin description	4
7	Functional description	4
8	Limiting values	4
9	Recommended operating conditions	5
10	Static characteristics	5
11	Dynamic characteristics	6
11.1	Waveforms and test circuit	6
12	Package outline	9
13	Abbreviations	13
14	Revision history	13
15	Legal information	

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© Nexperia B.V. 2017.

All rights reserved.

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com

Date of release: 8 September 2017 Document identifier: CBT3244A



#### ООО "ЛайфЭлектроникс"

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru

#### www.lifeelectronics.ru