

# Radial Leaded PTC

## OZRS Series

HF  OZRS Series

RoHS 2 Compliant

### Product Features

- Very Low resistance, Very High hold current, Solid state, Radial leaded product ideal for up to 32V and Operating temperatures up to 125°C.
- AEC-Q Compliant
- Meets Bel automotive qualification\*
- \* - Largely based on internal AEC-Q test plan

### Operating (Hold Current) Range

500mA - 10A

### Maximum Voltage

32V

### Temperature Range

-40°C to 125°C



### Agency Approval

TUV (Std. EN/IEC 60738-1-1 and EN/IEC 60730-1, Cert. R50102187)  
UL Recognized Component (Std. UL1434, File E305051)





**AEC-Q  
Compliant**



LEAD FREE =   
HALOGEN FREE = 

### Electrical Characteristics (23°C)

	Part Number (Bulk)	Hold Current	Trip Current	Rated Voltage	Max Current	Typical Power	Max Time to Trip		Resistance Tolerance		Agency Approvals	
							Current	Time	Rmin	R1max		
A	OZRS0050FF1E	0.5	1.0	32	100	0.9	2.5	3.0	0.3500	1.1000	Y	Y
B	OZRS0070FF1E	0.7	1.4	32	100	1.4	3.5	3.2	0.2300	0.8000	Y	Y
C	OZRS0100FF1E	1.0	1.9	32	100	1.4	5.0	6.2	0.1500	0.4300	Y	Y
D	OZRS0200FF1E	2.0	4.0	32	100	2.2	10.0	5.5	0.0650	0.2500	Y	Y
E	OZRS0300FF1A	3.0	6.0	32	100	3.2	15.0	5.0	0.0350	0.1100	Y	Y
F	OZRS0500FF1A	5.0	10.0	32	100	5.3	25.0	9.0	0.0150	0.0400	Y	Y
G	OZRS0750FF1A	7.5	15.0	32	100	6.5	37.5	13.0	0.0074	0.0230	Y	Y
H	OZRS1000FF1A	10.0	20.0	32	100	7.0	50.0	15.0	0.0060	0.0160	Y	Y

IH Hold Current- The maximum current at which the device will not trip in still air at 23°C.

IT Trip current- The minimum current at which the device will trip in still air at 23°C.

Vmax Maximum voltage device can withstand at its rated current without suffering damage.

I<sub>max</sub> Maximum fault current device can withstand at rated voltage (V<sub>max</sub>) without damage.

P<sub>d</sub> Typical power dissipated by device when in tripped state in 23°C still air environment.

R<sub>min</sub> Minimum device resistance at 23°C in initial un-soldered state.

R<sub>1max</sub> Maximum device resistance at 23°C, 1 hour after initial device trip, or after being soldered to PCB in end application.

## PTC's – Basic Theory of Operation / “Tripped” Resistance Explanation

A Bel PTC consists of a block of polymeric material containing conductive carbon granules which is sandwiched between two conductive metal plates. When this polymer block reaches approximately 125C, either due to current passing through it via conductive chains of carbon particles or due to an external heat source; it swells volumetrically. This expansion breaks apart a majority of the chains of carbon granules that run randomly between the two conductive plates. This behavior results in a sharp increase in resistance across the two plates which all but eliminates current flow through the device, allowing just enough residual current flow to maintain the block's internal temperature at 125C. Once this “tripped” state current is cut off, the polymer brick cools and shrinks to its original size, thereby allowing its broken carbon chains to reestablish themselves and permit the part to return to its low resistance state. Once cooled to room ambient, the PTC will once again exhibit a resistance less than its “R1max” rating.

At currents below the device I<sub>HOLD</sub> rating, AND at temperatures below 100C, the PTC maintains a resistance value below its R1 MAX rating.

The catalog data for each device specifies a "Typical Power" value. This is the power required to exactly match the heat lost by the tripped device to its ambient surroundings at 23C. By Ohm's Law, power can be stated as:  $W = E^2/R$ . Thus the approximate resistance of a “Tripped” PTC can be determined by:  $R = E^2/W$ , where "E" is the voltage appearing across the PTC (usually the supply's open circuit voltage), and "W" is the Typical Power value for the particular PTC.

Since the PPTC acts to maintain a constant internal temperature, its apparent resistance will change based upon applied voltage and, to a lesser degree, ambient conditions. Consider the following example....

A PTC with a Typical Power of 1 watt protecting a circuit using a 60V supply will demonstrate an apparent, tripped resistance "R" of:

$$R = 60^2/1 = 3,600 \text{ ohms}$$

This same tripped device when used to protect a 12V circuit would now present an apparent resistance of:

$$R = 12^2/1 = 144 \text{ ohms}$$

The value for Typical Power is "typical" because any physical factors that affect heat loss (such as ambient temperature or air convection) will somewhat alter the level of power that the PTC needs to maintain its internal temperature. In short, PTCs do not exhibit a constant, quantifiable tripped resistance value.

## Average Time Current Characteristic Curve at 23°C



The Average Time Current Characteristic Curve and Temperature Rerating Curve are affected by a number of variables and these curves are provided for guidance only.



Specifications subject to change without notice

Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)

## Physical Specifications

Lead material:

- 0ZRS0050FF- 0ZRS0100FF Tin plated copper, 24 AWG.
- 0ZRS0200FF- 0ZRS0750FF Tin plated copper, 20 AWG
- 0ZRS1000FF Tin plated copper, 18 AWG.

Soldering characteristics

MIL-STD-202, Method 208H.

Insulating coating


Flame retardant epoxy, meets UL-94V-0 requirement.

## PTC Marking

“bel” or “b”, , IH code and “RS”.


## Product Dimensions

All dimensions in mm.

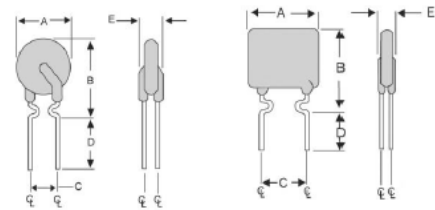


**Fig.1**  
Lead Size: 24AWG  
Φ0.51 mm Diameter

**Fig.2**  
Lead Size: 24AWG  
Φ0.51 mm Diameter



**Fig.3**  
Lead Size: 20AWG  
Φ0.81 mm Diameter



**Fig.4**  
Lead Size: 18AWG  
Φ1.00 mm Diameter

Part Number	Fig.	A	B	C	D	E
		Max	Max	Typical	Min	Max
0ZRS0050FF	1	7.4	12.7	5.1	7.6	3.3
0ZRS0070FF	2	6.9	10.8	5.1	7.6	3.0
0ZRS0100FF	1	9.7	13.6	5.1	7.6	3.0
0ZRS0200FF	3	9.5	13.5	5.1	7.6	3.0
0ZRS0300FF	3	10.2	15.5	5.1	7.6	3.8
0ZRS0500FF	3	14.0	24.1	5.1	7.6	3.8
0ZRS0750FF	3	21.1	24.9	10.2	7.6	3.8
0ZRS1000FF	4	23.5	27.9	10.2	7.6	4.0

## Temperature Derating Table

		Temperature Derating										
I Hold Value		-40	-20	0	23	30	40	50	60	70	85	125
0ZRS		138%	127%	115%	100%	96%	90%	80%	70%	63%	53%	21%

## Thermal Derating Curve



## Cautionary Notes


1. Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
2. These Polymer PTC (PPTC) devices are intended for protection against occasional overcurrent/overtemperature fault conditions and may not be suitable for use in applications where repeated and/or prolonged fault conditions are anticipated.
3. Avoid contact of PTC device with chemical solvent. Prolonged contact may adversely impact the PTC performance.
4. These PTC devices may not be suitable for use in circuits with a large inductance, as the PTC trip can generate circuit voltage spikes above the PTC rated voltage.
5. These devices may be used in both DC and AC circuits provided that peak-to-peak line voltage when carrying AC does not exceed the PTC's Vmax rating. As PTCs are essentially thermal devices, the RMS value of AC current carried by a PTC will produce tripping parameters and times-to-trip similar to those of a DC voltage of the same magnitude.
6. If potting is mandated, avoid rigid potting compounds as they will encase the PTC and prevent it from volumetrically expanding to properly respond to a trip event.

## Environmental Specifications

Temperature cycling	JESD22 Method JA-104
Biased humidity	MIL-STD-202 Method 103
Operational life	MIL-STD-202 Method 108
Terminal strength	AEC-Q200-004
Resistance to solvents	MIL-STD-202 Method 215
Mechanical shock	MIL-STD-202 Method 213
Vibration	MIL-STD-202 Method 204
Resistance to soldering heat	MIL-STD-202 Method 210
Thermal shock	MIL-STD-202 Method 107
Solderability	ANSI/J-STD-002

## Soldering Parameters


Lead-free Wave Soldering Profile	
Wave Solder Parameter	
Average ramp-up rate	200°C / second
Heating rate during preheat	typical 1 - 2°C / second Max 4°C / second
Final preheat temperature	within 125°C of soldering temperature
Peak temperature T <sub>p</sub>	260°C
Time within +0°C / -5°C of actual peak temperature	10 seconds
Ramp-down rate	5°C / second max.

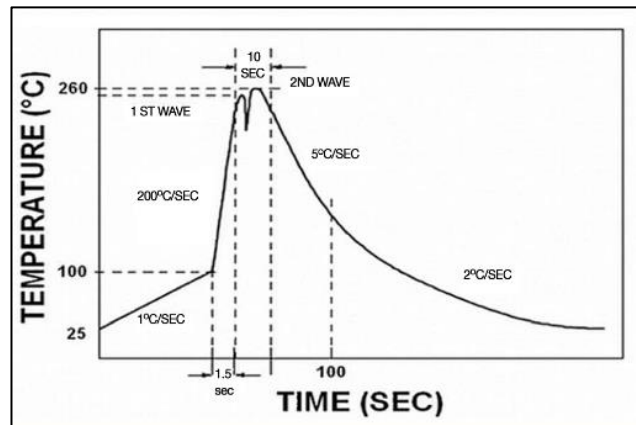

## Standard Packaging

Part Number	Bulk		Reel/Tape	
	Pcs/Box	P/N Code	Pcs/Reel	P/N Code
0ZRS0050FF - 0ZRS0070FF	3000	1E	2500	2D
0ZRS0100FF - 0ZRS0200FF	3000	1E	1500	2B
0ZRS0300FF	1000	1A	1500	2B
0ZRS0500FF - 0ZRS1000FF	1000	1A	N/A	N/A

## P/N Explanation and Ordering Information

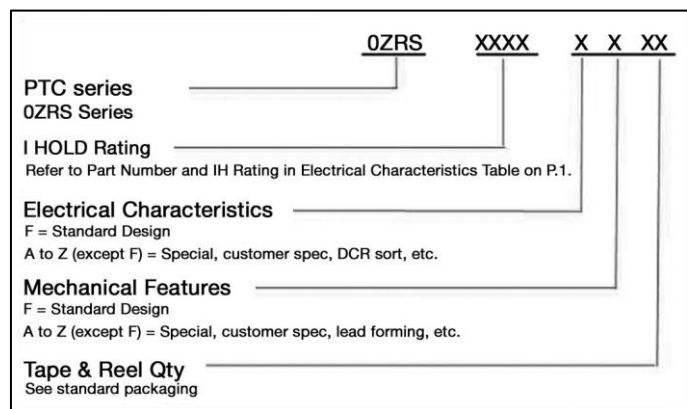

Specifications subject to change without notice

Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)