




**NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED**

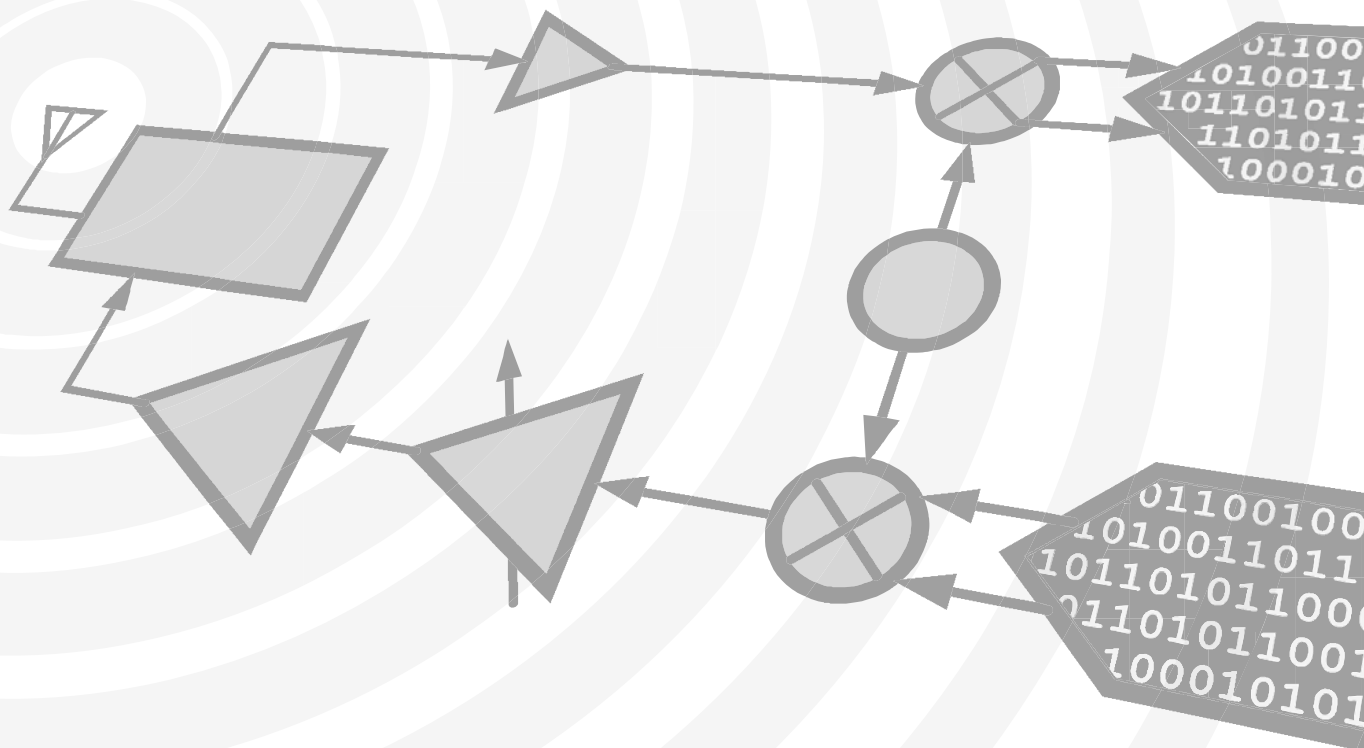

**THIS PAGE INTENTIONALLY LEFT BLANK**


## InGaP HBT GAIN BLOCK MMIC AMPLIFIER, DC - 10 GHz

### Typical Applications

An excellent cascadable 50 Ohm Gain Block or LO Driver for:

- Microwave & VSAT Radios
- Test Equipment
- Military EW, ECM, C<sup>3</sup>I
- Space Telecom

### Functional Diagram

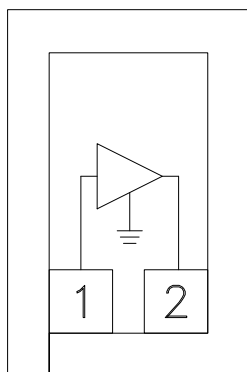

### Features

- Gain: 16 dB
- P1dB Output Power: +13 dBm
- Stable Gain Over Temperature
- 50 Ohm I/O's
- Small Size: 0.38 x 0.58 x 0.1 mm

### General Description

The HMC405 die is a GaAs InGaP Heterojunction Bipolar Transistor (HBT) Gain Block MMIC DC to 10 GHz amplifier. This amplifier can be used as either a cascadable 50 Ohm gain stage or to drive the LO of HMC mixers with up to +17 dBm output power. The HMC405 offers 16 dB of gain and an output IP<sub>3</sub> of +32 dBm while requiring only 50 mA from a +5V supply. The Darlington feedback pair used results in reduced sensitivity to normal process variations and yields excellent gain stability over temperature while requiring a minimal number of external bias components. The HMC405 can easily be integrated into Multi-Chip-Modules (MCMs) due to its small (0.22mm<sup>2</sup>) size. All data is with the chip in a 50 Ohm test fixture connected via 0.025mm (1 mil) diameter wire bonds of minimal length 0.5mm (20 mils).

### Electrical Specifications, $V_s = +5\text{ V}$ , $R_{bias} = 22\text{ Ohm}$ , $T_A = +25^\circ\text{ C}$


| Parameter                                |                | Min. | Typ.  | Max. | Units  |
|------------------------------------------|----------------|------|-------|------|--------|
| Gain                                     | DC - 3.0 GHz   |      | 16    |      | dB     |
|                                          | 3.0 - 7.0 GHz  |      | 15    |      | dB     |
|                                          | 7.0 - 10.0 GHz |      | 13    |      | dB     |
| Gain Variation Over Temperature          | DC - 3.0 GHz   |      | 0.004 |      | dB/ °C |
|                                          | 3.0 - 7.0 GHz  |      | 0.015 |      | dB/ °C |
|                                          | 7.0 - 10.0 GHz |      | 0.02  |      | dB/ °C |
| Input Return Loss                        | DC - 3.0 GHz   |      | 10    |      | dB     |
|                                          | 3.0 - 10.0 GHz |      | 11    |      | dB     |
| Output Return Loss                       | DC - 3.0 GHz   |      | 9     |      | dB     |
|                                          | 3.0 - 10.0 GHz |      | 10    |      | dB     |
| Reverse Isolation                        | DC - 7.0 GHz   |      | 20    |      | dB     |
|                                          | 7.0 - 10.0 GHz |      | 17    |      | dB     |
| Output Power for 1 dB Compression (P1dB) | DC - 3.0 GHz   |      | 15    |      | dBm    |
|                                          | 3.0 - 7.0 GHz  |      | 13    |      | dBm    |
|                                          | 7.0 - 10.0 GHz |      | 10    |      | dBm    |
| Output Third Order Intercept (IP3)       | DC - 3.0 GHz   |      | 30    |      | dBm    |
|                                          | 3.0 - 7.0 GHz  |      | 25    |      | dBm    |
|                                          | 7.0 - 10.0 GHz |      | 22    |      | dBm    |
| Noise Figure                             | DC - 7.0 GHz   |      | 4     |      | dB     |
|                                          | 7.0 - 10.0 GHz |      | 4.5   |      | dB     |
| Supply Current (I <sub>cq</sub> )        |                |      | 50    |      | mA     |

Note: Data taken with broadband bias tee on device output.


For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373  
Order On-line at [www.hittite.com](http://www.hittite.com)

## InGaP HBT GAIN BLOCK MMIC AMPLIFIER, DC - 10 GHz


**Gain & Return Loss**

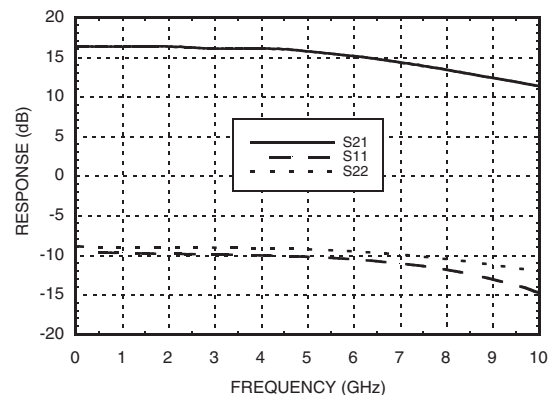


**Gain vs. Temperature**

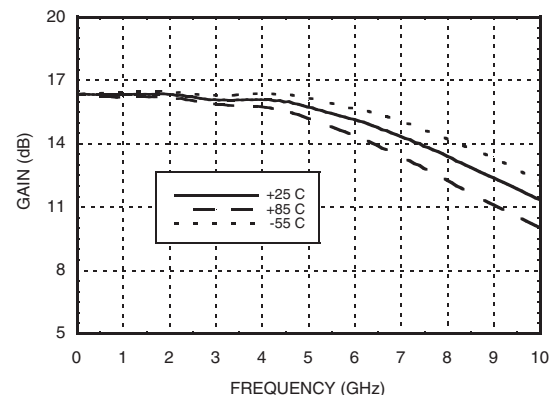


**Input Return Loss vs. Temperature**

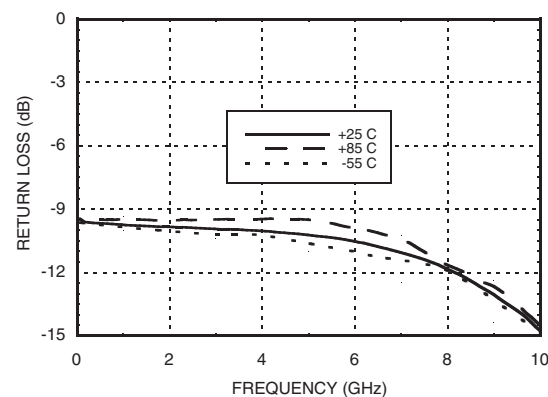


**Output Return Loss vs. Temperature**

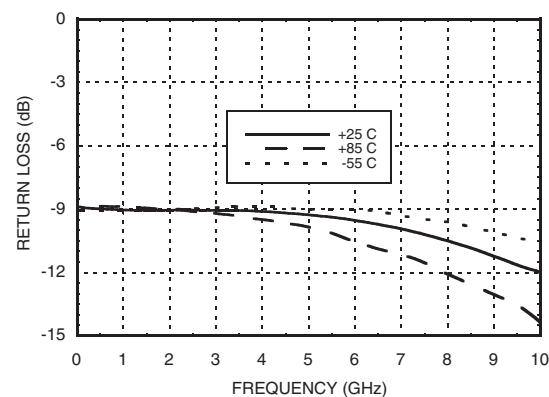

**Reverse Isolation vs. Temperature**

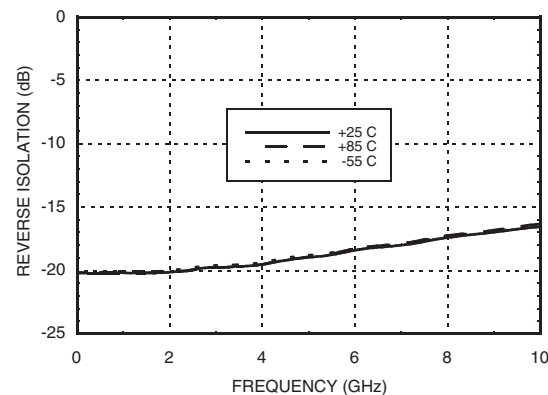

**Noise Figure vs. Temperature**

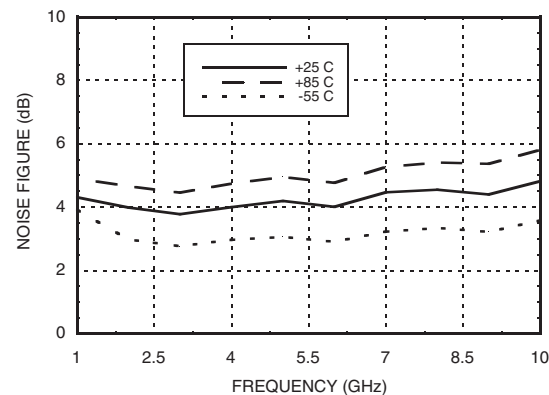


**InGaP HBT GAIN BLOCK  
MMIC AMPLIFIER, DC - 10 GHz**


2

DRIVER & GAIN BLOCK AMPLIFIERS - CHIP


**P1dB vs. Temperature**

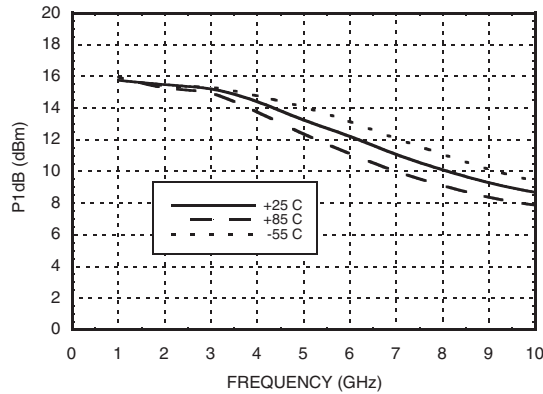


**Psat vs. Temperature**

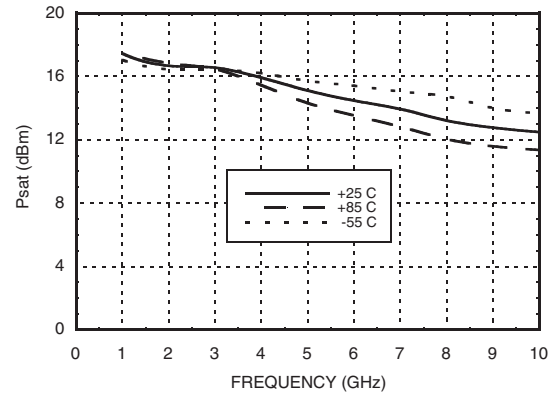


**Power Compression @ 1 GHz**

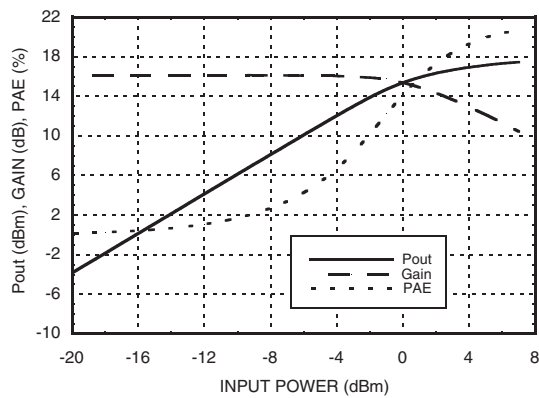


**Power Compression @ 7 GHz**

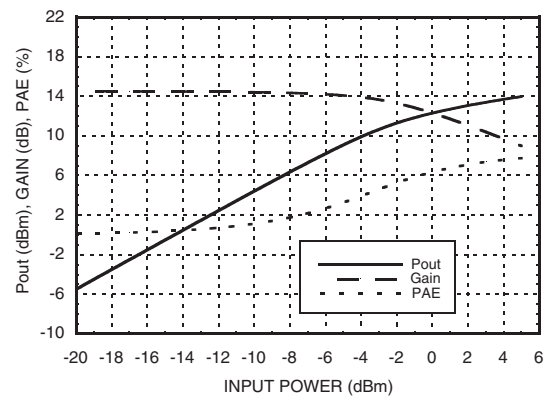

**Output IP3 vs. Temperature**

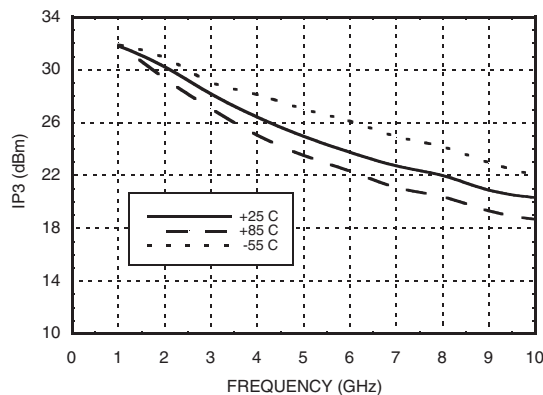

**Gain, Power, Output IP3 & Supply Current vs. Supply Voltage @ 1 GHz**

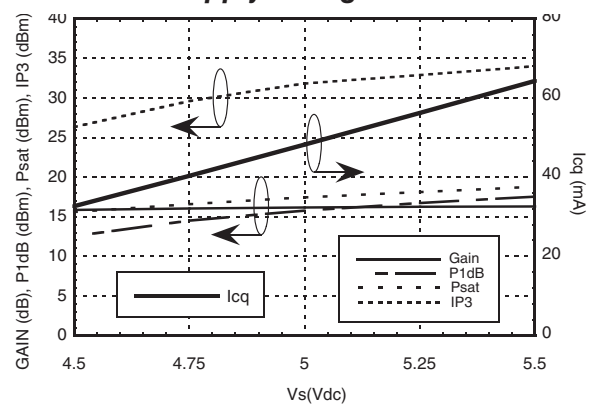

## InGaP HBT GAIN BLOCK MMIC AMPLIFIER, DC - 10 GHz


### Absolute Maximum Ratings

|                                                                            |                |
|----------------------------------------------------------------------------|----------------|
| Collector Bias Voltage                                                     | +7 Vdc         |
| RF Input Power (RFiN)(Vcc = +5 Vdc)                                        | +10 dBm        |
| Junction Temperature                                                       | 150 °C         |
| Continuous P <sub>diss</sub> (T= 85 °C)<br>(derate 5.21 mW/°C above 85 °C) | 0.339 W        |
| Thermal Resistance<br>(junction to die bottom)                             | 192 °C/W       |
| Storage Temperature                                                        | -65 to +150 °C |
| Operating Temperature                                                      | -55 to +85 °C  |



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

### Outline Drawing

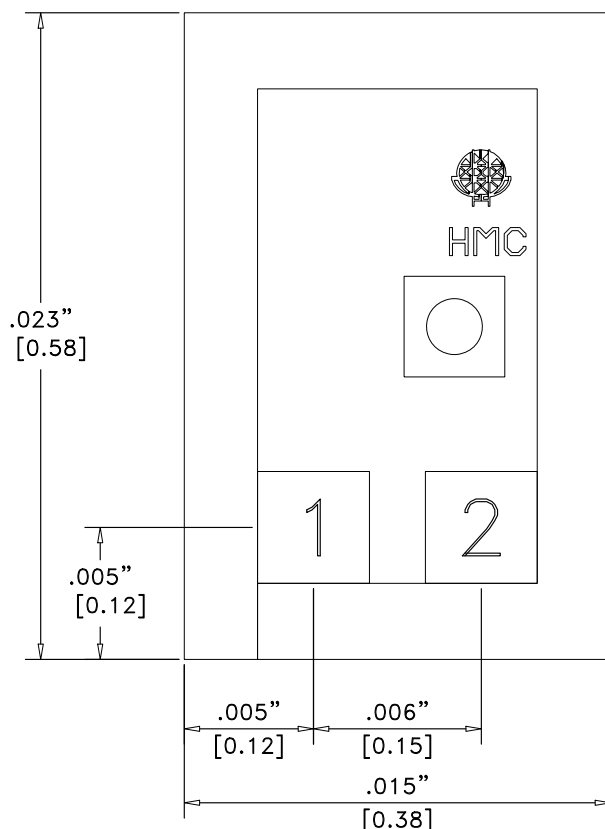

#### NOTES:

1. ALL DIMENSIONS IN INCHES [MILLIMETERS]
2. ALL TOLERANCES ARE  $\pm 0.001$  (0.025)
3. DIE THICKNESS IS 0.004 (0.100) BACKSIDE IS GROUND
4. BOND PADS ARE 0.004 (0.100) SQUARE
5. BOND PAD SPACING, CTR-CTR: 0.006 (0.150)
6. BACKSIDE METALLIZATION: GOLD
7. BOND PAD METALLIZATION: GOLD

### Die Packaging Information <sup>[1]</sup>


| Standard        | Alternate |
|-----------------|-----------|
| GP-3 (Gel Pack) | [2]       |

[1] Refer to the "Packaging Information" section for die packaging dimensions.


[2] For alternate packaging information contact Hittite Microwave Corporation.

**InGaP HBT GAIN BLOCK  
MMIC AMPLIFIER, DC - 10 GHz**

**Pad Descriptions**

| Pad Number | Function | Description                                                               | Interface Schematic                                                                 |
|------------|----------|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 1          | RFIN     | This pin is DC coupled.<br>An off chip DC blocking capacitor is required. |  |
| 2          | RFOUT    | RF output and DC Bias for the output stage.                               |                                                                                     |
| Die Bottom | GND      | Die bottom must be connected to RF/DC ground.                             |  |

**Application Circuit**

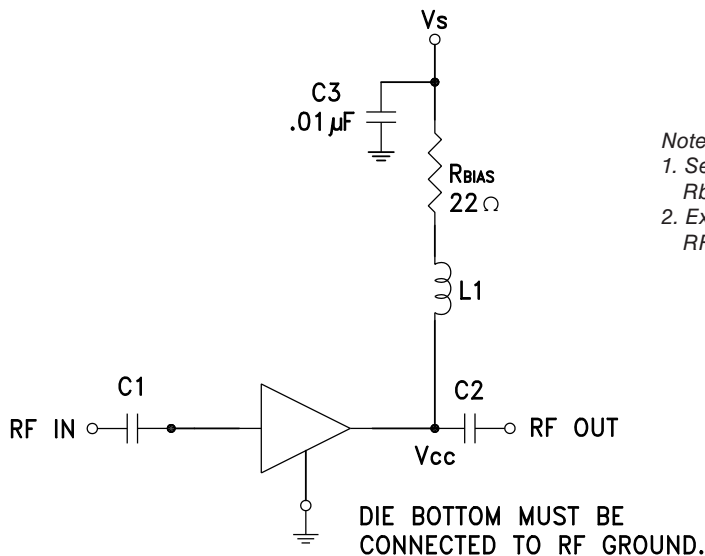

Note:

1. Select  $R_{bias}$  to achieve  $I_{cq}$  using equation below,  
 $R_{bias} \geq 22 \text{ Ohm}$ .
2. External blocking capacitors are required on  
 $R_{FIN}$  and  $R_{FOUT}$ .


$$I_{cq} = \frac{V_s - 3.9}{R_{bias}}$$

**Recommended Component Values**

| Component | Frequency (MHz) |        |        |        |
|-----------|-----------------|--------|--------|--------|
|           | 50              | 1000   | 3000   | 7000   |
| L1        | 270 nH          | 56 nH  | 8.2 nH | 2.2 nH |
| C1, C2    | 0.01 µF         | 100 pF | 100 pF | 100 pF |

**InGaP HBT GAIN BLOCK  
MMIC AMPLIFIER, DC - 10 GHz**

**Assembly Diagram**

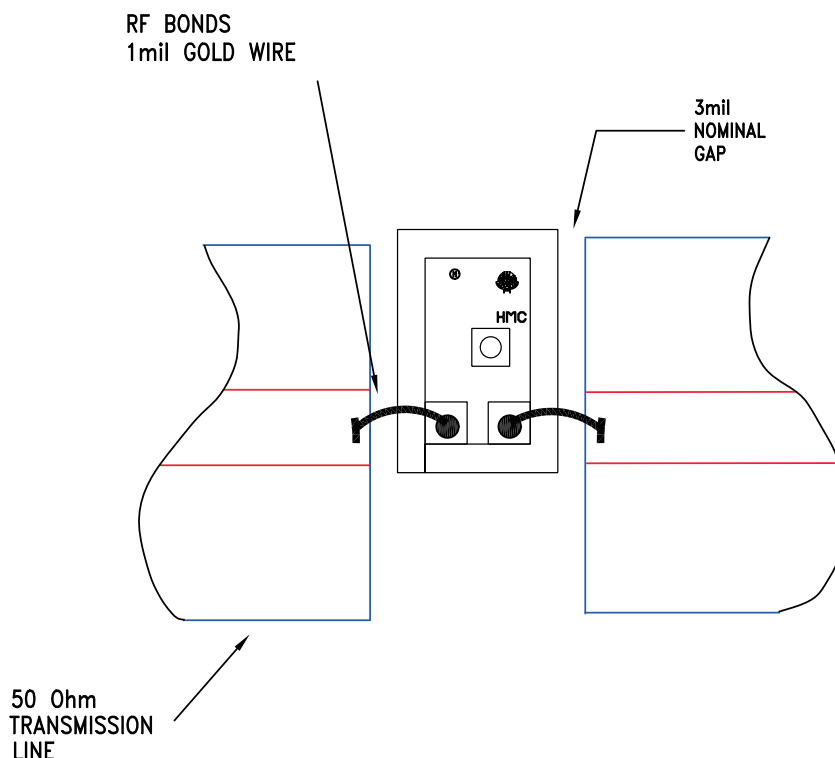

**Handling Precautions**

*Follow these precautions to avoid permanent damage.*

**Storage:** All bare die are placed in either Waffle or Gel based ESD protective containers, and then sealed in an ESD protective bag for shipment. Once the sealed ESD protective bag has been opened, all die should be stored in a dry nitrogen environment.

**Cleanliness:** Handle the chips in a clean environment. DO NOT attempt to clean the chip using liquid cleaning systems.

**Static Sensitivity:** Follow ESD precautions to protect against ESD strikes.

**Transients:** Suppress instrument and bias supply transients while bias is applied. Use shielded signal and bias cables to minimize inductive pick-up.

**General Handling:** Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers. The surface of the chip has fragile air bridges and should not be touched with vacuum collet, tweezers, or fingers.

**Mounting**

*The chip is back-metallized and can be die mounted with electrically conductive epoxy. The mounting surface should be clean and flat.*

**Epoxy Die Attach:** Apply a minimum amount of epoxy to the mounting surface so that a thin epoxy fillet is observed around the perimeter of the chip once it is placed into position. Cure epoxy per the manufacturer's schedule.

**Wire Bonding**

Ball or wedge bond with 0.025mm (1 mil) diameter pure gold wire. Thermosonic wirebonding with a nominal stage temperature of 150 deg. C and a ball bonding force of 40 to 50 grams or wedge bonding force of 18 to 22 grams is recommended. Use the minimum level of ultrasonic energy to achieve reliable wirebonds. Wirebonds should be started on the chip and terminated on the package or substrate. All bonds should be as short as possible <0.31mm (12 mils).

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)