

**NPN Silicon AF Transistor**

- For general AF applications
- High collector current
- High current gain
- Low collector-emitter saturation voltage
- Pb-free (RoHS compliant) package
- Qualified according AEC Q101



| Type       | Marking | Pin Configuration |       |       |   |   |   | Package |
|------------|---------|-------------------|-------|-------|---|---|---|---------|
| BC817K-16  | 6As     | 1 = B             | 2 = E | 3 = C | - | - | - | SOT23   |
| BC817K-16W | 6As     | 1 = B             | 2 = E | 3 = C | - | - | - | SOT323  |
| BC817K-25  | 6Bs     | 1 = B             | 2 = E | 3 = C | - | - | - | SOT23   |
| BC817K-25W | 6Bs     | 1 = B             | 2 = E | 3 = C | - | - | - | SOT323  |
| BC817K-40  | 6Cs     | 1 = B             | 2 = E | 3 = C | - | - | - | SOT23   |
| BC817K-40W | 6Cs     | 1 = B             | 2 = E | 3 = C | - | - | - | SOT323  |
| BC818K-16W | 6Es     | 1 = B             | 2 = E | 3 = C | - | - | - | SOT323  |
| BC818K-40  | 6Gs     | 1 = B             | 2 = E | 3 = C | - | - | - | SOT23   |

**Maximum Ratings**

| Parameter                                                                                                            | Symbol    | Value       | Unit |
|----------------------------------------------------------------------------------------------------------------------|-----------|-------------|------|
| Collector-emitter voltage<br>BC817...<br>BC818...                                                                    | $V_{CEO}$ | 45<br>25    | V    |
| Collector-base voltage<br>BC817...<br>BC818...                                                                       | $V_{CBO}$ | 50<br>30    |      |
| Emitter-base voltage                                                                                                 | $V_{EBO}$ | 5           |      |
| Collector current                                                                                                    | $I_C$     | 500         | mA   |
| Peak collector current                                                                                               | $I_{CM}$  | 1000        |      |
| Base current                                                                                                         | $I_B$     | 100         |      |
| Peak base current                                                                                                    | $I_{BM}$  | 200         |      |
| Total power dissipation-<br>$T_S \leq 115\text{ °C}$ , BC817K, BC818K<br>$T_S \leq 130\text{ °C}$ , BC817KW, BC818KW | $P_{tot}$ | 500<br>250  | mW   |
| Junction temperature                                                                                                 | $T_j$     | 150         |      |
| Storage temperature                                                                                                  | $T_{stg}$ | -65 ... 150 | °C   |

**Thermal Resistance**

| Parameter                                                                      | Symbol     | Value                  | Unit |
|--------------------------------------------------------------------------------|------------|------------------------|------|
| Junction - soldering point <sup>1)</sup><br>BC817K, BC818K<br>BC817KW, BC818KW | $R_{thJS}$ | $\leq 70$<br>$\leq 80$ | K/W  |

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note AN077 (Thermal Resistance Calculation)

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                                                                                                                                                                                                                                                                                                                | Symbol        | Values                  |                        |                        | Unit          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------------------|------------------------|------------------------|---------------|
|                                                                                                                                                                                                                                                                                                                                          |               | min.                    | typ.                   | max.                   |               |
| DC Characteristics                                                                                                                                                                                                                                                                                                                       |               |                         |                        |                        |               |
| Collector-emitter breakdown voltage<br>$I_C = 10\text{ mA}$ , $I_B = 0$ , BC817...<br>$I_C = 10\text{ mA}$ , $I_B = 0$ , BC818...                                                                                                                                                                                                        | $V_{(BR)CEO}$ | 45<br>25                | -<br>-                 | -<br>-                 | V             |
| Collector-base breakdown voltage<br>$I_C = 10\text{ }\mu\text{A}$ , $I_E = 0$ , BC817...<br>$I_C = 10\text{ }\mu\text{A}$ , $I_E = 0$ , BC818...                                                                                                                                                                                         | $V_{(BR)CBO}$ | 50<br>30                | -<br>-                 | -<br>-                 | -             |
| Emitter-base breakdown voltage<br>$I_E = 10\text{ }\mu\text{A}$ , $I_C = 0$                                                                                                                                                                                                                                                              | $V_{(BR)EBO}$ | 5                       | -                      | -                      | V             |
| Collector-base cutoff current<br>$V_{CB} = 25\text{ V}$ , $I_E = 0$<br>$V_{CB} = 25\text{ V}$ , $I_E = 0$ , $T_A = 150\text{ }^\circ\text{C}$                                                                                                                                                                                            | $I_{CBO}$     | -<br>-                  | -<br>-                 | 0.1<br>50              | $\mu\text{A}$ |
| Emitter-base cutoff current<br>$V_{EB} = 4\text{ V}$ , $I_C = 0$                                                                                                                                                                                                                                                                         | $I_{EBO}$     | -                       | -                      | 100                    | nA            |
| DC current gain <sup>1)</sup><br>$I_C = 100\text{ mA}$ , $V_{CE} = 1\text{ V}$ , $h_{FE}\text{-grp.16}$<br>$I_C = 100\text{ mA}$ , $V_{CE} = 1\text{ V}$ , $h_{FE}\text{-grp.25}$<br>$I_C = 100\text{ mA}$ , $V_{CE} = 1\text{ V}$ , $h_{FE}\text{-grp.40}$<br>$I_C = 500\text{ mA}$ , $V_{CE} = 1\text{ V}$ , all $h_{FE}\text{-grps.}$ | $h_{FE}$      | 100<br>160<br>250<br>40 | 160<br>250<br>350<br>- | 250<br>400<br>630<br>- | -             |
| Collector-emitter saturation voltage <sup>1)</sup><br>$I_C = 500\text{ mA}$ , $I_B = 50\text{ mA}$                                                                                                                                                                                                                                       | $V_{CEsat}$   | -                       | -                      | 0.7                    | V             |
| Base emitter saturation voltage <sup>1)</sup><br>$I_C = 500\text{ mA}$ , $I_B = 50\text{ mA}$                                                                                                                                                                                                                                            | $V_{BEsat}$   | -                       | -                      | 1.2                    |               |

<sup>1)</sup>Pulse test:  $t < 300\mu\text{s}$ ;  $D < 2\%$


**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                                                                   | Symbol   | Values |      |      | Unit |
|---------------------------------------------------------------------------------------------|----------|--------|------|------|------|
|                                                                                             |          | min.   | typ. | max. |      |
| AC Characteristics                                                                          |          |        |      |      |      |
| Transition frequency<br>$I_C = 50\text{ mA}$ , $V_{CE} = 5\text{ V}$ , $f = 100\text{ MHz}$ | $f_T$    | -      | 170  | -    | MHz  |
| Collector-base capacitance<br>$V_{CB} = 10\text{ V}$ , $f = 1\text{ MHz}$                   | $C_{cb}$ | -      | 3    | -    | pF   |
| Emitter-base capacitance<br>$V_{EB} = 0.5\text{ V}$ , $f = 1\text{ MHz}$                    | $C_{eb}$ | -      | 40   | -    |      |

### DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 1 \text{ V}$

$h_{FE}\text{-grp.16}$

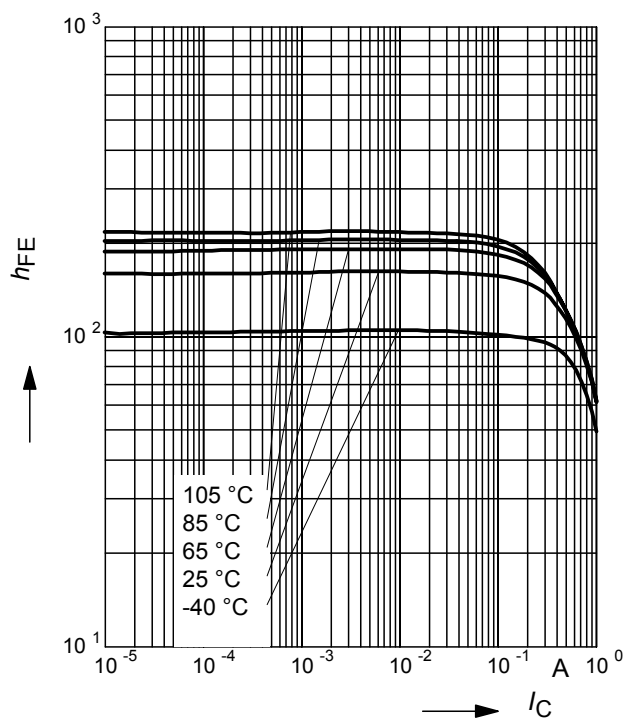

### DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 1 \text{ V}$


$h_{FE}\text{-grp.25}$



### DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 1 \text{ V}$

$h_{FE}\text{-grp.40}$

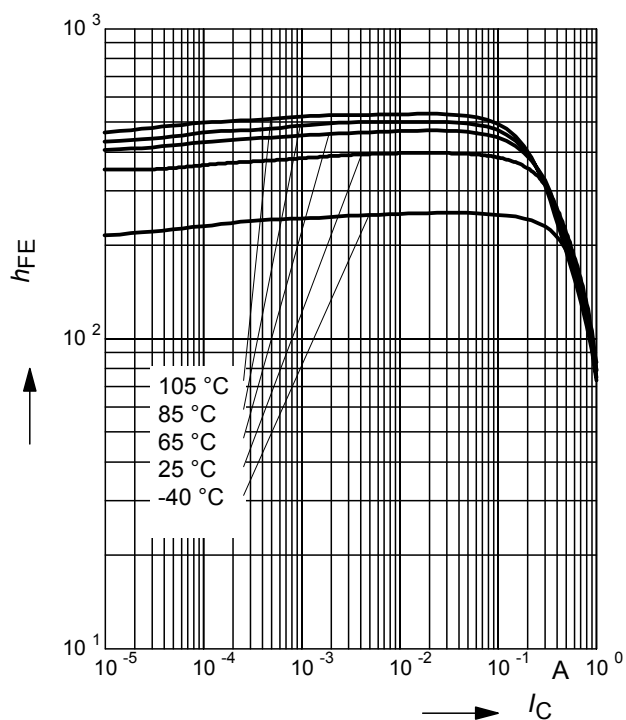


### Collector-emitter saturation voltage

$I_C = f(V_{CEsat}), h_{FE} = 10$




### Base-emitter saturation voltage

$$I_C = f(V_{BEsat}), h_{FE} = 10$$

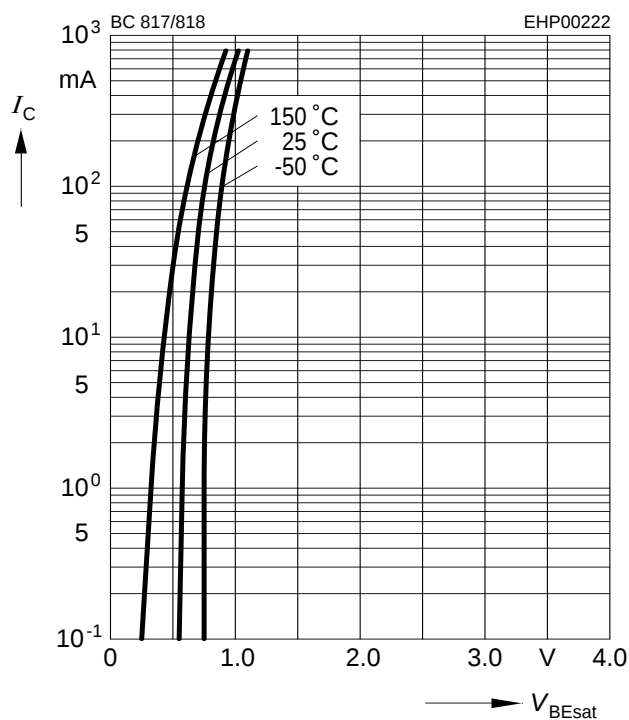


### Collector cutoff current $I_{CBO} = f(T_A)$

$$V_{CBO} = 25 \text{ V}$$

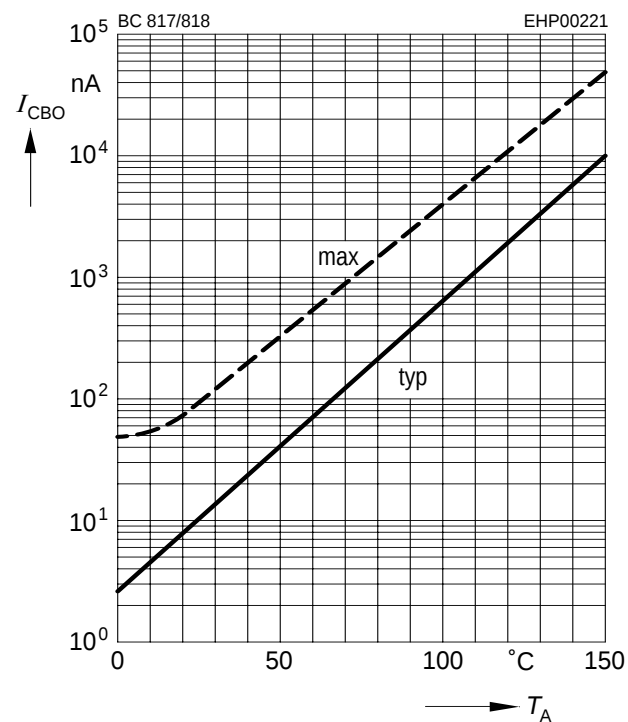

### Transition frequency $f_T = f(I_C)$


$$V_{CE} = \text{parameter in V}, f = 2 \text{ GHz}$$

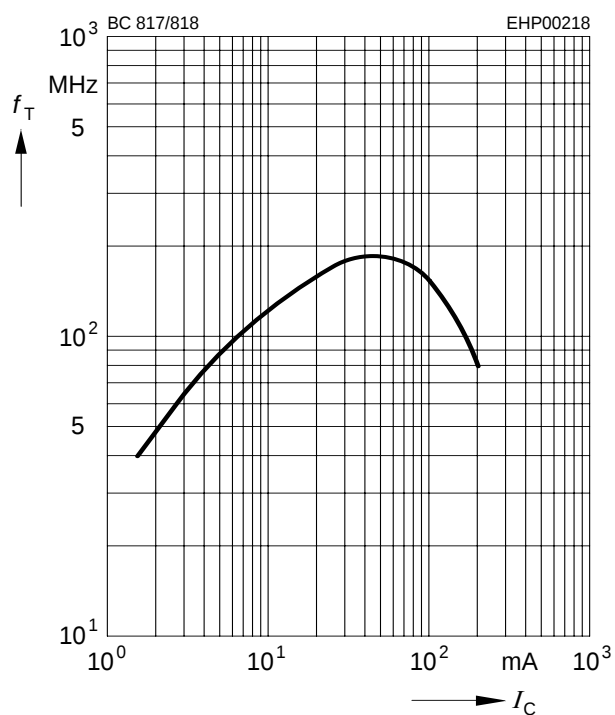

### Collector-base capacitance $C_{cb} = f(V_{CB})$



$$\text{Emitter-base capacitance } C_{eb} = f(V_{EB})$$

BC817K, BC818K

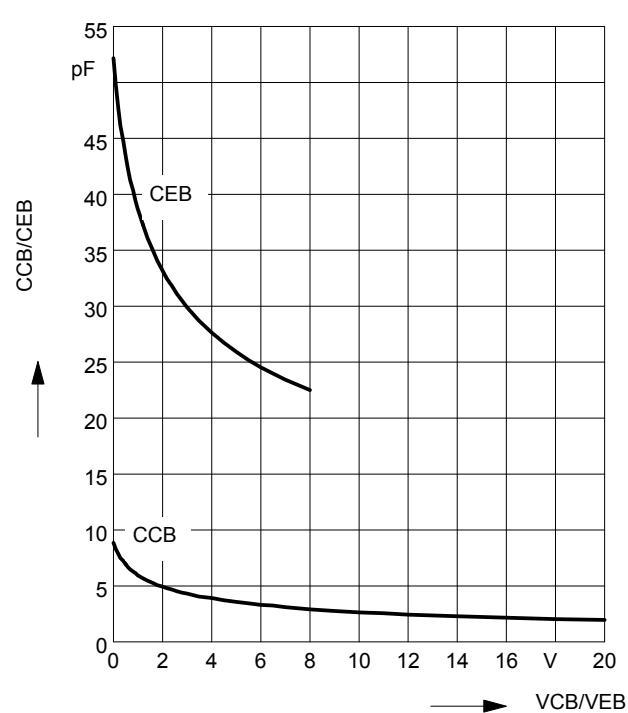

**Total power dissipation  $P_{\text{tot}} = f(T_S)$** 
**BC817K, BC818K**

**Total power dissipation  $P_{\text{tot}} = f(T_S)$** 
**BC817KW, BC818KW**

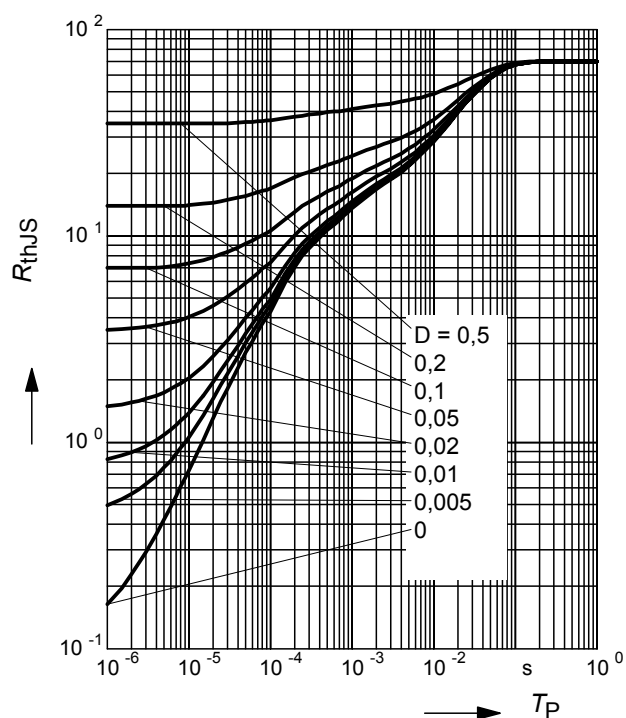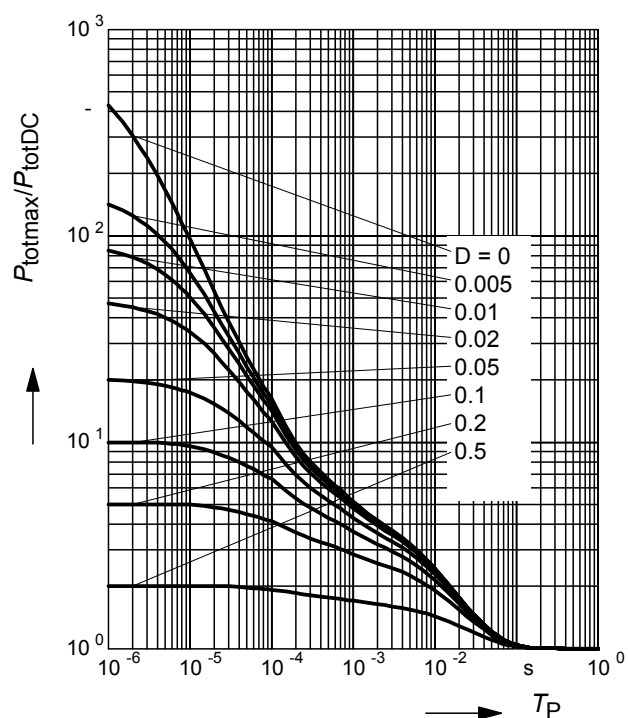**Permissible Pulse Load  $R_{\text{thJS}} = f(t_p)$** 
**BC817K, BC818K**

**Permissible Pulse Load**
 **$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$** 
**BC817K, BC818K**


### Permissible Puls Load $R_{thJS} = f(t_p)$

BC817KW, BC818KW




### Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$

BC817KW, BC818KW



## Package Outline

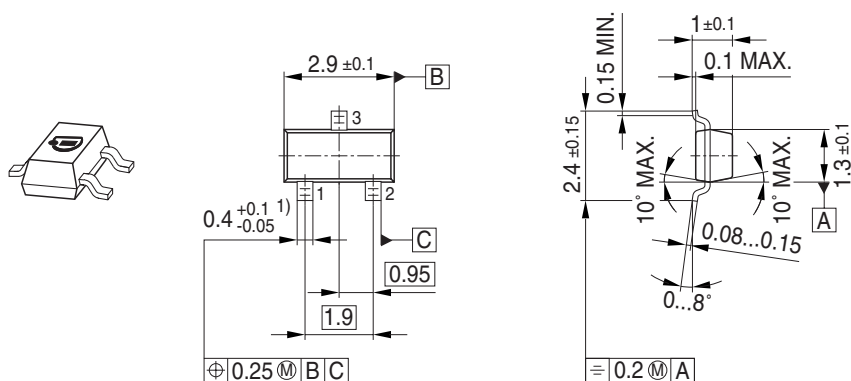


1) Lead width can be 0.6 max. in dambar area

## Foot Print



## Marking Layout (Example)

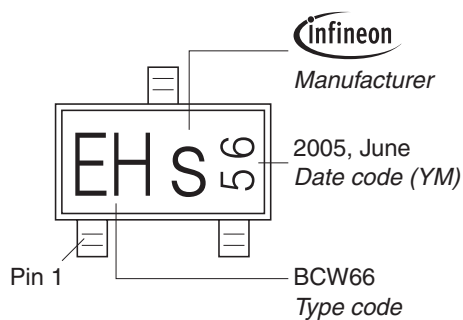

## Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
Reel ø330 mm = 10.000 Pieces/Reel



The technical drawing shows two views of the component:

- Top View:** A rectangular package with a width of  $2 \pm 0.2$ . The distance from the centerline to the first pin is  $0.3^{+0.1}_{-0.05}$ . There are three pins ( $3x$ ) with a pitch of  $0.1 \text{ M}$ . Pin positions are labeled 1, 2, and 3. The distance between pins 1 and 2 is  $0.65$ .
- Side View:** Shows the profile of the package. The total height is  $0.9 \pm 0.1$ . The maximum lead height is  $0.1 \text{ MAX.}$ . The mounting pad diameter is  $\varnothing 0.1$ . The distance from the base to the start of the leads is  $2.1 \pm 0.1$ . The minimum lead length is  $0.1 \text{ MIN.}$ . The distance from the base to the end of the leads is  $1.25 \pm 0.1$ . The distance from the base to the start of the second set of leads is  $0.15^{+0.1}_{-0.05}$ . The bottom surface has a flatness tolerance of  $0.2 \text{ M A}$ .

The diagram shows a rectangular barcode label with the text "WH S 05" inside. Callouts point to specific parts of the label: "infineon" (Manufacturer), "2005, June" (Date code (YM)), and "BCR108W" (Type code). A small "Pin 1" label points to the bottom-left corner of the label.

**Edition 2009-11-16**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2009 Infineon Technologies AG  
All Rights Reserved.**

### **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([<www.infineon.com>](http://www.infineon.com)).

### **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)