

CLASS H – RLN / RLS SERIES FUSES & LKN / LKS LINKS

250/600 VAC • Renewable • 1-600 A



Description

Littelfuse RLN and RLS series renewable fuses have traditionally been used to provide low cost protection. However, generally increased levels of available fault current and the distinct possibility that renewable fuses may be improperly renewed, have rendered them unsafe. The use of these fuses in new applications is prohibited by law.

Specifications

Voltage Ratings	AC: 250 V (RLN); 600 V (RLS)
Interrupting Ratings	AC: 10 kA rms symmetrical
Ampere Range	1–600 A
Approvals	Standard 248-6, Class H UL Listed (File: E81895) CSA Certified (File: LR29862)
Fuse Links	To order, specify LKN (250V) or LKS (600V) plus ampere rating.

Guide For Proper Renewable Fuse Usage

Renewable fuses should only be used where short-circuit currents are known to be less than 10,000 amperes, and where correct replacement of open links is assured. Renewable fuses and links are not recommended for new applications.

Still Using Class H Fuses?

Littelfuse offers several fuse and fuse block combinations that can greatly improve electrical safety.
 LLNRK / LLSRK
 FLNR / FLSR fuses
 LFR fuse holders

Ordering Information

AMPERE RATINGS					
1	6	20	45	90	175
2	8*	25	50	100	200
3	10	30	60	110	225†
4	12*	35	70	125	250†
5	15	40	80	150	300†
					400†
					450†
					500†
					600†

*RLS only.

†These ampere ratings require two links per fuse.

TYPE	VOLTAGE	CATALOG NUMBER	ORDERING NUMBER
FUSE	600	RLS020	ORLS020.T
FUSE	250	RLN020	ORLN020.T
LINK	600	LKS025	OLKS025.S
LINK	250	LKN030	OLKN030.S

Dimensions



FIG. 1

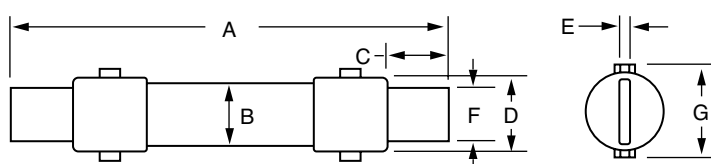


FIG. 2

AMPERES	REFER TO FIG. NO.	SERIES	DIMENSIONS INCHES (mm)						
			A	B	C	D	E	F	G
1 – 30	1	RLN	2 (50.8)	½ (12.7)	½ (12.7)	9/16 (14.3)	—	—	—
		RLS	5 (127.0)	¾ (19.1)	5/8 (15.9)	13/16 (20.6)	—	—	—
35 – 60	1	RLN	3 (76.2)	¾ (19.1)	5/8 (15.9)	13/16 (20.6)	—	—	—
		RLS	5 ½ (139.7)	1 (25.4)	5/8 (15.9)	1 1/16 (27.0)	—	—	—
70 – 100	2	RLN	5 5/8 (149.2)	1 (25.4)	1 (25.4)	1 1/16 (27.0)	1/8 (3.2)	¾ (19.1)	1 5/16 (33.3)
		RLS	7 7/8 (200.0)	1 ¼ (31.8)	1 (25.4)	1 5/16 (33.3)	1/8 (3.2)	¾ (19.1)	1 9/16 (39.7)
110 – 200	2	RLN	7 7/8 (181.0)	1 ½ (38.1)	1 3/8 (34.9)	1 5/16 (39.7)	3/16 (4.8)	1 ½ (28.6)	1 7/8 (47.6)
		RLS	9 5/8 (244.5)	1 ¾ (44.5)	1 3/8 (34.9)	1 7/8 (46.8)	3/16 (4.8)	1 ½ (28.6)	2 3/32 (53.2)
225 – 400	2	RLN	8 5/8 (219.1)	2 (50.8)	1 ½ (47.6)	2 3/32 (53.2)	¼ (6.4)	1 5/8 (41.3)	2 13/32 (61.1)
		RLS	11 5/8 (295.3)	2 ½ (63.5)	1 ½ (47.6)	2 9/32 (65.9)	¼ (6.4)	1 5/8 (41.3)	2 7/8 (73.0)
450 – 600	2	RLN	10 3/8 (263.5)	2 ½ (63.5)	2 ¼ (57.2)	2 9/32 (65.9)	¼ (6.4)	2 (50.8)	2 7/8 (73.0)
		RLS	13 3/8 (339.7)	3 (76.2)	2 ¼ (57.2)	3 3/32 (78.6)	¼ (6.4)	2 (50.8)	3 7/16 (87.3)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru