


# Silicon Power Rectifier Assemblies Plate Heatsink


- Complete bridge with heatsinks – no assembly required
- Available in many circuit configurations
- Rated for convection or forced air cooling
- Available with bracket or stud mounting
- Designs include: DO-4, DO-5, DO-8 and DO-9 rectifiers
- Blocking voltages to 1600V

Silicon Power Rectifier Plate Heatsink Assembly Coding System

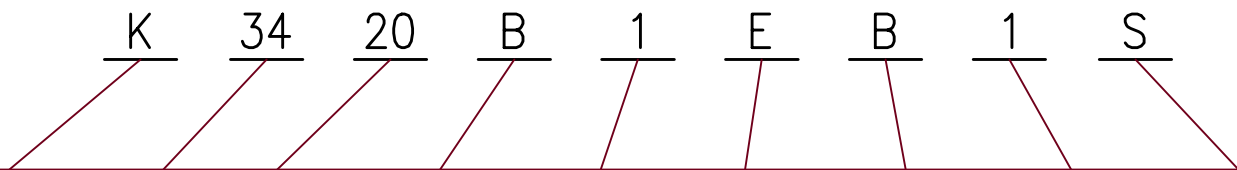

Size of Heat Sink	Type of Diode	Peak Reverse Voltage	Type of Circuit	Number of Diodes in Series	Type of Finish	Type of Mounting	Number of Diodes in Parallel	Special Feature
E-2"x2" K-3"x3" G-5"x5" N-7"x7"	21	20-200	Single Phase H-Half Wave C-Center Tap Positive N-Center Tap Negative	Per leg	E-Commercial	B-Stud with brackets or insulating board with mounting bracket N-Stud with no bracket	Per leg	Surge Suppressor
	34 37		D-Doubler B-Bridge					
	43	40-400	M-Open Bridge					
	504	60-600						
			Three Phase					
		80-800	Z-Bridge					
		100-1000	X-Center Tap Y-Half Wave DC Positive					
		120-1200	Q-Half Wave DC Negative					
		160-1600	W-Double WYE V-Open Bridge					

# Series 21, 34 & 37 Plate Heatsink

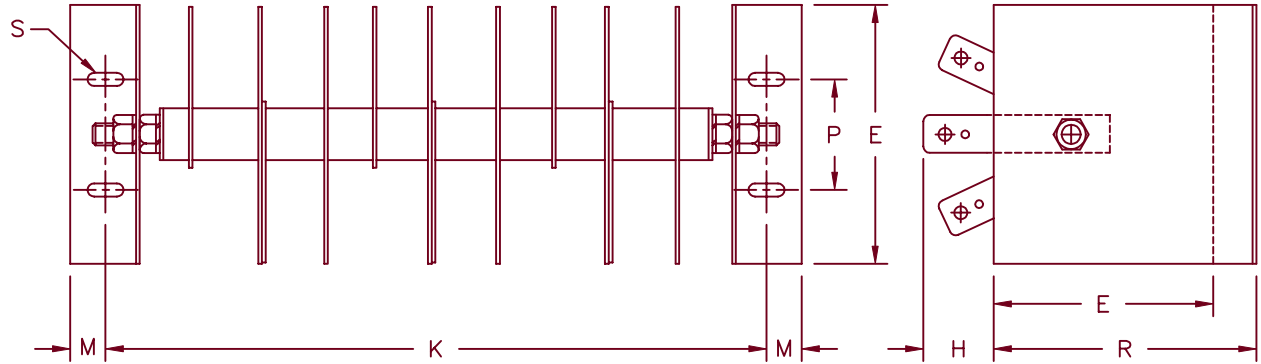

**Notes:**

1. Current ratings shown are for natural convection cooling resistive or inductive loads for single phase circuits and all loads for three phase circuits
2. Use 2.0 times the listed current ratings for forced convection cooling at 1000LFM
3. For single phase battery, capacitive, or motor loads: the output current shown below should be derated to 80% of the values shown.
4. Assemblies with heat sink sizes other than those shown below are available on request for special applications.

## Series 21

Circuit	Size	Dim.	Inches		Millimeters	
			Min.	Max.	Min.	Max.
1 $\emptyset$ Bridge	2x2	K	5.00	5.25	127.0	133.3
1 $\emptyset$ Bridge	3x3	K	5.87	6.12	149.0	155.4
3 $\emptyset$ Bridge	2x2	K	7.25	7.50	184.1	190.5
3 $\emptyset$ Bridge	3x3	K	8.12	8.37	206.2	212.5
Same for both circuits	2x2	M	0.30	0.32	7.62	8.12
		P	0.74	0.76	18.7	19.3
		E	1.99	2.01	50.5	51.0
		R	2.61	2.63	66.2	66.8
		H	0.86	0.88	21.8	22.3
			0.56x.28 Nom.		14x7.1 Nom.	
Same for both circuits	3x3	M	0.36	0.38	9.14	9.65
		P	1.49	1.51	37.8	38.3
		E	2.99	3.01	75.9	76.4
		R	3.67	3.69	93.2	93.7
		H	0.99	1.01	25.1	25.6
			0.31x.18 Nom.		7.9x4.7 Nom.	

## Series 34 & 37

Circuit	Size	Dim.	Inches		Millimeters	
			Min.	Max.	Min.	Max.
1 $\emptyset$ Bridge	3x3	K	5.75	6.25	146.0	158.7
1 $\emptyset$ Bridge	5x5	K	5.75	6.25	146.0	158.7
3 $\emptyset$ Bridge	3x3	K	8.00	8.50	203.2	215.9
3 $\emptyset$ Bridge	5x5	K	8.00	8.50	203.2	215.9
Same for both circuits	3x3	M	0.36	0.38	9.14	9.65
		P	1.49	1.51	37.8	38.3
		E	2.99	3.01	75.9	76.4
		R	3.67	3.69	93.2	93.7
		H	0.99	1.01	25.1	25.6
			0.56x.28 Nom.		14x7.1 Nom.	
Same for both circuits	5x5	M	0.36	0.38	9.14	9.65
		P	2.49	2.51	63.2	63.7
		E	4.99	5.01	126.7	127.2
		R	5.99	6.01	152.1	152.6
		H	1.24	1.26	31.4	32.0
			0.56x.28 Nom.		14x7.1 Nom.	


**Ratings – Average Circuit Output Current – Amperes**

DIODE SERIES	HEAT SINK SIZE (inches)	I <sub>FSM</sub> AMPS	AMBIENT TEMP. °C	1-PHASE 1/2 WAVE	1-PHASE CTR. TAP	1-PHASE BRIDGE	3-PHASE 1/2 WAVE	3-PHASE BRIDGE	3-PHASE CTR. TAP	3-PHASE DBL.-WYE
21	2x2x1/16	250	40	7.8	15.6	15.6	23.4	23.4	38.1	46.8
21	2x2x1/16	250	70	6.0	12.0	12.0	18.0	18.0	29.3	36.0
21	2x2x1/16	250	100	4.3	8.6	8.6	12.9	12.9	21.0	25.8
21	3x3x1/16	250	40	11.0	22.0	22.0	33.0	33.0	53.8	66.0
21	3x3x1/16	250	70	8.8	17.6	17.6	26.4	26.4	43.0	52.8
21	3x3x1/16	250	100	6.3	12.6	12.6	18.9	18.9	30.8	37.8

**Ratings – Average Circuit Output Current – Amperes**

DIODE SERIES	HEAT SINK SIZE (inches)	I <sub>FSM</sub> AMPS	AMBIENT TEMP. °C	1-PHASE 1/2 WAVE	1-PHASE CTR. TAP	1-PHASE BRIDGE	3-PHASE 1/2 WAVE	3-PHASE BRIDGE	3-PHASE CTR. TAP	3-PHASE DBL.-WYE
34	3x3x1/16	800	40	18.0	36.0	36.0	54.0	54.0	88.0	108.0
34	3x3x1/16	800	70	14.5	29.0	29.0	43.5	43.5	70.9	87.0
34	3x3x1/16	800	100	10.5	21.0	21.0	31.5	31.5	51.3	63.0
34	5x5x1/16	800	40	25.5	50.0	50.0	75.0	75.0	122.3	150.0
34	5x5x1/16	800	70	20.2	40.4	40.4	60.6	60.6	98.8	121.2
34	5x5x1/16	800	100	14.5	29.0	29.0	43.5	43.5	70.9	87.0
37	5x5x1/16	1500	40	33.2	67.5	67.5	97.5	97.5	159.0	195.0
37	5x5x1/16	1500	70	26.3	52.5	52.5	78.7	78.7	128.4	157.5
37	5x5x1/16	1500	100	18.8	37.7	37.7	56.5	56.5	92.2	113.1

# Series 43 & 504 Plate Heatsink

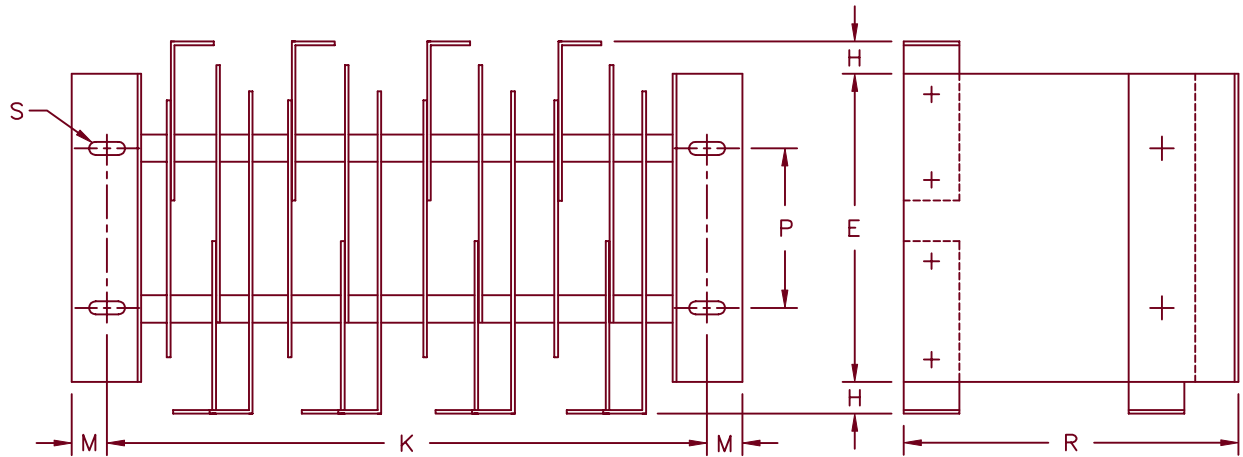

**Notes:**

1. Current ratings shown are for natural convection cooling resistive or inductive loads for single phase circuits and all loads for three phase circuits
2. Use 2.0 times the listed current ratings for forced convection cooling at 1000LFM
3. For single phase battery, capacitive, or motor loads: the output current shown below should be derated to 80% of the values shown.
4. Assemblies with heat sink sizes other than those shown below are available on request for special applications.

## Series 43

Circuit	Size	Dim.	Inches		Millimeters	
			Min.	Max.	Min.	Max.
1Ø Bridge	5x5	K	9.25	9.75	234.9	247.6
1Ø Bridge	7x7	K	9.25	9.75	234.9	247.6
3Ø Bridge	5x5	K	13.0	13.5	330.2	342.9
3Ø Bridge	7x7	K	13.0	13.5	330.2	342.9
Same for both circuits	5x5	M	0.36	0.38	9.14	9.65
		P	2.49	2.51	63.2	63.7
		E	4.99	5.01	126.7	127.2
		R	5.99	6.01	152.1	152.6
		H	0.98	1.00	25.1	25.6
		S	0.56x0.28 Nom.		14x7.1 Nom.	
Same for both circuits	7x7	M	0.36	0.38	9.14	9.65
		P	3.74	3.76	94.9	95.5
		E	6.99	7.01	177.5	178.0
		R	7.99	8.01	202.9	203.4
		H	0.98	1.00	25.1	25.6
		S	0.31x0.18 Nom.		7.9x4.7 Nom.	

## Series 504

Circuit	Size	Dim.	Inches		Millimeters	
			Min.	Max.	Min.	Max.
1Ø Bridge	5x5	K	10.5	11.0	266.7	279.4
1Ø Bridge	7x7	K	10.5	11.0	266.7	279.4
3Ø Bridge	5x5	K	15.0	15.5	381.0	393.7
3Ø Bridge	7x7	K	15.0	15.5	381.0	393.7
Same for both circuits	5x5	M	0.36	0.38	9.14	9.65
		P	2.49	2.51	63.2	63.7
		E	4.99	5.01	126.7	127.2
		R	5.99	6.01	152.1	153.6
		H	0.98	1.00	24.8	25.4
		S	0.56x0.28 Nom.		14x7.1 Nom.	
Same for both circuits	7x7	M	0.36	0.38	9.14	9.65
		P	3.74	3.76	94.9	95.5
		E	6.99	7.01	177.5	178.0
		R	7.99	8.01	202.9	203.4
		H	0.98	1.00	24.8	25.4
		S	0.56x0.28 Nom.		14x7.1 Nom.	

**Ratings – Average Circuit Output Current – Amperes**

DIODE SERIES	HEAT SINK SIZE (inches)	I <sub>FSM</sub> AMPS	AMBIENT TEMP. °C	1-PHASE 1/2 WAVE	1-PHASE CTR. TAP	1-PHASE BRIDGE	3-PHASE 1/2 WAVE	3-PHASE BRIDGE	3-PHASE CTR. TAP	3-PHASE DBL.-WYE
43	5x5x1/8	2500	40	42.0	84.0	84.0	126.0	126.0	205.4	252.0
43	5x5x1/8	2500	70	32.0	64.0	64.0	96.0	96.0	156.5	192.0
43	5x5x1/8	2500	100	24.0	48.0	48.0	72.0	72.0	117.4	144.0
43	7x7x1/8	2500	40	52.0	104.0	104.0	156.0	156.0	254.3	312.0
43	7x7x1/8	2500	70	40.0	80.0	80.0	120.0	120.0	195.6	240.0
43	7x7x1/8	2500	100	28.0	56.0	56.0	84.0	84.0	137.0	168.0

**Ratings – Average Circuit Output Current – Amperes**

DIODE SERIES	HEAT SINK SIZE (inches)	I <sub>FSM</sub> AMPS	AMBIENT TEMP. °C	1-PHASE 1/2 WAVE	1-PHASE CTR. TAP	1-PHASE BRIDGE	3-PHASE 1/2 WAVE	3-PHASE BRIDGE	3-PHASE CTR. TAP	3-PHASE DBL.-WYE
504	5x5x1/8	5500	40	62.0	124.0	124.0	186.0	186.0	303.0	372.0
504	5x5x1/8	5500	70	47.0	94.0	94.0	141.0	141.0	230.0	282.0
504	5x5x1/8	5500	100	33.0	66.0	66.0	99.0	99.0	161.0	198.0
504	7x7x1/4	5500	40	81.0	162.0	162.0	243.0	243.0	396.0	486.0
504	7x7x1/4	5500	70	63.0	126.0	126.0	189.0	189.0	308.0	378.0
504	7x7x1/4	5500	100	45.0	90.0	90.0	135.0	135.0	220.0	270.0

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)