EAO – Your Expert Partner for
**Human Machine Interfaces**

# EAO Product Information

Series 04

eao



Description ..... 3

Product Assembly ..... 4

Mounting instruction ..... 10

Devices raised mounting ..... 12

Devices flush mounting ..... 32

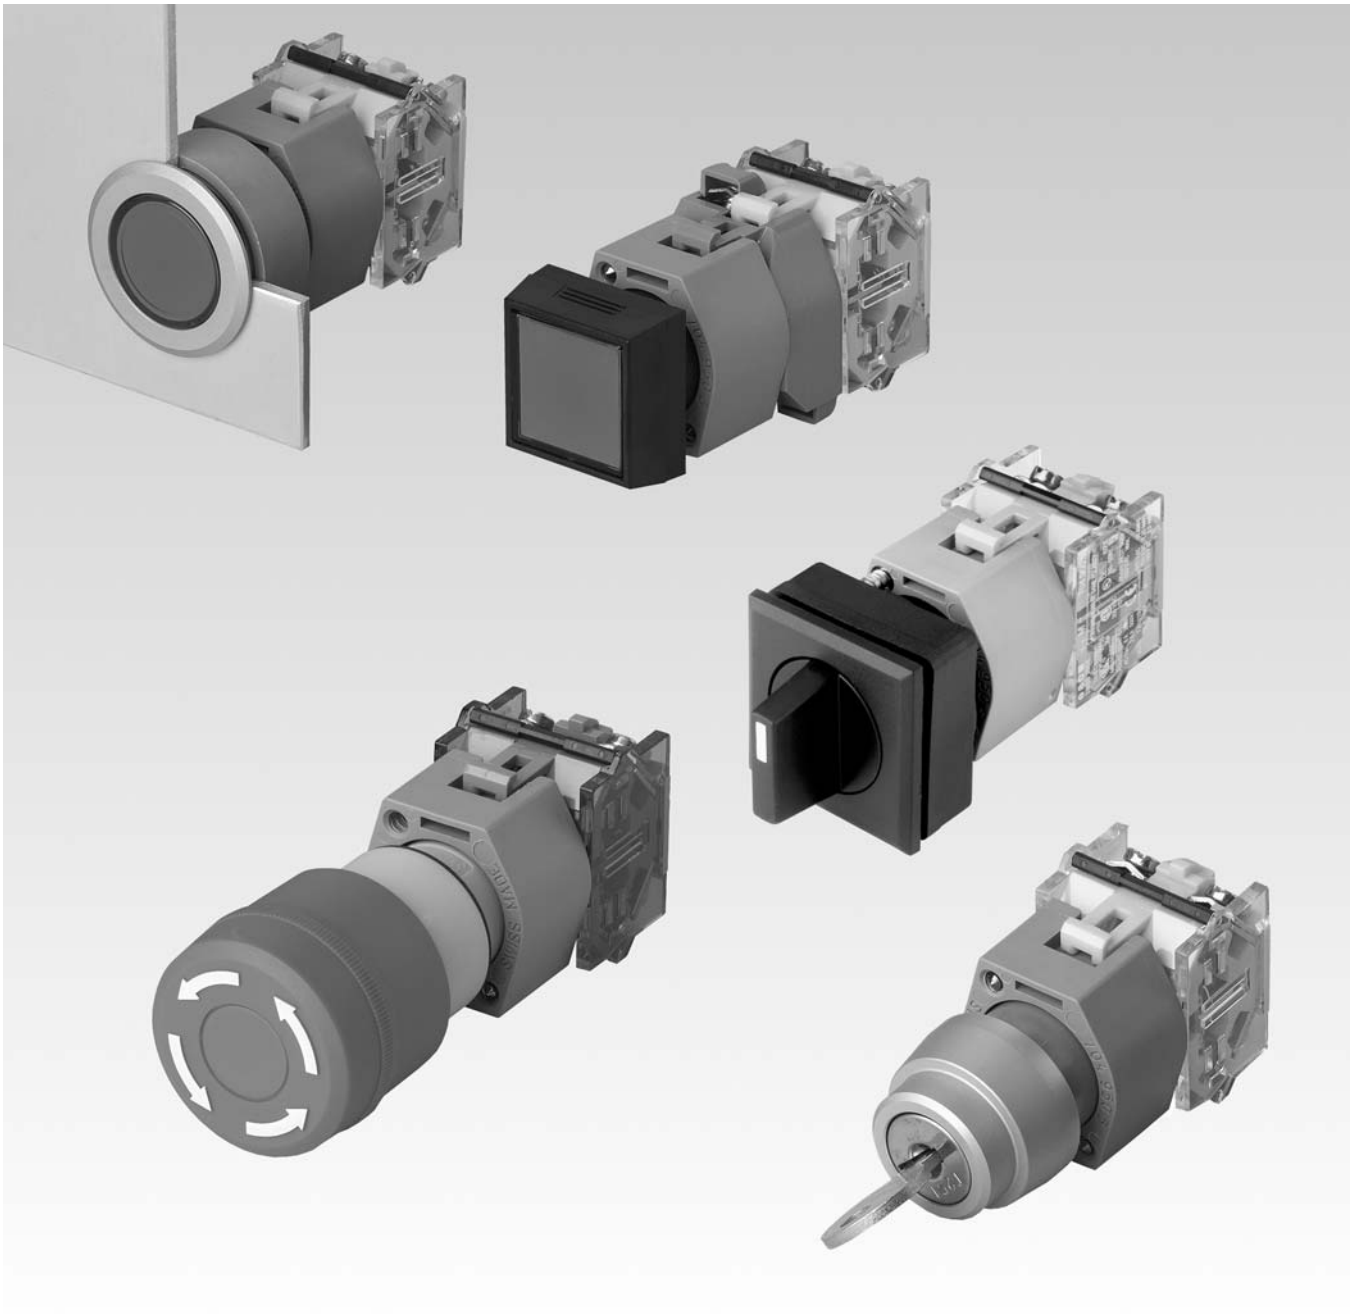Accessories ..... 48

Spare Parts ..... 64

Technical Data ..... 77

Typical Applications ..... 84

Application guidelines ..... 85

Marking ..... 86

Drawings ..... 91

Index ..... 122

## Product Information

**General notes**
Series 04, a modular switching system, offers users a wide range of possible combinations. A broad variety of actuators is available, round or square in shape, for use as pushbuttons, keylock switches or lever-operated switches and indicators.
Other special actuators, such as mushroom heads or emergency-stop pushbuttons and buzzers can also be supplied.
Max. 3 switching elements, as snap-action or slow-make switches, can be clipped as modules to each actuator. Each switching element is equipped with 1 or 2 independent switching systems with normally closed or normally open contact.
Anodized aluminium parts can have visible variations due production-technical reasons.

**Mounting**
The series 04 pushbuttons and switches in raised version are mounted in a 22.5 mm dia. cut-out or with appropriate adapter in 30.5 mm dia. mounting hole.
Flush mounted devices have a 30.5 mm dia. cutout or 30 x 30 mm.

**Terminals**
The switching elements and the lamp blocks can be supplied with srew- / plug-in terminals or push-in terminals.

**Lenses**
Lenses of transperent plasric or aluminium are available in various standard colours.

**Marking**
For further information about engraving, hot stamping and film inserts see part Marking.

**Illumination**
The BA9s incandescent (filament) lamp (6, 12, 24, 36, 48, 60, 110, 130 V) ensures perfect illumination of the lenses, which are supplied in various colours.
BA9s Single-Chip LED (6, 12, 24, 28, 48 V) are also available in blue, green, red, white or yellow.
Luminosity and wave length scattering caused by the technology used in the LED manufacturing processes may lead to visual differences in our products.

**Position indication**
The status of a maintained action switch can be determinded by the position of the lens.

**Keylock switch**
Standard lock number is 251, the last digit of Typ-Nr. = 0 (example : 704.335.**0**).
Additional lock numbers are available : 252 last digit = 1; 253 last digit = 2; 254 last digit = 3; 255 last digit = 4; 256 last digit = 5; 257 last digit = 6; 259 last digit = 8; 260 last digit = 9.
Two keys are supplied with each keylock switch.

**Keyinsert switch 704.095.0T28**
EAO worked with the German Railways to develop an incredibly strong key-insert switch, which allows the conductor to close all the train's doors at the same time from any door using so called 'remote closing'. The switch, which has a 'massive' all-stainless steel construction, was modified from EAO's standard Series 04 switch to actuate the remote closing function with a single twist of the conductor's key; he can cancel or 'revoke' the remote closing with another twist of the key.
The important difference in the EAO design and the design of the switch they used previously is that it separates the function according to direction; accidental operation far less likely - twist one way for remote closing, twist the other way to cancel the remote closing.
The switch has a mechanical liftime of 150 000 cycles and is incredibly durable to withstand the repeated use that might be necessary on every yourney.

**Rotary selector switch**
The rotary selector switch of series 04 are ideal control- and instrument switches. The switch types (CG4-1) are suitable particularly for switching of low tension. They correspond to the regulations after EN IEC 60947-3 and VDE 0660-Part 3.
By the special axial arrangement of the connecting terminals it is possible to mount the switches side by side or next to the cable duct. The contact marking remains well visible also in the mounted position. The required space of these switches is very small.

**Number structure**
Nomenclature in accordance with ' CENELEC Certificate '. The certification document we dispatch to them on demands.

**Specimen order**

Illuminated pushbutton:

- Illuminiated pushbutton actuator, 30 x 30 mm — 704.229.6
  Momentary action
  Front ring plastic black
  Lens plastic blue

Essential accessories:

- Single-Chip LED BA9s, 24 VAC/DC, blue — 10-2512.1146
- Switching element, snap-action — 704.900.5
  1 NC + 1 NO, hard silver
  srew terminal

*We reserve the right to modify technical data*
*All dimensions in mm*

## Pushbutton, raised mounting




1 Front bezel
2 Lens
3 Marking foil
4 Lens holder
5 Actuator housing
6 Sealing
7 Front plate
8 Bayonet flange
9 Switching element

## Emergency-stop pushbutton




1 Emergency-stop pushbutton actuator
2 Sealing
3 Front plate
4 Bayonet flange
5 Switching element
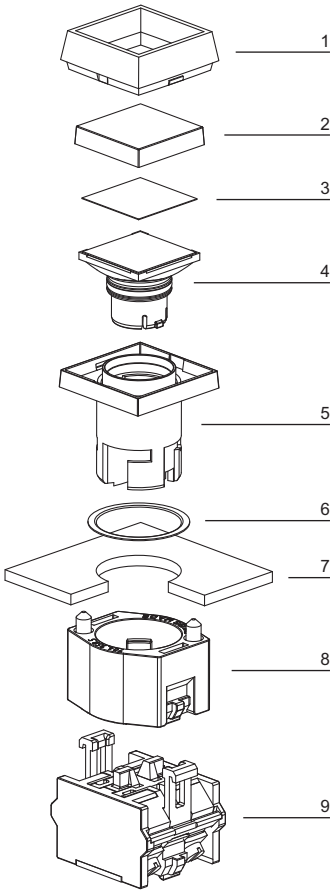
## Keylock switch, raised mounting




1 Keylock switch actuator
2 Sealing
3 Front plate
4 Fixing nut
5 Switching element
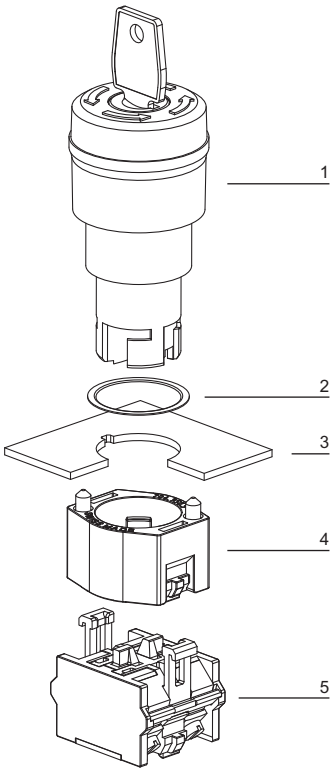
## Rotary selector switch, raised mounting




1 Rotary selector switch actuator
2 Sealing
3 Front plate
4 Bayonet flange
5 Rotary switch element
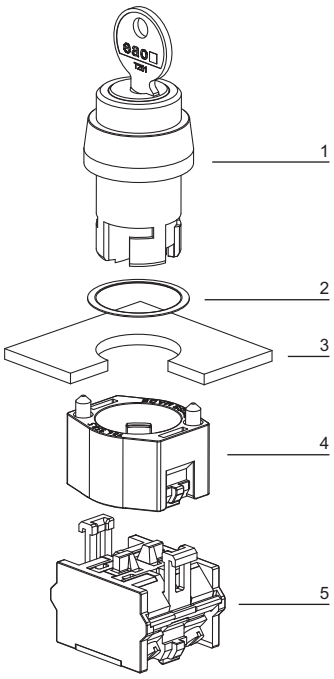
## Indicator, flush mounting




1 Lens
2 Marking foil
3 Lens holder
4 LED
5 Actuator housing
6 Front plate
7 Pressure ring
8 Bayonet flange
9 Lamp element
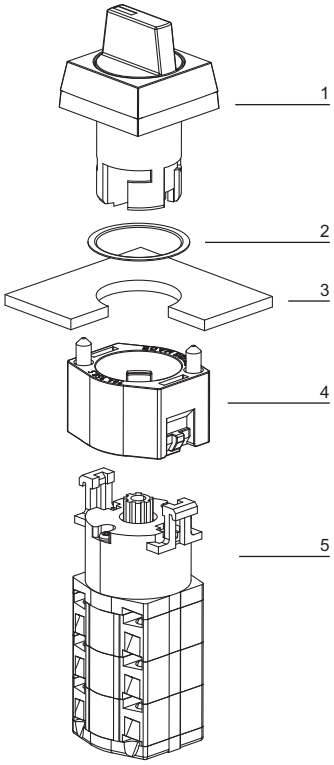
## Pushbutton illuminated, flush mounting




1 Lens
2 Marking plate
3 LED
4 Actuator housing
5 Sealing
6 Front plate
7 Pressure ring
8 Bayonet flange
9 Lamp element
10 Switching element
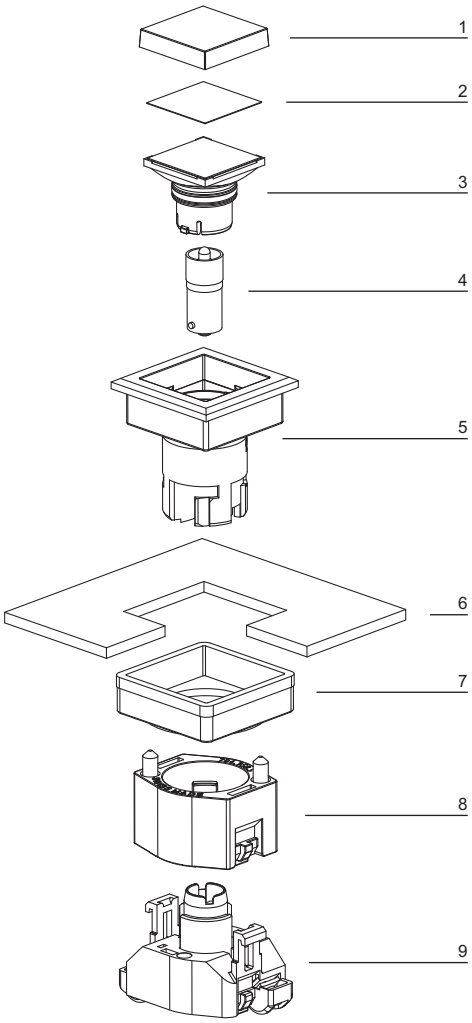
## Selector switch, flush mounting




1 Selector switch actuator
2 Front plate
3 Pressure ring
4 Bayonet flange
5 Switching element
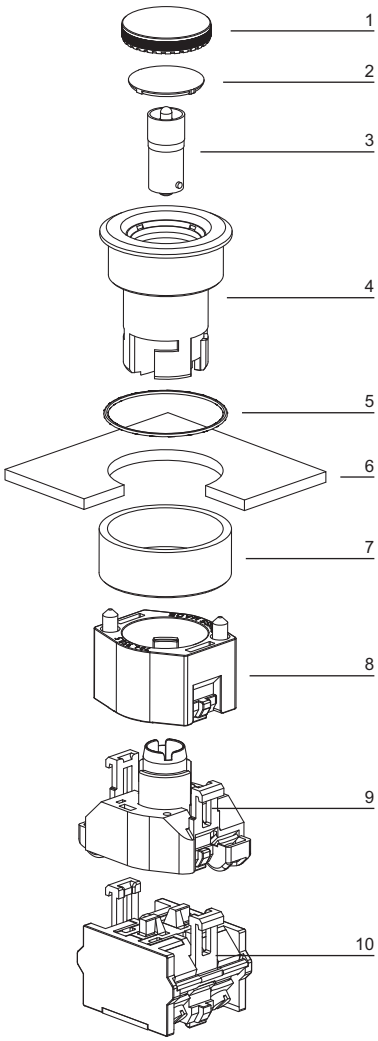
## Pushbutton

The actuator is inserted from the front through the mounting hole and locked at the rear by twisting the boyonet flange. The switch is fixed and positioned by evenly tightening the two screws in the mounting flange to a max. torque of 25 ... 30 Ncm. A reducing ring can be used to fit 22.5 mm into a 30.5 mm hole.



The switching elements (max. 3) or transformers, E-stop (max. 2), can easily be snapped in position without tools. LED's or filament lamps, as well as marking plates can be inserted or fitted from the front.

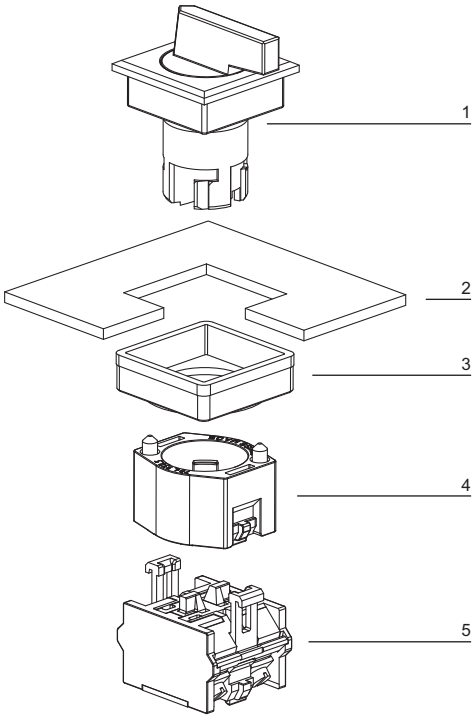



We can supply switching elements with terminal labels inserted.



To dismantle the switching elements or transformers one arm of the snap-on system is eased up with a screwdriver so that the snapped-on parts can easily removed.



## Rotary selector switch

**Actuator**

Step 1
Mounting of the actuator element:

1. Insert actuator from the front into the mounting hole.

2. Push mounting flange onto the actuator from the back and latch with bayonet.

3. Screw flange on with the two threaded pins.

4. Put lever into reference position (nine o'clock).

**Rotary switch element**

Step 2
Snap rotary switch onto the actuator:

1. First check switch number with circuit diagram.

2. Put switching position of the cam at nine o'clock.

3. Snap rotary switch element onto the mounting flange, pay attention to position of the driver.

4. Check to see that the two snap-action legs have engaged.

5. Check the switching action in accordance with the switching sequence.

## Indicator full-face illumination compact

**Essential Accessories:**

Single-LED page 58

| | Front protection | Terminals | Lens cap | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|
| **Indicator full-face illumination compact** Filament lamp 130 V, max. 2.6 W with integrated series resistor 230/130 V Marking cap white translucent | IP 65 | ST | Plastic blue translucent | **704.022.6** | 3 | 2 | 51 | 0.025 |
| | | | Plastic colourless translucent | **704.022.7** | 3 | 2 | 51 | 0.025 |
| | | | Plastic green translucent | **704.022.5** | 3 | 2 | 51 | 0.025 |
| | | | Plastic red translucent | **704.022.2** | 3 | 2 | 51 | 0.025 |
| | | | Plastic yellow translucent | **704.022.4** | 3 | 2 | 51 | 0.025 |
| Filament lamp 60 V, max. 2.6 W with integrated series resistor 125/60 V Marking cap white translucent | IP 65 | ST | Plastic blue translucent | **704.024.6** | 3 | 2 | 51 | 0.025 |
| | | | Plastic colourless translucent | **704.024.7** | 3 | 2 | 51 | 0.025 |
| | | | Plastic green translucent | **704.024.5** | 3 | 2 | 51 | 0.025 |
| | | | Plastic red translucent | **704.024.2** | 3 | 2 | 51 | 0.025 |
| | | | Plastic yellow translucent | **704.024.4** | 3 | 2 | 51 | 0.025 |
| Filament lamp max. 2.6 W or LED Marking cap white translucent | IP 65 | ST | Plastic blue translucent | **704.020.6** | 3 | 2 | 5 | 0.020 |
| | | | Plastic colourless translucent | **704.020.7** | 3 | 2 | 5 | 0.020 |
| | | | Plastic green translucent | **704.020.5** | 3 | 2 | 5 | 0.020 |
| | | | Plastic red translucent | **704.020.2** | 3 | 2 | 5 | 0.020 |
| | | | Plastic yellow translucent | **704.020.4** | 3 | 2 | 5 | 0.020 |
| Marking plate colourless transparent ribbed | IP 65 | ST | Plastic blue transparent | **704.021.6** | 3 | 2 | 5 | 0.020 |
| | | | Plastic colourless transparent | **704.021.7** | 3 | 2 | 5 | 0.020 |
| | | | Plastic green transparent | **704.021.5** | 3 | 2 | 5 | 0.020 |
| | | | Plastic red transparent | **704.021.2** | 3 | 2 | 5 | 0.020 |
| | | | Plastic yellow transparent | **704.021.4** | 3 | 2 | 5 | 0.020 |

Terminals: ST = Screw terminal

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Indicator full face illumination

**Essential Accessories:**

Single-LED page 58

| | Front protection | Terminals | Frontbezel/-ring | Lens cap | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Indicator full face illumination**<br>Filament lamp or LED<br>Marking plate white translucent | IP 65 | ST | Plastic black | Plastic blue | **704.199.6** | | 5 | 3 | 5 | 0.050 |
| | | | | Plastic colourless | **704.199.7** | | 5 | 3 | 5 | 0.050 |
| | | | | Plastic green | **704.199.5** | | 5 | 3 | 5 | 0.050 |
| | | | | Plastic red | **704.199.2** | | 5 | 3 | 5 | 0.050 |
| | | | | Plastic yellow | **704.199.4** | | 5 | 3 | 5 | 0.050 |
| | | | Plastic grey | Plastic blue | **704.200.6** | | 5 | 3 | 5 | 0.050 |
| | | | | Plastic colourless | **704.200.7** | | 5 | 3 | 5 | 0.050 |
| | | | | Plastic green | **704.200.5** | | 5 | 3 | 5 | 0.050 |
| | | | | Plastic red | **704.200.2** | | 5 | 3 | 5 | 0.050 |
| | | | | Plastic yellow | **704.200.4** | | 5 | 3 | 5 | 0.050 |
| | | | without | Plastic blue | | **704.000.6** | 5 | 3 | 5 | 0.050 |
| | | | | Plastic colourless | | **704.000.7** | 5 | 3 | 5 | 0.050 |
| | | | | Plastic green | | **704.000.5** | 5 | 3 | 5 | 0.050 |
| | | | | Plastic red | | **704.000.2** | 5 | 3 | 5 | 0.050 |
| | | | | Plastic yellow | | **704.000.4** | 5 | 3 | 5 | 0.050 |
| Marking cap colourless transparent ripped | IP 65 | ST | without | Plastic blue | | **704.001.6** | 5 | 3 | 5 | 0.050 |
| | | | | Plastic colourless | | **704.001.7** | 5 | 3 | 5 | 0.050 |
| | | | | Plastic green | | **704.001.5** | 5 | 3 | 5 | 0.050 |
| | | | | Plastic red | | **704.001.2** | 5 | 3 | 5 | 0.050 |
| | | | | Plastic yellow | | **704.001.4** | 5 | 3 | 5 | 0.050 |

Terminals: ST = Screw terminal

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Indicator front illumination

**Essential Accessories:**

Single-LED page 58

| | Front protection | Terminals | Frontbezel/-ring | Lens | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Indicator front illumination**<br>Filament lamp or LED<br>Marking plate white translucent | IP 65 | ST | Plastic black | Plastic blue | **704.206.6** | **704.006.6** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic colourless | **704.206.7** | **704.006.7** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic green | **704.206.5** | **704.006.5** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic red | **704.206.2** | **704.006.2** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic yellow | **704.206.4** | **704.006.4** | 5 | 5 | 5 | 0.050 |
| | | | Plastic grey | Plastic blue | **704.202.6** | **704.002.6** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic colourless | **704.202.7** | **704.002.7** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic green | **704.202.5** | **704.002.5** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic red | **704.202.2** | **704.002.2** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic yellow | **704.202.4** | **704.002.4** | 5 | 5 | 5 | 0.050 |
| Marking plate colourless transparent ribbed | IP 65 | ST | Plastic black | Plastic blue | **704.207.6** | **704.007.6** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic colourless | **704.207.7** | **704.007.7** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic green | **704.207.5** | **704.007.5** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic red | **704.207.2** | **704.007.2** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic yellow | **704.207.4** | **704.007.4** | 5 | 5 | 5 | 0.050 |
| | | | Plastic grey | Plastic blue | **704.203.6** | **704.003.6** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic colourless | **704.203.7** | **704.003.7** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic green | **704.203.5** | **704.003.5** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic red | **704.203.2** | **704.003.2** | 5 | 5 | 5 | 0.050 |
| | | | | Plastic yellow | **704.203.4** | **704.003.4** | 5 | 5 | 5 | 0.050 |

Terminals: ST = Screw terminal

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Flasher full face illumination

**Essential Accessories:**

Flasher element page 50
Single-LED page 58

| | Front protection | Frontbezel/-ring | Lens cap | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|
| **Flasher full face illumination**<br>Filament lamp or LED<br>Marking plate white translucent | IP 65 | Plastic black | Plastic blue | **704.199.6** | | 5 | 6 | 5 | 0.050 |
| | | | Plastic colourless | **704.199.7** | | 5 | 6 | 5 | 0.050 |
| | | | Plastic green | **704.199.5** | | 5 | 6 | 5 | 0.050 |
| | | | Plastic red | **704.199.2** | | 5 | 6 | 5 | 0.050 |
| | | | Plastic yellow | **704.199.4** | | 5 | 6 | 5 | 0.050 |
| | | Plastic grey | Plastic blue | **704.200.6** | | 5 | 6 | 5 | 0.050 |
| | | | Plastic colourless | **704.200.7** | | 5 | 6 | 5 | 0.050 |
| | | | Plastic green | **704.200.5** | | 5 | 6 | 5 | 0.050 |
| | | | Plastic red | **704.200.2** | | 5 | 6 | 5 | 0.050 |
| | | | Plastic yellow | **704.200.4** | | 5 | 6 | 5 | 0.050 |
| | | without | Plastic blue | | **704.000.6** | 5 | 6 | 5 | 0.050 |
| | | | Plastic colourless | | **704.000.7** | 5 | 6 | 5 | 0.050 |
| | | | Plastic green | | **704.000.5** | 5 | 6 | 5 | 0.050 |
| | | | Plastic red | | **704.000.2** | 5 | 6 | 5 | 0.050 |
| | | | Plastic yellow | | **704.000.4** | 5 | 6 | 5 | 0.050 |
| Marking cap colourless transparent ripped | IP 65 | without | Plastic blue | | **704.001.6** | 5 | 6 | 5 | 0.050 |
| | | | Plastic colourless | | **704.001.7** | 5 | 6 | 5 | 0.050 |
| | | | Plastic green | | **704.001.5** | 5 | 6 | 5 | 0.050 |
| | | | Plastic red | | **704.001.2** | 5 | 6 | 5 | 0.050 |
| | | | Plastic yellow | | **704.001.4** | 5 | 6 | 5 | 0.050 |

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Flasher front illumination

**Essential Accessories:**

Flasher element page 50
Single-LED page 58

| | Front protection | Frontbezel/-ring | Lens | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|
| **Flasher front illumination**<br>Filament lamp or LED<br>Marking plate white translucent | IP 65 | Plastic black | Plastic blue | **704.206.6** | **704.006.6** | 5 | 7 | 5 | 0.050 |
| | | | Plastic colourless | **704.206.7** | **704.006.7** | 5 | 7 | 5 | 0.050 |
| | | | Plastic green | **704.206.5** | **704.006.5** | 5 | 7 | 5 | 0.050 |
| | | | Plastic red | **704.206.2** | **704.006.2** | 5 | 7 | 5 | 0.050 |
| | | | Plastic yellow | **704.206.4** | **704.006.4** | 5 | 7 | 5 | 0.050 |
| | | Plastic grey | Plastic blue | **704.202.6** | **704.002.6** | 5 | 7 | 5 | 0.050 |
| | | | Plastic colourless | **704.202.7** | **704.002.7** | 5 | 7 | 5 | 0.050 |
| | | | Plastic green | **704.202.5** | **704.002.5** | 5 | 7 | 5 | 0.050 |
| | | | Plastic red | **704.202.2** | **704.002.2** | 5 | 7 | 5 | 0.050 |
| | | | Plastic yellow | **704.202.4** | **704.002.4** | 5 | 7 | 5 | 0.050 |
| Marking plate colourless transparent ribbed | IP 65 | Plastic black | Plastic blue | **704.207.6** | **704.007.6** | 5 | 7 | 5 | 0.050 |
| | | | Plastic colourless | **704.207.7** | **704.007.7** | 5 | 7 | 5 | 0.050 |
| | | | Plastic green | **704.207.5** | **704.007.5** | 5 | 7 | 5 | 0.050 |
| | | | Plastic red | **704.207.2** | **704.007.2** | 5 | 7 | 5 | 0.050 |
| | | | Plastic yellow | **704.207.4** | **704.007.4** | 5 | 7 | 5 | 0.050 |
| | | Plastic grey | Plastic blue | **704.203.6** | **704.003.6** | 5 | 7 | 5 | 0.050 |
| | | | Plastic colourless | **704.203.7** | **704.003.7** | 5 | 7 | 5 | 0.050 |
| | | | Plastic green | **704.203.5** | **704.003.5** | 5 | 7 | 5 | 0.050 |
| | | | Plastic red | **704.203.2** | **704.003.2** | 5 | 7 | 5 | 0.050 |
| | | | Plastic yellow | **704.203.4** | **704.003.4** | 5 | 7 | 5 | 0.050 |

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Buzzer

| | Front protection | Front cap | Terminals | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|
| **Buzzer** Operation voltage 24 VDC | IP 65 | Brass nickel-plated | S1 | **14-810.902** | 5 | 18 | 1 | 0.016 |
| | | Plastic black | S1 | **14-810.002** | 5 | 18 | 1 | 0.016 |

Further information in the Technical Data and Typical Applications
Terminals: S1 = Soldering terminal (also pluggable 2.8 x 0.5 mm)
Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Pushbutton actuator

**Essential Accessories:**

Switching element page 51

| | Front protection | Switching action | Frontbezel/-ring | Lens | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Pushbutton actuator** | IP 65 | MA | Plastic black | Plastic black | **704.239.0** | **704.039.0** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic blue | **704.239.6** | **704.039.6** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic colourless | **704.239.7** | **704.039.7** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic green | **704.239.5** | **704.039.5** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic red | **704.239.2** | **704.039.2** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic yellow | **704.239.4** | **704.039.4** | 5 | 4 | 3 | 0.040 |
| | | | Plastic grey | Plastic black | **704.240.0** | **704.040.0** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic blue | **704.240.6** | **704.040.6** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic colourless | **704.240.7** | **704.040.7** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic green | **704.240.5** | **704.040.5** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic red | **704.240.2** | **704.040.2** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic yellow | **704.240.4** | **704.040.4** | 5 | 4 | 3 | 0.040 |
| | | M | Plastic black | Plastic black | **704.209.0** | **704.009.0** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic blue | **704.209.6** | **704.009.6** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic colourless | **704.209.7** | **704.009.7** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic green | **704.209.5** | **704.009.5** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic red | **704.209.2** | **704.009.2** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic yellow | **704.209.4** | **704.009.4** | 5 | 4 | 4 | 0.040 |
| | | | Plastic grey | Plastic black | **704.210.0** | **704.010.0** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic blue | **704.210.6** | **704.010.6** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic colourless | **704.210.7** | **704.010.7** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic green | **704.210.5** | **704.010.5** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic red | **704.210.2** | **704.010.2** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic yellow | **704.210.4** | **704.010.4** | 5 | 4 | 4 | 0.040 |
| | | MA | Aluminium natural | Aluminium black | | **704.041.0** | 5 | 4 | 3 | 0.040 |
| | | | | Aluminium blue | | **704.041.6** | 5 | 4 | 3 | 0.040 |
| | | | | Aluminium gold | | **704.041.4** | 5 | 4 | 3 | 0.040 |
| | | | | Aluminium natural | | **704.041.8** | 5 | 4 | 3 | 0.040 |
| | | | | Aluminium olive-green | | **704.041.5** | 5 | 4 | 3 | 0.040 |
| | | | | Aluminium red | | **704.041.2** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic black | | **704.042.0** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic blue | | **704.042.6** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic colourless | | **704.042.7** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic green | | **704.042.5** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic red | | **704.042.2** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic yellow | | **704.042.4** | 5 | 4 | 3 | 0.040 |

Continuation see next page

Continued from previous page

| | Front protection | Switching action | Frontbezel/-ring | Lens | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Pushbutton actuator** | IP 65 | M | Aluminium natural | Aluminium black | | **704.011.0** | 5 | 4 | 4 | 0.040 |
| | | | | Aluminium blue | | **704.011.6** | 5 | 4 | 4 | 0.040 |
| | | | | Aluminium gold | | **704.011.4** | 5 | 4 | 4 | 0.040 |
| | | | | Aluminium natural | | **704.011.8** | 5 | 4 | 4 | 0.040 |
| | | | | Aluminium olive-green | | **704.011.5** | 5 | 4 | 4 | 0.040 |
| | | | | Aluminium red | | **704.011.2** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic black | | **704.012.0** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic blue | | **704.012.6** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic colourless | | **704.012.7** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic green | | **704.012.5** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic red | | **704.012.2** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic yellow | | **704.012.4** | 5 | 4 | 4 | 0.040 |
| | IP 67 | MA | Aluminium natural with protective cap | Plastic black | | **704.043.0** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic blue | | **704.043.6** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic colourless | | **704.043.7** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic green | | **704.043.5** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic red | | **704.043.2** | 5 | 4 | 3 | 0.040 |
| | | | | Plastic yellow | | **704.043.4** | 5 | 4 | 3 | 0.040 |
| | | M | Aluminium natural with protective cap | Plastic black | | **704.013.0** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic blue | | **704.013.6** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic colourless | | **704.013.7** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic green | | **704.013.5** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic red | | **704.013.2** | 5 | 4 | 4 | 0.040 |
| | | | | Plastic yellow | | **704.013.4** | 5 | 4 | 4 | 0.040 |

Frontring with protective cover to be mounted with a torque of 40 Ncm onto actuator.
Switching action: MA = Maintained action, M = Momentary action
Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Illuminated pushbutton actuator

**Essential Accessories:**

Single-LED page 58
Switching element page 51

| | Front protection | Switching action | Frontbezel/-ring | Lens | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Illuminated pushbutton actuator** | IP 65 | MA | Plastic black | Plastic blue | **704.259.6** | **704.059.6** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic colourless | **704.259.7** | **704.059.7** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic green | **704.259.5** | **704.059.5** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic red | **704.259.2** | **704.059.2** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic yellow | **704.259.4** | **704.059.4** | 5 | 8 | 34 | 0.056 |
| | | | Plastic grey | Plastic blue | **704.260.6** | **704.060.6** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic colourless | **704.260.7** | **704.060.7** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic green | **704.260.5** | **704.060.5** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic red | **704.260.2** | **704.060.2** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic yellow | **704.260.4** | **704.060.4** | 5 | 8 | 34 | 0.056 |
| | | M | Plastic black | Plastic blue | **704.229.6** | **704.029.6** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic colourless | **704.229.7** | **704.029.7** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic green | **704.229.5** | **704.029.5** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic red | **704.229.2** | **704.029.2** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic yellow | **704.229.4** | **704.029.4** | 5 | 8 | 41 | 0.056 |
| | | | Plastic grey | Plastic blue | **704.230.6** | **704.030.6** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic colourless | **704.230.7** | **704.030.7** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic green | **704.230.5** | **704.030.5** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic red | **704.230.2** | **704.030.2** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic yellow | **704.230.4** | **704.030.4** | 5 | 8 | 41 | 0.056 |
| | | MA | Aluminium natural | Plastic blue | | **704.062.6** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic colourless | | **704.062.7** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic green | | **704.062.5** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic red | | **704.062.2** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic yellow | | **704.062.4** | 5 | 8 | 34 | 0.056 |
| | | M | Aluminium natural | Plastic blue | | **704.032.6** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic colourless | | **704.032.7** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic green | | **704.032.5** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic red | | **704.032.2** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic yellow | | **704.032.4** | 5 | 8 | 41 | 0.056 |
| | | | Aluminium natural with protective cap | Plastic blue | | **704.033.6** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic colourless | | **704.033.7** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic green | | **704.033.5** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic red | | **704.033.2** | 5 | 8 | 41 | 0.056 |
| | | | | Plastic yellow | | **704.033.4** | 5 | 8 | 41 | 0.056 |
| | IP 67 | MA | Aluminium natural with protective cap | Plastic blue | | **704.063.6** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic colourless | | **704.063.7** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic green | | **704.063.5** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic red | | **704.063.2** | 5 | 8 | 34 | 0.056 |
| | | | | Plastic yellow | | **704.063.4** | 5 | 8 | 34 | 0.056 |

Continuation see next page

Continued from previous page

Frontring with protective cover to be mounted with a torque of 40 Ncm onto actuator.
Switching action: MA = Maintained action, M = Momentary action
Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Emergency-stop pushbutton actuator, foolproof EN IEC 60947-5-5

Application as per DIN EN ISO 13850 and EN 60204-1

**Essential Accessories:**

Switching element for Emergency-stop pushbutton page 54

| | Front protection | Switching action | Mushroom had cap | Marking | Ø 37 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|
| **Emergency-stop pushbutton actuator, foolproof EN IEC 60947-5-5**<br>Yellow actuator<br>Key to unlock anti-clockwise<br>Standard lock 9500<br>Max. 2 Slow-make elements can be clipped on | IP 65 | MA | Plastic red | Arrows | **704.066.2** | 2 | 24 | 6 | 0.300 |
| Yellow actuator<br>Twist to unlock anti-clockwise<br>Max. 2 Slow-make elements can be clipped on | IP 65 | MA | Plastic red | Arrows | **704.064.2** | 2 | 14 | 6 | 0.300 |

Switching action: MA = Maintained action
Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Stop pushbutton actuator

**Essential Accessories:**

Switching element for Emergency-stop pushbutton page 54

| | Front protection | Switching action | Front ring | Mushroom had cap | Marking | Ø 40 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Stop pushbutton actuator** Key to unlock clockwise Standard lock 251 | IP 65 | MA | Aluminium natural | Plastic red | without | **704.078.0** | 9 | 17 | 6 | 0.063 |
| | | | Plastic grey | Plastic red | without | **704.076.0** | 9 | 17 | 6 | 0.063 |
| Twist to unlock clockwise | IP 65 | MA | Aluminium natural | Plastic red | Arrows | **704.075.2** | 9 | 12 | 6 | 0.047 |
| | | | | | Stop | **704.075.3** | 9 | 12 | 6 | 0.047 |
| | | | Plastic grey | Plastic red | Arrows | **704.074.2** | 9 | 12 | 6 | 0.047 |
| | | | | | Stop | **704.074.3** | 9 | 12 | 6 | 0.047 |

Switching action: MA = Maintained action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Mushroom-head pushbutton actuator

**Essential Accessories:**

Switching element page 51

| | Front protection | Switching action | Front ring | Mushroom had cap | Ø 40 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|
| **Mushroom-head pushbutton actuator** | IP 65 | MA | Aluminium natural | Plastic black | **704.073.0** | 9 | 15 | 3 | 0.044 |
| | | | | Plastic green | **704.073.5** | 9 | 15 | 3 | 0.044 |
| | | | | Plastic red | **704.073.2** | 9 | 15 | 3 | 0.044 |
| | | | | Plastic yellow | **704.073.4** | 9 | 15 | 3 | 0.044 |
| | | | Plastic grey | Plastic black | **704.072.0** | 9 | 15 | 3 | 0.044 |
| | | | | Plastic green | **704.072.5** | 9 | 15 | 3 | 0.044 |
| | | | | Plastic red | **704.072.2** | 9 | 15 | 3 | 0.044 |
| | | | | Plastic yellow | **704.072.4** | 9 | 15 | 3 | 0.044 |
| | | M | Aluminium natural | Plastic black | **704.071.0** | 9 | 15 | 4 | 0.044 |
| | | | | Plastic green | **704.071.5** | 9 | 15 | 4 | 0.044 |
| | | | | Plastic red | **704.071.2** | 9 | 15 | 4 | 0.044 |
| | | | | Plastic yellow | **704.071.4** | 9 | 15 | 4 | 0.044 |
| | | | Plastic grey | Plastic black | **704.070.0** | 9 | 15 | 4 | 0.044 |
| | | | | Plastic green | **704.070.5** | 9 | 15 | 4 | 0.044 |
| | | | | Plastic red | **704.070.2** | 9 | 15 | 4 | 0.044 |
| | | | | Plastic yellow | **704.070.4** | 9 | 15 | 4 | 0.044 |

Switching action: MA = Maintained action, M = Momentary action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Mushroom-head pushbutton actuator illuminated

**Essential Accessories:**

Single-LED page 58
Switching element page 51

| | Front protection | Switching action | Front ring | Mushroom had cap | Ø 40 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|
| **Mushroom-head pushbutton actuator illuminated** | IP 65 | MA | Plastic grey | Plastic blue | **704.086.6** | 9 | 13 | 34 | 0.044 |
| | | | | Plastic colourless | **704.086.7** | 9 | 13 | 34 | 0.044 |
| | | | | Plastic green | **704.086.5** | 9 | 13 | 34 | 0.044 |
| | | | | Plastic red | **704.086.2** | 9 | 13 | 34 | 0.044 |
| | | | | Plastic yellow | **704.086.4** | 9 | 13 | 34 | 0.044 |
| | | M | Plastic grey | Plastic blue | **704.084.6** | 9 | 13 | 41 | 0.044 |
| | | | | Plastic colourless | **704.084.7** | 9 | 13 | 41 | 0.044 |
| | | | | Plastic green | **704.084.5** | 9 | 13 | 41 | 0.044 |
| | | | | Plastic red | **704.084.2** | 9 | 13 | 41 | 0.044 |
| | | | | Plastic yellow | **704.084.4** | 9 | 13 | 41 | 0.044 |

Switching action: MA = Maintained action, M = Momentary action
Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Keylock switch actuator 2 positions

**Essential Accessories:**

Switching element page 51




| | Front protection | Switching action | Frontbezel/-ring | Key remove | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Keylock switch actuator 2 positions**<br>Position A : Basic position<br>Position B : Momentary action 42°<br>Standard lock 251 | IP 65 | M | Plastic grey | A | **704.343.0** | | 5 | 9 | 44 | 0.070 |
| Position C + B : Maintained action 90°<br>Standard lock 251 | IP 65 | MA | Plastic grey | B | **704.340.0** | | 5 | 9 | 45 | 0.070 |
| | | | | C | **704.341.0** | | 5 | 9 | 45 | 0.070 |
| | | | | C + B | **704.342.0** | | 5 | 9 | 45 | 0.070 |
| Position A : Basic position<br>Position B : Momentary action 42°<br>Standard lock 251 | IP 65 | M | Aluminium chromium-plated | A | | **704.123.0** | 5 | 9 | 44 | 0.070 |
| Position C + B : Maintained action 90°<br>Standard lock 251 | IP 65 | MA | Aluminium chromium-plated | B | | **704.120.0** | 5 | 9 | 45 | 0.070 |
| | | | | C | | **704.121.0** | 5 | 9 | 45 | 0.070 |
| | | | | C + B | | **704.122.0** | 5 | 9 | 45 | 0.070 |

Switching action: M = Momentary action, MA = Maintained action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Keylock switch actuator 3 positions

**Essential Accessories:**

Switching element page 51




| | Front protection | Frontbezel/-ring | Switching action | Key remove | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Keylock switch actuator 3 positions**<br>Position C : Maintained action 42°<br>Position A : Basic position<br>Position B : Momentary action 42°<br>Standard lock 251 | IP 65 | Plastic grey | MA-0-M | C | **704.337.0** | | 5 | 9 | 46 | 0.070 |
| | | | | C + A | **704.344.0** | | 5 | 9 | 46 | 0.070 |
| Position C : Momentary action 42°<br>Position A : Basic position<br>Position B : Maintained action 42°<br>Standard lock 251 | IP 65 | Plastic grey | M-0-MA | A | **704.338.0** | | 5 | 9 | 43 | 0.070 |
| Position C + B : Maintained action 42°<br>Position A : Basic position<br>Standard lock 251 | IP 65 | Plastic grey | MA-0-MA | A | **704.334.0** | | 5 | 9 | 47 | 0.070 |
| | | | | C + B | **704.336.0** | | 5 | 9 | 47 | 0.070 |
| Position C + B : Maintained action 90°<br>Position A : Basic position<br>Standard lock 251 | IP 65 | Plastic grey | MA-0-MA | C + A + B | **704.333.0** | | 5 | 9 | 47 | 0.070 |
| Position C + B : Momentary action 42°<br>Position A : Basic position<br>Standard lock 251 | IP 65 | Plastic grey | M-0-M | A | **704.335.0** | | 5 | 9 | 42 | 0.070 |
| Position C : Maintained action 42°<br>Position A : Basic position<br>Position B : Momentary action 42°<br>Standard lock 251 | IP 65 | Aluminium chromium-plated | MA-0-M | C | | **704.117.0** | 5 | 9 | 46 | 0.070 |
| | | | | C + A | | **704.124.0** | 5 | 9 | 46 | 0.070 |
| Position C : Momentary action 42°<br>Position A : Basic position<br>Position B : Maintained action 42°<br>Standard lock 251 | IP 65 | Aluminium chromium-plated | M-0-MA | A | | **704.118.0** | 5 | 9 | 43 | 0.070 |
| Position C + B : Maintained action 42°<br>Position A : Basic position<br>Standard lock 251 | IP 65 | Aluminium chromium-plated | MA-0-MA | A | | **704.114.0** | 5 | 9 | 47 | 0.070 |
| | | | | C + B | | **704.116.0** | 5 | 9 | 47 | 0.070 |
| Position C + B : Maintained action 90°<br>Position A : Basic position<br>Standard lock 251 | IP 65 | Aluminium chromium-plated | MA-0-MA | C + A + B | | **704.113.0** | 5 | 9 | 47 | 0.070 |
| Position C + B : Momentary action 42°<br>Position A : Basic position<br>Standard lock 251 | IP 65 | Aluminium chromium-plated | M-0-M | A | | **704.115.0** | 5 | 9 | 42 | 0.070 |

Switching action: MA = Maintained action, M = Momentary action
Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Selector switch actuator 2 positions, short lever

**Essential Accessories:**

Switching element page 51

| Maintain 90 ° / Momentary 42 ° | Front protection | Switching action | Frontbezel/-ring | Lever | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Selector switch actuator 2 positions, short lever**<br>Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | M | Plastic grey | Plastic black | **704.512.0** | **704.412.0** | 5 | 11 | 37 | 0.034 |
| Position C + B : Maintained action 90° | IP 65 | MA | Plastic grey | Plastic black | **704.510.0** | **704.410.0** | 5 | 11 | 38 | 0.034 |
| Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | M | Aluminium natural | Plastic black | | **704.413.0** | 5 | 11 | 37 | 0.037 |
| Position C + B : Maintained action 90° | IP 65 | MA | Aluminium natural | Plastic black | | **704.411.0** | 5 | 11 | 38 | 0.037 |

Switching action: M = Momentary action, MA = Maintained action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Selector switch actuator 2 positions, short lever, 12 o'clock

**Essential Accessories:**

Switching element page 51

| Maintain 90 ° | Front protection | Switching action | Frontbezel/-ring | Lever | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Selector switch actuator 2 positions, short lever, 12 o'clock**<br>Position C + B : Maintained action 90° | IP 65 | MA | Plastic grey | Plastic black | **704.510.0.12** | **704.410.0.12** | 5 | 11 | 38 | 0.034 |
| | | | Aluminium black | Plastic black | | **704.411.0B.12** | 5 | 11 | 38 | 0.037 |
| | | | Aluminium natural | Plastic black | | **704.411.0.12** | 5 | 11 | 38 | 0.037 |

Switching action: MA = Maintained action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Selector switch actuator 2 positions, long lever

**Essential Accessories:**

Switching element page 51




| | Front protection | Switching action | Frontbezel/-ring | Lever | ⧠ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Selector switch actuator 2 positions, long lever**<br>Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | M | Plastic grey | Plastic black | **704.302.0** | **704.102.0** | 6 | 10 | 37 | 0.034 |
| Position C + B : Maintained action 90° | IP 65 | MA | Plastic grey | Plastic black | **704.300.0** | **704.100.0** | 6 | 10 | 38 | 0.034 |
| Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | M | Aluminium natural | Plastic black | | **704.103.0** | 6 | 10 | 37 | 0.037 |
| Position C + B : Maintained action 90° | IP 65 | MA | Aluminium natural | Plastic black | | **704.101.0** | 6 | 10 | 38 | 0.037 |

Switching action: M = Momentary action, MA = Maintained action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Selector switch actuator 2 positions, long lever, 12 o'clock

**Essential Accessories:**

Switching element page 51




| | Front protection | Switching action | Frontbezel/-ring | Lever | ⧠ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Selector switch actuator 2 positions, long lever, 12 o'clock**<br>Position C + B : Maintained action 90° | IP 65 | MA | Plastic grey | Plastic black | **704.300.0.12** | **704.100.0.12** | 6 | 10 | 38 | 0.034 |
| | | | Aluminium black | Plastic black | | **704.101.0D.12** | 6 | 10 | 38 | 0.037 |
| | | | Aluminium natural | Plastic black | | **704.101.0.12** | 6 | 10 | 38 | 0.037 |

Switching action: MA = Maintained action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Selector switch actuator 3 positions, short lever

**Essential Accessories:**

Switching element page 51

| Maintain/Momentary 42 ° A C B | Front protection | Switching action | Frontbezel/-ring | Lever | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Selector switch actuator 3 positions, short lever**<br>Position C : Maintained action 42°<br>Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | MA-0-M | Plastic grey | Plastic black | **704.506.0** | **704.406.0** | 5 | 11 | 39 | 0.034 |
| Position C : Momentary action 42°<br>Position A : Basic position<br>Position B : Maintained action 42° | IP 65 | M-0-MA | Plastic grey | Plastic black | **704.508.0** | **704.408.0** | 5 | 11 | 36 | 0.034 |
| Position C + B : Maintained action 42°<br>Position A : Basic position | IP 65 | MA-0-MA | Plastic grey | Plastic black | **704.502.0** | **704.402.0** | 5 | 11 | 40 | 0.034 |
| Position C + B : Momentary action 42°<br>Position A : Basic position | IP 65 | M-0-M | Plastic grey | Plastic black | **704.504.0** | **704.404.0** | 5 | 11 | 35 | 0.034 |
| Position C : Maintained action 42°<br>Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | MA-0-M | Aluminium natural | Plastic black | | **704.407.0** | 5 | 11 | 39 | 0.037 |
| Position C : Momentary action 42°<br>Position A : Basic position<br>Position B : Maintained action 42° | IP 65 | M-0-MA | Aluminium natural | Plastic black | | **704.409.0** | 5 | 11 | 36 | 0.037 |
| Position C + B : Maintained action 42°<br>Position A : Basic position | IP 65 | MA-0-MA | Aluminium natural | Plastic black | | **704.403.0** | 5 | 11 | 40 | 0.037 |
| Position C + B : Momentary action 42°<br>Position A : Basic position | IP 65 | M-0-M | Aluminium natural | Plastic black | | **704.405.0** | 5 | 11 | 35 | 0.037 |

Switching action: MA = Maintained action, M = Momentary action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Selector switch actuator 3 positions, long lever

**Essential Accessories:**

Switching element page 51

Maintain/Momentary
42 °




| | Front protection | Switching action | Frontbezel/-ring | Lever | □ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Selector switch actuator 3 positions, long lever**<br>Position C : Maintained action 42°<br>Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | MA-0-M | Plastic grey | Plastic black | **704.296.0** | **704.096.0** | 6 | 10 | 39 | 0.034 |
| Position C : Momentary action 42°<br>Position A : Basic position<br>Position B : Maintained action 42° | IP 65 | M-0-MA | Plastic grey | Plastic black | **704.298.0** | **704.098.0** | 6 | 10 | 36 | 0.034 |
| Position C + B : Maintained action 42°<br>Position A : Basic position | IP 65 | MA-0-MA | Plastic grey | Plastic black | **704.292.0** | **704.092.0** | 6 | 10 | 40 | 0.034 |
| Position C + B : Momentary action 42°<br>Position A : Basic position | IP 65 | M-0-M | Plastic grey | Plastic black | **704.294.0** | **704.094.0** | 6 | 10 | 35 | 0.034 |
| Position C : Maintained action 42°<br>Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | MA-0-M | Aluminium natural | Plastic black | | **704.097.0** | 6 | 10 | 39 | 0.037 |
| Position C : Momentary action 42°<br>Position A : Basic position<br>Position B : Maintained action 42° | IP 65 | M-0-MA | Aluminium natural | Plastic black | | **704.099.0** | 6 | 10 | 36 | 0.037 |
| Position C + B : Maintained action 42°<br>Position A : Basic position | IP 65 | MA-0-MA | Aluminium natural | Plastic black | | **704.093.0** | 6 | 10 | 40 | 0.037 |
| Position C + B : Momentary action 42°<br>Position A : Basic position | IP 65 | M-0-M | Aluminium natural | Plastic black | | **704.095.0** | 6 | 10 | 35 | 0.037 |

Switching action: MA = Maintained action, M = Momentary action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Rotary selector switch actuator, short lever

**Essential Accessories:**

- Rotary selector switching element 30° page 55
- Rotary selector switching element 45° page 55
- Rotary selector switching element 60° page 56

| | Front protection | Frontbezel/-ring | Lever | ⌑ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | kg |
|---|---|---|---|---|---|---|---|---|
| **Rotary selector switch actuator, short lever** Position 0 : nine o'clock | IP 65 | Plastic grey | Plastic black | **704.510.1KN** | | 4 | 69 | 0.045 |
| | | Aluminium natural | Plastic black | | **704.411.1KN** | 4 | 69 | 0.045 |

Mounting dimensions from page 91, Technical drawing from page 95

## Rotary selector switch actuator, long lever

**Essential Accessories:**

- Rotary selector switching element 30° page 55
- Rotary selector switching element 45° page 55
- Rotary selector switching element 60° page 56

| | Front protection | Frontbezel/-ring | Lever | ⌑ 30 x 30 mm Typ-Nr. | Ø 29 mm Typ-Nr. | Mounting dimensions | Technical drawing | kg |
|---|---|---|---|---|---|---|---|---|
| **Rotary selector switch actuator, long lever** Position 0 : nine o'clock | IP 65 | Plastic grey | Plastic black | **704.300.1KN** | | 4 | 70 | 0.045 |
| | | Aluminium natural | Plastic black | | **704.101.1KN** | 4 | 70 | 0.045 |
| Position 0 : twelve o'clock | IP 65 | Aluminium natural | Plastic black | | **704.101.0KN** | 4 | 70 | 0.045 |

Mounting dimensions from page 91, Technical drawing from page 95

## Indicator, flush mounting

**Essential Accessories:**

Single-LED page 58

| | Front protection | Terminals | Frontbezel/-ring | Lens | □ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Indicator, flush mounting** | IP 65 | ST | Plastic black | Plastic blue | **704.206.600** | | 12 | 20 | 5 | 0.061 |
| | | | | Plastic colourless | **704.206.700** | | 12 | 20 | 5 | 0.061 |
| | | | | Plastic green | **704.206.500** | | 12 | 20 | 5 | 0.061 |
| | | | | Plastic red | **704.206.200** | | 12 | 20 | 5 | 0.061 |
| | | | | Plastic yellow | **704.206.400** | | 12 | 20 | 5 | 0.061 |
| | | | Plastic silver | Plastic blue | **704.202.608** | | 12 | 20 | 5 | 0.061 |
| | | | | Plastic colourless | **704.202.708** | | 12 | 20 | 5 | 0.061 |
| | | | | Plastic green | **704.202.508** | | 12 | 20 | 5 | 0.061 |
| | | | | Plastic red | **704.202.208** | | 12 | 20 | 5 | 0.061 |
| | | | | Plastic yellow | **704.202.408** | | 12 | 20 | 5 | 0.061 |
| | | | Aluminium natural | Plastic blue | | **704.006.618** | 7 | 20 | 5 | 0.061 |
| | | | | Plastic colourless | | **704.006.718** | 7 | 20 | 5 | 0.061 |
| | | | | Plastic green | | **704.006.518** | 7 | 20 | 5 | 0.061 |
| | | | | Plastic red | | **704.006.218** | 7 | 20 | 5 | 0.061 |
| | | | | Plastic yellow | | **704.006.418** | 7 | 20 | 5 | 0.061 |

Terminals: ST = Screw terminal

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Flasher, flush mounting

**Essential Accessories:**

Flasher element page 50

Single-LED page 58

| | Front protection | Frontbezel/-ring | Lens | □ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|
| **Flasher, flush mounting** | IP 65 | Plastic black | Plastic blue | **704.206.600** | | 12 | 21 | 5 | 0.061 |
| | | | Plastic colourless | **704.206.700** | | 12 | 21 | 5 | 0.061 |
| | | | Plastic green | **704.206.500** | | 12 | 21 | 5 | 0.061 |
| | | | Plastic red | **704.206.200** | | 12 | 21 | 5 | 0.061 |
| | | | Plastic yellow | **704.206.400** | | 12 | 21 | 5 | 0.061 |
| | | Plastic silver | Plastic blue | **704.202.608** | | 12 | 21 | 5 | 0.061 |
| | | | Plastic colourless | **704.202.708** | | 12 | 21 | 5 | 0.061 |
| | | | Plastic green | **704.202.508** | | 12 | 21 | 5 | 0.061 |
| | | | Plastic red | **704.202.208** | | 12 | 21 | 5 | 0.061 |
| | | | Plastic yellow | **704.202.408** | | 12 | 21 | 5 | 0.061 |
| | | Aluminium natural | Plastic blue | | **704.006.618** | 7 | 21 | 5 | 0.061 |
| | | | Plastic colourless | | **704.006.718** | 7 | 21 | 5 | 0.061 |
| | | | Plastic green | | **704.006.518** | 7 | 21 | 5 | 0.061 |
| | | | Plastic red | | **704.006.218** | 7 | 21 | 5 | 0.061 |
| | | | Plastic yellow | | **704.006.418** | 7 | 21 | 5 | 0.061 |

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Buzzer, flush mounting

| | Front protection | Front cap | Terminals | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|
| **Buzzer, flush mounting** Operation voltage : 24 VDC | IP 40 | Aluminium black | S1 | **14-810.910** | 7 | 68 | 1 | 0.016 |
| | | Aluminium natural | S1 | **14-810.918** | 7 | 68 | 1 | 0.016 |

Further information in the Technical Data and Typical Applications
Terminals: S1 = Soldering terminal (also pluggable 2.8 x 0.5 mm)
Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Pushbutton actuator, flush mounting

non-illuminative

**Essential Accessories:**

Switching element page 51

| | Front protection | Switching action | Frontbezel/-ring | Lens | ⧠ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Pushbutton actuator, flush mounting** | IP 65 | MA | Plastic black | Plastic black | **704.239.000** | | 12 | 22 | 3 | 0.051 |
| | | | | Plastic blue | **704.239.600** | | 12 | 22 | 3 | 0.051 |
| | | | | Plastic colourless | **704.239.700** | | 12 | 22 | 3 | 0.051 |
| | | | | Plastic green | **704.239.500** | | 12 | 22 | 3 | 0.051 |
| | | | | Plastic red | **704.239.200** | | 12 | 22 | 3 | 0.051 |
| | | | | Plastic yellow | **704.239.400** | | 12 | 22 | 3 | 0.051 |
| | | | Plastic silver | Plastic black | **704.240.008** | | 12 | 22 | 4 | 0.051 |
| | | | | Plastic blue | **704.240.608** | | 12 | 22 | 3 | 0.051 |
| | | | | Plastic colourless | **704.240.708** | | 12 | 22 | 3 | 0.051 |
| | | | | Plastic green | **704.240.508** | | 12 | 22 | 3 | 0.051 |
| | | | | Plastic red | **704.240.208** | | 12 | 22 | 3 | 0.051 |
| | | | | Plastic yellow | **704.240.408** | | 12 | 22 | 3 | 0.051 |
| | | M | Plastic black | Plastic black | **704.209.000** | | 12 | 22 | 4 | 0.051 |
| | | | | Plastic blue | **704.209.600** | | 12 | 22 | 4 | 0.051 |
| | | | | Plastic colourless | **704.209.700** | | 12 | 22 | 4 | 0.051 |
| | | | | Plastic green | **704.209.500** | | 12 | 22 | 4 | 0.051 |
| | | | | Plastic red | **704.209.200** | | 12 | 22 | 4 | 0.051 |
| | | | | Plastic yellow | **704.209.400** | | 12 | 22 | 4 | 0.051 |
| | | | Plastic silver | Plastic black | **704.210.008** | | 12 | 22 | 4 | 0.051 |
| | | | | Plastic blue | **704.210.608** | | 12 | 22 | 4 | 0.051 |
| | | | | Plastic colourless | **704.210.708** | | 12 | 22 | 4 | 0.051 |
| | | | | Plastic green | **704.210.508** | | 12 | 22 | 4 | 0.051 |
| | | | | Plastic red | **704.210.208** | | 12 | 22 | 4 | 0.051 |
| | | | | Plastic yellow | **704.210.408** | | 12 | 22 | 4 | 0.051 |
| | | MA | Aluminium natural | Aluminium black | | **704.041.018** | 7 | 22 | 3 | 0.051 |
| | | | | Aluminium blue | | **704.041.618** | 7 | 22 | 3 | 0.051 |
| | | | | Aluminium gold | | **704.041.418** | 7 | 22 | 3 | 0.051 |
| | | | | Aluminium natural | | **704.041.818** | 7 | 22 | 3 | 0.051 |
| | | | | Aluminium olive-green | | **704.041.518** | 7 | 22 | 3 | 0.051 |
| | | | | Aluminium red | | **704.041.218** | 7 | 22 | 3 | 0.051 |
| | | | | Plastic black | | **704.042.018** | 7 | 22 | 3 | 0.051 |
| | | | | Plastic blue | | **704.042.618** | 7 | 22 | 3 | 0.051 |
| | | | | Plastic colourless | | **704.042.718** | 7 | 22 | 3 | 0.051 |
| | | | | Plastic green | | **704.042.518** | 7 | 22 | 3 | 0.051 |
| | | | | Plastic red | | **704.042.218** | 7 | 22 | 3 | 0.051 |
| | | | | Plastic yellow | | **704.042.418** | 7 | 22 | 3 | 0.051 |

Continuation see next page

Continued from previous page

| | Front protection | Switching action | Frontbezel/-ring | Lens | ⧻ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Pushbutton actuator, flush mounting** | IP 65 | M | Aluminium natural | Aluminium black | | **704.011.018** | 7 | 22 | 4 | 0.051 |
| | | | | Aluminium blue | | **704.011.618** | 7 | 22 | 4 | 0.051 |
| | | | | Aluminium gold | | **704.011.418** | 7 | 22 | 4 | 0.051 |
| | | | | Aluminium natural | | **704.011.818** | 7 | 22 | 4 | 0.051 |
| | | | | Aluminium olive-green | | **704.011.518** | 7 | 22 | 4 | 0.051 |
| | | | | Aluminium red | | **704.011.218** | 7 | 22 | 4 | 0.051 |
| | | | | Plastic black | | **704.012.018** | 7 | 22 | 4 | 0.051 |
| | | | | Plastic blue | | **704.012.618** | 7 | 22 | 4 | 0.051 |
| | | | | Plastic colourless | | **704.012.718** | 7 | 22 | 4 | 0.051 |
| | | | | Plastic green | | **704.012.518** | 7 | 22 | 4 | 0.051 |
| | | | | Plastic red | | **704.012.218** | 7 | 22 | 4 | 0.051 |
| | | | | Plastic yellow | | **704.012.418** | 7 | 22 | 4 | 0.051 |

Switching action: MA = Maintained action, M = Momentary action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Illuminated pushbutton actuator, flush mounting

**Essential Accessories:**

Single-LED page 58
Switching element page 51

| | Front protection | Switching action | Frontbezel/-ring | Lens | □ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Illuminated pushbutton actuator, flush mounting** | IP 65 | MA | Plastic black | Plastic blue | **704.259.600** | | 12 | 19 | 3 | 0.051 |
| | | | | Plastic colourless | **704.259.700** | | 12 | 19 | 3 | 0.051 |
| | | | | Plastic green | **704.259.500** | | 12 | 19 | 3 | 0.051 |
| | | | | Plastic red | **704.259.200** | | 12 | 19 | 3 | 0.051 |
| | | | | Plastic yellow | **704.259.400** | | 12 | 19 | 3 | 0.051 |
| | | | Plastic silver | Plastic blue | **704.260.608** | | 12 | 19 | 3 | 0.051 |
| | | | | Plastic colourless | **704.260.708** | | 12 | 19 | 3 | 0.051 |
| | | | | Plastic green | **704.260.508** | | 12 | 19 | 3 | 0.051 |
| | | | | Plastic red | **704.260.208** | | 12 | 19 | 3 | 0.051 |
| | | | | Plastic yellow | **704.260.408** | | 12 | 19 | 3 | 0.051 |
| | | M | Plastic black | Plastic blue | **704.229.600** | | 12 | 19 | 4 | 0.051 |
| | | | | Plastic colourless | **704.229.700** | | 12 | 19 | 4 | 0.051 |
| | | | | Plastic green | **704.229.500** | | 12 | 19 | 4 | 0.051 |
| | | | | Plastic red | **704.229.200** | | 12 | 19 | 4 | 0.051 |
| | | | | Plastic yellow | **704.229.400** | | 12 | 19 | 4 | 0.051 |
| | | | Plastic silver | Plastic blue | **704.230.608** | | 12 | 19 | 4 | 0.051 |
| | | | | Plastic colourless | **704.230.708** | | 12 | 19 | 4 | 0.051 |
| | | | | Plastic green | **704.230.508** | | 12 | 19 | 4 | 0.051 |
| | | | | Plastic red | **704.230.208** | | 12 | 19 | 4 | 0.051 |
| | | | | Plastic yellow | **704.230.408** | | 12 | 19 | 4 | 0.051 |
| | | MA | Aluminium natural | Plastic blue | | **704.062.618** | 7 | 19 | 34 | 0.067 |
| | | | | Plastic colourless | | **704.062.718** | 7 | 19 | 34 | 0.067 |
| | | | | Plastic green | | **704.062.518** | 7 | 19 | 34 | 0.067 |
| | | | | Plastic red | | **704.062.218** | 7 | 19 | 34 | 0.067 |
| | | | | Plastic yellow | | **704.062.418** | 7 | 19 | 34 | 0.067 |
| | | M | Aluminium natural | Plastic blue | | **704.032.618** | 7 | 19 | 41 | 0.067 |
| | | | | Plastic colourless | | **704.032.718** | 7 | 19 | 41 | 0.067 |
| | | | | Plastic green | | **704.032.518** | 7 | 19 | 41 | 0.067 |
| | | | | Plastic red | | **704.032.218** | 7 | 19 | 41 | 0.067 |
| | | | | Plastic yellow | | **704.032.418** | 7 | 19 | 41 | 0.067 |

Switching action: MA = Maintained action, M = Momentary action
Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Stop pusbutton actuator, flush mounting

**Essential Accessories:**

Switching element for Emergency-stop pushbutton page 54

| | Front protection | Switching action | Front ring | Mushroom had cap | Marking | Ø 40 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Stop pusbutton actuator, flush mounting** Twist to unlock clockwise | IP 65 | MA | Aluminium black | Plastic red | Arrows | **704.074.210** | 10 | 26 | 6 | 0.048 |
| | | | | | Stop | **704.075.310** | 10 | 26 | 6 | 0.048 |
| | | | Aluminium natural | Plastic red | Arrows | **704.075.218** | 10 | 26 | 6 | 0.048 |
| | | | | | Stop | **704.075.318** | 10 | 26 | 6 | 0.048 |

Switching action: MA = Maintained action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Mushroom-head pushbutton actuator, flush mounting

**Essential Accessories:**

Switching element page 51

| | Front protection | Front ring | Switching action | Mushroom had cap | Ø 40 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|
| **Mushroom-head pushbutton actuator, flush mounting** | IP 65 | Aluminium black | MA | Plastic red | **704.073.210** | 10 | 27 | 3 | 0.041 |
| | | | M | Plastic red | **704.071.210** | 10 | 27 | 4 | 0.041 |
| | | | | Plastic yellow | **704.071.410** | 10 | 27 | 4 | 0.041 |
| | | Aluminium natural | M | Plastic red | **704.071.218** | 10 | 27 | 4 | 0.041 |
| | | | | Plastic yellow | **704.071.418** | 10 | 27 | 4 | 0.041 |

Switching action: MA = Maintained action, M = Momentary action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Keylock switch actuator 2 positions, flush mounting

**Essential Accessories:**

Switching element page 51




| | Front protection | Switching action | Frontbezel/-ring | Key remove | □ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Keylock switch actuator 2 positions, flush mounting**<br>Position A : Basic position<br>Position B : Momentary action 42°<br>Standard lock 251 | IP 65 | M | Plastic black | A | **704.343.000** | | 12 | 25 | 44 | 0.099 |
| | | | Plastic silver | A | **704.343.008** | | 12 | 25 | 44 | 0.099 |
| Position C + B : Maintained action 90°<br>Standard lock 251 | IP 65 | MA | Plastic black | B | **704.340.000** | | 12 | 25 | 45 | 0.099 |
| | | | | C | **704.341.000** | | 12 | 25 | 45 | 0.099 |
| | | | | C + B | **704.342.000** | | 12 | 25 | 45 | 0.099 |
| | | | Plastic silver | B | **704.340.008** | | 12 | 25 | 45 | 0.099 |
| | | | | C | **704.341.008** | | 12 | 25 | 45 | 0.099 |
| | | | | C + B | **704.342.008** | | 12 | 25 | 45 | 0.099 |
| Position A : Basic position<br>Position B : Momentary action 42°<br>Standard lock 251 | IP 65 | M | Aluminium natural | A | | **704.123.018** | 7 | 25 | 44 | 0.099 |
| Position C + B : Maintained action 90°<br>Standard lock 251 | IP 65 | MA | Aluminium natural | B | | **704.120.018** | 7 | 25 | 45 | 0.099 |
| | | | | C | | **704.121.018** | 7 | 25 | 45 | 0.099 |
| | | | | C + B | | **704.122.018** | 7 | 25 | 45 | 0.099 |

Switching action: M = Momentary action, MA = Maintained action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Keylock switch actuator 3 positions, flush mounting

**Essential Accessories:**

Switching element page 51




| Front protection | Switching action | Frontbezel/-ring | Key remove | □ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|
| **Keylock switch actuator 3 positions, flush mounting** Position C : Maintained action 42° Position A : Basic position Position B : Momentary action 42° Standard lock 251 | IP 65 | MA-0-M | Plastic black | C | **704.337.000** | | 12 | 25 | 46 | 0.099 |
| | | | | C + A | **704.344.000** | | 12 | 25 | 46 | 0.099 |
| | | | Plastic silver | C | **704.337.008** | | 12 | 25 | 46 | 0.099 |
| | | | | C + A | **704.344.008** | | 12 | 25 | 46 | 0.099 |
| Position C : Momentary action 42° Position A : Basic position Position B : Maintained action 42° Standard lock 251 | IP 65 | M-0-MA | Plastic black | A | **704.338.000** | | 12 | 25 | 43 | 0.099 |
| | | | Plastic silver | A | **704.338.008** | | 12 | 25 | 43 | 0.099 |
| Position C + B : Maintained action 42° Position A : Basic position Standard lock 251 | IP 65 | MA-0-MA | Plastic black | A | **704.334.000** | | 12 | 25 | 47 | 0.099 |
| | | | | C + B | **704.336.000** | | 12 | 25 | 47 | 0.099 |
| | | | Plastic silver | A | **704.334.008** | | 12 | 25 | 47 | 0.099 |
| | | | | C + B | **704.336.008** | | 12 | 25 | 47 | 0.099 |
| Position C + B : Maintained action 90° Position A : Basic position Standard lock 251 | IP 65 | MA-0-MA | Plastic black | C + A + B | **704.333.000** | | 12 | 25 | 47 | 0.099 |
| | | | Plastic silver | C + A + B | **704.333.008** | | 12 | 25 | 47 | 0.099 |
| Position C + B : Momentary action 42° Position A : Basic position Standard lock 251 | IP 65 | M-0-M | Plastic black | A | **704.335.000** | | 12 | 25 | 42 | 0.099 |
| | | | Plastic silver | A | **704.335.008** | | 12 | 25 | 42 | 0.099 |
| Position C : Maintained action 42° Position A : Basic position Position B : Momentary action 42° Standard lock 251 | IP 65 | MA-0-M | Aluminium natural | C | | **704.117.018** | 7 | 25 | 46 | 0.099 |
| | | | | C + A | | **704.124.018** | 7 | 25 | 46 | 0.099 |
| Position C : Momentary action 42° Position A : Basic position Position B: Maintained action 42° Standard lock 251 | IP 65 | M-0-MA | Aluminium natural | A | | **704.118.018** | 7 | 25 | 43 | 0.099 |
| Position C + B : Maintained action 42° Position A : Basic position Standard lock 251 | IP 65 | MA-0-MA | Aluminium natural | A | | **704.114.018** | 7 | 25 | 47 | 0.099 |
| | | | | C + B | | **704.116.018** | 7 | 25 | 47 | 0.099 |
| Position C + B : Maintained action 90° Position A : Basic position Standard lock 251 | IP 65 | MA-0-MA | Aluminium natural | C + A + B | | **704.113.018** | 7 | 25 | 47 | 0.099 |
| Position C + B : Momentary action 42° Position A : Basic position Standard lock 251 | IP 65 | M-0-M | Aluminium natural | A | | **704.115.018** | 7 | 25 | 42 | 0.099 |

Switching action: MA = Maintained action, M = Momentary action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Selector switch actuator 2 positions, short lever, flush mounting

**Essential Accessories:**

Switching element page 51

| Maintain 90 ° C B / Momentary 42 ° A B | Front protection | Switching action | Frontbezel/-ring | Lever | ⍈ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Selector switch actuator 2 positions, short lever, flush mounting**<br>Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | M | Plastic black | Plastic black | **704.512.000** | | 12 | 23 | 37 | 0.056 |
| | | | Plastic silver | Plastic black | **704.512.008** | | 12 | 23 | 37 | 0.056 |
| Position C + B : Maintained action 90° | IP 65 | MA | Plastic black | Plastic black | **704.510.000** | | 12 | 23 | 38 | 0.056 |
| | | | Plastic silver | Plastic black | **704.510.008** | | 12 | 23 | 38 | 0.056 |
| Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | M | Aluminium black | Plastic black | | **704.413.010** | 7 | 23 | 37 | 0.056 |
| | | | Aluminium natural | Plastic black | | **704.413.018** | 7 | 23 | 37 | 0.056 |
| Position C + B : Maintained action 90° | IP 65 | MA | Aluminium black | Plastic black | | **704.411.010** | 7 | 23 | 38 | 0.056 |
| | | | Aluminium natural | Plastic black | | **704.411.018** | 7 | 23 | 38 | 0.056 |

Switching action: M = Momentary action, MA = Maintained action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Selector switch actuator 2 positions, short lever, 12 o'clock, flush mounting

**Essential Accessories:**

Switching element page 51

| Maintain 90 ° C B | Front protection | Switching action | Frontbezel/-ring | Lever | ⍈ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Selector switch actuator 2 positions, short lever, 12 o'clock, flush mounting**<br>Position C + B : Maintained action 90° | IP 65 | MA | Plastic black | Plastic black | **704.510.000.12** | | 12 | 23 | 38 | 0.056 |
| | | | Plastic silver | Plastic black | **704.510.008.12** | | 12 | 23 | 38 | 0.056 |
| | | | Aluminium black | Plastic black | | **704.411.010.12** | 7 | 23 | 38 | 0.056 |
| | | | Aluminium natural | Plastic black | | **704.411.018.12** | 7 | 23 | 38 | 0.056 |

Switching action: MA = Maintained action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Selector switch actuator 2 positions, long lever, flush mounting

**Essential Accessories:**

Switching element page 51




| | Front protection | Switching action | Frontbezel/-ring | Lever | □ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Selector switch actuator 2 positions, long lever, flush mounting** Position A : Basic position Position B : Momentary action 42° | IP 65 | M | Plastic black | Plastic black | **704.302.000** | | 13 | 16 | 37 | 0.056 |
| | | | Plastic silver | Plastic black | **704.302.008** | | 13 | 16 | 37 | 0.056 |
| Position C + B : Maintained action 90° | IP 65 | MA | Plastic black | Plastic black | **704.300.000** | | 13 | 16 | 38 | 0.056 |
| | | | Plastic silver | Plastic black | **704.300.008** | | 13 | 16 | 38 | 0.056 |
| Position A : Basic position Position B : Momentary action 42° | IP 65 | M | Aluminium natural | Plastic black | | **704.103.018** | 7 | 16 | 37 | 0.056 |
| Position C + B : Maintained action 90° | IP 65 | MA | Aluminium natural | Plastic black | | **704.101.018** | 7 | 16 | 38 | 0.056 |
| | | | Plastic black | Plastic black | | **704.101.010** | 7 | 16 | 38 | 0.056 |

Switching action: M = Momentary action, MA = Maintained action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Selector switch actuator 2 positions, long lever, 12 o'clock, flush mounting

**Essential Accessories:**

Switching element page 51




| | Front protection | Switching action | Frontbezel/-ring | Lever | □ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Selector switch actuator 2 positions, long lever, 12 o'clock, flush mounting** Position C + B : Maintained action 90° | IP 65 | MA | Plastic black | Plastic black | **704.300.000.12** | | 13 | 16 | 38 | 0.056 |
| | | | Plastic silver | Plastic black | **704.300.008.12** | | 13 | 16 | 38 | 0.056 |
| | | | Aluminium natural | Plastic black | | **704.101.018.12** | 7 | 16 | 38 | 0.056 |
| | | | Plastic black | Plastic black | | **704.101.010.12** | 7 | 16 | 38 | 0.056 |

Switching action: MA = Maintained action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Selector switch actuator 3 positions, short lever, flush mounting

**Essential Accessories:**

Switching element page 51

| Maintain/Momentary 42 ° C A B | Front protection | Switching action | Frontbezel/-ring | Lever | □ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Selector switch actuator 3 positions, short lever, flush mounting**<br>Position C : Maintained action 42°<br>Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | MA-0-M | Plastic black | Plastic black | **704.506.000** | | 12 | 23 | 39 | 0.056 |
| | | | Plastic silver | Plastic black | **704.506.008** | | 12 | 23 | 39 | 0.056 |
| Position C : Momentary action 42°<br>Position A : Basic position<br>Position B : Maintained action 42° | IP 65 | M-0-MA | Plastic black | Plastic black | **704.508.000** | | 12 | 23 | 36 | 0.056 |
| | | | Plastic silver | Plastic black | **704.508.008** | | 12 | 23 | 36 | 0.056 |
| Position C + B : Maintained action 42°<br>Position A : Basic position | IP 65 | MA-0-MA | Plastic black | Plastic black | **704.502.000** | | 12 | 23 | 40 | 0.056 |
| | | | Plastic silver | Plastic black | **704.502.008** | | 12 | 23 | 40 | 0.056 |
| Position C + B : Momentary action 42°<br>Position A : Basic position | IP 65 | M-0-M | Plastic black | Plastic black | **704.504.000** | | 12 | 23 | 35 | 0.056 |
| | | | Plastic silver | Plastic black | **704.504.008** | | 12 | 23 | 35 | 0.056 |
| Position C : Maintained action 42°<br>Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | MA-0-M | Aluminium black | Plastic black | | **704.407.010** | 7 | 23 | 39 | 0.056 |
| | | | Aluminium natural | Plastic black | | **704.407.018** | 7 | 23 | 39 | 0.056 |
| Position C : Momentary action 42°<br>Position A : Basic position<br>Position B : Maintained action 42° | IP 65 | M-0-MA | Aluminium black | Plastic black | | **704.409.010** | 7 | 23 | 36 | 0.056 |
| | | | Aluminium natural | Plastic black | | **704.409.018** | 7 | 23 | 36 | 0.056 |
| Position C + B : Maintained action 42°<br>Position A : Basic position | IP 65 | MA-0-MA | Aluminium black | Plastic black | | **704.403.010** | 7 | 23 | 40 | 0.056 |
| | | | Aluminium natural | Plastic black | | **704.403.018** | 7 | 23 | 40 | 0.056 |
| Position C + B : Momentary action 42°<br>Position A : Basic position | IP 65 | M-0-M | Aluminium black | Plastic black | | **704.405.010** | 7 | 23 | 35 | 0.056 |
| | | | Aluminium natural | Plastic black | | **704.405.018** | 7 | 23 | 35 | 0.056 |

Switching action: MA = Maintained action, M = Momentary action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Selector switch actuator 3 positions, long lever, flush mounting

**Essential Accessories:**

Switching element page 51

| Maintain/Momentary 42 ° C A B | Front protection | Switching action | Frontbezel/-ring | Lever | ⍁ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| **Selector switch actuator 3 positions, long lever, flush mounting**<br>Position C : Maintained action 42°<br>Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | MA-0-M | Plastic black | Plastic black | **704.296.000** | | 13 | 23 | 39 | 0.056 |
| | | | Plastic silver | Plastic black | **704.296.008** | | 13 | 23 | 39 | 0.056 |
| Position C : Momentary action 42°<br>Position A : Basic position<br>Position B : Maintained action 42° | IP 65 | M-0-MA | Plastic black | Plastic black | **704.298.000** | | 13 | 16 | 36 | 0.056 |
| | | | Plastic silver | Plastic black | **704.298.008** | | 13 | 16 | 36 | 0.056 |
| Position C + B : Maintained action 42°<br>Position A : Basic position | IP 65 | MA-0-MA | Plastic black | Plastic black | **704.292.000** | | 13 | 16 | 40 | 0.056 |
| | | | Plastic silver | Plastic black | **704.292.008** | | 13 | 16 | 40 | 0.056 |
| Position C + B : Momentary action 42°<br>Position A : Basic position | IP 65 | M-0-M | Plastic black | Plastic black | **704.294.000** | | 13 | 16 | 35 | 0.056 |
| | | | Plastic silver | Plastic black | **704.294.008** | | 13 | 16 | 35 | 0.056 |
| Position C : Maintained action 42°<br>Position A : Basic position<br>Position B : Momentary action 42° | IP 65 | MA-0-M | Aluminium black | Plastic black | | **704.097.010** | 8 | 16 | 39 | 0.056 |
| | | | Aluminium natural | Plastic black | | **704.097.018** | 8 | 16 | 39 | 0.056 |
| Position C : Momentary action 42°<br>Position A : Basic position<br>Position B : Maintained action 42° | IP 65 | M-0-MA | Aluminium black | Plastic black | | **704.099.010** | 8 | 16 | 36 | 0.056 |
| | | | Aluminium natural | Plastic black | | **704.099.018** | 8 | 16 | 36 | 0.056 |
| Position C + B : Maintained action 42°<br>Position A : Basic position | IP 65 | MA-0-MA | Aluminium black | Plastic black | | **704.093.010** | 8 | 16 | 40 | 0.056 |
| | | | Aluminium natural | Plastic black | | **704.093.018** | 8 | 16 | 40 | 0.056 |
| Position C + B : Momentary action 42°<br>Position A : Basic position | IP 65 | M-0-M | Aluminium black | Plastic black | | **704.095.010** | 8 | 16 | 35 | 0.056 |
| | | | Aluminium natural | Plastic black | | **704.095.018** | 8 | 16 | 35 | 0.056 |

Switching action: MA = Maintained action, M = Momentary action

Mounting dimensions from page 91, Technical drawing from page 95, Circuit drawing from page 115

## Rotary selector switch actuator, short lever, flush mounting

**Essential Accessories:**

- Rotary selector switching element 30° page 55
- Rotary selector switching element 45° page 55
- Rotary selector switching element 60° page 56

| | Front protection | Frontbezel/-ring | Lever | ⍁ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | kg |
|---|---|---|---|---|---|---|---|---|
| **Rotary selector switch actuator, short lever, flush mounting** Position 0 : nine o'clock | IP 65 | Plastic black | Plastic black | **704.510.100KN** | | 14 | 71 | 0.056 |
| | | Plastic silver | Plastic black | **704.510.108KN** | | 14 | 71 | 0.056 |
| | | Aluminium black | Plastic black | | **704.411.110KN** | 1 | 71 | 0.056 |
| | | Aluminium natural | Plastic black | | **704.411.118KN** | 1 | 71 | 0.056 |
| Position 0 : twelve o'clock | IP 65 | Aluminium black | Plastic black | | **704.411.010KN** | 1 | 71 | 0.056 |

Mounting dimensions from page 91, Technical drawing from page 95

## Rotary selector switch actuator, long lever, flush mounting

**Essential Accessories:**

- Rotary selector switching element 30° page 55
- Rotary selector switching element 45° page 55
- Rotary selector switching element 60° page 56

| | Front protection | Frontbezel/-ring | Lever | ⍁ 35 x 35 mm Typ-Nr. | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | kg |
|---|---|---|---|---|---|---|---|---|
| **Rotary selector switch actuator, long lever, flush mounting** Position 0 : nine o'clock | IP 65 | Plastic black | Plastic black | **704.300.100KN** | | 14 | 72 | 0.056 |
| | | Plastic silver | Plastic black | **704.300.108KN** | | 14 | 72 | 0.056 |
| | | Aluminium black | Plastic black | | **704.101.110KN** | 1 | 72 | 0.056 |
| | | Aluminium natural | Plastic black | | **704.101.118KN** | 1 | 72 | 0.056 |
| Position 0 : twelve o'clock | IP 65 | Aluminium natural | Plastic black | | **704.101.018KN** | 1 | 72 | 0.056 |

Mounting dimensions from page 91, Technical drawing from page 95

## Keylock rotary switch actuator, flush mounting

**Essential Accessories:**

- Rotary selector switching element 30° page 55
- Rotary selector switching element 45° page 55
- Rotary selector switching element 60° page 56

| | Front protection | Front ring | Key remove | Ø 35 mm Typ-Nr. | Mounting dimensions | Technical drawing | kg |
|---|---|---|---|---|---|---|---|
| **Keylock rotary switch actuator, flush mounting**<br>Position 0 : nine o'clock (standard)<br>Standard lock 251 | IP 65 | Aluminium natural | 9 o'clock | **704.123.118KN** | 7 | 73 | 0.120 |
| Position 0 : twelve o'clock (special)<br>Standard lock 251 | IP 65 | Aluminium natural | 12 o'clock | **704.123.018KN** | 7 | 73 | 0.120 |

Mounting dimensions from page 91, Technical drawing from page 95

## Key insert switch actuator 2 positions, flush mounting

**Essential Accessories:**

- Switching element page 51

| | Front protection | Switching action | Front ring | Ø 38 mm Typ-Nr. | Mounting dimensions | Technical drawing | kg |
|---|---|---|---|---|---|---|---|
| **Key insert switch actuator 2 positions, flush mounting** | IP 67 | 0-MA90° | Stainless-steel | **704.101.0x28** | 11 | 1 | 0.130 |
| | | 0-M45° | Stainless-steel | **704.103.0x28** | 11 | 1 | 0.130 |

In the Typ-Nr. "x" stands for not defined actuator.
Switching action: MA = Maintained action, M = Momentary action
Mounting dimensions from page 91, Technical drawing from page 95

## Key insert switch actuator 3 positions, flush mounting

**Essential Accessories:**

Switching element page 51

| | Front protection | Front ring | Switching action | Ø 38 mm Typ-Nr. | Mounting dimensions | Technical drawing | kg |
|---|---|---|---|---|---|---|---|
| **Key insert switch actuator 3 positions, flush mounting** | IP 67 | Stainless-steel | MA45°-0-MA45° | **704.093.0x28** | 11 | 1 | 0.130 |
| | | | MA45°-0-M45° | **704.097.0x28** | 11 | 1 | 0.130 |
| | | | M45°-0-MA45° | **704.099.0x28** | 11 | 1 | 0.130 |
| | | | M45°-0-M45° | **704.095.0x28** | 11 | 1 | 0.130 |

In the Typ-Nr. "x" stands for not defined actuator.
Switching action: MA = Maintained action, M = Momentary action
Mounting dimensions from page 91, Technical drawing from page 95

## Key insert switch actuator 3 positions Conductor Switch, flush mounting

**Essential Accessories:**

Switching element page 51

| | Front protection | Front ring | Switching action | Ø 38 mm Typ-Nr. | Mounting dimensions | Technical drawing | kg |
|---|---|---|---|---|---|---|---|
| **Key insert switch actuator 3 positions Conductor Switch, flush mounting** | IP 67 | Stainless-steel | M45°-0-M45° | **704.095.0T28** | 15 | 56 | 0.190 |

Switching action: M = Momentary action
Mounting dimensions from page 91, Technical drawing from page 95

## Lever switch

| | Front protection | Front ring | Lever | Switching action | Contacts | Contact material | Ø 40 mm Typ-Nr. | kg |
|---|---|---|---|---|---|---|---|---|
| **Lever switch** Typ S41, Lever-Nr. 11, 1 Contact element | IP 54 | Aluminium natural | Plastic black | MA / M | 1 NC / 1 NO | Ag | **704.151.XXX** | 0.230 |
| Typ S42, Lever-Nr. 11, 1 Contact element | IP 54 | Aluminium natural | Plastic black | MA / M | 1 NC / 1 NO | Ag | **704.152.XXX** | 0.230 |
| Typ S43, Lever-Nr. 11, 1 Contact element | IP 54 | Aluminium natural | Plastic black | MA / M | 1 NC / 1 NO | Ag | **704.153.XXX** | 0.230 |
| Typ S44, Lever-Nr. 11, 1 Contact element positive opened | IP 54 | Aluminium natural | Plastic black | MA / M | 1 NC / 1 NO | Ag | **704.154.XXX** | 0.230 |
| Typ S45, Lever-Nr. 11, 1 Contact element positive opend | IP 54 | Aluminium natural | Plastic black | MA / M | 1 NC / 1 NO | Ag | **704.155.XXX** | 0.230 |

Connection types
S41: Cage clamp 1.0 ... 1.5 mm²
S42: JST connector max. 0.2 mm² (counter plug is supplied)
S43: Plug-in terminal 6.3 x 0.8 mm
S44:: Cage clamp 1.0 ... 1.5 mm²
S45: Screw terminal or plug-in terminal 6.3 x 0.8 mm.

Micro-switch contacts
The micro-switch is available with a silver contact or a gold plated silver contact.
Contact without positive opening operation:
This is used in the lever switches S41, S42 and S43. Each lever switch includes a maximum of 5 micro-switches.
Contact with positive opening operation:
This is used in the lever switches S44 and S45. Each lever switch includes a maximum of 4 micro-switches.

Levers
There are 8 alternative standard levers (02, 03, 04, 05, 11, 13, 14, 15) available. Special levers are available on request.

Front bezel
Standard front bezel in aluminium natural, can also be delivered in black version.

Note:
Typ-Nr. will be supplied once switching function has been defined including specification of lever style and switching positions.
For further information please contact your local sales office.

A detailed technical documentation is available separately.

Switching action: MA = Maintained action, M = Momentary action
Contacts: NC = Normally closed, NO = Normally open
Contact material: Ag = Silver

## Front

### Legend frame

adhesive, Aluminium black

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Legend frame**<br>30 x 50 mm for raised mounting | **704.968.2** | 55 | 0.001 |
| 35 x 57.5 mm for flush mounting | **704.968.3** | 60 | 0.001 |

Technical drawing from page 95

### Legend plate insert

for Legend frame 704.968.2 and 704.968.3

| | Typ-Nr. | kg |
|---|---|---|
| **Legend plate insert**<br>14.5 x 23.5 mm, adhesive, Aluminium black | **704.968.1** | 0.001 |
| 14.5 x 23.5 mm, adhesive, Aluminium natural | **704.968.0** | 0.001 |

### Legend plate, square for flush mounting

| | Typ-Nr. | kg |
|---|---|---|
| **Legend plate, square for flush mounting**<br>18 x 35 mm, adhesive, Aluminium black | **704.968.5** | 0.001 |
| 18 x 35 mm, adhesive, Aluminium natural | **704.968.4** | 0.001 |

### Protective cover

Mounting hole size 22.5 mm dia.

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Protective cover**<br>hinged, transparent, with means for sealing, for Pushbutton | **704.925.0** | 49 | 0.007 |
| hinged, transparent, with means for sealing, for Selector switch | **704.925.2** | 51 | 0.007 |
| hinged, transparent, with means for sealing, with spring fitted, for Pushbutton | **704.925.3** | 49 | 0.007 |

Protective cover only for selector switch in basic position A applicable.
Technical drawing from page 95

## Protective cover, flush mounting

Mounting hole size 30.5 mm dia.

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Protective cover, flush mounting**<br>hinged, Aluminium natural, with means for sealing, for Pushbutton and Selector switch short lever | **704.928.38** | 53 | 0.019 |
| hinged, Aluminium natural, with means for sealing, spring fitted, for Pushbutton and Selector switch short lever | **704.928.28** | 50 | 0.019 |
| hinged, Aluminium natural, with window, spring fitted, for Pushbutton | **704.928.18** | 52 | 0.019 |
| hinged, transparent, with means for sealing, for Pushbutton | **704.925.7** | 54 | 0.006 |

Technical drawing from page 95

## Blind plug

| | Blind plug | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|---|
| **Blind plug**<br>Size 28 mm dia., for mounting hole 22.5 mm dia. | Plastic black | **704.960.4** | 46 | 0.004 |
| Size 30 x 30 mm, for mounting hole 22.5 mm dia. | Plastic black | **704.964.7** | 43 | 0.009 |
| Size 35 x 35 mm, for mounting hole 30 x 30 mm | Plastic black | **704.964.9** | 45 | 0.009 |
| Size 36 mm dia., for mounting hole 30.5 mm dia. | Plastic black | **704.964.8** | 44 | 0.007 |

Technical drawing from page 95

## Spare key

| | Typ-Nr. | kg |
|---|---|---|
| **Spare key**<br>Standard lock 251 | **704.989.251** | 0.006 |

Other lock numbers on request

## Backside

### Flasher element

| | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|
| **Flasher element**<br>Operating voltage : 115 VAC ±10 %, 50/60 Hz<br>Lamp voltage/-current : 60 V, 33 mA | ST | **704.943.1** | 32 | 12 | 0.024 |
| Operating voltage : 130 VDC ±10 %<br>Lamp voltage/-current : 130 V, 3 mA | ST | **704.943.2** | 32 | 12 | 0.024 |
| Operating voltage : 230 VAC -10 % ... +6 %, 50/60 Hz<br>Lamp voltage/-current : 130 V, 20 mA | ST | **704.943.0** | 32 | 12 | 0.024 |
| Operating voltage : 24 VDC ±15 %<br>Lamp voltage/-current : 24 V, 10 mA ... 85 mA | ST | **704.943.5** | 32 | 12 | 0.024 |

Further information in the Technical Data and Typical Applications
Terminals: ST = Screw terminal
Technical drawing from page 95, Circuit drawing from page 115

## Switching element

| | Switch rating | Switching system | Contacts | Contact material | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|
| **Switching element** | 250 VAC, 6 A | SA | 1 NC | Au-Ag | PIT | **704.907.2** | 28 | 7 | 0.020 |
| | | | | Ag-Cu | PIT | **704.908.2** | 28 | 7 | 0.020 |
| | | | 1 NC + 1 NO | Au-Ag | PIT | **704.907.5** | 28 | 48 | 0.027 |
| | | | | Ag-Cu | PIT | **704.908.5** | 28 | 48 | 0.027 |
| | | | 1 NO | Au-Ag | PIT | **704.907.1** | 28 | 8 | 0.020 |
| | | | | Ag-Cu | PIT | **704.908.1** | 28 | 8 | 0.020 |
| | | | 2 NC | Au-Ag | PIT | **704.907.4** | 28 | 50 | 0.027 |
| | | | | Ag-Cu | PIT | **704.908.4** | 28 | 50 | 0.027 |
| | | | 2 NO | Au-Ag | PIT | **704.907.3** | 28 | 49 | 0.027 |
| | | | | Ag-Cu | PIT | **704.908.3** | 28 | 49 | 0.027 |
| | 500 VAC, 10 A | SM | 1 NC | Au-Ag | ST | **704.911.2** | 29 | 7 | 0.021 |
| | | | | Ag-Cu | D-PT 6.3 | **704.915.2/D** | 31 | 7 | 0.025 |
| | | | | | PT 6.3 | **704.915.2** | 30 | 7 | 0.021 |
| | | | | | ST | **704.910.2** | 29 | 7 | 0.021 |
| | | | | Ag-Pd | ST | **704.912.2** | 29 | 7 | 0.021 |
| | | | 1 NC + 1 NO | Au-Ag | ST | **704.911.5** | 29 | 48 | 0.028 |
| | | | | Ag-Cu | D-PT 6.3 | **704.915.5/D** | 31 | 48 | 0.032 |
| | | | | | PT 6.3 | **704.915.5** | 30 | 48 | 0.028 |
| | | | | | ST | **704.910.5** | 29 | 48 | 0.028 |
| | | | | Ag-Pd | ST | **704.912.5** | 29 | 48 | 0.028 |
| | | | 1 NO | Au-Ag | ST | **704.911.1** | 29 | 8 | 0.021 |
| | | | | Ag-Cu | D-PT 6.3 | **704.915.1/D** | 31 | 8 | 0.025 |
| | | | | | PT 6.3 | **704.915.1** | 30 | 8 | 0.021 |
| | | | | | ST | **704.910.1** | 29 | 8 | 0.021 |
| | | | | Ag-Pd | ST | **704.912.1** | 29 | 8 | 0.021 |
| | | | 2 NC | Au-Ag | ST | **704.911.4** | 29 | 50 | 0.028 |
| | | | | Ag-Cu | D-PT 6.3 | **704.915.4/D** | 31 | 50 | 0.032 |
| | | | | | PT 6.3 | **704.915.4** | 30 | 50 | 0.028 |
| | | | | | ST | **704.910.4** | 29 | 50 | 0.028 |
| | | | | Ag-Pd | ST | **704.912.4** | 29 | 50 | 0.028 |
| | | | 2 NO | Au-Ag | ST | **704.911.3** | 29 | 49 | 0.028 |
| | | | | Ag-Cu | D-PT 6.3 | **704.915.3/D** | 31 | 49 | 0.032 |
| | | | | | PT 6.3 | **704.915.3** | 30 | 49 | 0.028 |
| | | | | | ST | **704.910.3** | 29 | 49 | 0.028 |
| | | | | Ag-Pd | ST | **704.912.3** | 29 | 49 | 0.028 |

Continuation see next page

Continued from previous page

| | Switch rating | Switching system | Contacts | Contact material | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|
| **Switching element** | 500 VAC, 10 A | SA | 1 NC | Au-Ag | D-PT 6.3 | **704.901.2/D** | 31 | 7 | 0.026 |
| | | | | | ST | **704.901.2** | 29 | 7 | 0.021 |
| | | | | Ag-Cu | D-PT 6.3 | **704.905.2/D** | 31 | 7 | 0.026 |
| | | | | | PT 6.3 | **704.905.2** | 30 | 7 | 0.021 |
| | | | | | ST | **704.900.2** | 29 | 7 | 0.021 |
| | | | | Ag-Pd | ST | **704.902.2** | 29 | 7 | 0.021 |
| | | | 1 NC + 1 NO | Au-Ag | D-PT 6.3 | **704.901.5/D** | 31 | 48 | 0.033 |
| | | | | | ST | **704.901.5** | 29 | 48 | 0.028 |
| | | | | Ag-Cu | D-PT 6.3 | **704.905.5/D** | 31 | 48 | 0.033 |
| | | | | | PT 6.3 | **704.905.5** | 30 | 48 | 0.028 |
| | | | | | ST | **704.900.5** | 29 | 48 | 0.028 |
| | | | | Ag-Pd | ST | **704.902.5** | 29 | 48 | 0.028 |
| | | | 1 NO | Au-Ag | D-PT 6.3 | **704.901.1/D** | 31 | 8 | 0.026 |
| | | | | | ST | **704.901.1** | 29 | 8 | 0.021 |
| | | | | Ag-Cu | D-PT 6.3 | **704.905.1/D** | 31 | 8 | 0.026 |
| | | | | | PT 6.3 | **704.905.1** | 30 | 8 | 0.021 |
| | | | | | ST | **704.900.1** | 29 | 8 | 0.021 |
| | | | | Ag-Pd | ST | **704.902.1** | 29 | 8 | 0.021 |
| | | | 2 NC | Au-Ag | D-PT 6.3 | **704.901.4/D** | 31 | 50 | 0.033 |
| | | | | | ST | **704.901.4** | 29 | 50 | 0.028 |
| | | | | Ag-Cu | D-PT 6.3 | **704.905.4/D** | 31 | 50 | 0.033 |
| | | | | | PT 6.3 | **704.905.4** | 30 | 50 | 0.028 |
| | | | | | ST | **704.900.4** | 29 | 50 | 0.028 |
| | | | | Ag-Pd | ST | **704.902.4** | 29 | 50 | 0.028 |
| | | | 2 NO | Au-Ag | D-PT 6.3 | **704.901.3/D** | 31 | 49 | 0.033 |
| | | | | | ST | **704.901.3** | 29 | 49 | 0.028 |
| | | | | Ag-Cu | D-PT 6.3 | **704.905.3/D** | 31 | 49 | 0.033 |
| | | | | | PT 6.3 | **704.905.3** | 30 | 49 | 0.028 |
| | | | | | ST | **704.900.3** | 29 | 49 | 0.028 |
| | | | | Ag-Pd | ST | **704.902.3** | 29 | 49 | 0.028 |

For the 3rd switching element per switch the terminal marking insert is to be ordered separately.
Switching system: SA = Snap-action switching element, SM = Slow-make switching element
Contacts: NC = Normally closed, NO = Normally open
Contact material: Au-Ag = Gold-Silver, Ag-Cu = Hard silver, Ag-Pd = Silver-Palladium
Terminals: PIT = PIT Spring terminal, ST = Screw terminal, D-PT 6.3 = Double plug-in terminal 6.3 mm, PT 6.3 = Plug-in terminal 6.3 mm
Technical drawing from page 95, Circuit drawing from page 115

## Switching element for ring cable shoe

| | Switching system | Contacts | Contact material | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|
| **Switching element for ring cable shoe** | SM | 1 NC | Au-Ag | ST | **704.911.2B** | 29 | 7 | 0.021 |
| | | | Ag-Cu | ST | **704.910.2B** | 29 | 7 | 0.021 |
| | | 1 NC + 1 NO | Au-Ag | ST | **704.911.5B** | 29 | 48 | 0.028 |
| | | | Ag-Cu | ST | **704.910.5B** | 29 | 48 | 0.028 |
| | | 1 NO | Au-Ag | ST | **704.911.1B** | 29 | 8 | 0.021 |
| | | | Ag-Cu | ST | **704.910.1B** | 29 | 8 | 0.021 |
| | | 2 NC | Au-Ag | ST | **704.911.4B** | 29 | 50 | 0.028 |
| | | | Ag-Cu | ST | **704.910.4B** | 29 | 50 | 0.028 |
| | | 2 NO | Au-Ag | ST | **704.911.3B** | 29 | 49 | 0.028 |
| | | | Ag-Cu | ST | **704.910.3B** | 29 | 49 | 0.028 |
| | SA | 1 NC | Ag-Cu | ST | **704.900.2B** | 29 | 7 | 0.021 |
| | | 1 NC + 1 NO | Ag-Cu | ST | **704.900.5B** | 29 | 48 | 0.028 |
| | | 1 NO | Ag-Cu | ST | **704.900.1B** | 29 | 8 | 0.021 |
| | | 2 NC | Ag-Cu | ST | **704.900.4B** | 29 | 50 | 0.028 |
| | | 2 NO | Ag-Cu | ST | **704.900.3B** | 29 | 49 | 0.028 |

Switching system: SM = Slow-make switching element, SA = Snap-action switching element
Contacts: NC = Normally closed, NO = Normally open
Contact material: Au-Ag = Gold-Silver, Ag-Cu = Hard silver
Terminals: ST = Screw terminal
Technical drawing from page 95, Circuit drawing from page 115

## Switching element for Emergency-stop pushbutton

| | Switch rating | Switching system | Contacts | Contact material | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|---|---|---|---|
| **Switching element for Emergency-stop pushbutton** | 250 VAC, 6 A | SM | 1 NC | Au-Ag | PIT | **704.917.2** | 28 | 7 | 0.019 |
| | | | | Ag-Cu | PIT | **704.918.2** | 28 | 7 | 0.019 |
| | | | 1 NC + 1 NO | Au-Ag | PIT | **704.917.5** | 28 | 48 | 0.026 |
| | | | | Ag-Cu | PIT | **704.918.5** | 28 | 48 | 0.026 |
| | | | 1 NO | Au-Ag | PIT | **704.917.1** | 28 | 8 | 0.019 |
| | | | | Ag-Cu | PIT | **704.918.1** | 28 | 8 | 0.019 |
| | | | 2 NC | Au-Ag | PIT | **704.917.4** | 28 | 50 | 0.019 |
| | | | | Ag-Cu | PIT | **704.918.4** | 28 | 50 | 0.019 |
| | | | 2 NO | Au-Ag | PIT | **704.917.3** | 28 | 49 | 0.026 |
| | | | | Ag-Cu | PIT | **704.918.3** | 28 | 49 | 0.026 |
| | 500 VAC, 10 A | SM | 1 NC | Au-Ag | ST | **704.911.2** | 29 | 7 | 0.021 |
| | | | | Ag-Cu | D-PT 6.3 | **704.915.2/D** | 31 | 7 | 0.025 |
| | | | | | PT 6.3 | **704.915.2** | 30 | 7 | 0.021 |
| | | | | | ST | **704.910.2** | 29 | 7 | 0.021 |
| | | | | Ag-Pd | ST | **704.912.2** | 29 | 7 | 0.021 |
| | | | 1 NC + 1 NO | Au-Ag | ST | **704.911.5** | 29 | 48 | 0.028 |
| | | | | Ag-Cu | D-PT 6.3 | **704.915.5/D** | 31 | 48 | 0.032 |
| | | | | | PT 6.3 | **704.915.5** | 30 | 48 | 0.028 |
| | | | | | ST | **704.910.5** | 29 | 48 | 0.028 |
| | | | | Ag-Pd | ST | **704.912.5** | 29 | 48 | 0.028 |
| | | | 1 NO | Au-Ag | ST | **704.911.1** | 29 | 8 | 0.021 |
| | | | | Ag-Cu | D-PT 6.3 | **704.915.1/D** | 31 | 8 | 0.025 |
| | | | | | PT 6.3 | **704.915.1** | 30 | 8 | 0.021 |
| | | | | | ST | **704.910.1** | 29 | 8 | 0.021 |
| | | | | Ag-Pd | ST | **704.912.1** | 29 | 8 | 0.021 |
| | | | 2 NC | Au-Ag | ST | **704.911.4** | 29 | 50 | 0.028 |
| | | | | Ag-Cu | D-PT 6.3 | **704.915.4/D** | 31 | 50 | 0.032 |
| | | | | | PT 6.3 | **704.915.4** | 30 | 50 | 0.028 |
| | | | | | ST | **704.910.4** | 29 | 50 | 0.028 |
| | | | | Ag-Pd | ST | **704.912.4** | 29 | 50 | 0.028 |
| | | | 2 NO | Au-Ag | ST | **704.911.3** | 29 | 49 | 0.028 |
| | | | | Ag-Cu | D-PT 6.3 | **704.915.3/D** | 31 | 49 | 0.032 |
| | | | | | PT 6.3 | **704.915.3** | 30 | 49 | 0.028 |
| | | | | | ST | **704.910.3** | 29 | 49 | 0.028 |
| | | | | Ag-Pd | ST | **704.912.3** | 29 | 49 | 0.028 |

Switching system: SM = Slow-make switching element
Contacts: NC = Normally closed, NO = Normally open
Contact material: Au-Ag = Gold-Silver, Ag-Cu = Hard silver, Ag-Pd = Silver-Palladium
Terminals: PIT = PIT Spring terminal, ST = Screw terminal, D-PT 6.3 = Double plug-in terminal 6.3 mm, PT 6.3 = Plug-in terminal 6.3 mm
Technical drawing from page 95, Circuit drawing from page 115

## Rotary selector switching element 30°

| | Contacts | Stages | Terminals | Typ-Nr. | Circuit drawing | [kg] |
|---|---|---|---|---|---|---|
| **Rotary selector switching element 30°**<br>Position a : Start position<br>Position i : End position | 9 (1-pole) | 5 | ST | **704.8A236** | 13 | 0.073 |
| Position a : Start position<br>Position k : End position | 10 (1-pole) | 5 | ST | **704.8A237** | 14 | 0.073 |
| Position a : Start position<br>Position l : End position | 11 (1-pole) | 6 | ST | **704.8A238** | 15 | 0.082 |
| Position a : Start position<br>Position m : End position | 12 (1-pole) | 6 | ST | **704.8A239** | 16 | 0.082 |
| Position a : Start position<br>without stop | 12 (1-pole) | 6 | ST | **704.8A639** | 16 | 0.082 |

Rotary switching elements are not on stock and have to be ordered as a customised product locally
Terminals: ST = Screw terminal
Circuit drawing from page 115

## Rotary selector switching element 45°

| | Contacts | Stages | Terminals | Typ-Nr. | Circuit drawing | [kg] |
|---|---|---|---|---|---|---|
| **Rotary selector switching element 45°** | 7 (1-pole) | 4 | ST | **704.8A234** | 17 | 0.064 |
| Position a : Start position<br>Position g : End position | 7 (2-poles) | 7 | ST | **704.8A254** | 18 | 0.091 |
| Position a : Start position<br>Position h : End position | 8 (1-pole) | 4 | ST | **704.8A235** | 19 | 0.064 |
| | 8 (2-poles) | 8 | ST | **704.8A255** | 20 | 0.100 |

Rotary switching elements are not on stock and have to be ordered as a customised product locally
Terminals: ST = Screw terminal
Circuit drawing from page 115

## Rotary selector switching element 60°

| | Contacts | Stages | Terminals | Typ-Nr. | Circuit drawing | kg |
|---|---|---|---|---|---|---|
| **Rotary selector switching element 60°**<br>Position a : Start position<br>Position c : End position | 3 (1-pole) | 2 | ST | **704.8A230** | 21 | 0.046 |
| | 3 (1-pole, DC-isolated) | 2 | ST | **704.8A730** | 32 | 0.046 |
| | 3 (2-poles) | 3 | ST | **704.8A250** | 22 | 0.055 |
| | 3 (3-poles) | 5 | ST | **704.8A270** | 23 | 0.073 |
| Position a : Start position<br>Position d : End position | 4 (1-pole) | 2 | ST | **704.8A231** | 24 | 0.046 |
| | 4 (1-pole, DC isolated) | 2 | ST | **704.8A731** | 33 | 0.046 |
| | 4 (2-poles) | 4 | ST | **704.8A251** | 25 | 0.064 |
| | 4 (3-poles) | 6 | ST | **704.8A271** | 26 | 0.082 |
| Position a : Start position<br>Position e : End position | 5 (1-pole) | 3 | ST | **704.8A232** | 27 | 0.055 |
| | 5 (2-poles) | 5 | ST | **704.8A252** | 28 | 0.073 |
| | 5 (3-poles) | 8 | ST | **704.8A272** | 29 | 0.100 |
| Position a : Start position<br>Position f : End position | 6 (1-pole) | 3 | ST | **704.8A233** | 30 | 0.055 |
| | 6 (2-poles) | 6 | ST | **704.8A253** | 31 | 0.082 |

Rotary switching elements are not on stock and have to be ordered as a customised product locally
Terminals: ST = Screw terminal
Circuit drawing from page 115

## Terminal cover

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Terminal cover**<br>for covering of screw terminal | **704.964.5** | 35 | 0.003 |

Technical drawing from page 95

## Terminal marking

| | Marking | Typ-Nr. | kg |
|---|---|---|---|
| **Terminal marking**<br>1 NC + 1 NO (for 1st or 2nd switching element) | 13/21 33/41 | **704.965.9** | 0.001 |
| | 22/14 42/34 | **704.966.0** | 0.001 |
| 1 NC + 1 NO (for 3rd switching element) | 53/61 73/81 | **704.966.1** | 0.001 |
| | 62/54 82/74 | **704.966.2** | 0.001 |
| 2 NC (for 1st or 2nd switching element) | 11/21 31/41 | **704.965.5** | 0.001 |
| | 22/12 42/32 | **704.965.6** | 0.001 |
| 2 NC (for 3rd switching element) | 51/61 71/81 | **704.965.7** | 0.001 |
| | 62/52 82/72 | **704.965.8** | 0.001 |
| 2 NO (for 1st or 2nd switching element) | 13/23 33/43 | **704.965.1** | 0.001 |
| | 24/14 44/34 | **704.965.2** | 0.001 |
| 2 NO (for 3rd switching element) | 53/63 73/83 | **704.965.3** | 0.001 |
| | 64/54 84/74 | **704.965.4** | 0.001 |

## Illumination

### Filament lamp

The max. overall length of the lamp may not exeed 25 mm

| | Socket | Operating voltage/-current | Typ-Nr. | kg |
|---|---|---|---|---|
| **Filament lamp** | BA9s | 110 VAC/DC, 22 mA | **10-1422.1179** | 0.002 |
| | | 12 VAC/DC, 100 mA | **10-1409.1329** | 0.002 |
| | | 130 VAC/DC, 20 mA | **10-1424.1179** | 0.002 |
| | | 24 VAC/DC, 50 mA | **10-1412.1279** | 0.002 |
| | | 36 VAC/DC, 56 mA | **10-1416.1289** | 0.002 |
| | | 48 VAC/DC, 42 mA | **10-1419.1249** | 0.002 |
| | | 6 VAC/DC, 200 mA | **10-1406.1369** | 0.002 |
| | | 60 VAC/DC, 33 mA | **10-1420.1219** | 0.002 |

## Single-LED

The max. overall length of the lamp may not exeed 25 mm

| | Socket | Light colour | Operating voltage/-current | Typ-Nr. | kg |
|---|---|---|---|---|---|
| **Single-LED** | BA9s | blue | 12 VAC/DC, 16 mA | **10-2509.1146** | 0.002 |
| | | | 130 VAC, 5 mA | **10-2H24.2056** | 0.002 |
| | | | 230 VAC, 3 mA | **10-2H25.2046** | 0.002 |
| | | | 24 VAC/DC, 15 mA | **10-2512.1146** | 0.002 |
| | | | 28 VAC/DC, 13 mA | **10-2513.1146** | 0.002 |
| | | | 48 VAC/DC, 8 mA | **10-2519.1056** | 0.002 |
| | | | 6 VDC, 17 mA | **10-2506.1086** | 0.002 |
| | | green | 12 VAC/DC, 7 mA | **10-2509.1145** | 0.002 |
| | | | 130 VAC, 3 mA | **10-2H24.2055** | 0.002 |
| | | | 230 VAC, 2 mA | **10-2H25.2045** | 0.002 |
| | | | 24 VAC/DC, 7 mA | **10-2512.1145** | 0.002 |
| | | | 28 VAC/DC, 7 mA | **10-2513.1145** | 0.002 |
| | | | 48 VAC/DC, 4 mA | **10-2519.1055** | 0.002 |
| | | | 6 VDC, 7 mA | **10-2506.1085** | 0.002 |
| | | red | 12 VAC/DC, 16 mA | **10-2509.1142** | 0.002 |
| | | | 130 VAC, 5 mA | **10-2H24.2052** | 0.002 |
| | | | 230 VAC, 3 mA | **10-2H25.2042** | 0.002 |
| | | | 24 VAC/DC, 15 mA | **10-2512.1142** | 0.002 |
| | | | 28 VAC/DC, 13 mA | **10-2513.1142** | 0.002 |
| | | | 48 VAC/DC, 8 mA | **10-2519.1052** | 0.002 |
| | | | 6 VDC, 17 mA | **10-2506.1082** | 0.002 |
| | | white diffuse | 12 VAC/DC, 16 mA | **10-2509.1149** | 0.002 |
| | | | 130 VAC, 5 mA | **10-2H24.2059** | 0.002 |
| | | | 230 VAC, 3 mA | **10-2H25.2049** | 0.002 |
| | | | 24 VAC/DC, 15 mA | **10-2512.1149** | 0.002 |
| | | | 28 VAC/DC, 13 mA | **10-2513.1149** | 0.002 |
| | | | 48 VAC/DC, 8 mA | **10-2519.1059** | 0.002 |
| | | | 6 VDC, 17 mA | **10-2506.1089** | 0.002 |
| | | yellow | 12 VAC/DC, 16 mA | **10-2509.1144** | 0.002 |
| | | | 130 VAC, 5 mA | **10-2H24.2054** | 0.002 |
| | | | 230 VAC, 3 mA | **10-2H25.2044** | 0.002 |
| | | | 24 VAC/DC, 15 mA | **10-2512.1144** | 0.002 |
| | | | 28 VAC/DC, 13 mA | **10-2513.1144** | 0.002 |
| | | | 48 VAC/DC, 8 mA | **10-2519.1054** | 0.002 |
| | | | 6 VDC, 17 mA | **10-2506.1084** | 0.002 |

Note:
AC operation through halve-wave rectifier possible, slight flickering can occure.
12, 24, 28, 48 VAC/DC versions with bridge rectifier. Used on a DC voltage and AC voltage with the same light output.

## Diode block

| | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|
| **Diode block**<br>2 Diodes 1N4007 | ST | **704.942.5** | 34 | 2 | 0.019 |

Terminals: ST = Screw terminal
Technical drawing from page 95, Circuit drawing from page 115

## Lamp transformer

Lamp voltage/-current : 24 VAC, 50 mA, 50/60 Hz

| | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|
| **Lamp transformer**<br>Operating voltage : 115 VAC / 24 VAC | ST | **704.970.3** | 33 | 9 | 0.100 |
| Operating voltage : 230 VAC / 24 VAC | ST | **704.970.4** | 33 | 9 | 0.100 |
| Operating voltage : 400 VAC / 24 VAC | ST | **704.970.5** | 33 | 9 | 0.100 |
| Operating voltage : 440 VAC / 24 VAC | ST | **704.970.6** | 33 | 9 | 0.100 |

Terminals: ST = Screw terminal
Technical drawing from page 95, Circuit drawing from page 115

## Resistor block

Lamp voltage/-current : 130 V, 20mA und 60 V, 33 mA

| | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|
| **Resistor block**<br>Operating voltage : 125 VAC / 60 VAC | ST | **704.941.5** | 34 | 10 | 0.006 |
| Operating voltage : 230 VAC / 130 VAC | ST | **704.941.0** | 34 | 10 | 0.017 |

Terminals: ST = Screw terminal
Technical drawing from page 95, Circuit drawing from page 115

## Resistor-diode block

Lamp voltage/-current : 130 V, 20mA

| | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|
| **Resistor-diode block**<br>Operating voltage : 230 VAC / 130 VAC | ST | **704.941.9** | 34 | 11 | 0.017 |

Terminals: ST = Screw terminal
Technical drawing from page 95, Circuit drawing from page 115

## Terminal plate empty

for fitting with series resistors

| | Typ-Nr. | kg |
|---|---|---|
| **Terminal plate empty**<br>10 spaces 125 x 60 x 15 mm | **02-912.2** | 0.045 |
| 15 spaces 187.5 x 60 x 15 mm | **02-912.3** | 0.090 |
| 20 spaces 250 x 60 x 15 mm | **02-912.4** | 0.095 |
| 5 spaces 62.5 x 60 x 15 mm | **02-912.1** | 0.025 |

## Emergency-stop pushbutton

### Emergency-stop label

front panel thickness 3 mm max.

| | Marking | Typ-Nr. | kg |
|---|---|---|---|
| **Emergency-stop label**<br>60 mm dia., yellow, Mounting hole size 22.5 mm dia. | ARRET D'URGENCE | **704.963.7** | 0.011 |
| | EMERGENCY STOP | **704.963.6** | 0.011 |
| | NOT AUS | **704.963.5** | 0.011 |
| | NOT HALT | **704.963.8** | 0.011 |
| 90 mm dia., yellow, Mounting hole size 22.5 mm dia. | ARRET D'URGENCE | **704.963.2** | 0.011 |
| | EMERGENCY STOP | **704.963.1** | 0.011 |
| | NOT AUS | **704.963.0** | 0.011 |
| | NOT HALT | **704.963.3** | 0.011 |

### Emergency-stop protective shroud

use only for Typ-Nr. 704.064.2 und 704.066.2

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Emergency-stop protective shroud**<br>Plastic yellow, 50 mm dia., IP 65 | **704.927.8** | 58 | 0.024 |
| Plastic yellow, 50 mm dia., IP 65, SEMI S2-93/12.4.c | **704.927.9** | 59 | 0.052 |

The protection ring is not suitable for a proper use of Emergency-stop pushbutton. It can obstruct a spontaneous operation of the Emergency-stop pushbutton.
Technical drawing from page 95

### Emergency-stop enclosures

Bottom grey similar RAL 7035; cover lead-sealable, yellow similar RAL 1004

| | Dimension | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|---|
| **Emergency-stop enclosures**<br>with mounting hole size 22.5 mm dia., with anti-twist device | L 65 mm, W 65 mm, H 81 mm | **704.945.7** | 61 | 0.127 |
| | L 94 mm, W 65 mm, H 81 mm | **704.945.8** | 62 | 0.157 |
| | L 94 mm, W 94 mm, H 81 mm | **704.945.0** | 63 | 0.195 |

Openings for cable gland M16 or M20.
Protection class IP 66.
Technical drawing from page 95

## Cable gland

| | Typ-Nr. | kg |
|---|---|---|
| **Cable gland**<br>M16, Plastic grey | **61-9481.6** | 0.007 |
| M20, Plastic grey | **704.945.6** | 0.011 |

with traction relief; protection degree IP 68.

# Assembling

## Anti-twist ring, flush mounting

| | Typ-Nr. | kg |
|---|---|---|
| **Anti-twist ring, flush mounting** | **704.954.0** | 0.002 |

## Reducing ring

Devices 22.5 mm dia. in mounting hole size 30.5 mm dia.

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Reducing ring**<br>Aluminium black | **704.960.0** | 57 | 0.004 |
| Aluminium natural | **704.960.8** | 57 | 0.004 |

With the metal bayonet flange you can use one reduction ring. If you have a plastic bayonet flange you need to install two reduction rings.
Technical drawing from page 95

## Mounting plate

for separate mounting of lamp transformer, resistor block or capacitor block

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Mounting plate** | **704.940.8** | 36 | 0.006 |

Technical drawing from page 95

## Snap-on base

to snap-on, for seperate mounting of lamp transformer, resistor block or capacitor block

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Snap-on base**<br>DIN mounting bar EN 50022 | **704.941.1** | 38 | 0.006 |
| DIN mounting bar EN 50035 | **704.940.9** | 37 | 0.006 |

Technical drawing from page 95

## Reinforcement plate

for thin front panel and plastic case

| | Typ-Nr. | kg |
|---|---|---|
| **Reinforcement plate**<br>44 x 29 x 2 mm, mounting hole 22,5 mm dia., sheet steel galvanized yellow passivated | **704.960.9** | 0.014 |

## Lens plug for round lens, flush mounting

with lamp remover function (BA9s)



| | Typ-Nr. | kg |
|---|---|---|
| **Lens plug for round lens, flush mounting**<br>for mounting and dismantling of Lens round, flush mounting | **700.006.0** | 0.003 |

## Lens remover for square lens, flush mounting

| | Typ-Nr. | kg |
|---|---|---|
| **Lens remover for square lens, flush mounting** | **98-968** | 0.004 |

## Mounting tool for Indicator

for Indicators full-face illumination, compact

| | Typ-Nr. | kg |
|---|---|---|
| **Mounting tool for Indicator**<br>for tightening (or loosening) of the Fixing nut | **700.005.0** | 0.020 |

## Mounting tool for Key insert switch

| | Typ-Nr. | kg |
|---|---|---|
| **Mounting tool for Key insert switch**<br>for tightening (or loosening) of the Fixing nut | **704.990.0** | 0.020 |

## Enclosure

Grey similar RAL 7035; cover lead-sealable

| | Dimension | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|---|
| **Enclosure**<br>with mounting hole 1 x 22.5 mm dia., with anti-twist device | L 94 mm, W 94 mm, H 81 mm | **704.945.1** | 63 | 0.211 |
| with mounting hole 2 x 22.5 mm dia., with anti-twist device | L 130 mm, W 94 mm, H 81 mm | **704.945.2** | 64 | 0.251 |
| with mounting hole 3 x 22.5 mm dia., with anti-twist device | L 180 mm, W 94 mm, H 81 mm | **704.945.3** | 65 | 0.313 |
| with mounting hole 4 x 22.5 mm dia., with anti-twist device | L 180 mm, W 182 mm, H 110 mm | **704.945.4** | 66 | 0.572 |
| with mounting hole 6 x 22.5 mm dia., with anti-twist device | L 180 mm, W 182 mm, H 110 mm | **704.945.5** | 67 | 0.568 |

Openings for cable gland M16 or M20.
Protection class IP 66.
Technical drawing from page 95

## Cable gland

| | Typ-Nr. | kg |
|---|---|---|
| **Cable gland**<br>M16, Plastic grey | **61-9481.6** | 0.007 |
| M20, Plastic grey | **704.945.6** | 0.011 |

with traction relief; protection degree IP 68.

## Indicator compact

### Indicator actuator for Indicator compact

| | Housing | Ø 29 mm Typ-Nr. | Circuit drawing | kg |
|---|---|---|---|---|
| **Indicator actuator for Indicator compact** with series resistor for 110/125 V and incandescent lamp 60 V, 33 mA | Plastic grey | **704.642.1** | 5 | 0.020 |
| with series resistor for 220/240 V and incandescent lamp 130 V, 20 mA | Plastic grey | **704.642.2** | 5 | 0.009 |
| without built-in series resistor | Plastic grey | **704.642.0** | 5 | 0.006 |

Circuit drawing from page 115

### Lens cap round, plastic

| | Lens cap | Ø 29 mm Typ-Nr. | kg |
|---|---|---|---|
| **Lens cap round, plastic** | blue transparent | **704.603.6** | 0.003 |
| | colourless transparent | **704.603.7** | 0.003 |
| | green transparent | **704.603.5** | 0.003 |
| | red transparent | **704.603.2** | 0.003 |
| | yellow transparent | **704.603.4** | 0.003 |

### Marking cap for Lens cap round

| | Marking cap | Typ-Nr. | kg |
|---|---|---|---|
| **Marking cap for Lens cap round** LED | Plastic colourless transparent ribbed | **704.608.7** | 0.002 |
| LED and Filament lamp | Plastic white translucent | **704.608.9** | 0.002 |

## Indicator and Flasher round, full face illumination

### Indicator actuator round, full face illumination

| | Housing | Ø 29 mm Typ-Nr. | kg |
|---|---|---|---|
| **Indicator actuator round, full face illumination** | Plastic grey | **704.630.1** | 0.020 |

## Lens cap round, plastic

| | Lens cap | Ø 29 mm Typ-Nr. | kg |
|---|---|---|---|
| **Lens cap round, plastic** | blue transparent | **704.603.6** | 0.003 |
| | colourless transparent | **704.603.7** | 0.003 |
| | green transparent | **704.603.5** | 0.003 |
| | red transparent | **704.603.2** | 0.003 |
| | yellow transparent | **704.603.4** | 0.003 |

## Marking cap for Lens cap round

| | Marking cap | Typ-Nr. | kg |
|---|---|---|---|
| **Marking cap for Lens cap round** LED | Plastic colourless transparent ribbed | **704.608.7** | 0.002 |
| LED and Filament lamp | Plastic white translucent | **704.608.9** | 0.002 |

## Bayonet flange

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Bayonet flange** Metal | **704.960.5** | 48 | 0.025 |
| Plastic | **704.950.5** | 47 | 0.015 |

Technical drawing from page 95

## Lamp block

| | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|
| **Lamp block** Spring terminal | PIT | **704.950.3** | 42 | 5 | 0.014 |
| Standard | PT 6.3 | **704.950.1** | 40 | 5 | 0.012 |
| | ST | **704.950.0** | 39 | 5 | 0.012 |
| Terminals Cu/Sn nickel plated | D-PT 6.3 | **704.950.2/D** | 41 | 5 | 0.013 |
| Terminals Cu/Sn nickel plated and blank | D-PT 6.3 | **704.950.1/D** | 41 | 5 | 0.013 |
| Terminals for ring cable shoe | ST | **704.950.0B** | 39 | 5 | 0.013 |

Terminals: PIT = PIT Spring terminal, PT 6.3 = Plug-in terminal 6.3 mm, ST = Screw terminal, D-PT 6.3 = Double plug-in terminal 6.3 mm

Technical drawing from page 95, Circuit drawing from page 115

## Indicator and Flasher square, full face illumination

### Indicator actuator square, full face illumination

| | Housing | ⍁ 30 x 30 mm Typ-Nr. | kg |
|---|---|---|---|
| **Indicator actuator square, full face illumination** | Plastic black | **704.730.0** | 0.005 |
| | Plastic grey | **704.730.1** | 0.005 |

### Lens cap square, plastic

| | Lens cap | ⍁ 30 x 30 mm Typ-Nr. | kg |
|---|---|---|---|
| **Lens cap square, plastic** | blue transparent | **704.703.6** | 0.003 |
| | colourless transparent | **704.703.7** | 0.003 |
| | green transparent | **704.703.5** | 0.003 |
| | red transparent | **704.703.2** | 0.003 |
| | yellow transparent | **704.703.4** | 0.003 |

### Diffusor cap for Lens cap square

| | Diffusor cap | ⍁ 30 x 30 mm Typ-Nr. | kg |
|---|---|---|---|
| **Diffusor cap for Lens cap square** can be marked | Plastic white | **704.708.9** | 0.004 |
| LED | Plastic colourless | **704.708.7** | 0.004 |

### Marking foil for Lens square

| | Marking foil | Typ-Nr. | kg |
|---|---|---|---|
| **Marking foil for Lens square** can be hot stamped | Plastic colourless transparent | **704.706.7** | 0.001 |

### Bayonet flange

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Bayonet flange** Metal | **704.960.5** | 48 | 0.025 |
| Plastic | **704.950.5** | 47 | 0.015 |

Technical drawing from page 95

## Lamp block

| | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|
| **Lamp block**<br>Spring terminal | PIT | **704.950.3** | 42 | 5 | 0.014 |
| Standard | PT 6.3 | **704.950.1** | 40 | 5 | 0.012 |
| | ST | **704.950.0** | 39 | 5 | 0.012 |
| Terminals Cu/Sn nickel plated | D-PT 6.3 | **704.950.2/D** | 41 | 5 | 0.013 |
| Terminals Cu/Sn nickel plated and blank | D-PT 6.3 | **704.950.1/D** | 41 | 5 | 0.013 |
| Terminals for ring cable shoe | ST | **704.950.0B** | 39 | 5 | 0.013 |

Terminals: PIT = PIT Spring terminal, PT 6.3 = Plug-in terminal 6.3 mm, ST = Screw terminal, D-PT 6.3 = Double plug-in terminal 6.3 mm
Technical drawing from page 95, Circuit drawing from page 115

# Indicator and Flasher round, front illumination

## Indicator actuator round, front illumination

| | Housing | Typ-Nr. | kg |
|---|---|---|---|
| **Indicator actuator round, front illumination** | Plastic grey | **704.633.1** | 0.020 |

## Lens round, flush, plastic

Lenses are usable for round devices in raised and flush mounting

| | Lens | Symbol | Typ-Nr. | kg |
|---|---|---|---|---|
| **Lens round, flush, plastic** | black opaque | without | **704.602.0** | 0.001 |
| | blue transparent | without | **704.602.6** | 0.001 |
| | colourless transparent | Halo | **704.602.7A01** | 0.001 |
| | | without | **704.602.7** | 0.001 |
| | green transparent | without | **704.602.5** | 0.001 |
| | red transparent | without | **704.602.2** | 0.001 |
| | yellow transparent | without | **704.602.4** | 0.001 |

## Marking plate for Lens round, flush

| | Marking plate | Typ-Nr. | kg |
|---|---|---|---|
| **Marking plate for Lens round, flush**<br>Halo illumination | Plastic white translucent | **704.609.9A01** | 0.001 |
| LED | Plastic colourless transparent ribbed | **704.609.7** | 0.001 |
| LED and Filament lamp | Plastic white translucent | **704.609.9** | 0.001 |
| non-illuminative | Plastic black opaque | **704.609.0** | 0.001 |

## Lens round raised, plastic

| | Lens | Typ-Nr. | kg |
|---|---|---|---|
| **Lens round raised, plastic** | colourless transparent | **704.611.7** | 0.002 |
| | green transparent | **704.611.5** | 0.002 |
| | red transparent | **704.611.2** | 0.002 |
| | yellow transparent | **704.611.4** | 0.002 |

## Marking cap for Lens round, raised

| | Marking cap | Typ-Nr. | kg |
|---|---|---|---|
| **Marking cap for Lens round, raised** LED | Plastic colourless transparent ribbed | **704.610.7** | 0.001 |
| LED and Filament lamp | Plastic white translucent | **704.610.9** | 0.001 |

## Front bezel set for Indicator and Pushbutton, flush mounting

| | Front bezel | Ø 35 mm Typ-Nr. | Mounting dimensions | kg |
|---|---|---|---|---|
| **Front bezel set for Indicator and Pushbutton, flush mounting** | Aluminium black | **704.955.0** | 7 | 0.015 |
| | Aluminium natural | **704.955.1** | 7 | 0.015 |
| | Stainless steel natural | **704.955.9** | 7 | 0.033 |

Mounting dimensions from page 91

## Front bezel with protective membrane, flush mounting

for Pushbutton and Illuminated pushbutton (IP 67)

| | Front bezel | Ø 35 mm Typ-Nr. | kg |
|---|---|---|---|
| **Front bezel with protective membrane, flush mounting** with transparent silicone membrane | Aluminium black | **704.955.4** | 0.015 |
| | Aluminium natural | **704.955.3** | 0.015 |
| with transparent silicone membrane, resistant to sea water | Stainless steel natural | **704.955.9E** | 0.033 |

Front bezel to be mounted with a torque of 40 Ncm onto actuator.

## Front ring

| | Front ring | Ø 29 mm Typ-Nr. | kg |
|---|---|---|---|
| **Front ring** | Aluminium black | **704.600.1A** | 0.005 |
| | Aluminium natural | **704.600.1** | 0.005 |
| | Plastic black | **704.600.0** | 0.003 |
| | Plastic light-grey | **704.600.6** | 0.003 |
| | Stainless steel natural | **704.600.9** | 0.006 |
| Heigth 16 mm | Plastic light-grey | **704.600.7** | 0.003 |

## Front protective cap

for Indicator, Pushbutton and Illuminated pushbutton for protection IP 68

| | Front protective cap | Typ-Nr. | kg |
|---|---|---|---|
| **Front protective cap**<br>only together with Lenses 704.602.X, 704.601.X and Front rings 704.600.X | Silicone colourless transparent | **704.953.0** | 0.002 |

## Front protective ring

for Pushbutton and Illuminated pushbutton with front illumination (IP 67)

| | Front protective ring | Ø 29 mm Typ-Nr. | kg |
|---|---|---|---|
| **Front protective ring**<br>with transparent Pebax membrane, temperature resistance -40 °C ... +85 °C | Aluminium natural | **704.600.5/A** | 0.005 |
| with transparent silicone membrane (extent resistant to sea water), temperature resistance -40 °C ... +85 °C | Aluminium natural | **704.600.3** | 0.005 |
| | Chromed brass | **704.600.2** | 0.005 |

Front protective ring to be mounted with a torque of 40 Ncm onto actuator.

## Bayonet flange

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Bayonet flange**<br>Metal | **704.960.5** | 48 | 0.025 |
| Plastic | **704.950.5** | 47 | 0.015 |

Technical drawing from page 95

## Lamp block

| | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | |
|---|---|---|---|---|---|
| **Lamp block**<br>Spring terminal | PIT | **704.950.3** | 42 | 5 | 0.014 |
| Standard | PT 6.3 | **704.950.1** | 40 | 5 | 0.012 |
| | ST | **704.950.0** | 39 | 5 | 0.012 |
| Terminals Cu/Sn nickel plated | D-PT 6.3 | **704.950.2/D** | 41 | 5 | 0.013 |
| Terminals Cu/Sn nickel plated and blank | D-PT 6.3 | **704.950.1/D** | 41 | 5 | 0.013 |
| Terminals for ring cable shoe | ST | **704.950.0B** | 39 | 5 | 0.013 |

Terminals: PIT = PIT Spring terminal, PT 6.3 = Plug-in terminal 6.3 mm, ST = Screw terminal, D-PT 6.3 = Double plug-in terminal 6.3 mm
Technical drawing from page 95, Circuit drawing from page 115

## Indicator and Flasher square, front illumination

### Indicator actuator square, front illumination

| | Front bezel | Housing | ⍁ 35 x 35 mm Typ-Nr. | ⍁ 30 x 30 mm Typ-Nr. | |
|---|---|---|---|---|---|
| **Indicator actuator square, front illumination** | black | Plastic black | **704.743.0** | | 0.020 |
| | silver | Plastic black | **704.743.8** | | 0.020 |
| | without | Plastic black | | **704.733.0** | 0.020 |
| | | Plastic grey | | **704.733.1** | 0.020 |

### Lens square, plastic

| | Lens | ⍁ 35 x 35 mm Typ-Nr. | ⍁ 30 x 30 mm Typ-Nr. | |
|---|---|---|---|---|
| **Lens square, plastic** | blue transparent | **704.702.6** | **704.702.6** | 0.001 |
| | colourless transparent | **704.702.7** | **704.702.7** | 0.001 |
| | green transparent | **704.702.5** | **704.702.5** | 0.001 |
| | red transparent | **704.702.2** | **704.702.2** | 0.001 |
| | yellow transparent | **704.702.4** | **704.702.4** | 0.001 |

### Lens holder for Lens square

| | Lens holder | Typ-Nr. | |
|---|---|---|---|
| **Lens holder for Lens square**<br>can be marked | translucent white | **704.709.9** | 0.003 |
| LED | transparent colourless | **704.709.7** | 0.003 |

## Marking foil for Lens square

| | Marking foil | Typ-Nr. | kg |
|---|---|---|---|
| **Marking foil for Lens square**<br>can be hot stamped | Plastic colourless transparent | **704.707.7** | 0.001 |

## Front bezel square

| | Front bezel | ⍈ 30 x 30 mm<br>Typ-Nr. | kg |
|---|---|---|---|
| **Front bezel square** | Plastic black | **704.701.0** | 0.002 |
| | Plastic chromium-plated | **704.701.4** | 0.002 |
| | Plastic grey | **704.701.6** | 0.002 |

## Bayonet flange

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Bayonet flange**<br>Metal | **704.960.5** | 48 | 0.025 |
| Plastic | **704.950.5** | 47 | 0.015 |

Technical drawing from page 95

## Lamp block

| | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|
| **Lamp block**<br>Spring terminal | PIT | **704.950.3** | 42 | 5 | 0.014 |
| Standard | PT 6.3 | **704.950.1** | 40 | 5 | 0.012 |
| | ST | **704.950.0** | 39 | 5 | 0.012 |
| Terminals Cu/Sn nickel plated | D-PT 6.3 | **704.950.2/D** | 41 | 5 | 0.013 |
| Terminals Cu/Sn nickel plated and blank | D-PT 6.3 | **704.950.1/D** | 41 | 5 | 0.013 |
| Terminals for ring cable shoe | ST | **704.950.0B** | 39 | 5 | 0.013 |

Terminals: PIT = PIT Spring terminal, PT 6.3 = Plug-in terminal 6.3 mm, ST = Screw terminal, D-PT 6.3 = Double plug-in terminal 6.3 mm

Technical drawing from page 95, Circuit drawing from page 115

## Pushbutton and Illuminated pushbutton round

### Pushbutton- and Illuminated pushbutton actuator round

Actuators usable for devices with front dimension 29 mm dia., raised mounting and 35 mm dia., flush mounting

| | Switching action | Housing | Typ-Nr. | kg |
|---|---|---|---|---|
| **Pushbutton- and Illuminated pushbutton actuator round** | MA | Plastic grey | **704.632.1** | 0.009 |
| | M | Plastic grey | **704.631.1** | 0.009 |

Switching action: MA = Maintained action, M = Momentary action

### Lens round, flush, plastic

Lenses are usable for round devices in raised and flush mounting

| | Lens | Symbol | Typ-Nr. | kg |
|---|---|---|---|---|
| **Lens round, flush, plastic** | black opaque | without | **704.602.0** | 0.001 |
| | blue transparent | without | **704.602.6** | 0.001 |
| | colourless transparent | Halo | **704.602.7A01** | 0.001 |
| | | without | **704.602.7** | 0.001 |
| | green transparent | without | **704.602.5** | 0.001 |
| | red transparent | without | **704.602.2** | 0.001 |
| | yellow transparent | without | **704.602.4** | 0.001 |

### Marking plate for Lens round, flush

| | Marking plate | Typ-Nr. | kg |
|---|---|---|---|
| **Marking plate for Lens round, flush**<br>Halo illumination | Plastic white translucent | **704.609.9A01** | 0.001 |
| LED | Plastic colourless transparent ribbed | **704.609.7** | 0.001 |
| LED and Filament lamp | Plastic white translucent | **704.609.9** | 0.001 |
| non-illuminative | Plastic black opaque | **704.609.0** | 0.001 |

### Lens round, metal

| | Lens | Ø 29 mm<br>Typ-Nr. | kg |
|---|---|---|---|
| **Lens round, metal** | Aluminium black | **704.601.0** | 0.001 |
| | Aluminium blue | **704.601.6** | 0.001 |
| | Aluminium gold | **704.601.4** | 0.001 |
| | Aluminium natural | **704.601.8** | 0.001 |
| | Aluminium olive-green | **704.601.5** | 0.001 |
| | Aluminium red | **704.601.2** | 0.001 |
| | Stainless steel natural | **704.601.9** | 0.001 |

## Lens round, metal with spot

| | Lens | Ø 29 mm Typ-Nr. | kg |
|---|---|---|---|
| **Lens round, metal with spot** | Aluminium black | **704.601.01** | 0.001 |
| | Aluminium blue | **704.601.61** | 0.001 |
| | Aluminium gold | **704.601.41** | 0.001 |
| | Aluminium natural | **704.601.81** | 0.001 |
| | Aluminium olive-green | **704.601.51** | 0.001 |
| | Aluminium red | **704.601.21** | 0.001 |
| | Stainless steel natural | **704.601.91** | 0.001 |

## Front bezel set for Indicator and Pushbutton, flush mounting

| | Front bezel | Ø 35 mm Typ-Nr. | Mounting dimensions | kg |
|---|---|---|---|---|
| **Front bezel set for Indicator and Pushbutton, flush mounting** | Aluminium black | **704.955.0** | 7 | 0.015 |
| | Aluminium natural | **704.955.1** | 7 | 0.015 |
| | Stainless steel natural | **704.955.9** | 7 | 0.033 |

Mounting dimensions from page 91

## Front bezel with protective membrane, flush mounting

for Pushbutton and Illuminated pushbutton (IP 67)

| | Front bezel | Ø 35 mm Typ-Nr. | kg |
|---|---|---|---|
| **Front bezel with protective membrane, flush mounting** with transparent silicone membrane | Aluminium black | **704.955.4** | 0.015 |
| | Aluminium natural | **704.955.3** | 0.015 |
| with transparent silicone membrane, resistant to sea water | Stainless steel natural | **704.955.9E** | 0.033 |

Front bezel to be mounted with a torque of 40 Ncm onto actuator.

## Front ring

| | Front ring | Ø 29 mm Typ-Nr. | kg |
|---|---|---|---|
| **Front ring** | Aluminium black | **704.600.1A** | 0.005 |
| | Aluminium natural | **704.600.1** | 0.005 |
| | Plastic black | **704.600.0** | 0.003 |
| | Plastic light-grey | **704.600.6** | 0.003 |
| | Stainless steel natural | **704.600.9** | 0.006 |
| Heigth 16 mm | Plastic light-grey | **704.600.7** | 0.003 |

## Front protective cap

for Indicator, Pushbutton and Illuminated pushbutton for protection IP 68

| | Front protective cap | Typ-Nr. | kg |
|---|---|---|---|
| **Front protective cap**<br>only together with Lenses 704.602.X, 704.601.X and Front rings 704.600.X | Silicone colourless transparent | **704.953.0** | 0.002 |

## Front protective ring

for Pushbutton and Illuminated pushbutton with front illumination (IP 67)

| | Front protective ring | Ø 29 mm Typ-Nr. | kg |
|---|---|---|---|
| **Front protective ring**<br>with transparent Pebax membrane, temperature resistance -40 °C ... +85 °C | Aluminium natural | **704.600.5/A** | 0.005 |
| with transparent silicone membrane (extent resistant to sea water), temperature resistance -40 °C ... +85 °C | Aluminium natural | **704.600.3** | 0.005 |
| | Chromed brass | **704.600.2** | 0.005 |

Front protective ring to be mounted with a torque of 40 Ncm onto actuator.

## Bayonet flange

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Bayonet flange**<br>Metal | **704.960.5** | 48 | 0.025 |
| Plastic | **704.950.5** | 47 | 0.015 |

Technical drawing from page 95

## Lamp block

| | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|
| **Lamp block**<br>Spring terminal | PIT | **704.950.3** | 42 | 5 | 0.014 |
| Standard | PT 6.3 | **704.950.1** | 40 | 5 | 0.012 |
| | ST | **704.950.0** | 39 | 5 | 0.012 |
| Terminals Cu/Sn nickel plated | D-PT 6.3 | **704.950.2/D** | 41 | 5 | 0.013 |
| Terminals Cu/Sn nickel plated and blank | D-PT 6.3 | **704.950.1/D** | 41 | 5 | 0.013 |
| Terminals for ring cable shoe | ST | **704.950.0B** | 39 | 5 | 0.013 |

Terminals: PIT = PIT Spring terminal, PT 6.3 = Plug-in terminal 6.3 mm, ST = Screw terminal, D-PT 6.3 = Double plug-in terminal 6.3 mm
Technical drawing from page 95, Circuit drawing from page 115

## Pushbutton and Illuminated pushbutton square

### Pushbutton- and Illuminated pushbutton actuator square

| | Switching action | Front bezel | Housing | ⍈ 35 x 35 mm Typ-Nr. | ⍈ 30 x 30 mm Typ-Nr. | kg |
|---|---|---|---|---|---|---|
| **Pushbutton- and Illuminated pushbutton actuator square** | MA | black | Plastic black | **704.742.0** | | 0.020 |
| | | silver | Plastic black | **704.742.8** | | 0.020 |
| | M | black | Plastic black | **704.741.0** | | 0.020 |
| | | silver | Plastic black | **704.741.8** | | 0.020 |
| | MA | without | Plastic black | | **704.732.0** | 0.020 |
| | | | Plastic grey | | **704.732.1** | 0.020 |
| | M | without | Plastic black | | **704.731.0** | 0.020 |
| | | | Plastic grey | | **704.731.1** | 0.020 |

Switching action: MA = Maintained action, M = Momentary action

### Lens square, plastic

| | Lens | Typ-Nr. | kg |
|---|---|---|---|
| **Lens square, plastic** | black opaque | **704.702.0** | 0.001 |
| | blue transparent | **704.702.6** | 0.001 |
| | colourless transparent | **704.702.7** | 0.001 |
| | green transparent | **704.702.5** | 0.001 |
| | red transparent | **704.702.2** | 0.001 |
| | white opaque | **704.702.9** | 0.001 |
| | yellow transparent | **704.702.4** | 0.001 |

Lenses are usable for square devices in raised and flush mounting

### Lens holder for Lens square

| | Lens holder | Typ-Nr. | kg |
|---|---|---|---|
| **Lens holder for Lens square** can be marked | translucent white | **704.709.9** | 0.003 |
| LED | transparent colourless | **704.709.7** | 0.003 |

### Marking foil for Lens square

| | Marking foil | Typ-Nr. | kg |
|---|---|---|---|
| **Marking foil for Lens square** can be hot stamped | Plastic colourless transparent | **704.707.7** | 0.001 |

## Front bezel square

| | Front bezel | ⏍ 30 x 30 mm Typ-Nr. | kg |
|---|---|---|---|
| **Front bezel square** | Plastic black | **704.701.0** | 0.002 |
| | Plastic chromium-plated | **704.701.4** | 0.002 |
| | Plastic grey | **704.701.6** | 0.002 |

## Bayonet flange

| | Typ-Nr. | Technical drawing | kg |
|---|---|---|---|
| **Bayonet flange** Metal | **704.960.5** | 48 | 0.025 |
| Plastic | **704.950.5** | 47 | 0.015 |

Technical drawing from page 95

## Lamp block

| | Terminals | Typ-Nr. | Technical drawing | Circuit drawing | kg |
|---|---|---|---|---|---|
| **Lamp block** Spring terminal | PIT | **704.950.3** | 42 | 5 | 0.014 |
| Standard | PT 6.3 | **704.950.1** | 40 | 5 | 0.012 |
| | ST | **704.950.0** | 39 | 5 | 0.012 |
| Terminals Cu/Sn nickel plated | D-PT 6.3 | **704.950.2/D** | 41 | 5 | 0.013 |
| Terminals Cu/Sn nickel plated and blank | D-PT 6.3 | **704.950.1/D** | 41 | 5 | 0.013 |
| Terminals for ring cable shoe | ST | **704.950.0B** | 39 | 5 | 0.013 |

Terminals: PIT = PIT Spring terminal, PT 6.3 = Plug-in terminal 6.3 mm, ST = Screw terminal, D-PT 6.3 = Double plug-in terminal 6.3 mm

Technical drawing from page 95, Circuit drawing from page 115

## Snap-action switching element

### Switching system

The double-break, snap-action switching element is equipped with one or two independent contact systems, acting as normally open or normally closed contact. The snap-action switching element is fitted with self-cleaning contacts.
Up to three switching elements can be snapped to each actuator.
Snap-action switching elements are not permissible for emergency-stop pushbuttons!

### Material

**Material of contact**
Hardsilver, gold-silver, silver-palladium (for aggressive atmospheres)

**Switch housing**
Polycarbonate (PC)

### Mechanical characteristics

**Terminals**
Screw terminals
Plug-in terminals 6.3 x 0.8 mm
max. wire cross-section 2 x 2.5 mm²
max. wire cross-section of stranded cable 2 x 1.5 mm²
For switches with plug-in terminals it is necessary to provide insulation sleeves and to maintain a spacing of 65 mm between rows (mounting dimensions)

**Tightening torque**
Screws at the mounting flange max. 25 Ncm
Screws at switching element max. 50 Ncm

**Actuating force**
1 Normally closed 1.9 N
1 Normally open 2 N

**Actuating travel**
5.8 mm ± 0.2 mm

**Rebound time**
≤3 ms

**Mechanical lifetime**
(with 1 switching element)

| | | |
|---|---|---|
| Pushbutton maintained action | 1.5 million | Cycles of operation |
| Pushbutton momentary action | 3 million | Cycles of operation |
| Selector switch maintained action | 1.25 million | Cycles of operation |
| Selector switch momentary action | 2.5 million | Cycles of operation |
| Keylock switch maintained action | 25 000 | Cycles of operation |
| Keylock switch momentary action | 50 000 | Cycles of operation |

### Electrical characteristics

**Standards**
The switches comply with the "Standards for low-voltage switching devices" EN IEC 60947-5-1

**Rated Insulation Voltage $U_i$**
500 VAC / 600 VDC, as per EN IEC 60947-5-1

**Contact resistance**
New state ≤50 mΩ as per DIN IEC 60512-2-4

**Isolation resistance**
≥10 MΩ between open contacts at 500 VDC, as per DIN IEC 60512-2-10

**Electrical life**
50 000 cycles of operations

**Conventional free air thermal current $I_{th}$**
10 A, as per EN IEC 60947-5-1
the maximum current in continuous operation and at ambient temperature must not exceed the quoted maximum values.

**Switch rating**
At switch rating AC for gold-silver, silver-palladium and hardsilver contacts, service category AC-15, as per EN IEC 60947-5-1 (cosϕ 0.3)

| | | | |
|---|---|---|---|
| Voltage | 230 VAC | 400 VAC | 500 VAC |
| Current | 6 A | 4 A | 2.5 A |

At switch rating DC for gold-silver and hardsilver contacts, service category DC-13, as per EN IEC 60947-5-1

| | | | |
|---|---|---|---|
| Voltage | 24 VDC | 60 VDC | 110 VDC |
| Current | 10 A | 3 A | 1 A |

**Recommended minimum operational data**
Gold-silver contacts:

| | | | |
|---|---|---|---|
| Voltage | 5 VDC | 24 VDC | 110 VDC |
| Current | 15 mA | 5 mA | 2 mA |

Hardsilver contacts:

| | | |
|---|---|---|
| Voltage | 24 VDC | 110 VDC |
| Current | 50 mA | 10 mA |

**Protection class**
Indicators and switches, fit for mounting into devices with protection class II

### Environmental conditions

**Storage temperature**
-40 °C ... +85 °C

**Operating temperature**
-40 °C ... +55 °C

**Protection degree**
IP 20

**Shock resistance**
(single impacts, semi-sinusoidal)
300 m/s²puls width 11 ms, as per EN IEC 60068-2-27

**Vibration resistance**
(sinusoidal)
100 m/s² at 10 Hz ... 500 Hz, amplitude 0,75 mm, as per EN IEC 60068-2-6

### Approvals

**Approbations**
CB (IEC 60947)
CCC
CSA
Germanischer Lloyd
GOST
NFF 16-102
SEV
UL

**Declaration of conformity**
CE

## Slow-make switching element

### Switching system

The double-break, slow-make switching element is equipped with one or two independent contact systems, acting as normally open or normally closed contact. The normally closed contact has forced opening.
Slow-make contacts with forced action are ideal for high switch ratings.
Up to three switching elements can be snapped to each actuator.
For the emergency-stop pushbutton use the slow-make switching element (max. 2).

### Material

**Material of contact**
Hardsilver, gold-silver, silver-palladium (for aggressive atmospheres)

**Switch housing**
Polycarbonate (PC)

### Mechanical characteristics

**Terminals**
Screw terminals
Plug-in terminals 6.3 x 0.8 mm
max. wire cross-section 2 x 2.5 mm²
max. wire cross-section of stranded cable 2 x 1.5 mm²
For switches with plug-in terminals it is necessary to provide insulation sleeves and to maintain a spacing of 65 mm between rows (mounting dimensions)

**Tightening torque**
Screws at the mounting flange max. 25 Ncm
Screws at switching element max. 50 Ncm

**Actuating force**
1 Normally closed 2 N
1 Normally open 3.1 N

**Actuating travel**
5.8 mm ± 0.2 mm

**Rebound time**
≤1 ms

**Mechanical lifetime**
(with 1 switching element)

| | | |
|---|---|---|
| Pushbutton maintained action | 1.5 million | Cycles of operation |
| Pushbutton momentary action | 3 million | Cycles of operation |
| Selector switch maintained action | 1.25 million | Cycles of operation |
| Selector switch momentary action | 2.5 million | Cycles of operation |
| Emergency-stop switch | 50 000 | Cycles of operation |
| Keylock switch maintained action | 25 000 | Cycles of operation |
| Keylock switch momentary action | 50 000 | Cycles of operation |

### Electrical characteristics

**Standards**
The switches comply with the "Standards for low-voltage switching devices" EN IEC 60947-5-1

**Rated Insulation Voltage $U_i$**
500 VAC / 600 VDC, as per EN IEC 60947-5-1

**Contact resistance**
New state ≤50 mΩ as per DIN IEC 60512-2-4

**Isolation resistance**
≥10 MΩ between open contacts at 500 VDC, as per DIN IEC 60512-2-10

**Electrical life**
50 000 cycles of operations

**Conventional free air thermal current $I_{th}$**
10 A, as per EN IEC 60947-5-1
the maximum current in continuous operation and at ambient temperature must not exceed the quoted maximum values.

**Switch rating**
At switch rating AC for gold-silver, silver-palladium and hardsilver contacts, service category AC-15, as per EN IEC 60947-5-1 (cosϕ 0.3)

| | | | |
|---|---|---|---|
| Voltage | 230 VAC | 400 VAC | 500 VAC |
| Current | 7 A | 5 A | 4 A |

At switch rating DC for gold-silver and hardsilver contacts, service category DC-13, as per EN IEC 60947-5-1

| | | | | |
|---|---|---|---|---|
| Voltage | 24 VDC | 60 VDC | 110 VDC | 250 VDC |
| Current | 10 A | 5 A | 2.5 A | 0.6 A |

**Recommended minimum operational data**
Gold-silver contacts:

| | | |
|---|---|---|
| Voltage | 24 VDC | 110 VDC |
| Current | 10 mA | 2 mA |

Hardsilver contacts:

| | | |
|---|---|---|
| Voltage | 24 VDC | 110 VDC |
| Current | 50 mA | 10 mA |

**Protection class**
Indicators and switches, fit for mounting into devices with protection class II

### Environmental conditions

**Storage temperature**
-40 °C ... +85 °C

**Operating temperature**
-40 °C ... +55 °C

**Protection degree**
IP 20

**Shock resistance**
(single impacts, semi-sinusoidal)
300 m/s²puls width 11 ms, as per EN IEC 60068-2-27

**Vibration resistance**
(sinusoidal)
100 m/s² at 10 Hz ... 500 Hz, amplitude 0,75 mm, as per EN IEC 60068-2-6

### Approvals

**Approbations**
CB (IEC 60947)
CCC
CSA
Germanischer Lloyd
GOST
NFF 16-102

SEV
UL

**Declaration of conformity**
CE

## Snap-action switching element PIT

### Switching system

The double-break, snap-action switching element is equipped with one or two independent contact systems, acting as normally open or normally closed contact. The snap-action switching element is fitted with self-cleaning contacts.
Up to three switching elements can be snapped to each actuator. Snap-action switching elements are not permissible for emergency-stop pushbuttons!

### Material

**Material of contact**
Hardsilver and gold-silver

**Switch housing**
Polycarbonate (PC)

### Mechanical characteristics

**Terminals**
PIT Spring terminal
Skinning 8 mm
Wire cross-section:
Wire 0.2 to 1.0 mm²Stranded wire 0.2 to 1.0 mm² without core and sleeve
Stranded wire 0.2 to 0.75 mm² with core and sleeve

**Tightening torque**
Screws at the mounting flange max. 25 Ncm

**Actuating force**
1 Normally closed 1.9 N
1 Normally open 2 N

**Actuating travel**
5.8 mm ± 0.2 mm

**Rebound time**
≤3 ms

**Mechanical lifetime**
(with 1 switching element)

| | | |
|---|---|---|
| Pushbutton maintained action | 1.5 million | Cycles of operation |
| Pushbutton momentary action | 3 million | Cycles of operation |
| Selector switch maintained action | 1.25 million | Cycles of operation |
| Selector switch momentary action | 2.5 million | Cycles of operation |
| Emergency-stop switch | 50 000 | Cycles of operation |
| Keylock switch maintained action | 25 000 | Cycles of operation |
| Keylock switch momentary action | 50 000 | Cycles of operation |

### Electrical characteristics

**Standards**
The switches comply with EN IEC 60947-1 / EN IEC 60947-5-1

**Rated Insulation Voltage $U_i$**
500 VAC / 600 VDC, as per EN IEC 60947-5-1

**Contact resistance**
New state ≤50 mΩ as per DIN IEC 60512-2-4

**Isolation resistance**
≥10 MΩ between open contacts at 500 VDC, as per DIN IEC 60512-2-10

**Electrical life**
50 000 cycles of operations

**Conventional free air thermal current $I_{th}$**
6 A, as per EN IEC 60947-5-1
the maximum current in continuous operation and at ambient temperature must not exceed the quoted maximum values.

**Switch rating**
At switch rating AC for gold-silver and hardsilver contacts, service category AC-15, as per EN IEC 60947-5-1 (cosϕ 0.3)

| | |
|---|---|
| Voltage | 250 VAC |
| Current | 6 A |

At switch rating DC for gold-silver and hardsilver contacts, service category DC-13, as per EN IEC 60947-5-1

| | | |
|---|---|---|
| Voltage | 24 VDC | 110 VDC |
| Current | 6 A | 1.0 A |

**Recommended minimum operational data**
Gold-silver contacts:

| | |
|---|---|
| Voltage | 24 VDC |
| Current | 5 mA |

Hardsilver contacts:

| | |
|---|---|
| Voltage | 24 VDC |
| Current | 50 mA |

**Protection class**
Indicators and switches, fit for mounting into devices with protection class II

### Environmental conditions

**Storage temperature**
-40 °C ... +85 °C

**Operating temperature**
-40 °C ... +55 °C

**Protection degree**
IP 20

**Shock resistance**
(single impacts, semi-sinusoidal)
300 m/s²puls width 11 ms, as per EN IEC 60068-2-27

**Vibration resistance**
(sinusoidal)
100 m/s² at 10 Hz ... 500 Hz, as per EN IEC 60068-2-6 and EN 61373 Increased broad band noise, class 1B

### Approvals

**Approbations**
CB (IEC 60947)
CCC
CSA
Germanischer Lloyd
GOST
NFF 16-102

**Declaration of conformity**
CE

## Slow-make switching element PIT

### Switching system

The double-break, slow-make switching element is equipped with one or two independent contact systems, acting as normally open or normally closed contact. The normally closed contact has forced opening.
Slow-make contacts with forced action are ideal for high switch ratings.
Up to three switching elements can be snapped to each actuator.
For the emergency-stop pushbutton use the slow-make switching element (max. 2).

### Material

**Material of contact**
Hardsilver and gold-silver

**Switch housing**
Polycarbonate (PC)

### Mechanical characteristics

**Terminals**
PIT Spring terminal
Skinning 8 mm
Wire cross-section:
Wire 0.2 to 1.0 mm²Stranded wire 0.2 to 1.0 mm² without core and sleeve
Stranded wire 0.2 to 0.75 mm² with core and sleeve

**Tightening torque**
Screws at the mounting flange max. 25 Ncm

**Actuating force**
1 Normally closed 2 N
1 Normally open 3.1 N

**Actuating travel**
5.8 mm ± 0.2 mm

**Rebound time**
≤1 ms

**Mechanical lifetime**
(with 1 switching element)

| | | |
|---|---|---|
| Pushbutton maintained action | 1.5 million | Cycles of operation |
| Pushbutton momentary action | 3 million | Cycles of operation |
| Selector switch maintained action | 1.25 million | Cycles of operation |
| Selector switch momentary action | 2.5 million | Cycles of operation |
| Emergency-stop switch | 50 000 | Cycles of operation |
| Keylock switch maintained action | 25 000 | Cycles of operation |
| Keylock switch momentary action | 50 000 | Cycles of operation |

### Electrical characteristics

**Standards**
The switches comply with EN IEC 60947-1 / EN IEC 60947-5-1

**Rated Insulation Voltage $U_i$**
500 VAC / 600 VDC, as per EN IEC 60947-5-1

**Contact resistance**
New state ≤50 mΩ as per DIN IEC 60512-2-4

**Isolation resistance**
≥10 MΩ between open contacts at 500 VDC, as per DIN IEC 60512-2-10

**Electrical life**
50 000 cycles of operations

**Conventional free air thermal current $I_{th}$**
6 A, as per EN IEC 60947-5-1
the maximum current in continuous operation and at ambient temperature must not exceed the quoted maximum values.

**Switch rating**
At switch rating AC for gold-silver and hardsilver contacts, service category AC-15, as per EN IEC 60947-5-1 (cosϕ 0.3)

| | |
|---|---|
| Voltage | 250 VAC |
| Current | 6 A |

At switch rating DC for gold-silver and hardsilver contacts, service category DC-13, as per EN IEC 60947-5-1

| | | |
|---|---|---|
| Voltage | 24 VDC | 110 VDC |
| Current | 6 A | 1.0 A |

**Recommended minimum operational data**
Gold-silver contacts:

| | |
|---|---|
| Voltage | 24 VDC |
| Current | 5 mA |

Hardsilver contacts:

| | |
|---|---|
| Voltage | 24 VDC |
| Current | 50 mA |

**Protection class**
Indicators and switches, fit for mounting into devices with protection class II

### Approvals

**Approbations**
CB (IEC 60947)
CCC
CSA
Germanischer Lloyd
GOST
NFF 16-102

**Declaration of conformity**
CE

## Lamp block PIT

### Material

**Housing**
Polycarbonate (PC)

### Mechanical characteristics

**Terminals**
PIT Spring terminal
Skinning 8 mm
Wire cross-section:
Wire 0.2 to 1.0 mm²Stranded wire 0.2 to 1.0 mm² without core and sleeve
Stranded wire 0.2 to 0.75 mm² with core and sleeve

### Electrical characteristics

**Standards**
The switches comply with EN IEC 60947-1 / EN IEC 60947-5-1

**Illumination**
Voltage 250 V max.
Power 2.6 W max.
BA9s standard adaptable.

### Environmental conditions

**Storage temperature**
-40 °C ... +85 °C

**Operating temperature**
-40 °C ... +55 °C

**Protection degree**
IP 20

**Shock resistance**
(single impacts, semi-sinusoidal)
300 m/s²puls width 11 ms, as per EN IEC 60068-2-27

**Vibration resistance**
(sinusoidal)
100 m/s² at 10 Hz ... 500 Hz, as per EN IEC 60068-2-6 and EN 61373 Increased broad band noise, class 1B

## Buzzer

### Buzzer system

**System**
Piezo disc

### Material

**Alarm buzzer case**
Polyamide

**Front cap**
Plastic Polyamide
Metal Nickel-plated brass (sea-water proof)

### Mechanical characteristics

**Terminals**
Plug-in terminal 2.8 x 0.5 mm

### Electrical characteristics

**Frequency (tone)**
approx. 2.8 kHz continuous tone only

**Sound pressure**
95 db (A) ±8 dB at a distance of 0.1 m

**Operation Voltage/Current**

| | |
|---|---|
| Operation Voltage | 24 VDC ±10 % |
| Operation Current | ≤25 mA |

### Environmental conditions

**Storage temperature**
-40 °C ... +85 °C

**Operating temperature**
-25 °C ... +55 °C

**Protection degree**
as per EN IEC 60529, frontside
IP 40, devices flush mounting
IP 65, devices raised mounting

### Approvals

**Declaration of conformity**
CE

## Actuator

### Material

**Front ring**
Polyamide, Aluminium or Stainless steel

**Mounting flange**
Polyethylene terephtalate

**Actuator housing**
Polycarbonate, Polyamide

### Mechanical characteristics

**Actuating force**
Mounting style square flush 6.2 N
other Mounting styles 8 N

**Actuating travel**
5.8 mm ± 0.2 mm

**Mechanical lifetime**
(with 1 switching element)

| | | |
|---|---|---|
| Pushbutton | ≤3 million | Cycles of operation |
| Selector switch | ≤2.5 million | Cycles of operation |
| Stop switch | ≤50 000 | Cycles of operation |
| Fool proofed E-stop | ≥6050 | Cycles of operation |
| Keylock switch | ≤50 000 | Cycles of operation |
| Key insert switches | ≤250 000 | Cycles of operation |

### Electrical characteristics

**Standards**
The switches comply with the "Rules for low-voltage switching devices" EN IEC 60947-5-1

### Environmental conditions

**Storage temperature**
-40 °C ... +85 °C

**Operating temperature**
-25 °C ... +55 °C
-40 °C ... +55 °C (Key insert switch)

**Protection degree**
as per EN IEC 60529
frontside IP 65 (IP 67 Key insert switch)

## Rotary selector switch element

### Mechanical characteristics

**Terminals**
Screw terminals
Terminal lead material copper wires only
max. permissible wire gage :
Single-core or stranded wire 2 x 1.5 mm² (2 x AWG 14)
flexible wire 2 x 1,5 mm² (2 x AWG 16)

**Number of stages**
1 to 8 positions max.

**Number of contacts**
1 to 16 max. normally open contacts
(contact positioning according circuit drawing)

**Switching angle**
Basic position of switching position "a" is 9 o'clock

| Maintained action | Switching angle |
|---|---|
| 12 max. | 30 ° |
| 8 max. | 45 ° |
| 6 max. | 60 ° |
| 4 max. | 90 ° |

Momentary action with release 24 °
(provide at the beginning or at the end )

**Standard type of Kraus & Naimer**
CG4 Hard Silver contacts with 1 µm Gold layer
CG4-1 Hard Silver contacts with 35 µm Gold layer

## Electrical characteristics

**Minimum Voltage**
20 V

**Rated Impulse Withstand Voltage $U_{imp}$**
4 kV

**Short Circuit Protection**
Max. fuse size (gL- characteristic) 10 A
Rated short-time withstand current (1s-current) 90 A

## Electrical characteristics for AC

**Standards**
The devices comply with : EN IEC 60947-3, VDE 0660 part 107

**Rated Operational Voltage $U_e$**
440 V

**Rated Insulation Voltage $U_i$**
440 V

**Rated Thermal Current $I_u/I_{th}$**
10 A

**Rated Operational Current $I_e$**
AC-15 Switching of control devices, contactors, valves etc.

| | | |
|---|---|---|
| 110 V - 120 V | 2.5 A |
| 220 V - 240 V | 2.5 A |
| 380 V - 440 V | 1.5 A |

No load operation
10 A

AC-21A Switching of resistive loads, including moderate overloads
For switchin of power >1 kW
10 A

AC-22A Switching of combined resistive or low inductive loads including moderate overloads

| | |
|---|---|
| 220 V - 240 V | 10 A |

**Rated Utilization Category**
AC-2 Slip ring motor starting, reversing and plugging, star-delta starting 3 phase, 3 pole

| | | |
|---|---|---|
| 220 V - 240 V | 2.5 kW |
| 380 V - 440 V | 4.5 kW |

AC-3 Direct-on-line starting, star-delta starting

| | | |
|---|---|---|
| 3 phase, 3 pole | 220 V - 240 V | 2.5 kW |
| | 380 V - 440 V | 2.2 kW |
| 1 phase, 2 pole | 110 V - 120 V | 0.3 kW |
| | 220 V - 240 V | 0.55 kW |
| | 380 V - 440 V | 0.75 kW |

AC-Direct-on-line starting, reversing, plugging and inching

| | | |
|---|---|---|
| 3 phase, 3 pole | 220 V - 240 V | 0.37 kW |
| | 380 V - 440 V | 0.55 kW |
| 1 phase, 2 pole | 110 V - 120 V | 0.15 kW |
| | 220 V - 240 V | 0.25 kW |
| | 380 V - 440 V | 0.5 kW |

AC-23A Frequent switching of motors or other high inductive loads

| | | |
|---|---|---|
| 3 phase, 3 pole | 220 V - 240 V | 1.8 kW |
| | 380 V - 440 V | 3 kW |
| 1 phase, 2 pole | 110 V - 120 V | 0.37 kW |
| | 220 V - 240 V | 0.75 kW |
| | 380 V - 440 V | 1.1 kW |

**Overvoltage category**
III, valid for lines with grounded common neutral termination

**Degree of pollution**
3, valid for lines with grounded common neutral termination

## Electrical characteristics for AC (UL/Canada)

**Rated operational voltage**
300 V

**Rated Insulation Voltage $U_i$**
300 V

**Rated Thermal Current**
10 A

**Ampere Rating**
Resisitve or low inductive loads, for switching of power >1 kW, 10 A

**Ratings**
Standard motor load, DOL Rating (similar AC-3)

| | | |
|---|---|---|
| 3 phase, 3 pole | 110 V - 120 V | 0.75 HP |
| | 220 V - 240 V | 1 HP |
| 1 phase, 2 pole | 110 V - 120 V | 0.33 HP |
| | 220 V - 240 V | 0.75 HP |
| | 277 V - 277 V | 0.75 HP |

**Pilot Duty, Heavy**
300 VAC

## Electrical characteristics for DC

**Switch Rating DC**
Resistive loads T ≤1 ms

| Number of series contact(s) | | | | | | | Switch |
|---|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 8 | Capacity |
| 24 V | 48 V | 70 V | 95 V | 120 V | 145 V | 190 V | 10 A |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 48 V | 95 V | 140 V | 190 V | 240 V | 290 V | 350 V | 6 A |
| 60 V | 120 V | 180 V | 240 V | 300 V | 360 V | 450 V | 2.5 A |
| 110 V | 220 V | 330 V | 440 V | 550 V | 660 V | | 0.7 A |
| 220 V | 440 V | 660 V | | | | | 0.3 A |
| 440 V | 660 V | | | | | | 0.2 A |

Inductive loads T = 50 ms

| Number of series contact(s) | | | | | | | Switch |
|---|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 8 | Capacity |
| 24 V | 48 V | 70 V | 95 V | 120 V | 145 V | 190 V | 6 A |
| 30 V | 60 V | 90 V | 120 V | 150 V | 180 V | 240 V | 3 A |
| 48 V | 95 V | 140 V | 190 V | 240 V | 290 V | 350 V | 1 A |
| 60 V | 120 V | 180 V | 240 V | 300 V | 360 V | 450 V | 0.7 A |
| 110 V | 220 V | 330 V | 440 V | 550 V | 660 V | | 0.3 A |

## Environmental conditions

**Operating temperature**
Ambient Temperatures of Stages

| | |
|---|---|
| open at 100 % $I_u/I_{th}$ | 55 °C during 24 h with peaks up to 60 °C |
| enclosed at 100 % $I_{the}$ | 35 °C during 24 h with peaks up to 40 °C |

## Flasher element

Do not connect terminal c and f simultaneously when powered up.



## Suppressor circuits

When switching inductive loads such as relays, DC motors, and DC solenoids, it is always important to absorb surges (e.g. with a diode) to protect the contacts. When these inductive loads are switched off, a counter emf can severely damage switch contacts and greatly shorten lifetime.

Fig. 1 shows an inductive load with a free-wheeling diode connected in parallel. This free-wheeling diode provides a path for the inductor current to flow when the current is interrupted by the switch. Without this free-wheeling diode, the voltage across the coil will be limited only by dielectric breakdown voltages of the circuit or parasitic elements of the coil. This voltage can be kilovolts in amplitude even when nominal circuit voltages are low (e.g. 12 VDC) see Fig. 2.

The free-wheeling diode should be chosen so that the reverse breakdown voltage is greater than the voltage driving the inductive load. The DC blocking voltage (VR) of the free-wheeling diode can be found in the datasheet of a diode. The forward current should be equal or greater than the maximum current flowing through the load.

**To get an efficient protection, the free-wheeling diode must be connected as close as possible to the inductive load!**

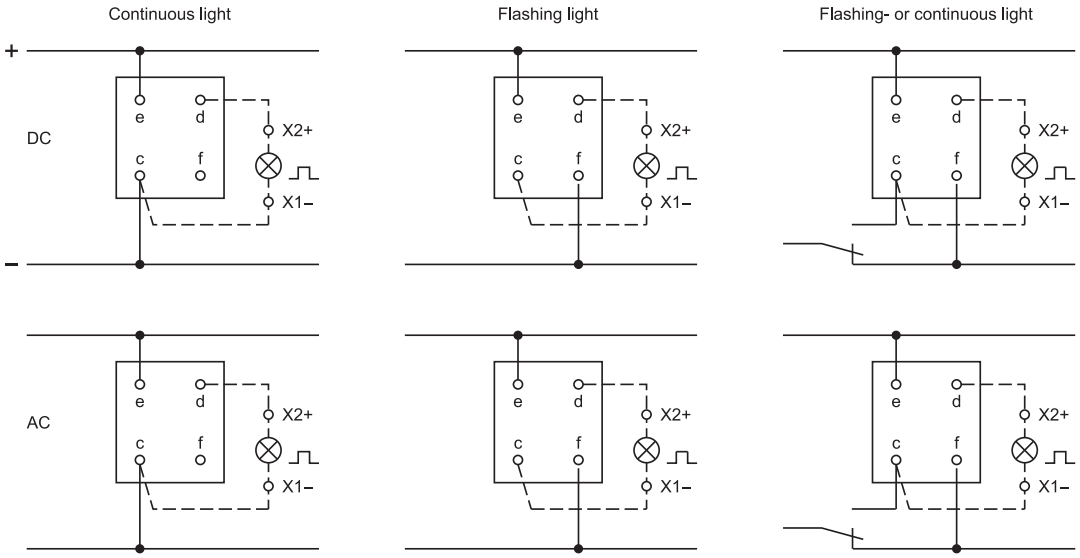Switching with inductive load
Fig. 1




Counter emf
over load without free-wheeling diode
Fig. 2



## General notes

**1. Engraving**
In addition to the most commonly used world languages, in DIN 1451-3 close spacing, other typefaces are available as Scandinavian, Slavic, Greek, Russian and Polish.
The lenses are filled with black or white colour.
Standard height of letters is 3 mm. If the height is not specified, we will supply 3 mm engraved letters.

**2. Hot stamping**
Standard legends and ISO symbols are hot stamped. For larger series it is worth considering markings by means of hot stamping. We will pleased to advise you.

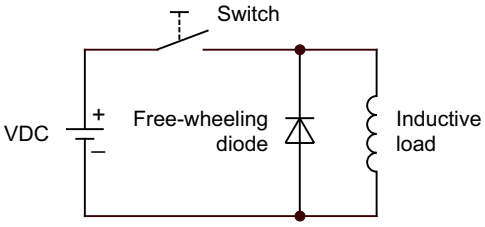**3. Film inserts**
Instead of using engraving the square lenses can be fitted with film inserts, as an alternative.
Film thickness is 0.25 mm.
Max. film size :
for Indicator 24.5 mm x 24.5 mm
for illuminated Pushbutton 21.5 x 21.5 mm.

## Engraving marking cap for Indicator round, full face illumination

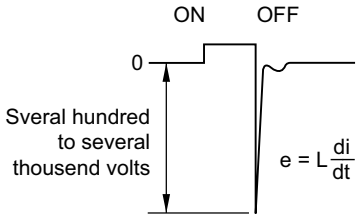All dimensions in mm

| Height of letters | Number of lines | Number of (target value) letters per line | | | Line spacing |
|---|---|---|---|---|---|
| h | | b1 | b2 | b3 | d |
| 3 | 3 | 11 | 10 | 9 | 4.6 |
| 4 | 2 | 8 | 7 | - | 6.6 |
| 8 | 1 | 4 | - | - | - |




The gap between 2 words results in each case a letter less.

## Engraving marking cap for Indicator and illuminated Pushbutton round, front illumination

All dimensions in mm

| Height of letters | Number of lines | Number of (target value) letters per line | | | Line spacing |
|---|---|---|---|---|---|
| h | | b1 | b2 | b3 | d |
| 3 | 3 | 9 | 9 | 7 | 4.6 |
| 4 | 2 | 7 | 6 | - | 6.6 |
| 8 | 1 | 3 | - | - | - |

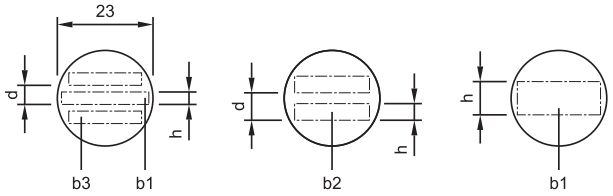


The gap between 2 words results in each case a letter less.

## Engraving diffusor cap for Indicator square, full face illumination

All dimensions in mm

| Height of letters h | Number of lines | Number of (target value) capital letters per line | Number of (target value) small letters per line |
|---|---|---|---|
| 2.5 | 6 | 13 | 14 |
| 3.0 | 5 | 11 | 12 |
| 4.0 | 4 | 8 | 8 - 9 |
| 5.0 | 3 | 6 - 7 | 7 |
| 6.0 | 2 | 5 - 6 | 6 |
| 8.0 | 1 | 4 | 4 - 5 |

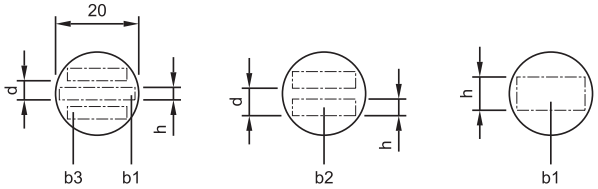


The gap between 2 words results in each case a letter less.

## Engraving lens holder for Indicator and Illuminate Pushbutton square, front illumination

All dimensions in mm

| Height of letters h | Number of lines | Number of (target value) capital letters per line | Number of (target value) small letters per line |
|---|---|---|---|
| 2.5 | 5 | 9 | 9 - 10 |
| 3.0 | 4 | 7 - 8 | 8 |
| 4.0 | 3 | 5 - 6 | 6 |
| 5.0 | 2 | 4 - 5 | 4 - 5 |
| 6.0 | 2 | 3 - 4 | 4 |
| 8.0 | 1 | 2 - 3 | 3 |




The gap between 2 words results in each case a letter less.

Important : Consider lens holder mounting orientation before specifying engraving charachters !

## Engraving legend plates

All dimensions in mm

| Dimension | Devices mounting style | Height of letters h | Number of lines | Number of (target value) letters per line | Image |
|---|---|---|---|---|---|
| 30 x 50 | round, raised | 3 | 2 | 12 | B1 |
| | | 4 | 1 | 7 | B1 |
| | | 8 | 1 | 4 | B1 |
| 35 x 57.5 | round, flush | 3 | 2 | 12 | B2 |
| | | 4 | 1 | 7 | B2 |
| | | 8 | 1 | 4 | B2 |
| 18 x 35 | square, flush | 3 | 3 | 16 | B3 |
| | | 4 | 2 | 10 | B3 |
| | | 8 | 1 | 6 | B3 |

B1 B2 B3




The gap between 2 words results in each case a letter less.

## Standard texts for marking plates and marking caps for Indicator and Illuminated Pushbutton

Height of letters 6 mm



## Symbols for marking plates and marking caps for Indicator and Illuminated Pushbutton
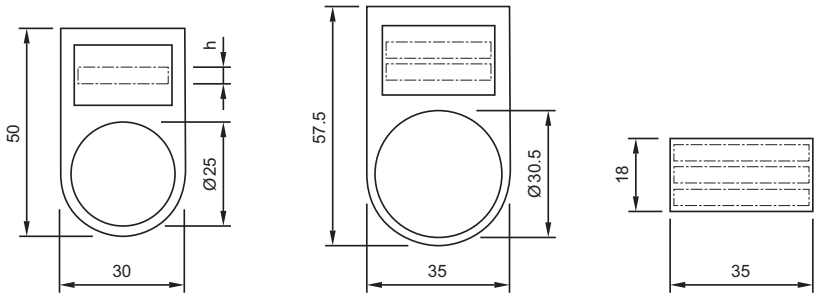
| | | | | | | | |
|---|---|---|---|---|---|---|---|
| | 1 Direction of linear rectilinear motion (also for ⟶ ↓↑) | | 13 Direction of spindle rotation | | 29 Decrease of value (speed, for instance) | | 49 Cooling pump |
| | 2 Linear motion in in 2 directions (also for ↕) | | 14 One revolution | | 30 Speed of planing cut | | 50 Lubricant pump |
| | 3 Interrupted linear motion (also for ← ← ↓↑ ↑↓) | | 15 Number of revolutions per minute (spindle speed) | | 31 Speed of turning cut | | 51 Hydraulic system pump |
| | 4 Limited linear motion (also for ← ↑↓ ) | | 16 Feed | | 32 Speed of drilling cut | | 52 Hydraulic motor |
| | 5 Limited linear motion and return | | 17 Feed per revolution | | 33 Speed of milling cut (similar symbol fpr speed of grinding) | | 53 Tracer |
| | 6 Oscillating linear motion (continuous) | | 18 Feed per minute | | 34 Conventional milling | | 61 Stepless regulation |
| | 7 Direction of continuous rotation (right) | | 19 Reduced feed | | 35 Climb milling (down milling) | | 62 Adjustable |
| | 7a Direction of continuous rotation (left) | | 20 Rapid feed |  | 41 Electric motor |  | 63.1 Lock or tighten |
| | 8 Rotation in 2 directions | | 21 Normal feed |  | 42 Rectangular work table or slide element | | 63.2 Lock or tighten |
| | 9 Direction of interrupted rotation (right) | | 22 Direction of feed (orientation not specified) |  | 43 Round work table or rotating element | | 64.1 Unlock, unclamp |
| | 9a Direction of interrupted rotation (left) | | 24 Transverse feed | | 44 Turning spindle | | 64.2 Chuck open |
| | 10 Limited rotation (right) | | 25 Vertical feed |  | 45 Drilling spindle | | 65 Brake on |
| | 10a Limited rotation (left) | | 26 Rapid traverse |  | 46 Milling spindle | | 66 Brake off |
| | 11 Limited rotation and return | | 27 Threading |  | 47 Grinding spindle | | 67 Automatic (or semi-automatic) cycle |
| | 12 Oscillating rotary movement (continuous) | | 28 Increase of value (speed, for instance) | | 48 Pump (general symbol) | | 68 Hand control |

Continuation see next page

Continued from previous page

69 Start, on

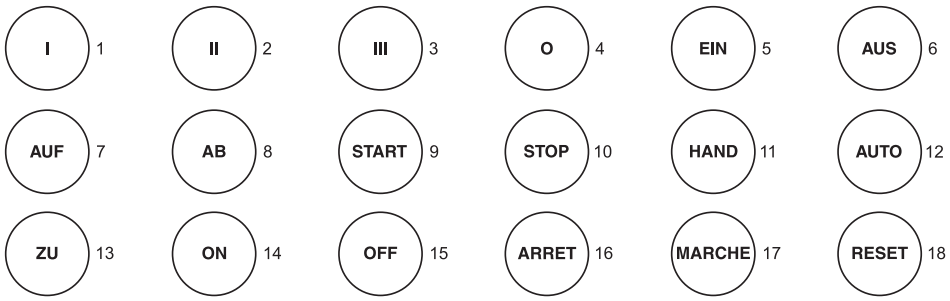70 Stop, off

71 Start and stop with same button

72 In action as long as button is operated

74 Engaging (mechanical start)

75 Disengaging (mechanical stop)

76 Close lock-nut

77 Open lock-nut

78 Engage sensor

79 Disengage sensor

80 Change speed only in stopped position

81 Change speed only in motion

91 Shear pin construction

92 Danger (high voltage)

93 Caution!

94 Main switch

101 Coolant fluid

102 Machine lighting

103 Weight

104 Filter opening

105 Overflow

106 Drain


107 Oil, lubricant

108 Blast


109 Suction

## Mounting dimensions

**1 Rotary selector switch actuator, short lever, flush mounting** page 44 **| Rotary selector switch actuator, long lever, flush mounting** page 44




**2 Emergency-stop pushbutton actuator, foolproof EN IEC 60947-5-5** page 21




**3 Indicator full-face illumination compact** page 12

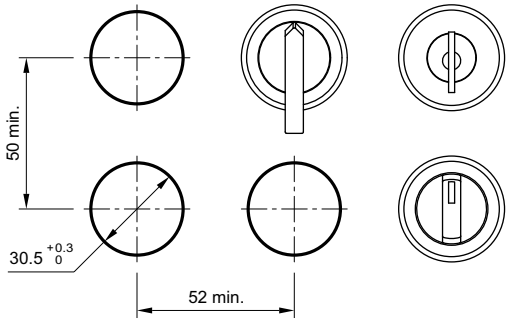


Hole spacing 31 mm min. by using blind plug 704.960.4

**4 Rotary selector switch actuator, short lever** page 31 **| Rotary selector switch actuator, long lever** page 31

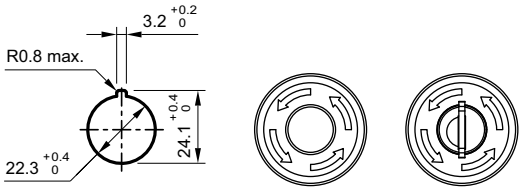

**5 Indicator full face illumination** page 13 **| Indicator front illumination** page 14 **| Flasher full face illumination** page 15 **| Flasher front illumination** page 16 **| Buzzer** page 17 **| Pushbutton actuator** page 18 **| Illuminated pushbutton actuator** page 20 **| Keylock switch actuator 2 positions** page 25 **| Keylock switch actuator 3 positions** page 26 **| Selector switch actuator 2 positions, short lever** page 27 **| Selector switch actuator 2 positions, short lever, 12 o'clock** page 27 **| Selector switch actuator 3 positions, short lever** page 29

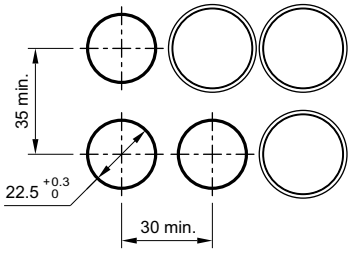


Hole spacing 31 mm min. by using blind plug 704.960.4

**6 Selector switch actuator 2 positions, long lever** page 28 **| Selector switch actuator 2 positions, long lever, 12 o'clock** page 28 **| Selector switch actuator 3 positions, long lever** page 30

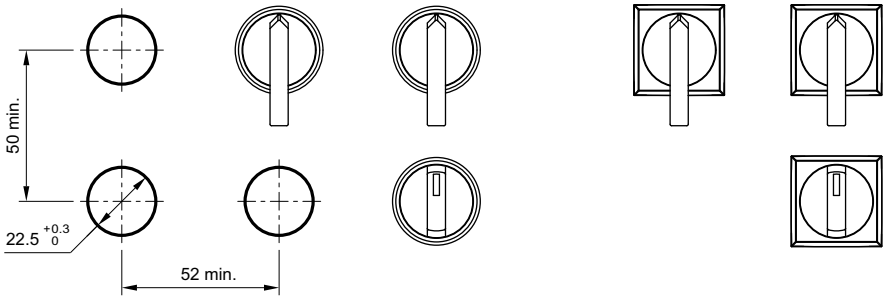


**7 Indicator, flush mounting** page 32 **| Flasher, flush mounting** page 33 **| Buzzer, flush mounting** page 33 **| Pushbutton actuator, flush mounting** page 34 **| Illuminated pushbutton actuator, flush mounting** page 36 **| Keylock switch actuator 2 positions, flush mounting** page 38 **| Keylock switch actuator 3 positions, flush mounting** page 39 **| Selector switch actuator 2 positions, short lever, flush mounting** page 40 **| Selector switch actuator 2 positions, short lever, 12 o'clock, flush mounting** page 40 **| Selector switch actuator 2 positions, long lever, flush mounting** page 41 **| Selector switch actuator 2 positions, long lever, 12 o'clock, flush mounting** page 41 **| Selector switch actuator 3 positions, short lever, flush mounting** page 42 **| Keylock rotary switch actuator, flush mounting** page 45 **| Front bezel set for Indicator and Pushbutton, flush mounting** page 68 **| Front bezel set for Indicator and Pushbutton, flush mounting** page 73

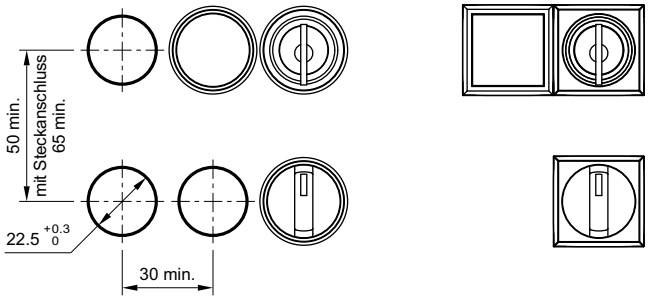


**8 Selector switch actuator 3 positions, long lever, flush mounting** page 43



**9 Stop pushbutton actuator** page 22 **| Mushroom-head pushbutton actuator** page 23 **| Mushroom-head pushbutton actuator illuminated** page 24

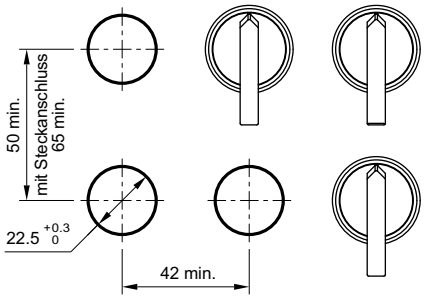


**10 Stop pusbutton actuator, flush mounting** page 37 **| Mushroom-head pushbutton actuator, flush mounting** page 37

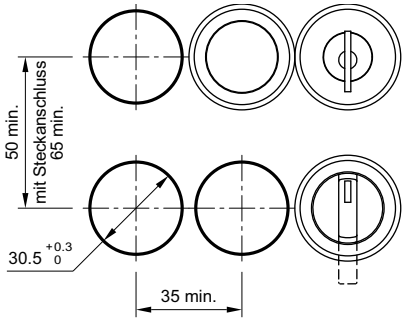


**11 Key insert switch actuator 2 positions, flush mounting** page 45 **| Key insert switch actuator 3 positions, flush mounting** page 46

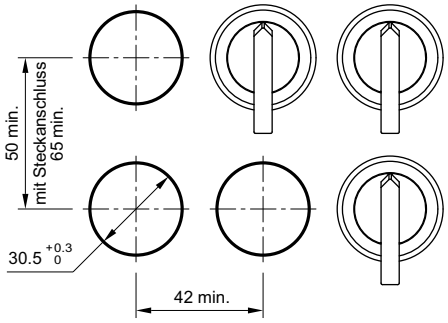


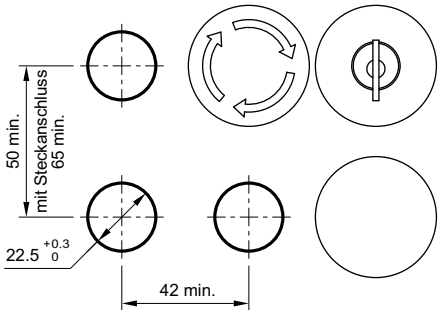**12 Indicator, flush mounting** page 32 **| Flasher, flush mounting** page 33 **| Pushbutton actuator, flush mounting** page 34 **| Illuminated pushbutton actuator, flush mounting** page 36 **| Keylock switch actuator 2 positions, flush mounting** page 38 **| Keylock switch actuator 3 positions, flush mounting** page 39 **| Selector switch actuator 2 positions, short lever, flush mounting** page 40 **| Selector switch actuator 2 positions, short lever, 12 o'clock, flush mounting** page 40 **| Selector switch actuator 3 positions, short lever, flush mounting** page 42



**13 Selector switch actuator 2 positions, long lever, flush mounting** page 41 **| Selector switch actuator 2 positions, long lever, 12 o'clock, flush mounting** page 41 **| Selector switch actuator 3 positions, long lever, flush mounting** page 43

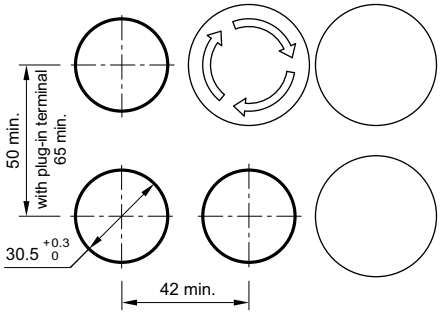


**14 Rotary selector switch actuator, short lever, flush mounting** page 44 **| Rotary selector switch actuator, long lever, flush mounting** page 44

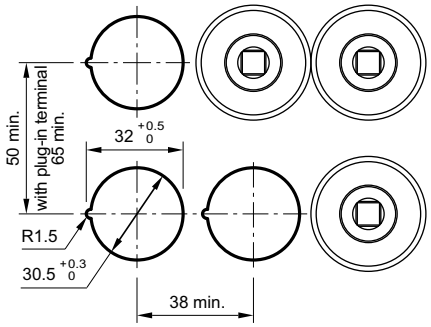


**15 Key insert switch actuator 3 positions Conductor Switch, flush mounting** page 46

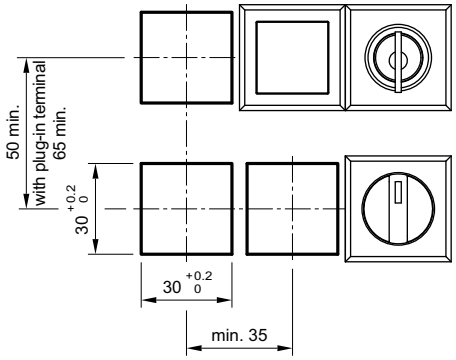

## Technical drawing

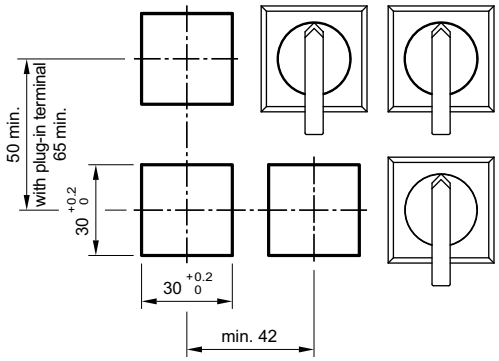**1 Key insert switch actuator 2 positions, flush mounting** page 45 **| Key insert switch actuator 3 positions, flush mounting** page 46

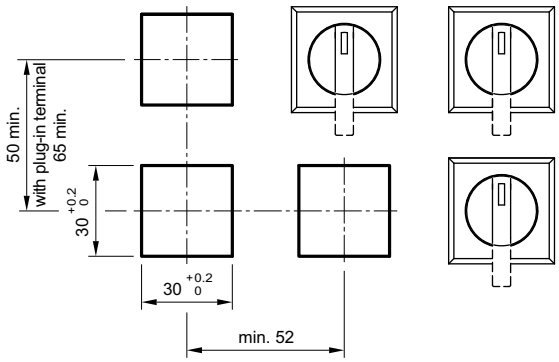


**2 Indicator full-face illumination compact** page 12

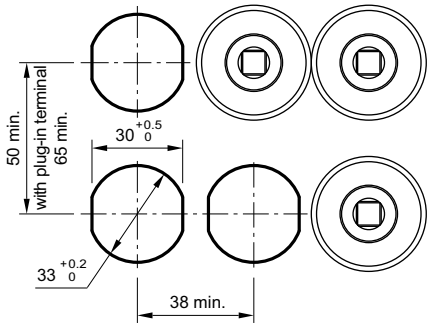


**3 Indicator full face illumination** page 13



**4 Pushbutton actuator** page 18

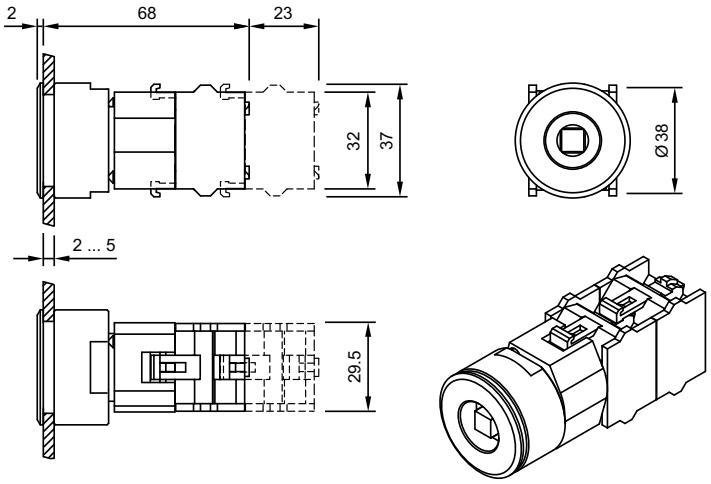


**5 Indicator front illumination** page 14

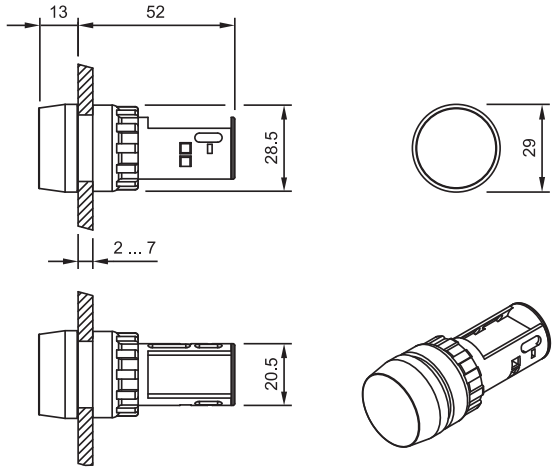


**6 Flasher full face illumination** page 15

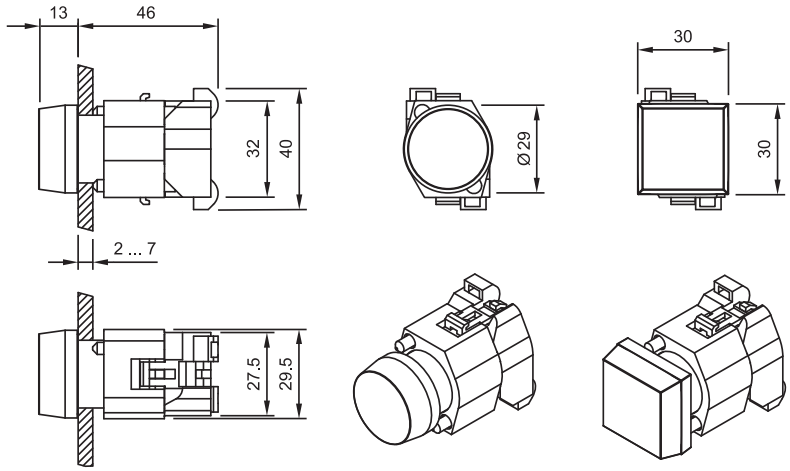

**7 Flasher front illumination** page 16

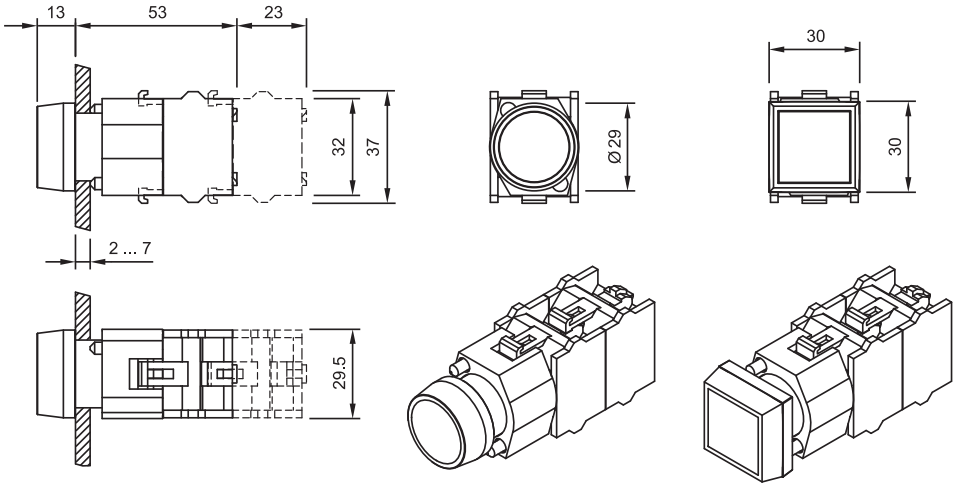


**8 Illuminated pushbutton actuator** page 20

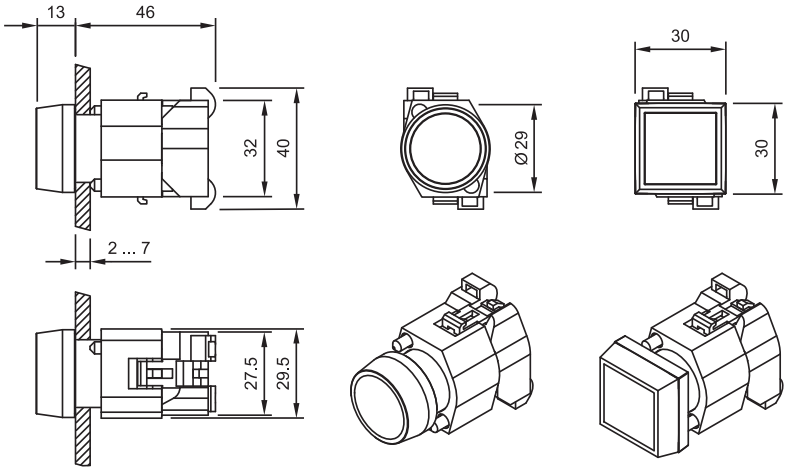


**9 Keylock switch actuator 2 positions** page 25 **| Keylock switch actuator 3 positions** page 26

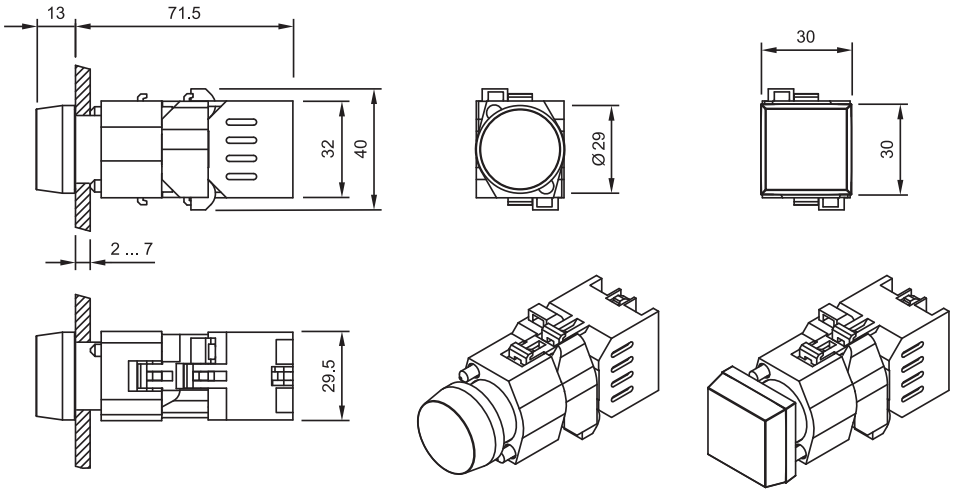

**10 Selector switch actuator 2 positions, long lever** page 28 **| Selector switch actuator 2 positions, long lever, 12 o'clock** page 28 **| Selector switch actuator 3 positions, long lever** page 30

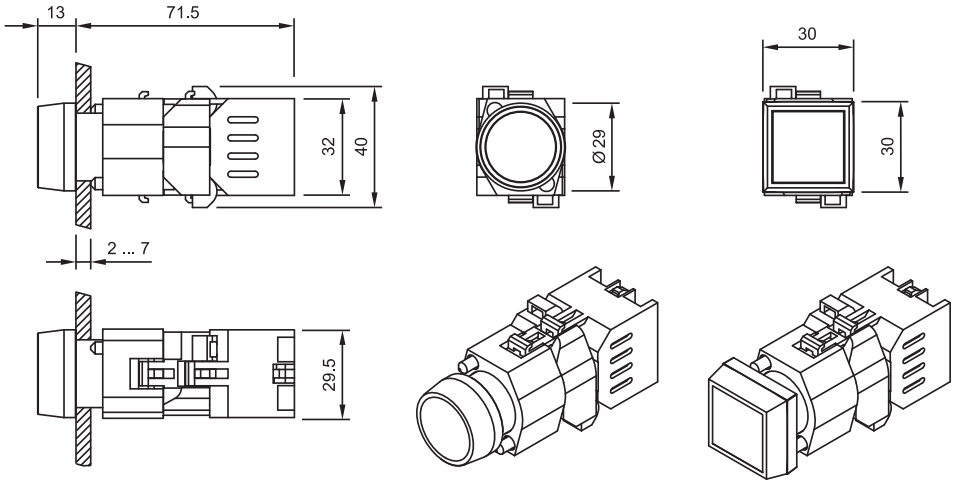


**11 Selector switch actuator 2 positions, short lever** page 27 **| Selector switch actuator 2 positions, short lever, 12 o'clock** page 27 **| Selector switch actuator 3 positions, short lever** page 29

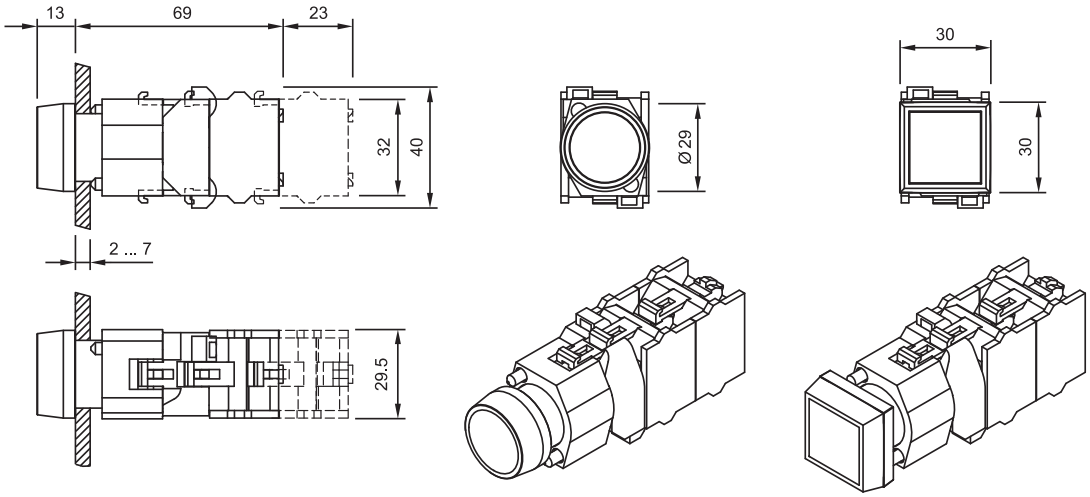


**12 Stop pushbutton actuator** page 22

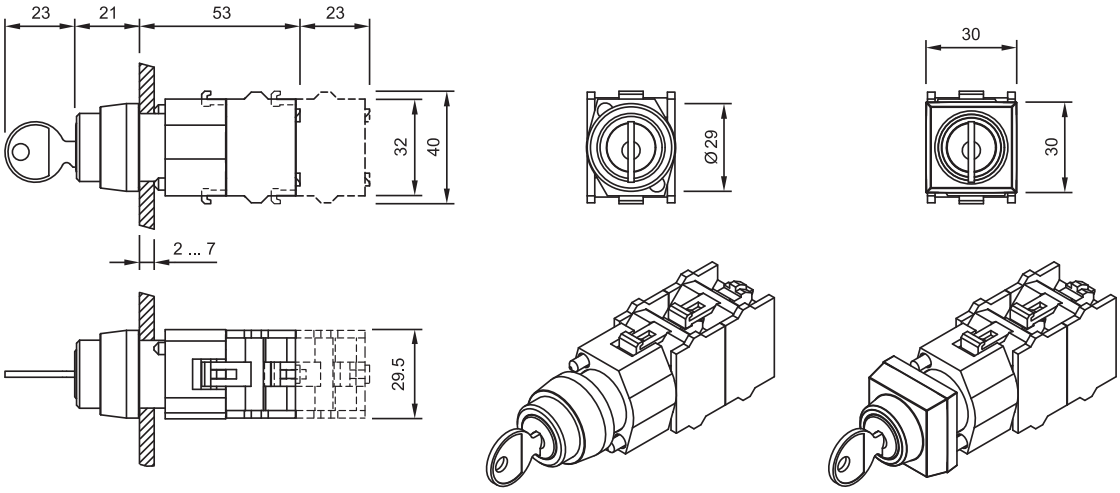

**13 Mushroom-head pushbutton actuator illuminated** page 24

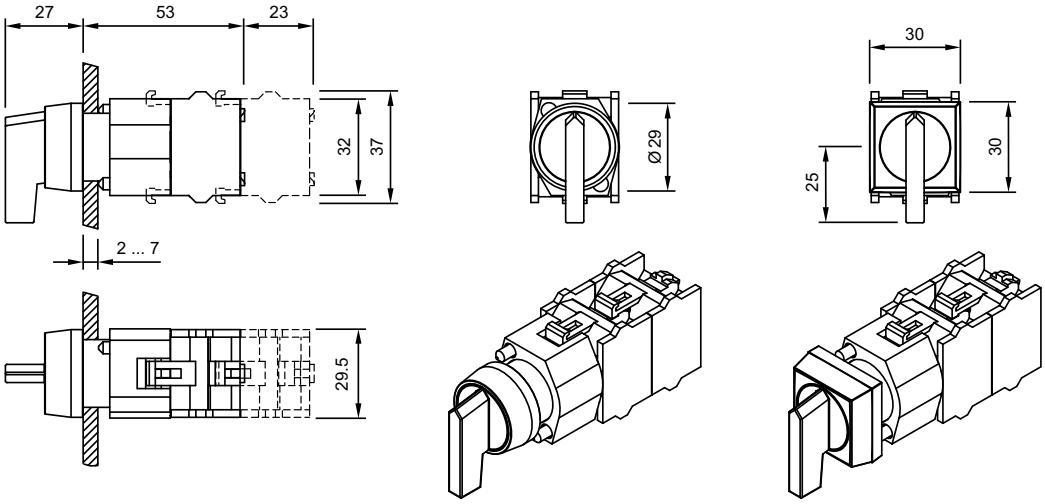


**14 Emergency-stop pushbutton actuator, foolproof EN IEC 60947-5-5** page 21

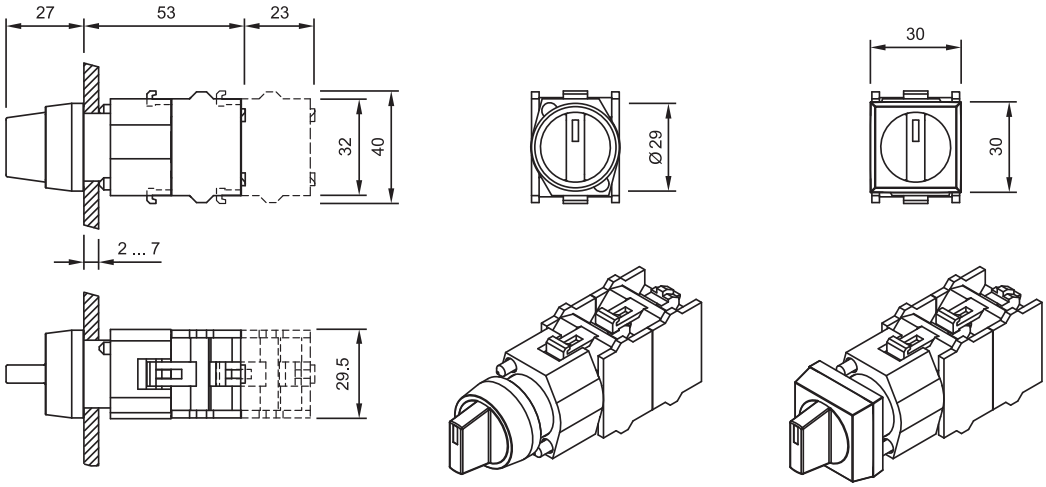


**15 Mushroom-head pushbutton actuator** page 23

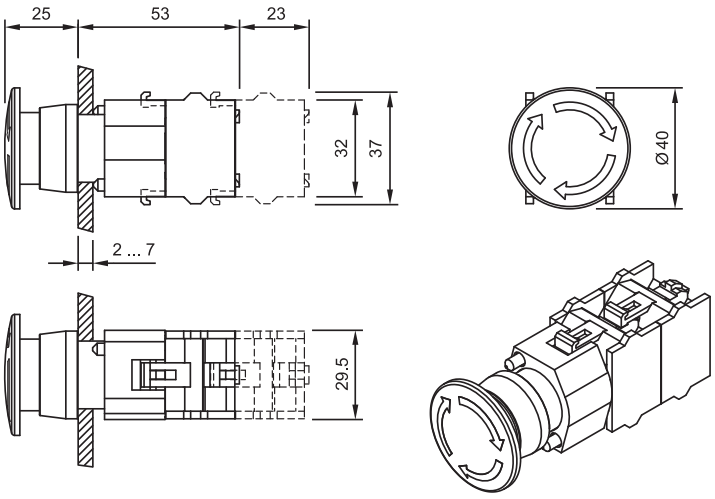

**16 Selector switch actuator 2 positions, long lever, flush mounting** page 41 **| Selector switch actuator 2 positions, long lever, 12 o'clock, flush mounting** page 41 **| Selector switch actuator 3 positions, long lever, flush mounting** page 43

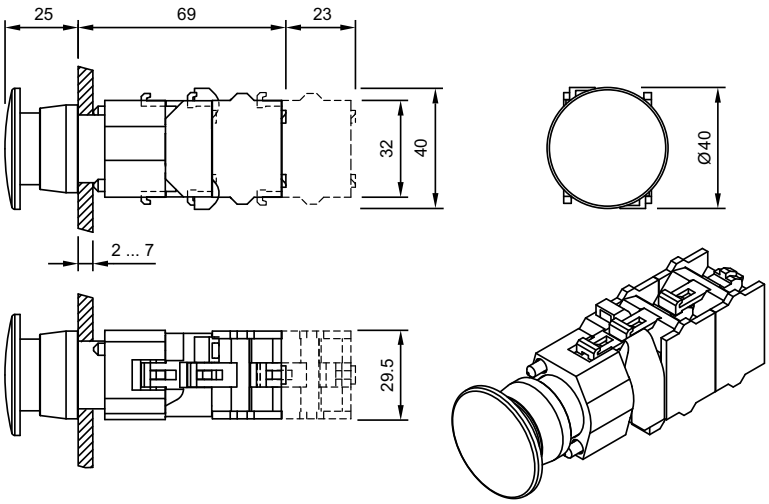


**17 Stop pushbutton actuator** page 22

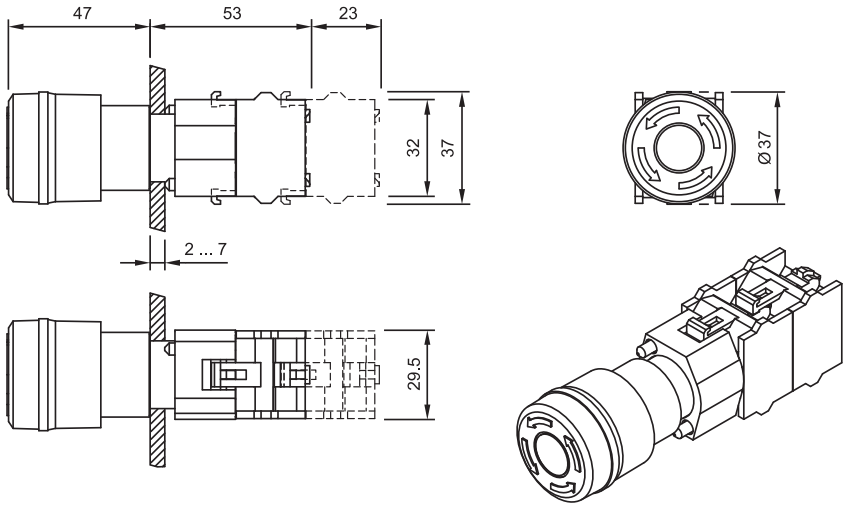


**18 Buzzer** page 17

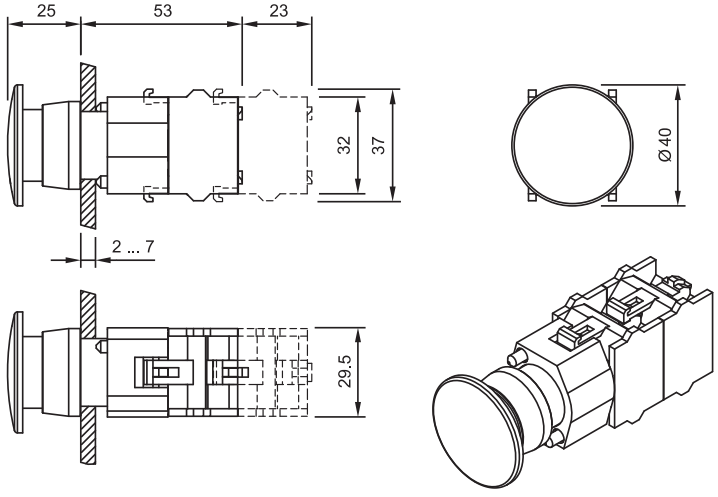

**19 Illuminated pushbutton actuator, flush mounting** page 36

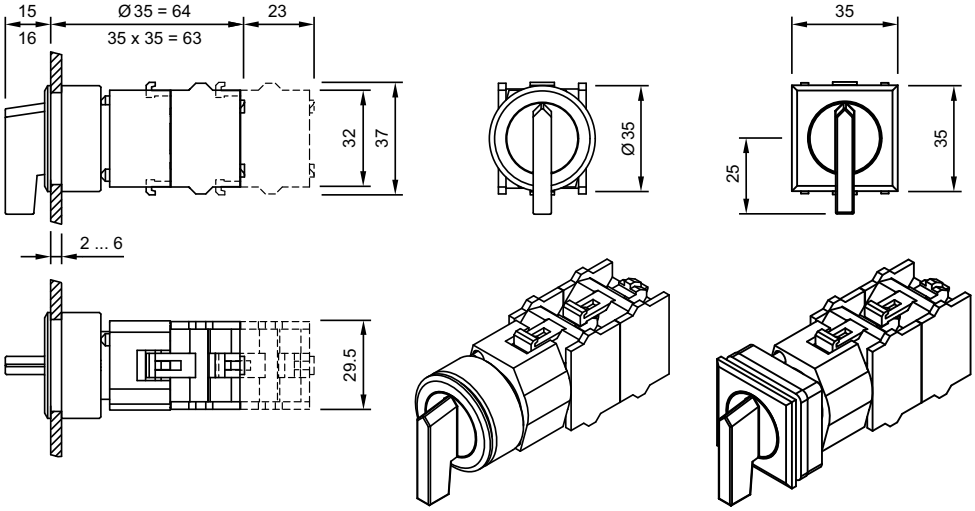


**20 Indicator, flush mounting** page 32

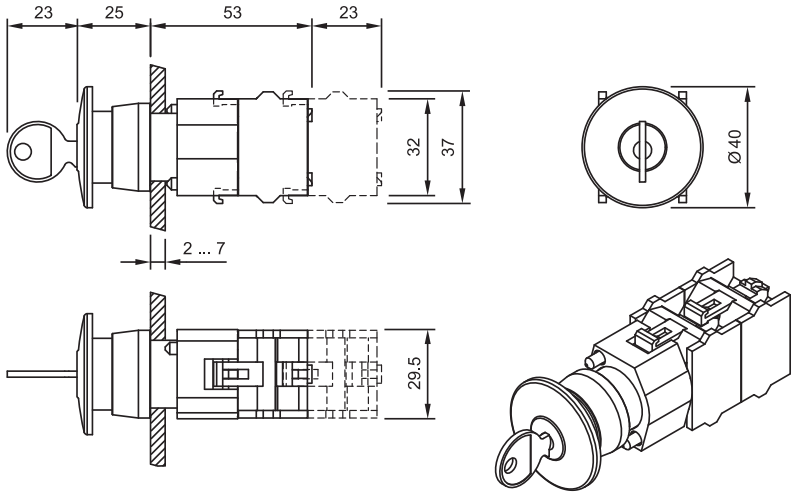


**21 Flasher, flush mounting** page 33

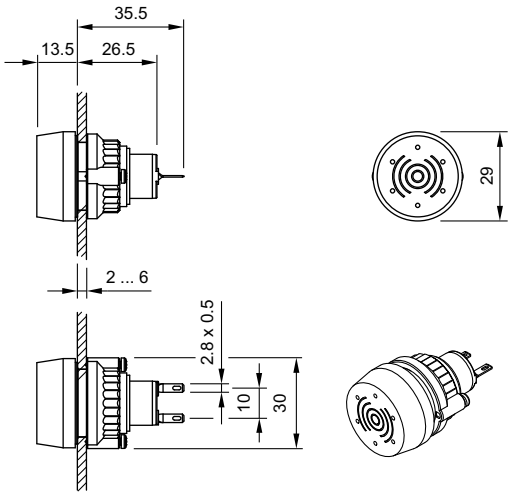

**22 Pushbutton actuator, flush mounting** page 34

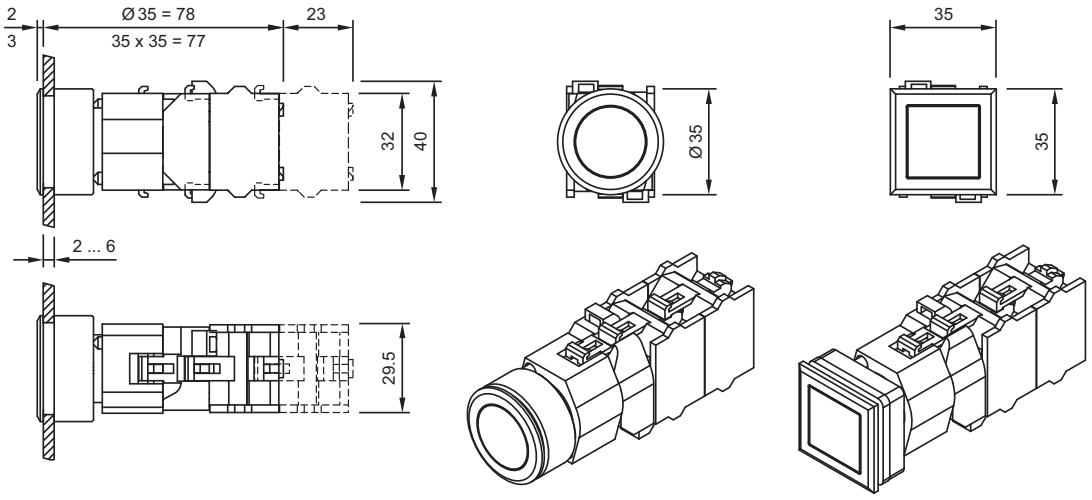


**23 Selector switch actuator 2 positions, short lever, flush mounting** page 40 **| Selector switch actuator 2 positions, short lever, 12 o'clock, flush mounting** page 40 **| Selector switch actuator 3 positions, short lever, flush mounting** page 42 **| Selector switch actuator 3 positions, long lever, flush mounting** page 43

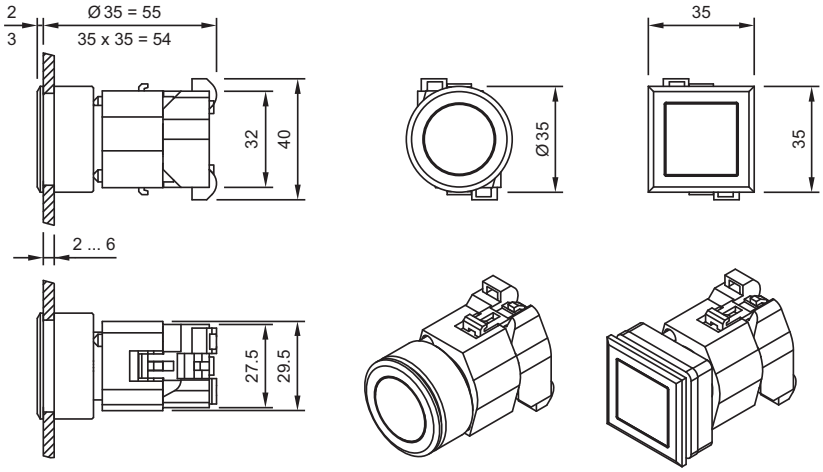


**24 Emergency-stop pushbutton actuator, foolproof EN IEC 60947-5-5** page 21

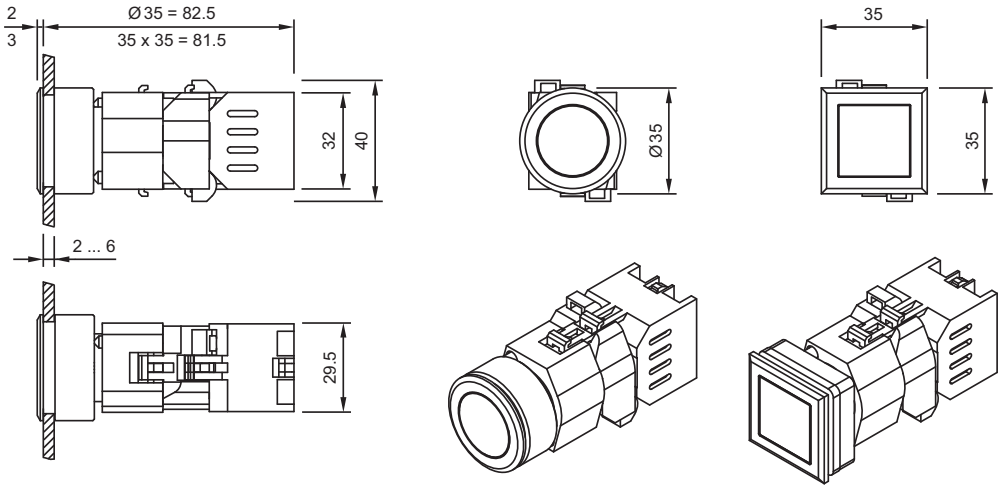

**25 Keylock switch actuator 2 positions, flush mounting** page 38 **| Keylock switch actuator 3 positions, flush mounting** page 39

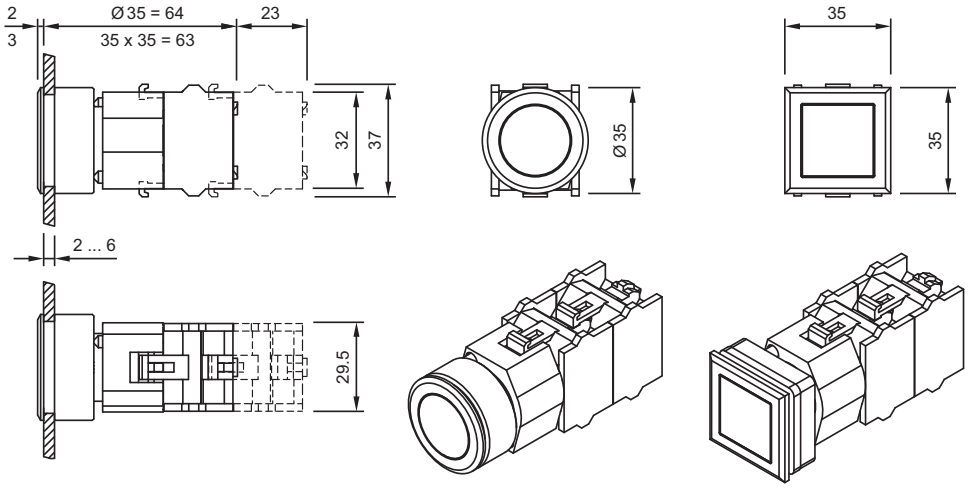


**26 Stop pusbutton actuator, flush mounting** page 37

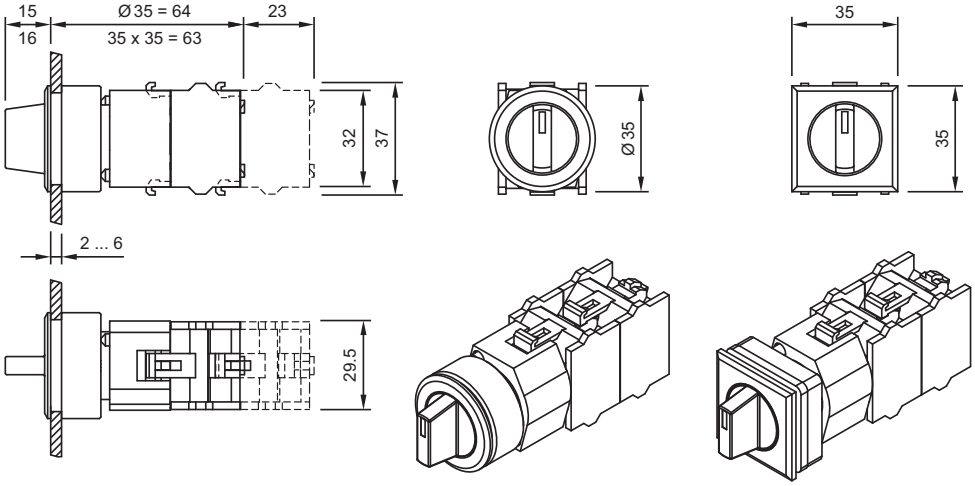


**27 Mushroom-head pushbutton actuator, flush mounting** page 37

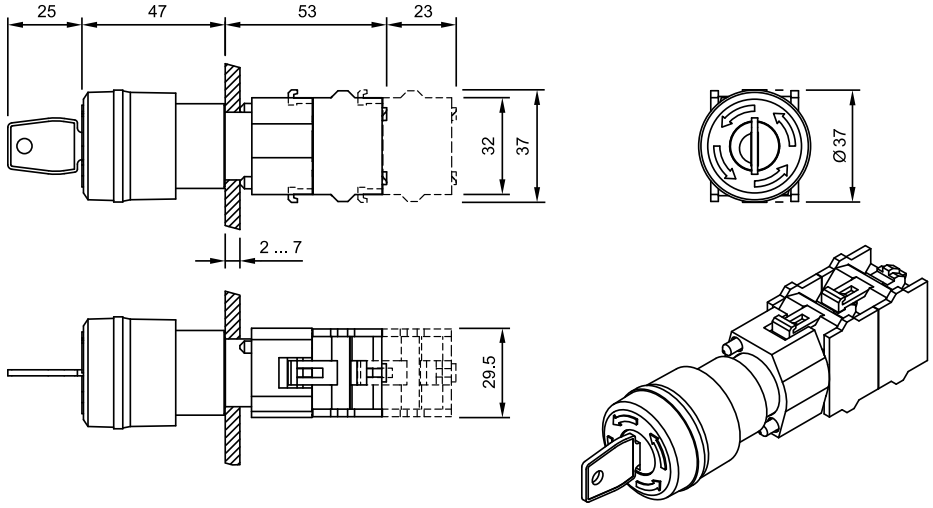

**28 Switching element** page 51 **| Switching element for Emergency-stop pushbutton** page 54

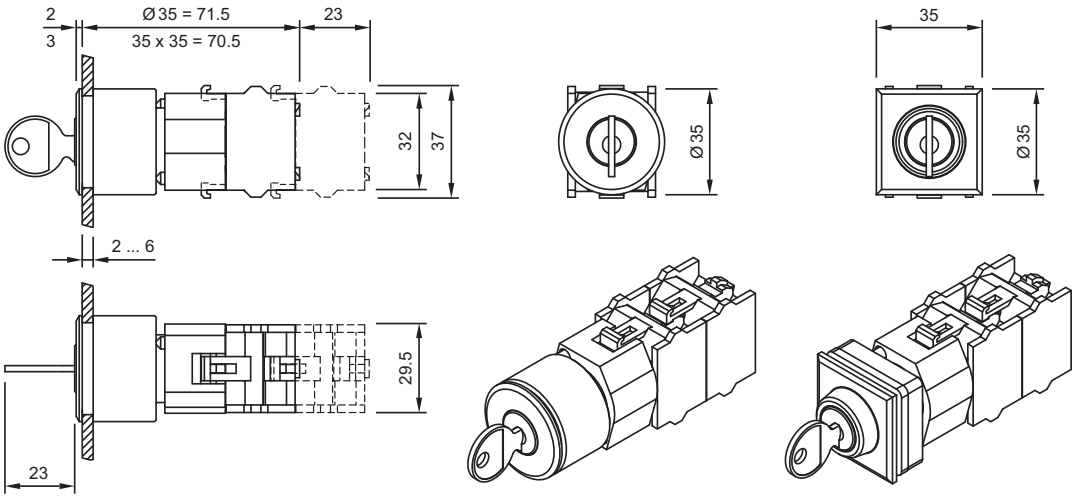


**29 Switching element** page 51 **| Switching element for ring cable shoe** page 53 **| Switching element for Emergency-stop pushbutton** page 54

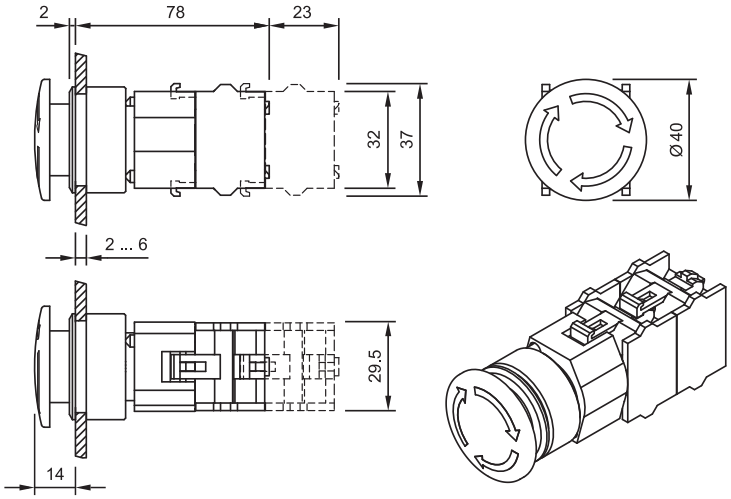


**30 Switching element** page 51 **| Switching element for Emergency-stop pushbutton** page 54

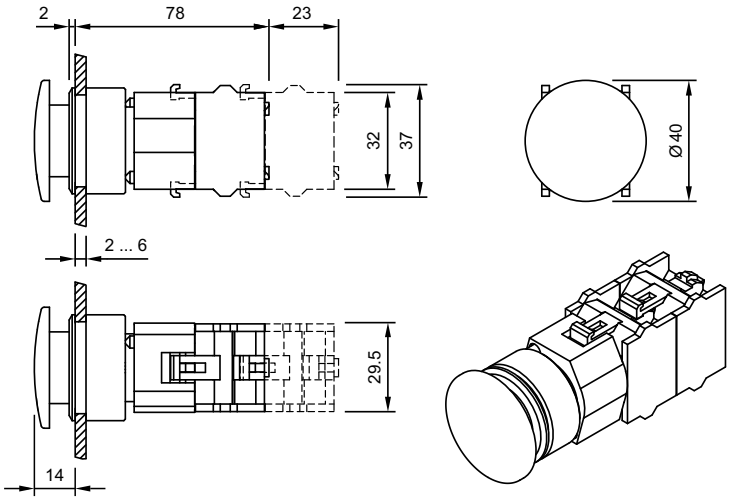


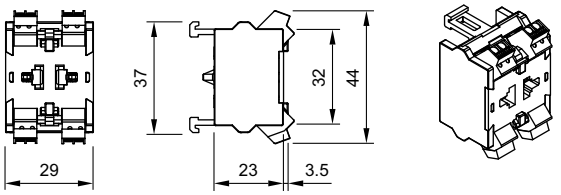**31 Switching element** page 51 **| Switching element for Emergency-stop pushbutton** page 54

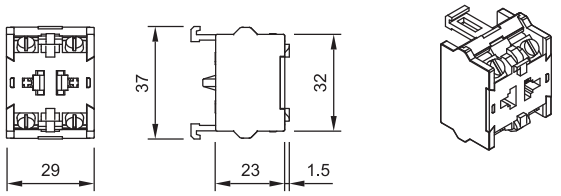


**32 Flasher element** page 50

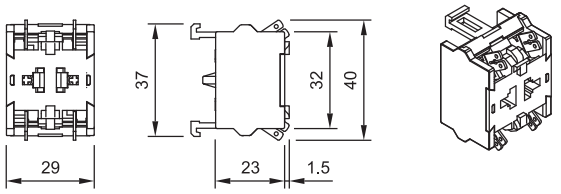


**33 Lamp transformer** page 59

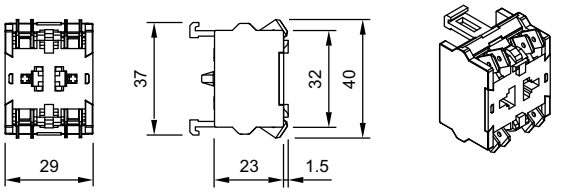


**34 Diode block** page 58 **| Resistor block** page 59 **| Resistor-diode block** page 59



**35 Terminal cover** page 56

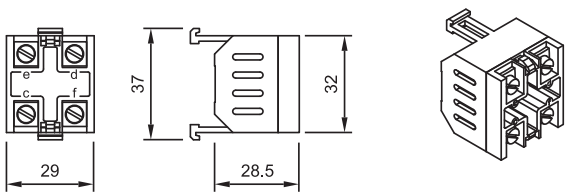


**36 Mounting plate** page 61

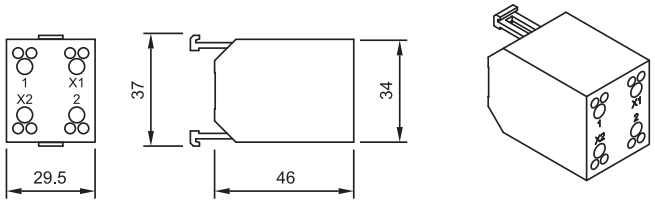


**37 Snap-on base** page 62

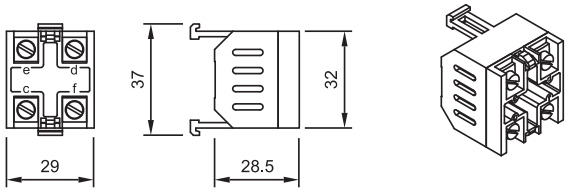


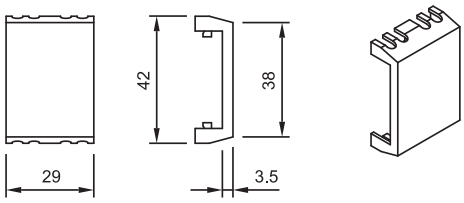**38 Snap-on base** page 62

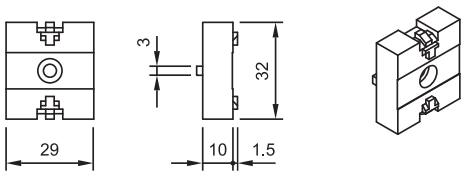


**39 Lamp block** page 65 **| Lamp block** page 67 **| Lamp block** page 70 **| Lamp block** page 71 **| Lamp block** page 74 **| Lamp block** page 76

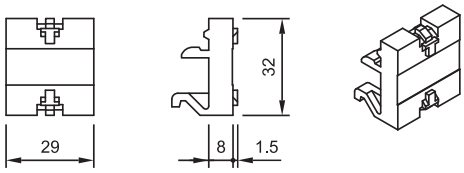


**40 Lamp block** page 65 **| Lamp block** page 67 **| Lamp block** page 70 **| Lamp block** page 71 **| Lamp block** page 74 **| Lamp block** page 76

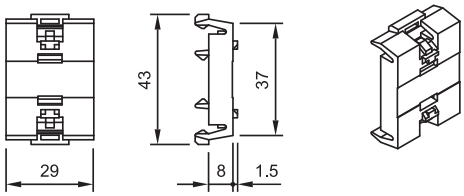


**41 Lamp block** page 65 **| Lamp block** page 67 **| Lamp block** page 70 **| Lamp block** page 71 **| Lamp block** page 74 **| Lamp block** page 76



**42 Lamp block** page 65 **| Lamp block** page 67 **| Lamp block** page 70 **| Lamp block** page 71 **| Lamp block** page 74 **| Lamp block** page 76

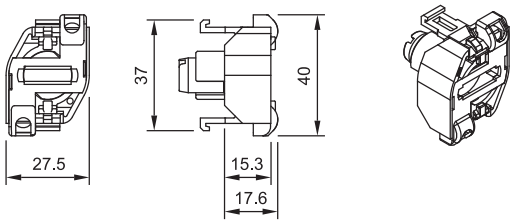


**43 Blind plug** page 49

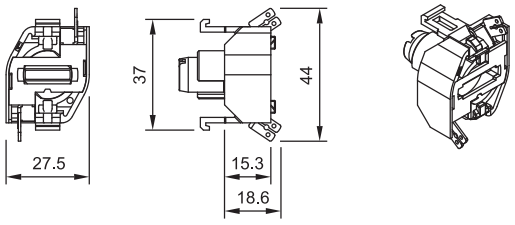


**44 Blind plug** page 49

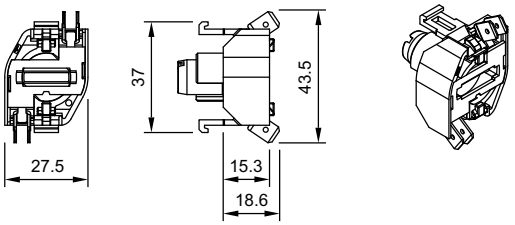


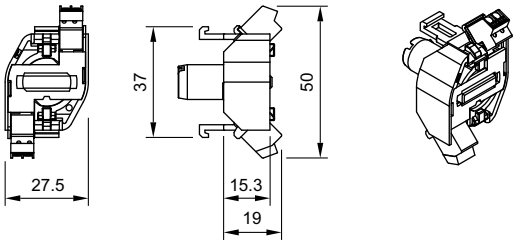**45 Blind plug** page 49

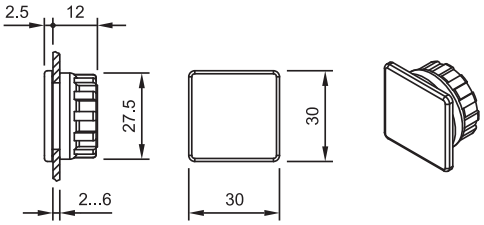


**46 Blind plug** page 49

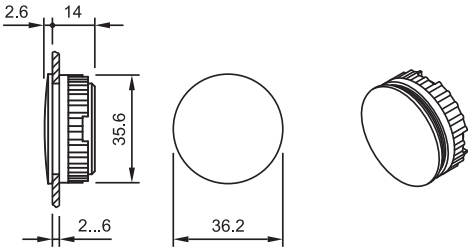


**47 Bayonet flange** page 65 **| Bayonet flange** page 66 **| Bayonet flange** page 69 **| Bayonet flange** page 71 **| Bayonet flange** page 74 **| Bayonet flange** page 76



**48 Bayonet flange** page 65 **| Bayonet flange** page 66 **| Bayonet flange** page 69 **| Bayonet flange** page 71 **| Bayonet flange** page 74 **| Bayonet flange** page 76

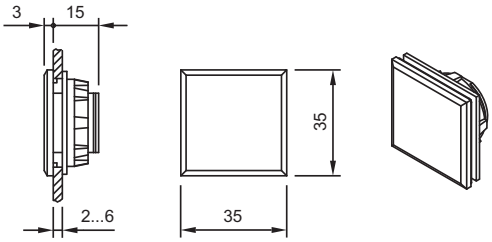


**49 Protective cover** page 48

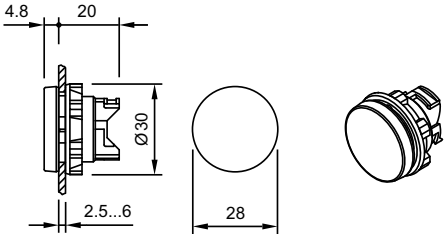


Front panel thickness reduces by 3.5 mm to max. 4.5 mm

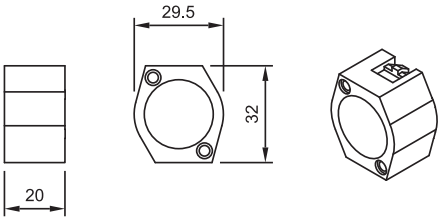**50 Protective cover, flush mounting** page 49

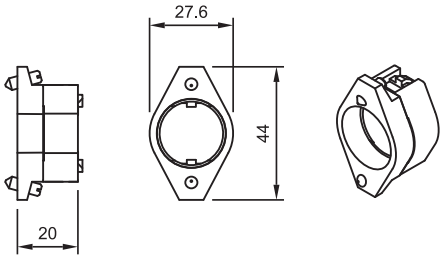


Front panel thickness reduces by 2.5 mm to max. 3.5 mm

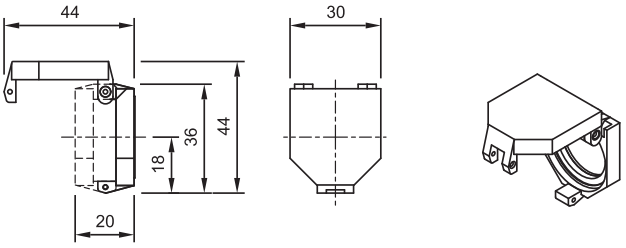**51 Protective cover** page 48




Front panel thickness reduces by 3.5 mm to max. 4.5 mm

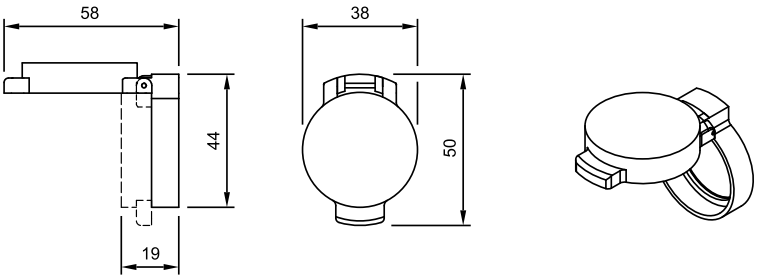**52 Protective cover, flush mounting** page 49




Front panel thickness reduces by 2.5 mm to max. 3.5 mm

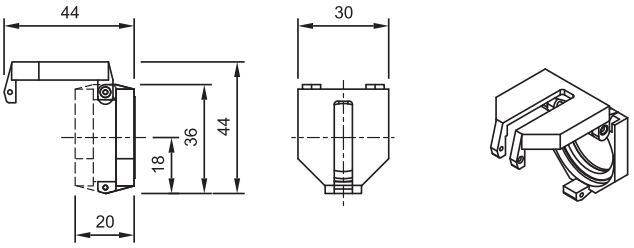**53 Protective cover, flush mounting** page 49




Front panel thickness reduces by 2.5 mm to max. 3.5 mm

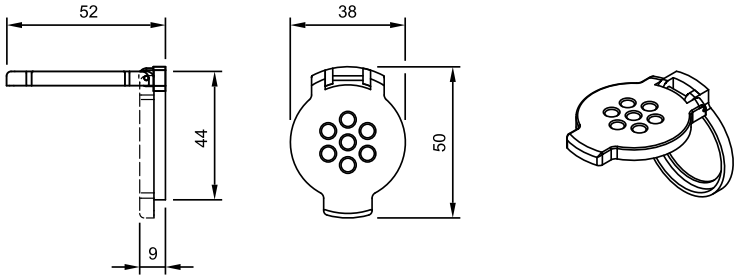**54 Protective cover, flush mounting** page 49




**55 Legend frame** page 48

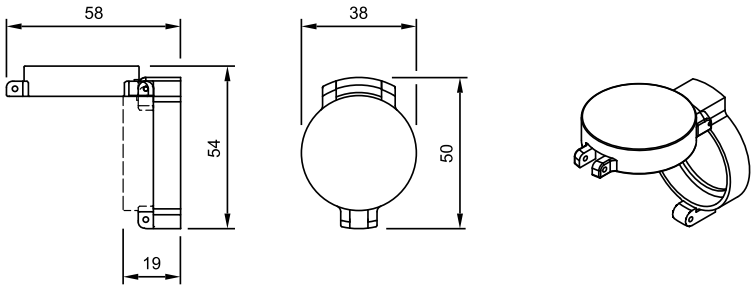

**56 Key insert switch actuator 3 positions Conductor Switch, flush mounting** page 46




**57 Reducing ring** page 61

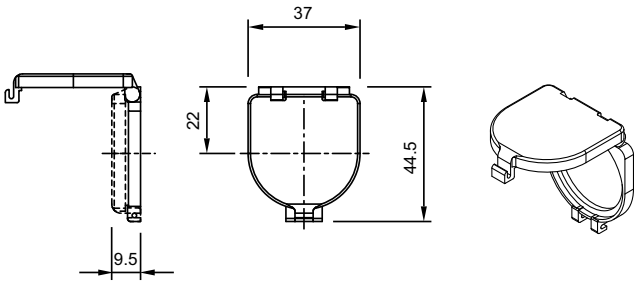


**58 Emergency-stop protective shroud** page 60

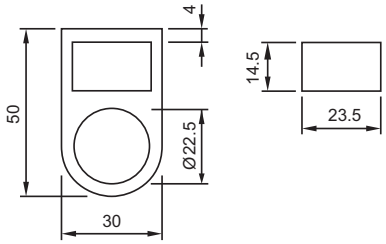


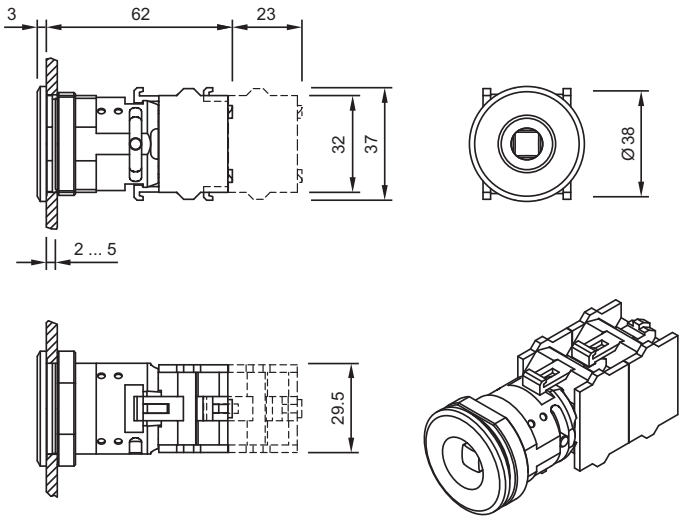**59 Emergency-stop protective shroud** page 60



**60 Legend frame** page 48




**61 Emergency-stop enclosures** page 60

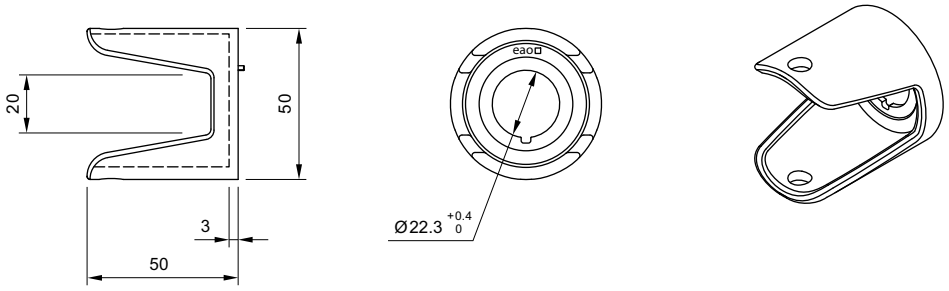


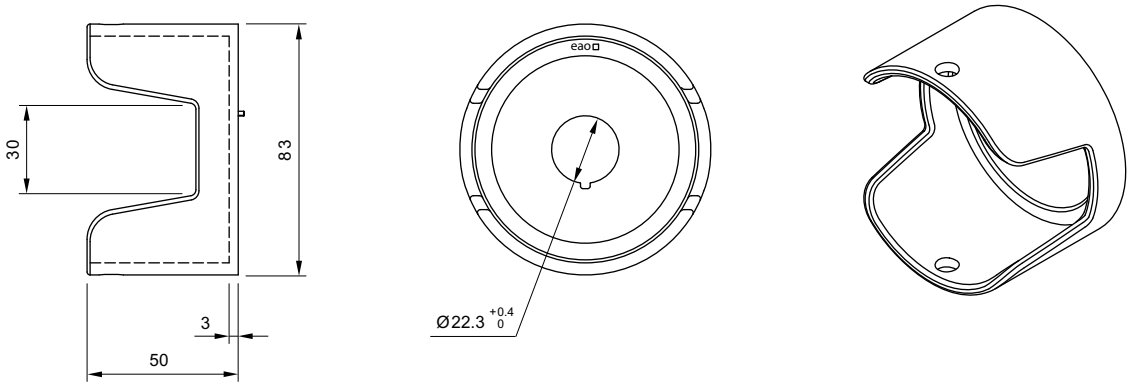




**62 Emergency-stop enclosures** page 60

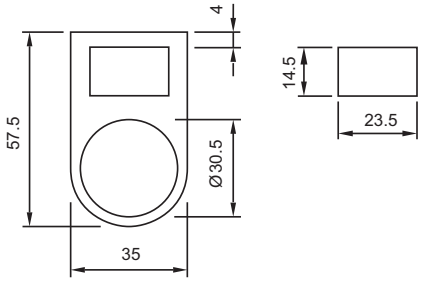







**63 Emergency-stop enclosures** page 60 **| Enclosure** page 63









**64 Enclosure** page 63

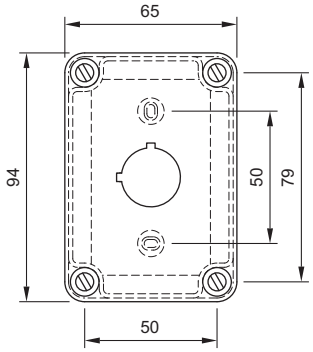







**65 Enclosure** page 63

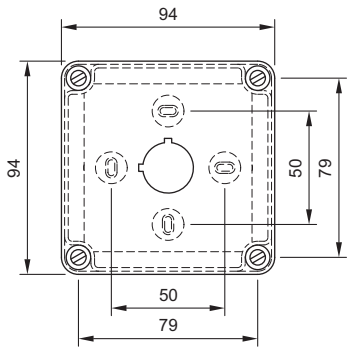





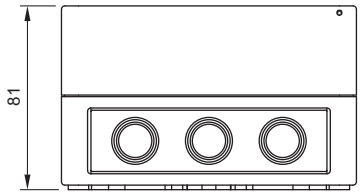

**66 Enclosure** page 63

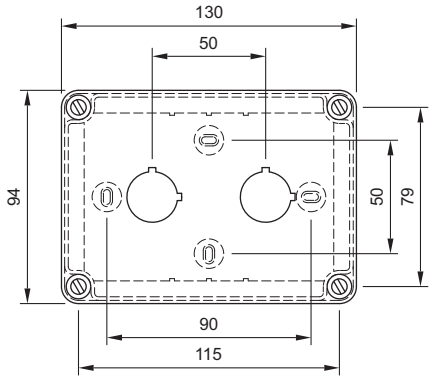


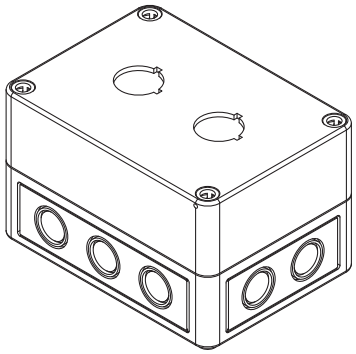


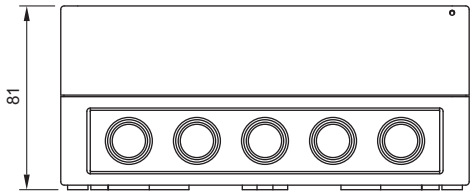

**67 Enclosure** page 63

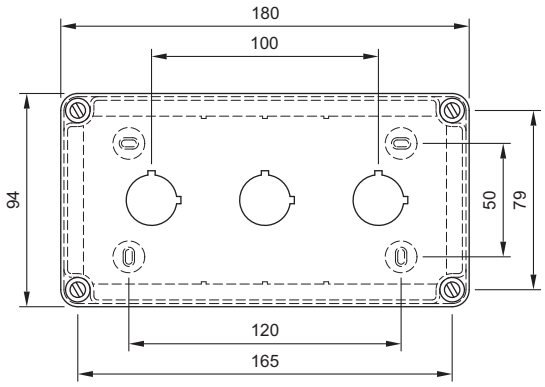


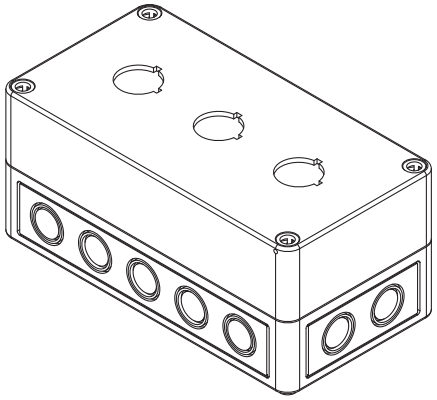


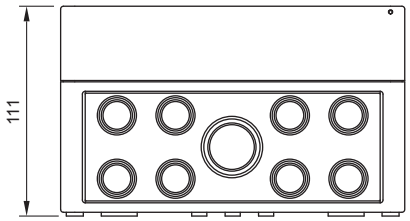

**68 Buzzer, flush mounting** page 33

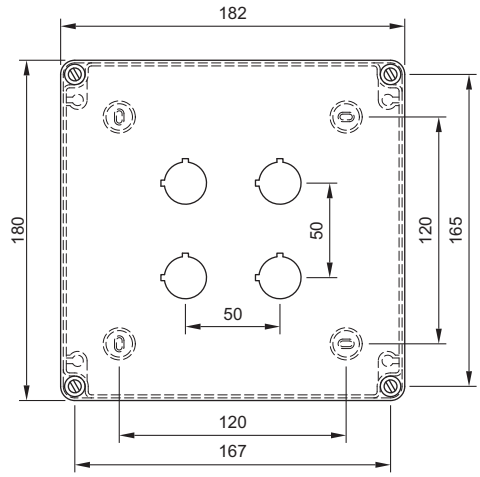

**69 Rotary selector switch actuator, short lever** page 31

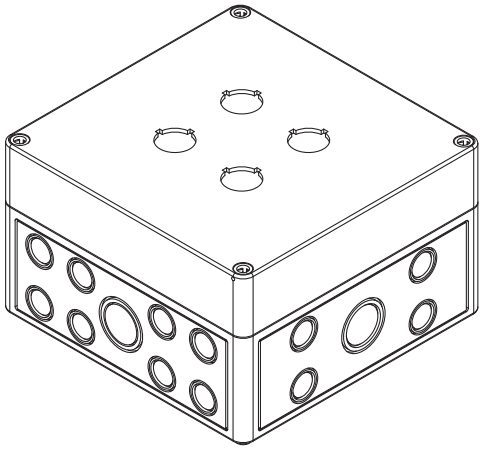

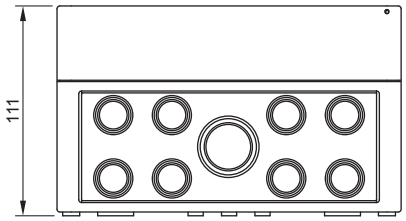
| Stages | L |
|---|---|
| 1 | 66.5 |
| 2 | 78.5 |
| 3 | 90.5 |
| 4 | 102.5 |
| 5 | 114.5 |
| 6 | 126.5 |
| 7 | 138.5 |
| 8 | 150.5 |

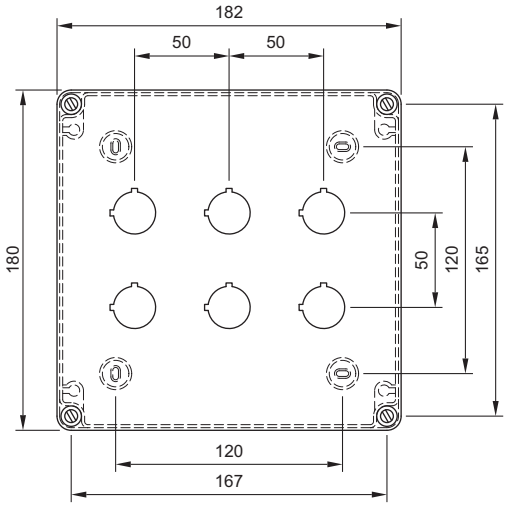**70 Rotary selector switch actuator, long lever** page 31

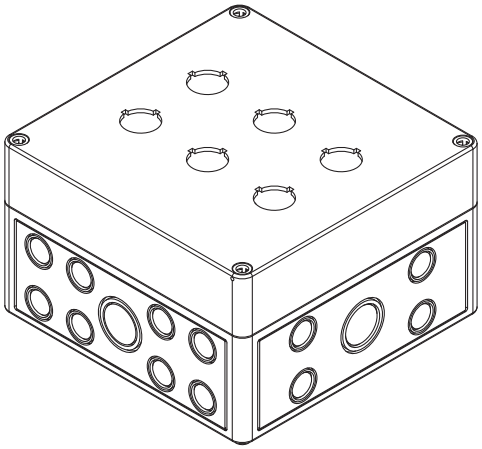

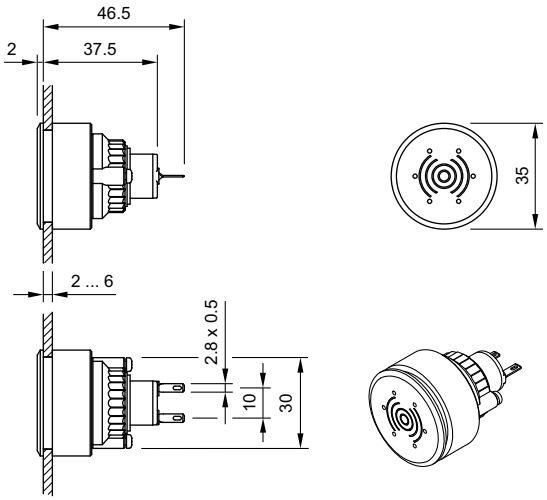
| Stages | L |
|---|---|
| 1 | 66.5 |
| 2 | 78.5 |
| 3 | 90.5 |
| 4 | 102.5 |
| 5 | 114.5 |
| 6 | 126.5 |
| 7 | 138.5 |
| 8 | 150.5 |

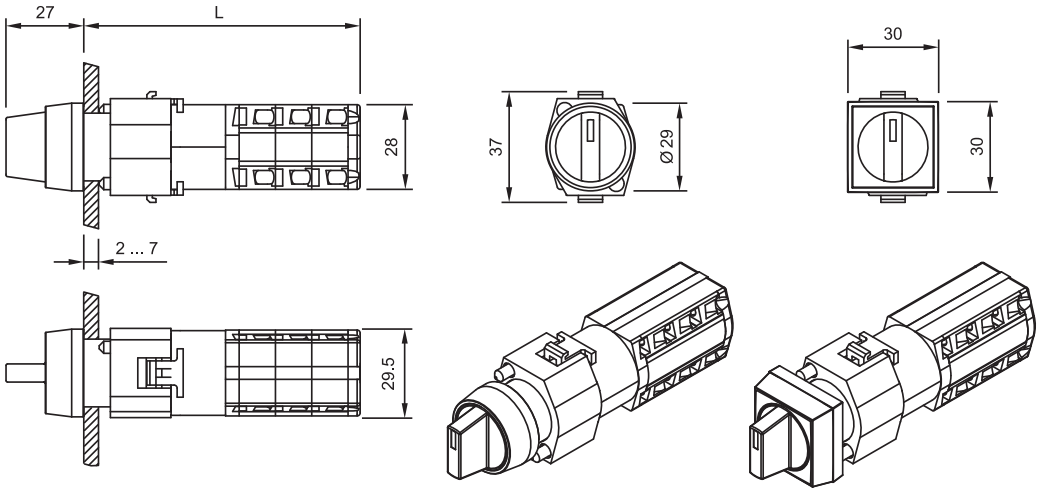**71 Rotary selector switch actuator, short lever, flush mounting** page 44




| Stages | L |
|---|---|
| 1 | 78.5 |
| 2 | 90.5 |
| 3 | 102.5 |
| 4 | 114.5 |
| 5 | 126.5 |
| 6 | 138.5 |
| 7 | 150.5 |
| 8 | 162.5 |

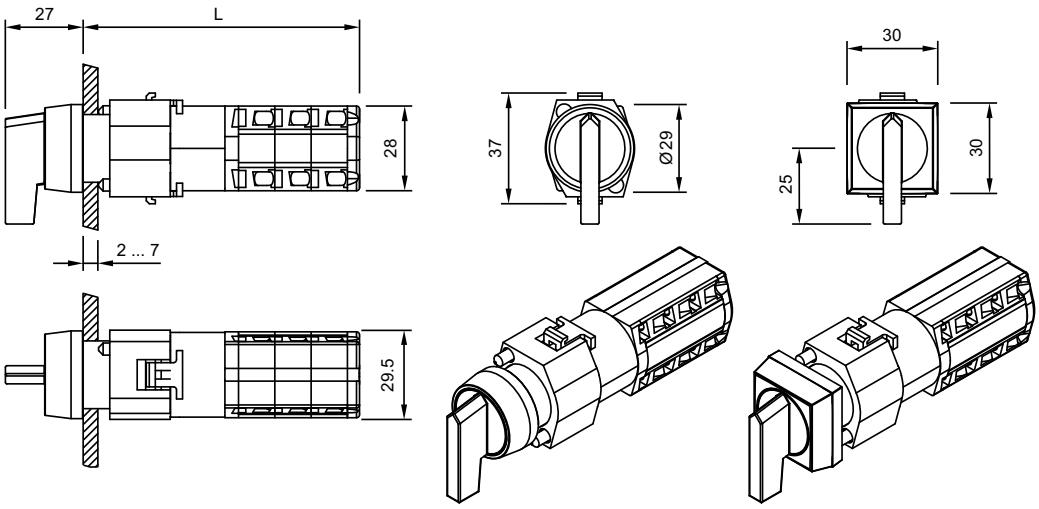**72 Rotary selector switch actuator, long lever, flush mounting** page 44




| Stages | L |
|---|---|
| 1 | 78.5 |
| 2 | 90.5 |
| 3 | 102.5 |
| 4 | 114.5 |
| 5 | 126.5 |
| 6 | 138.5 |
| 7 | 150.5 |
| 8 | 162.5 |

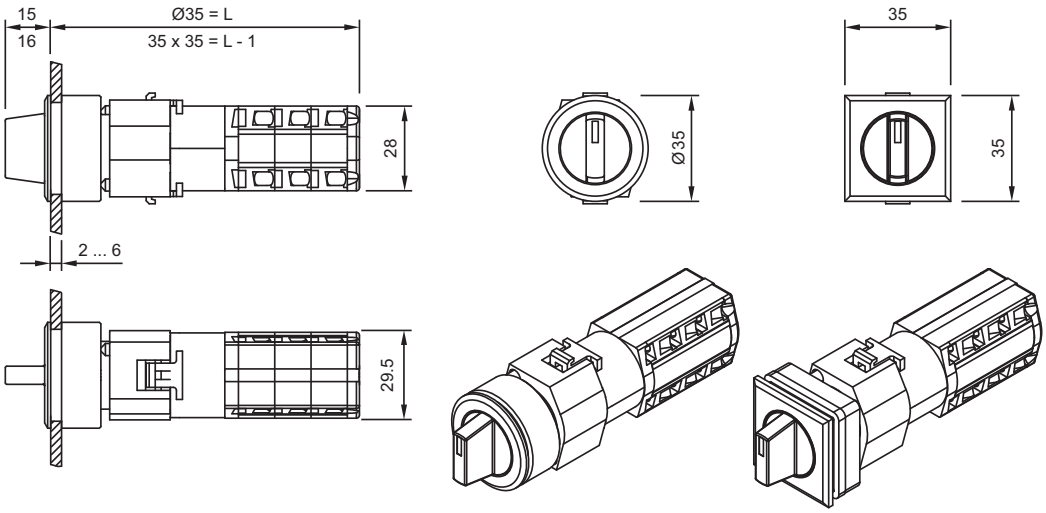**73 Keylock rotary switch actuator, flush mounting** page 45




| Stages | L |
|---|---|
| 1 | 85.5 |
| 2 | 97.5 |
| 3 | 109.5 |
| 4 | 121.5 |
| 5 | 133.5 |
| 6 | 145.5 |
| 7 | 157.5 |
| 8 | 169.5 |
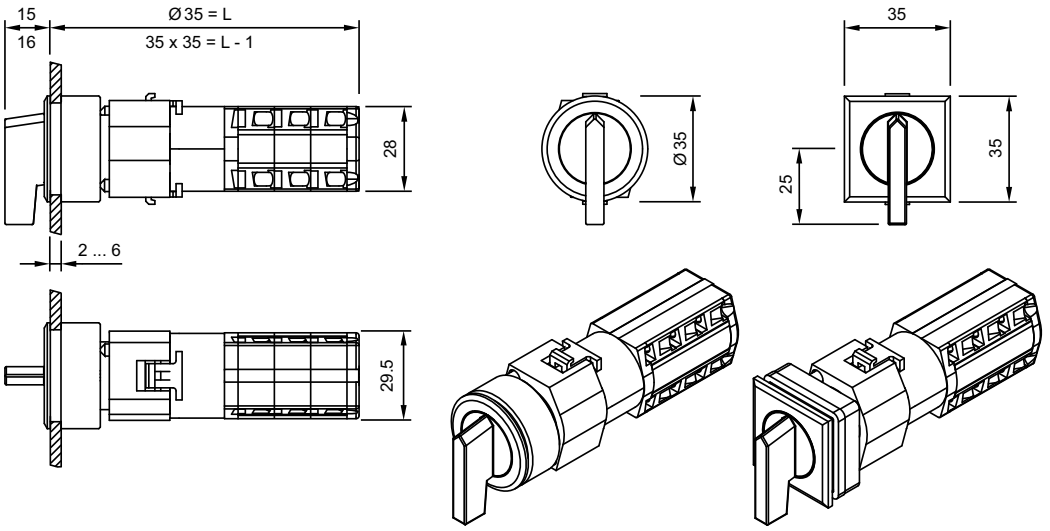
## Circuit drawing

**1 Buzzer** page 17 **| Buzzer, flush mounting** page 33

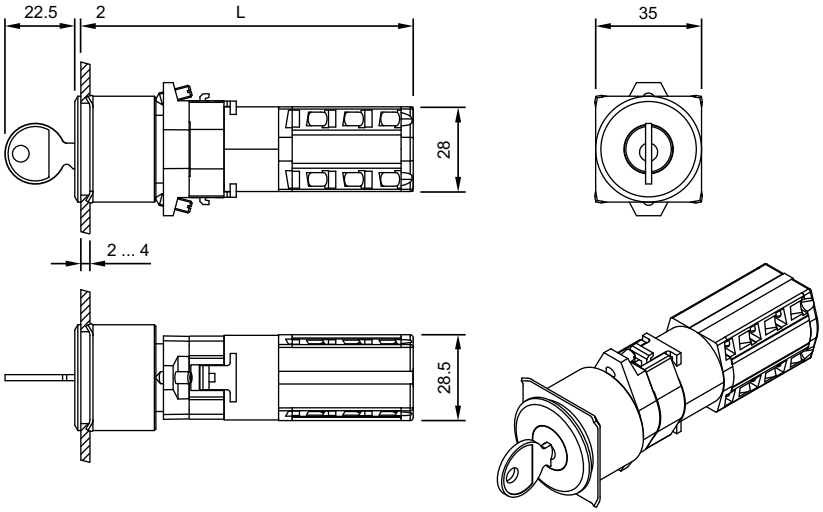


**2 Diode block** page 58




**3 Pushbutton actuator** page 18 **| Mushroom-head pushbutton actuator** page 23 **| Pushbutton actuator, flush mounting** page 34 **| Illuminated pushbutton actuator, flush mounting** page 36 **| Mushroom-head pushbutton actuator, flush mounting** page 37

**4 Pushbutton actuator** page 18 **| Mushroom-head pushbutton actuator** page 23 **| Pushbutton actuator, flush mounting** page 34 **| Illuminated pushbutton actuator, flush mounting** page 36 **| Mushroom-head pushbutton actuator, flush mounting** page 37

**5 Indicator full-face illumination compact** page 12 **| Indicator full face illumination** page 13 **| Indicator front illumination** page 14 **| Flasher full face illumination** page 15 **| Flasher front illumination** page 16 **| Indicator, flush mounting** page 32 **| Flasher, flush mounting** page 33 **| Indicator actuator for Indicator compact** page 64 **| Lamp block** page 65 **| Lamp block** page 67 **| Lamp block** page 70 **| Lamp block** page 71 **| Lamp block** page 74 **| Lamp block** page 76




**6 Emergency-stop pushbutton actuator, foolproof EN IEC 60947-5-5** page 21 **| Stop pushbutton actuator** page 22 **| Stop pusbutton actuator, flush mounting** page 37

**7 Switching element** page 51 **| Switching element for ring cable shoe** page 53 **| Switching element for Emergency-stop pushbutton** page 54




**8 Switching element** page 51 **| Switching element for ring cable shoe** page 53 **| Switching element for Emergency-stop pushbutton** page 54

**9 Lamp transformer** page 59




**10 Resistor block** page 59




**11 Resistor-diode block** page 59



**12 Flasher element** page 50




**13 Rotary selector switching element 30°** page 55




**14 Rotary selector switching element 30°** page 55




**15 Rotary selector switching element 30°** page 55




**16 Rotary selector switching element 30°** page 55




**17 Rotary selector switching element 45°** page 55




**18 Rotary selector switching element 45°** page 55



**19 Rotary selector switching element 45°** page 55




**20 Rotary selector switching element 45°** page 55




**21 Rotary selector switching element 60°** page 56

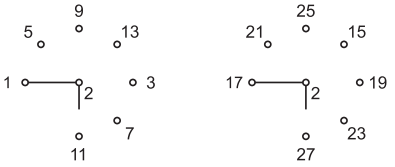


**22 Rotary selector switching element 60°** page 56

**23 Rotary selector switching element 60°** page 56

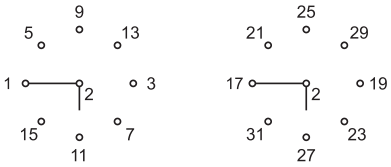


**24 Rotary selector switching element 60°** page 56




**25 Rotary selector switching element 60°** page 56




**26 Rotary selector switching element 60°** page 56




**27 Rotary selector switching element 60°** page 56




**28 Rotary selector switching element 60°** page 56



**29 Rotary selector switching element 60°** page 56




**30 Rotary selector switching element 60°** page 56




**31 Rotary selector switching element 60°** page 56

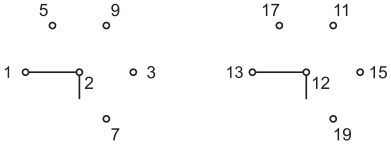


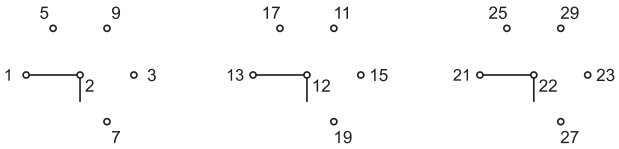**32 Rotary selector switching element 60°** page 56




**33 Rotary selector switching element 60°** page 56

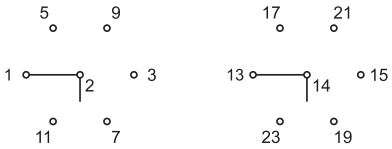


**34 Illuminated pushbutton actuator** page 20 **| Mushroom-head pushbutton actuator illuminated** page 24 **| Illuminated pushbutton actuator, flush mounting** page 36




**35 Selector switch actuator 3 positions, short lever** page 29 **| Selector switch actuator 3 positions, long lever** page 30 **| Selector switch actuator 3 positions, short lever, flush mounting** page 42 **| Selector switch actuator 3 positions, long lever, flush mounting** page 43

**36 Selector switch actuator 3 positions, short lever** page 29 **| Selector switch actuator 3 positions, long lever** page 30 **| Selector switch actuator 3 positions, short lever, flush mounting** page 42 **| Selector switch actuator 3 positions, long lever, flush mounting** page 43

**37 Selector switch actuator 2 positions, short lever** page 27 **| Selector switch actuator 2 positions, long lever** page 28 **| Selector switch actuator 2 positions, short lever, flush mounting** page 40 **| Selector switch actuator 2 positions, long lever, flush mounting** page 41

**38 Selector switch actuator 2 positions, short lever** page 27 **| Selector switch actuator 2 positions, short lever, 12 o'clock** page 27 **| Selector switch actuator 2 positions, long lever** page 28 **| Selector switch actuator 2 positions, long lever, 12 o'clock** page 28 **| Selector switch actuator 2 positions, short lever, flush mounting** page 40 **| Selector switch actuator 2 positions, short lever, 12 o'clock, flush mounting** page 40 **| Selector switch actuator 2 positions, long lever, flush mounting** page 41 **| Selector switch actuator 2 positions, long lever, 12 o'clock, flush mounting** page 41

**39 Selector switch actuator 3 positions, short lever** page 29 **| Selector switch actuator 3 positions, long lever** page 30 **| Selector switch actuator 3 positions, short lever, flush mounting** page 42 **| Selector switch actuator 3 positions, long lever, flush mounting** page 43

**40 Selector switch actuator 3 positions, short lever** page 29 **| Selector switch actuator 3 positions, long lever** page 30 **| Selector switch actuator 3 positions, short lever, flush mounting** page 42 **| Selector switch actuator 3 positions, long lever, flush mounting** page 43

**41 Illuminated pushbutton actuator** page 20 **| Mushroom-head pushbutton actuator illuminated** page 24 **| Illuminated pushbutton actuator, flush mounting** page 36




**42 Keylock switch actuator 3 positions** page 26 **| Keylock switch actuator 3 positions, flush mounting** page 39

**43 Keylock switch actuator 3 positions** page 26 **| Keylock switch actuator 3 positions, flush mounting** page 39

**44 Keylock switch actuator 2 positions** page 25 **| Keylock switch actuator 2 positions, flush mounting** page 38

**45 Keylock switch actuator 2 positions** page 25 **| Keylock switch actuator 2 positions, flush mounting** page 38



**46 Keylock switch actuator 3 positions** page 26 **| Keylock switch actuator 3 positions, flush mounting** page 39

**47 Keylock switch actuator 3 positions** page 26 **| Keylock switch actuator 3 positions, flush mounting** page 39

**48 Switching element** page 51 **| Switching element for ring cable shoe** page 53 **| Switching element for Emergency-stop pushbutton** page 54




**49 Switching element** page 51 **| Switching element for ring cable shoe** page 53 **| Switching element for Emergency-stop pushbutton** page 54

**50 Switching element** page 51 **| Switching element for ring cable shoe** page 53 **| Switching element for Emergency-stop pushbutton** page 54




**51 Indicator full-face illumination compact** page 12



# Index from Typ-Nr.


| Typ-Nr. | Page |
|---|---|
| 02-912.1 | 59 |
| 02-912.2 | 59 |
| 02-912.3 | 59 |
| 02-912.4 | 59 |
| 10-1406.1369 | 57 |
| 10-1409.1329 | 57 |
| 10-1412.1279 | 57 |
| 10-1416.1289 | 57 |
| 10-1419.1249 | 57 |
| 10-1420.1219 | 57 |
| 10-1422.1179 | 57 |
| 10-1424.1179 | 57 |
| 10-2506.1082 | 58 |
| 10-2506.1084 | 58 |
| 10-2506.1085 | 58 |
| 10-2506.1086 | 58 |
| 10-2506.1089 | 58 |
| 10-2509.1142 | 58 |
| 10-2509.1144 | 58 |
| 10-2509.1145 | 58 |
| 10-2509.1146 | 58 |
| 10-2509.1149 | 58 |
| 10-2512.1142 | 58 |
| 10-2512.1144 | 58 |
| 10-2512.1145 | 58 |
| 10-2512.1146 | 58 |
| 10-2512.1149 | 58 |
| 10-2513.1142 | 58 |
| 10-2513.1144 | 58 |
| 10-2513.1145 | 58 |
| 10-2513.1146 | 58 |
| 10-2513.1149 | 58 |
| 10-2519.1052 | 58 |
| 10-2519.1054 | 58 |
| 10-2519.1055 | 58 |
| 10-2519.1056 | 58 |
| 10-2519.1059 | 58 |
| 10-2H24.2052 | 58 |
| 10-2H24.2054 | 58 |
| 10-2H24.2055 | 58 |
| 10-2H24.2056 | 58 |
| 10-2H24.2059 | 58 |
| 10-2H25.2042 | 58 |
| 10-2H25.2044 | 58 |
| 10-2H25.2045 | 58 |
| 10-2H25.2046 | 58 |
| 10-2H25.2049 | 58 |
| 14-810.002 | 17 |
| 14-810.902 | 17 |
| 14-810.910 | 33 |
| 14-810.918 | 33 |
| 61-9481.6 | 61 |
| 61-9481.6 | 63 |
| 700.005.0 | 62 |
| 700.006.0 | 62 |
| 704.000.2 | 13 |
| 704.000.2 | 15 |
| 704.000.4 | 13 |
| 704.000.4 | 15 |
| 704.000.5 | 13 |
| 704.000.5 | 15 |
| 704.000.6 | 13 |
| 704.000.6 | 15 |
| 704.000.7 | 13 |
| 704.000.7 | 15 |
| 704.001.2 | 13 |
| 704.001.2 | 15 |
| 704.001.4 | 13 |
| 704.001.4 | 15 |
| 704.001.5 | 13 |
| 704.001.5 | 15 |
| 704.001.6 | 13 |
| 704.001.6 | 15 |
| 704.001.7 | 13 |
| 704.001.7 | 15 |
| 704.002.2 | 14 |
| 704.002.2 | 16 |
| 704.002.4 | 14 |
| 704.002.4 | 16 |
| 704.002.5 | 14 |
| 704.002.5 | 16 |
| 704.002.6 | 14 |
| 704.002.6 | 16 |
| 704.002.7 | 14 |
| 704.002.7 | 16 |
| 704.003.2 | 14 |
| 704.003.2 | 16 |
| 704.003.4 | 14 |
| 704.003.4 | 16 |
| 704.003.5 | 14 |
| 704.003.5 | 16 |
| 704.003.6 | 14 |
| 704.003.6 | 16 |
| 704.003.7 | 14 |
| 704.003.7 | 16 |
| 704.006.2 | 14 |
| 704.006.2 | 16 |
| 704.006.218 | 32 |
| 704.006.218 | 33 |
| 704.006.4 | 14 |
| 704.006.4 | 16 |
| 704.006.418 | 32 |
| 704.006.418 | 33 |
| 704.006.5 | 14 |
| 704.006.5 | 16 |
| 704.006.518 | 32 |
| 704.006.518 | 33 |
| 704.006.6 | 14 |
| 704.006.6 | 16 |
| 704.006.618 | 32 |
| 704.006.618 | 33 |
| 704.006.7 | 14 |
| 704.006.7 | 16 |
| 704.006.718 | 32 |
| 704.006.718 | 33 |
| 704.007.2 | 14 |
| 704.007.2 | 16 |
| 704.007.4 | 14 |
| 704.007.4 | 16 |
| 704.007.5 | 14 |
| 704.007.5 | 16 |
| 704.007.6 | 14 |
| 704.007.6 | 16 |
| 704.007.7 | 14 |
| 704.007.7 | 16 |
| 704.009.0 | 18 |
| 704.009.2 | 18 |
| 704.009.4 | 18 |
| 704.009.5 | 18 |
| 704.009.6 | 18 |
| 704.009.7 | 18 |
| 704.010.0 | 18 |
| 704.010.2 | 18 |
| 704.010.4 | 18 |
| 704.010.5 | 18 |
| 704.010.6 | 18 |
| 704.010.7 | 18 |
| 704.011.0 | 19 |
| 704.011.018 | 35 |
| 704.011.2 | 19 |
| 704.011.218 | 35 |
| 704.011.4 | 19 |
| 704.011.418 | 35 |
| 704.011.5 | 19 |
| 704.011.518 | 35 |
| 704.011.6 | 19 |
| 704.011.618 | 35 |
| 704.011.8 | 19 |
| 704.011.818 | 35 |
| 704.012.0 | 19 |
| 704.012.018 | 35 |
| 704.012.2 | 19 |
| 704.012.218 | 35 |
| 704.012.4 | 19 |
| 704.012.418 | 35 |
| 704.012.5 | 19 |
| 704.012.518 | 35 |
| 704.012.6 | 19 |
| 704.012.618 | 35 |
| 704.012.7 | 19 |
| 704.012.718 | 35 |
| 704.013.0 | 19 |
| 704.013.2 | 19 |
| 704.013.4 | 19 |
| 704.013.5 | 19 |
| 704.013.6 | 19 |
| 704.013.7 | 19 |
| 704.020.2 | 12 |
| 704.020.4 | 12 |
| 704.020.5 | 12 |
| 704.020.6 | 12 |
| 704.020.7 | 12 |
| 704.021.2 | 12 |
| 704.021.4 | 12 |
| 704.021.5 | 12 |
| 704.021.6 | 12 |
| 704.021.7 | 12 |
| 704.022.2 | 12 |
| 704.022.4 | 12 |
| 704.022.5 | 12 |
| 704.022.6 | 12 |
| 704.022.7 | 12 |
| 704.024.2 | 12 |
| 704.024.4 | 12 |
| 704.024.5 | 12 |
| 704.024.6 | 12 |
| 704.024.7 | 12 |
| 704.029.2 | 20 |
| 704.029.4 | 20 |

# Index from Typ-Nr.


| Typ-Nr. | Page |
|---|---|
| 704.029.5 | 20 |
| 704.029.6 | 20 |
| 704.029.7 | 20 |
| 704.030.2 | 20 |
| 704.030.4 | 20 |
| 704.030.5 | 20 |
| 704.030.6 | 20 |
| 704.030.7 | 20 |
| 704.032.2 | 20 |
| 704.032.218 | 36 |
| 704.032.4 | 20 |
| 704.032.418 | 36 |
| 704.032.5 | 20 |
| 704.032.518 | 36 |
| 704.032.6 | 20 |
| 704.032.618 | 36 |
| 704.032.7 | 20 |
| 704.032.718 | 36 |
| 704.033.2 | 20 |
| 704.033.4 | 20 |
| 704.033.5 | 20 |
| 704.033.6 | 20 |
| 704.033.7 | 20 |
| 704.039.0 | 18 |
| 704.039.2 | 18 |
| 704.039.4 | 18 |
| 704.039.5 | 18 |
| 704.039.6 | 18 |
| 704.039.7 | 18 |
| 704.040.0 | 18 |
| 704.040.2 | 18 |
| 704.040.4 | 18 |
| 704.040.5 | 18 |
| 704.040.6 | 18 |
| 704.040.7 | 18 |
| 704.041.0 | 18 |
| 704.041.018 | 34 |
| 704.041.2 | 18 |
| 704.041.218 | 34 |
| 704.041.4 | 18 |
| 704.041.418 | 34 |
| 704.041.5 | 18 |
| 704.041.518 | 34 |
| 704.041.6 | 18 |
| 704.041.618 | 34 |
| 704.041.8 | 18 |
| 704.041.818 | 34 |
| 704.042.0 | 18 |
| 704.042.018 | 34 |
| 704.042.2 | 18 |
| 704.042.218 | 34 |
| 704.042.4 | 18 |
| 704.042.418 | 34 |
| 704.042.5 | 18 |
| 704.042.518 | 34 |
| 704.042.6 | 18 |
| 704.042.618 | 34 |
| 704.042.7 | 18 |
| 704.042.718 | 34 |
| 704.043.0 | 19 |
| 704.043.2 | 19 |
| 704.043.4 | 19 |
| 704.043.5 | 19 |
| 704.043.6 | 19 |
| 704.043.7 | 19 |
| 704.059.2 | 20 |
| 704.059.4 | 20 |
| 704.059.5 | 20 |
| 704.059.6 | 20 |
| 704.059.7 | 20 |
| 704.060.2 | 20 |
| 704.060.4 | 20 |
| 704.060.5 | 20 |
| 704.060.6 | 20 |
| 704.060.7 | 20 |
| 704.062.2 | 20 |
| 704.062.218 | 36 |
| 704.062.4 | 20 |
| 704.062.418 | 36 |
| 704.062.5 | 20 |
| 704.062.518 | 36 |
| 704.062.6 | 20 |
| 704.062.618 | 36 |
| 704.062.7 | 20 |
| 704.062.718 | 36 |
| 704.063.2 | 20 |
| 704.063.4 | 20 |
| 704.063.5 | 20 |
| 704.063.6 | 20 |
| 704.063.7 | 20 |
| 704.064.2 | 21 |
| 704.066.2 | 21 |
| 704.070.0 | 23 |
| 704.070.2 | 23 |
| 704.070.4 | 23 |
| 704.070.5 | 23 |
| 704.071.0 | 23 |
| 704.071.2 | 23 |
| 704.071.210 | 37 |
| 704.071.218 | 37 |
| 704.071.4 | 23 |
| 704.071.410 | 37 |
| 704.071.418 | 37 |
| 704.071.5 | 23 |
| 704.072.0 | 23 |
| 704.072.2 | 23 |
| 704.072.4 | 23 |
| 704.072.5 | 23 |
| 704.073.0 | 23 |
| 704.073.2 | 23 |
| 704.073.210 | 37 |
| 704.073.4 | 23 |
| 704.073.5 | 23 |
| 704.074.2 | 22 |
| 704.074.210 | 37 |
| 704.074.3 | 22 |
| 704.075.2 | 22 |
| 704.075.218 | 37 |
| 704.075.3 | 22 |
| 704.075.310 | 37 |
| 704.075.318 | 37 |
| 704.076.0 | 22 |
| 704.078.0 | 22 |
| 704.084.2 | 24 |
| 704.084.4 | 24 |
| 704.084.5 | 24 |
| 704.084.6 | 24 |
| 704.084.7 | 24 |
| 704.086.2 | 24 |
| 704.086.4 | 24 |
| 704.086.5 | 24 |
| 704.086.6 | 24 |
| 704.086.7 | 24 |
| 704.092.0 | 30 |
| 704.093.0 | 30 |
| 704.093.010 | 43 |
| 704.093.018 | 43 |
| 704.093.0x28 | 46 |
| 704.094.0 | 30 |
| 704.095.0 | 30 |
| 704.095.010 | 43 |
| 704.095.018 | 43 |
| 704.095.0T28 | 46 |
| 704.095.0x28 | 46 |
| 704.096.0 | 30 |
| 704.097.0 | 30 |
| 704.097.010 | 43 |
| 704.097.018 | 43 |
| 704.097.0x28 | 46 |
| 704.098.0 | 30 |
| 704.099.0 | 30 |
| 704.099.010 | 43 |
| 704.099.018 | 43 |
| 704.099.0x28 | 46 |
| 704.100.0 | 28 |
| 704.100.0.12 | 28 |
| 704.101.0 | 28 |
| 704.101.0.12 | 28 |
| 704.101.010 | 41 |
| 704.101.010.12 | 41 |
| 704.101.018 | 41 |
| 704.101.018.12 | 41 |
| 704.101.018KN | 44 |
| 704.101.0D.12 | 28 |
| 704.101.0KN | 31 |
| 704.101.0x28 | 45 |
| 704.101.110KN | 44 |
| 704.101.118KN | 44 |
| 704.101.1KN | 31 |
| 704.102.0 | 28 |
| 704.103.0 | 28 |
| 704.103.018 | 41 |
| 704.103.0x28 | 45 |
| 704.113.0 | 26 |
| 704.113.018 | 39 |
| 704.114.0 | 26 |
| 704.114.018 | 39 |
| 704.115.0 | 26 |
| 704.115.018 | 39 |
| 704.116.0 | 26 |
| 704.116.018 | 39 |
| 704.117.0 | 26 |
| 704.117.018 | 39 |
| 704.118.0 | 26 |
| 704.118.018 | 39 |
| 704.120.0 | 25 |
| 704.120.018 | 38 |
| 704.121.0 | 25 |
| 704.121.018 | 38 |

# Index from Typ-Nr.


| Typ-Nr. | Page |
|---|---|
| 704.122.0 | 25 |
| 704.122.018 | 38 |
| 704.123.0 | 25 |
| 704.123.018 | 38 |
| 704.123.018KN | 45 |
| 704.123.118KN | 45 |
| 704.124.0 | 26 |
| 704.124.018 | 39 |
| 704.151.XXX | 47 |
| 704.152.XXX | 47 |
| 704.153.XXX | 47 |
| 704.154.XXX | 47 |
| 704.155.XXX | 47 |
| 704.199.2 | 13 |
| 704.199.2 | 15 |
| 704.199.4 | 13 |
| 704.199.4 | 15 |
| 704.199.5 | 13 |
| 704.199.5 | 15 |
| 704.199.6 | 13 |
| 704.199.6 | 15 |
| 704.199.7 | 13 |
| 704.199.7 | 15 |
| 704.200.2 | 13 |
| 704.200.2 | 15 |
| 704.200.4 | 13 |
| 704.200.4 | 15 |
| 704.200.5 | 13 |
| 704.200.5 | 15 |
| 704.200.6 | 13 |
| 704.200.6 | 15 |
| 704.200.7 | 13 |
| 704.200.7 | 15 |
| 704.202.2 | 14 |
| 704.202.2 | 16 |
| 704.202.208 | 32 |
| 704.202.208 | 33 |
| 704.202.4 | 14 |
| 704.202.4 | 16 |
| 704.202.408 | 32 |
| 704.202.408 | 33 |
| 704.202.5 | 14 |
| 704.202.5 | 16 |
| 704.202.508 | 32 |
| 704.202.508 | 33 |
| 704.202.6 | 14 |
| 704.202.6 | 16 |
| 704.202.608 | 32 |
| 704.202.608 | 33 |
| 704.202.7 | 14 |
| 704.202.7 | 16 |
| 704.202.708 | 32 |
| 704.202.708 | 33 |
| 704.203.2 | 14 |
| 704.203.2 | 16 |
| 704.203.4 | 14 |
| 704.203.4 | 16 |
| 704.203.5 | 14 |
| 704.203.5 | 16 |
| 704.203.6 | 14 |
| 704.203.6 | 16 |
| 704.203.7 | 14 |
| 704.203.7 | 16 |
| 704.206.2 | 14 |
| 704.206.2 | 16 |
| 704.206.200 | 32 |
| 704.206.200 | 33 |
| 704.206.4 | 14 |
| 704.206.4 | 16 |
| 704.206.400 | 32 |
| 704.206.400 | 33 |
| 704.206.5 | 14 |
| 704.206.5 | 16 |
| 704.206.500 | 32 |
| 704.206.500 | 33 |
| 704.206.6 | 14 |
| 704.206.6 | 16 |
| 704.206.600 | 32 |
| 704.206.600 | 33 |
| 704.206.7 | 14 |
| 704.206.7 | 16 |
| 704.206.700 | 32 |
| 704.206.700 | 33 |
| 704.207.2 | 14 |
| 704.207.2 | 16 |
| 704.207.4 | 14 |
| 704.207.4 | 16 |
| 704.207.5 | 14 |
| 704.207.5 | 16 |
| 704.207.6 | 14 |
| 704.207.6 | 16 |
| 704.207.7 | 14 |
| 704.207.7 | 16 |
| 704.209.0 | 18 |
| 704.209.000 | 34 |
| 704.209.2 | 18 |
| 704.209.200 | 34 |
| 704.209.4 | 18 |
| 704.209.400 | 34 |
| 704.209.5 | 18 |
| 704.209.500 | 34 |
| 704.209.6 | 18 |
| 704.209.600 | 34 |
| 704.209.7 | 18 |
| 704.209.700 | 34 |
| 704.210.0 | 18 |
| 704.210.008 | 34 |
| 704.210.2 | 18 |
| 704.210.208 | 34 |
| 704.210.4 | 18 |
| 704.210.408 | 34 |
| 704.210.5 | 18 |
| 704.210.508 | 34 |
| 704.210.6 | 18 |
| 704.210.608 | 34 |
| 704.210.7 | 18 |
| 704.210.708 | 34 |
| 704.229.2 | 20 |
| 704.229.200 | 36 |
| 704.229.4 | 20 |
| 704.229.400 | 36 |
| 704.229.5 | 20 |
| 704.229.500 | 36 |
| 704.229.6 | 20 |
| 704.229.600 | 36 |
| 704.229.7 | 20 |
| 704.229.700 | 36 |
| 704.230.2 | 20 |
| 704.230.208 | 36 |
| 704.230.4 | 20 |
| 704.230.408 | 36 |
| 704.230.5 | 20 |
| 704.230.508 | 36 |
| 704.230.6 | 20 |
| 704.230.608 | 36 |
| 704.230.7 | 20 |
| 704.230.708 | 36 |
| 704.239.0 | 18 |
| 704.239.000 | 34 |
| 704.239.2 | 18 |
| 704.239.200 | 34 |
| 704.239.4 | 18 |
| 704.239.400 | 34 |
| 704.239.5 | 18 |
| 704.239.500 | 34 |
| 704.239.6 | 18 |
| 704.239.600 | 34 |
| 704.239.7 | 18 |
| 704.239.700 | 34 |
| 704.240.0 | 18 |
| 704.240.008 | 34 |
| 704.240.2 | 18 |
| 704.240.208 | 34 |
| 704.240.4 | 18 |
| 704.240.408 | 34 |
| 704.240.5 | 18 |
| 704.240.508 | 34 |
| 704.240.6 | 18 |
| 704.240.608 | 34 |
| 704.240.7 | 18 |
| 704.240.708 | 34 |
| 704.259.2 | 20 |
| 704.259.200 | 36 |
| 704.259.4 | 20 |
| 704.259.400 | 36 |
| 704.259.5 | 20 |
| 704.259.500 | 36 |
| 704.259.6 | 20 |
| 704.259.600 | 36 |
| 704.259.7 | 20 |
| 704.259.700 | 36 |
| 704.260.2 | 20 |
| 704.260.208 | 36 |
| 704.260.4 | 20 |
| 704.260.408 | 36 |
| 704.260.5 | 20 |
| 704.260.508 | 36 |
| 704.260.6 | 20 |
| 704.260.608 | 36 |
| 704.260.7 | 20 |
| 704.260.708 | 36 |
| 704.292.0 | 30 |
| 704.292.000 | 43 |
| 704.292.008 | 43 |
| 704.294.0 | 30 |
| 704.294.000 | 43 |
| 704.294.008 | 43 |
| 704.296.0 | 30 |
| 704.296.000 | 43 |

# Index from Typ-Nr.


| Typ-Nr. | Page |
|---|---|
| 704.296.008 | 43 |
| 704.298.0 | 30 |
| 704.298.000 | 43 |
| 704.298.008 | 43 |
| 704.300.0 | 28 |
| 704.300.0.12 | 28 |
| 704.300.000 | 41 |
| 704.300.000.12 | 41 |
| 704.300.008 | 41 |
| 704.300.008.12 | 41 |
| 704.300.100KN | 44 |
| 704.300.108KN | 44 |
| 704.300.1KN | 31 |
| 704.302.0 | 28 |
| 704.302.000 | 41 |
| 704.302.008 | 41 |
| 704.333.0 | 26 |
| 704.333.000 | 39 |
| 704.333.008 | 39 |
| 704.334.0 | 26 |
| 704.334.000 | 39 |
| 704.334.008 | 39 |
| 704.335.0 | 26 |
| 704.335.000 | 39 |
| 704.335.008 | 39 |
| 704.336.0 | 26 |
| 704.336.000 | 39 |
| 704.336.008 | 39 |
| 704.337.0 | 26 |
| 704.337.000 | 39 |
| 704.337.008 | 39 |
| 704.338.0 | 26 |
| 704.338.000 | 39 |
| 704.338.008 | 39 |
| 704.340.0 | 25 |
| 704.340.000 | 38 |
| 704.340.008 | 38 |
| 704.341.0 | 25 |
| 704.341.000 | 38 |
| 704.341.008 | 38 |
| 704.342.0 | 25 |
| 704.342.000 | 38 |
| 704.342.008 | 38 |
| 704.343.0 | 25 |
| 704.343.000 | 38 |
| 704.343.008 | 38 |
| 704.344.0 | 26 |
| 704.344.000 | 39 |
| 704.344.008 | 39 |
| 704.402.0 | 29 |
| 704.403.0 | 29 |
| 704.403.010 | 42 |
| 704.403.018 | 42 |
| 704.404.0 | 29 |
| 704.405.0 | 29 |
| 704.405.010 | 42 |
| 704.405.018 | 42 |
| 704.406.0 | 29 |
| 704.407.0 | 29 |
| 704.407.010 | 42 |
| 704.407.018 | 42 |
| 704.408.0 | 29 |
| 704.409.0 | 29 |
| 704.409.010 | 42 |
| 704.409.018 | 42 |
| 704.410.0 | 27 |
| 704.410.0.12 | 27 |
| 704.411.0 | 27 |
| 704.411.0.12 | 27 |
| 704.411.010 | 40 |
| 704.411.010.12 | 40 |
| 704.411.010KN | 44 |
| 704.411.018 | 40 |
| 704.411.018.12 | 40 |
| 704.411.0B.12 | 27 |
| 704.411.110KN | 44 |
| 704.411.118KN | 44 |
| 704.411.1KN | 31 |
| 704.412.0 | 27 |
| 704.413.0 | 27 |
| 704.413.010 | 40 |
| 704.413.018 | 40 |
| 704.502.0 | 29 |
| 704.502.000 | 42 |
| 704.502.008 | 42 |
| 704.504.0 | 29 |
| 704.504.000 | 42 |
| 704.504.008 | 42 |
| 704.506.0 | 29 |
| 704.506.000 | 42 |
| 704.506.008 | 42 |
| 704.508.0 | 29 |
| 704.508.000 | 42 |
| 704.508.008 | 42 |
| 704.510.0 | 27 |
| 704.510.0.12 | 27 |
| 704.510.000 | 40 |
| 704.510.000.12 | 40 |
| 704.510.008 | 40 |
| 704.510.008.12 | 40 |
| 704.510.100KN | 44 |
| 704.510.108KN | 44 |
| 704.510.1KN | 31 |
| 704.512.0 | 27 |
| 704.512.000 | 40 |
| 704.512.008 | 40 |
| 704.600.0 | 69 |
| 704.600.0 | 73 |
| 704.600.1 | 69 |
| 704.600.1 | 73 |
| 704.600.1A | 69 |
| 704.600.1A | 73 |
| 704.600.2 | 69 |
| 704.600.2 | 74 |
| 704.600.3 | 69 |
| 704.600.3 | 74 |
| 704.600.5/A | 69 |
| 704.600.5/A | 74 |
| 704.600.6 | 69 |
| 704.600.6 | 73 |
| 704.600.7 | 69 |
| 704.600.7 | 73 |
| 704.600.9 | 69 |
| 704.600.9 | 73 |
| 704.601.0 | 72 |
| 704.601.01 | 73 |
| 704.601.2 | 72 |
| 704.601.21 | 73 |
| 704.601.4 | 72 |
| 704.601.41 | 73 |
| 704.601.5 | 72 |
| 704.601.51 | 73 |
| 704.601.6 | 72 |
| 704.601.61 | 73 |
| 704.601.8 | 72 |
| 704.601.81 | 73 |
| 704.601.9 | 72 |
| 704.601.91 | 73 |
| 704.602.0 | 67 |
| 704.602.0 | 72 |
| 704.602.2 | 67 |
| 704.602.2 | 72 |
| 704.602.4 | 67 |
| 704.602.4 | 72 |
| 704.602.5 | 67 |
| 704.602.5 | 72 |
| 704.602.6 | 67 |
| 704.602.6 | 72 |
| 704.602.7 | 67 |
| 704.602.7 | 72 |
| 704.602.7A01 | 67 |
| 704.602.7A01 | 72 |
| 704.603.2 | 64 |
| 704.603.2 | 65 |
| 704.603.4 | 64 |
| 704.603.4 | 65 |
| 704.603.5 | 64 |
| 704.603.5 | 65 |
| 704.603.6 | 64 |
| 704.603.6 | 65 |
| 704.603.7 | 64 |
| 704.603.7 | 65 |
| 704.608.7 | 64 |
| 704.608.7 | 65 |
| 704.608.9 | 64 |
| 704.608.9 | 65 |
| 704.609.0 | 67 |
| 704.609.0 | 72 |
| 704.609.7 | 67 |
| 704.609.7 | 72 |
| 704.609.9 | 67 |
| 704.609.9 | 72 |
| 704.609.9A01 | 67 |
| 704.609.9A01 | 72 |
| 704.610.7 | 68 |
| 704.610.9 | 68 |
| 704.611.2 | 68 |
| 704.611.4 | 68 |
| 704.611.5 | 68 |
| 704.611.7 | 68 |
| 704.630.1 | 64 |
| 704.631.1 | 72 |
| 704.632.1 | 72 |
| 704.633.1 | 67 |
| 704.642.0 | 64 |
| 704.642.1 | 64 |
| 704.642.2 | 64 |
| 704.701.0 | 71 |
| 704.701.0 | 76 |

# Index from Typ-Nr.


| Typ-Nr. | Page |
|---|---|
| 704.701.4 | 71 |
| 704.701.4 | 76 |
| 704.701.6 | 71 |
| 704.701.6 | 76 |
| 704.702.0 | 75 |
| 704.702.2 | 70 |
| 704.702.2 | 70 |
| 704.702.2 | 75 |
| 704.702.4 | 70 |
| 704.702.4 | 70 |
| 704.702.4 | 75 |
| 704.702.5 | 70 |
| 704.702.5 | 70 |
| 704.702.5 | 75 |
| 704.702.6 | 70 |
| 704.702.6 | 70 |
| 704.702.6 | 75 |
| 704.702.7 | 70 |
| 704.702.7 | 70 |
| 704.702.7 | 75 |
| 704.702.9 | 75 |
| 704.703.2 | 66 |
| 704.703.4 | 66 |
| 704.703.5 | 66 |
| 704.703.6 | 66 |
| 704.703.7 | 66 |
| 704.706.7 | 66 |
| 704.707.7 | 71 |
| 704.707.7 | 75 |
| 704.708.7 | 66 |
| 704.708.9 | 66 |
| 704.709.7 | 70 |
| 704.709.7 | 75 |
| 704.709.9 | 70 |
| 704.709.9 | 75 |
| 704.730.0 | 66 |
| 704.730.1 | 66 |
| 704.731.0 | 75 |
| 704.731.1 | 75 |
| 704.732.0 | 75 |
| 704.732.1 | 75 |
| 704.733.0 | 70 |
| 704.733.1 | 70 |
| 704.741.0 | 75 |
| 704.741.8 | 75 |
| 704.742.0 | 75 |
| 704.742.8 | 75 |
| 704.743.0 | 70 |
| 704.743.8 | 70 |
| 704.8A230 | 56 |
| 704.8A231 | 56 |
| 704.8A232 | 56 |
| 704.8A233 | 56 |
| 704.8A234 | 55 |
| 704.8A235 | 55 |
| 704.8A236 | 55 |
| 704.8A237 | 55 |
| 704.8A238 | 55 |
| 704.8A239 | 55 |
| 704.8A250 | 56 |
| 704.8A251 | 56 |
| 704.8A252 | 56 |
| 704.8A253 | 56 |
| 704.8A254 | 55 |
| 704.8A255 | 55 |
| 704.8A270 | 56 |
| 704.8A271 | 56 |
| 704.8A272 | 56 |
| 704.8A639 | 55 |
| 704.8A730 | 56 |
| 704.8A731 | 56 |
| 704.900.1 | 52 |
| 704.900.1B | 53 |
| 704.900.2 | 52 |
| 704.900.2B | 53 |
| 704.900.3 | 52 |
| 704.900.3B | 53 |
| 704.900.4 | 52 |
| 704.900.4B | 53 |
| 704.900.5 | 52 |
| 704.900.5B | 53 |
| 704.901.1 | 52 |
| 704.901.1/D | 52 |
| 704.901.2 | 52 |
| 704.901.2/D | 52 |
| 704.901.3 | 52 |
| 704.901.3/D | 52 |
| 704.901.4 | 52 |
| 704.901.4/D | 52 |
| 704.901.5 | 52 |
| 704.901.5/D | 52 |
| 704.902.1 | 52 |
| 704.902.2 | 52 |
| 704.902.3 | 52 |
| 704.902.4 | 52 |
| 704.902.5 | 52 |
| 704.905.1 | 52 |
| 704.905.1/D | 52 |
| 704.905.2 | 52 |
| 704.905.2/D | 52 |
| 704.905.3 | 52 |
| 704.905.3/D | 52 |
| 704.905.4 | 52 |
| 704.905.4/D | 52 |
| 704.905.5 | 52 |
| 704.905.5/D | 52 |
| 704.907.1 | 51 |
| 704.907.2 | 51 |
| 704.907.3 | 51 |
| 704.907.4 | 51 |
| 704.907.5 | 51 |
| 704.908.1 | 51 |
| 704.908.2 | 51 |
| 704.908.3 | 51 |
| 704.908.4 | 51 |
| 704.908.5 | 51 |
| 704.910.1 | 51 |
| 704.910.1 | 54 |
| 704.910.1B | 53 |
| 704.910.2 | 51 |
| 704.910.2 | 54 |
| 704.910.2B | 53 |
| 704.910.3 | 51 |
| 704.910.3 | 54 |
| 704.910.3B | 53 |
| 704.910.4 | 51 |
| 704.910.4 | 54 |
| 704.910.4B | 53 |
| 704.910.5 | 51 |
| 704.910.5 | 54 |
| 704.910.5B | 53 |
| 704.911.1 | 51 |
| 704.911.1 | 54 |
| 704.911.1B | 53 |
| 704.911.2 | 51 |
| 704.911.2 | 54 |
| 704.911.2B | 53 |
| 704.911.3 | 51 |
| 704.911.3 | 54 |
| 704.911.3B | 53 |
| 704.911.4 | 51 |
| 704.911.4 | 54 |
| 704.911.4B | 53 |
| 704.911.5 | 51 |
| 704.911.5 | 54 |
| 704.911.5B | 53 |
| 704.912.1 | 51 |
| 704.912.1 | 54 |
| 704.912.2 | 51 |
| 704.912.2 | 54 |
| 704.912.3 | 51 |
| 704.912.3 | 54 |
| 704.912.4 | 51 |
| 704.912.4 | 54 |
| 704.912.5 | 51 |
| 704.912.5 | 54 |
| 704.915.1 | 51 |
| 704.915.1 | 54 |
| 704.915.1/D | 51 |
| 704.915.1/D | 54 |
| 704.915.2 | 51 |
| 704.915.2 | 54 |
| 704.915.2/D | 51 |
| 704.915.2/D | 54 |
| 704.915.3 | 51 |
| 704.915.3 | 54 |
| 704.915.3/D | 51 |
| 704.915.3/D | 54 |
| 704.915.4 | 51 |
| 704.915.4 | 54 |
| 704.915.4/D | 51 |
| 704.915.4/D | 54 |
| 704.915.5 | 51 |
| 704.915.5 | 54 |
| 704.915.5/D | 51 |
| 704.915.5/D | 54 |
| 704.917.1 | 54 |
| 704.917.2 | 54 |
| 704.917.3 | 54 |
| 704.917.4 | 54 |
| 704.917.5 | 54 |
| 704.918.1 | 54 |
| 704.918.2 | 54 |
| 704.918.3 | 54 |
| 704.918.4 | 54 |
| 704.918.5 | 54 |
| 704.925.0 | 48 |
| 704.925.2 | 48 |
| 704.925.3 | 48 |

# Index from Typ-Nr.


| Typ-Nr. | Page |
|---|---|
| 704.925.7 | 49 |
| 704.927.8 | 60 |
| 704.927.9 | 60 |
| 704.928.18 | 49 |
| 704.928.28 | 49 |
| 704.928.38 | 49 |
| 704.940.8 | 61 |
| 704.940.9 | 62 |
| 704.941.0 | 59 |
| 704.941.1 | 62 |
| 704.941.5 | 59 |
| 704.941.9 | 59 |
| 704.942.5 | 58 |
| 704.943.0 | 50 |
| 704.943.1 | 50 |
| 704.943.2 | 50 |
| 704.943.5 | 50 |
| 704.945.0 | 60 |
| 704.945.1 | 63 |
| 704.945.2 | 63 |
| 704.945.3 | 63 |
| 704.945.4 | 63 |
| 704.945.5 | 63 |
| 704.945.6 | 61 |
| 704.945.6 | 63 |
| 704.945.7 | 60 |
| 704.945.8 | 60 |
| 704.950.0 | 65 |
| 704.950.0 | 67 |
| 704.950.0 | 70 |
| 704.950.0 | 71 |
| 704.950.0 | 74 |
| 704.950.0 | 76 |
| 704.950.0B | 65 |
| 704.950.0B | 67 |
| 704.950.0B | 70 |
| 704.950.0B | 71 |
| 704.950.0B | 74 |
| 704.950.0B | 76 |
| 704.950.1 | 65 |
| 704.950.1 | 67 |
| 704.950.1 | 70 |
| 704.950.1 | 71 |
| 704.950.1 | 74 |
| 704.950.1 | 76 |
| 704.950.1/D | 65 |
| 704.950.1/D | 67 |
| 704.950.1/D | 70 |
| 704.950.1/D | 71 |
| 704.950.1/D | 74 |
| 704.950.1/D | 76 |
| 704.950.2/D | 65 |
| 704.950.2/D | 67 |
| 704.950.2/D | 70 |
| 704.950.2/D | 71 |
| 704.950.2/D | 74 |
| 704.950.2/D | 76 |
| 704.950.3 | 65 |
| 704.950.3 | 67 |
| 704.950.3 | 70 |
| 704.950.3 | 71 |
| 704.950.3 | 74 |
| 704.950.3 | 76 |
| 704.950.5 | 65 |
| 704.950.5 | 66 |
| 704.950.5 | 69 |
| 704.950.5 | 71 |
| 704.950.5 | 74 |
| 704.950.5 | 76 |
| 704.953.0 | 69 |
| 704.953.0 | 74 |
| 704.954.0 | 61 |
| 704.955.0 | 68 |
| 704.955.0 | 73 |
| 704.955.1 | 68 |
| 704.955.1 | 73 |
| 704.955.3 | 68 |
| 704.955.3 | 73 |
| 704.955.4 | 68 |
| 704.955.4 | 73 |
| 704.955.9 | 68 |
| 704.955.9 | 73 |
| 704.955.9E | 68 |
| 704.955.9E | 73 |
| 704.960.0 | 61 |
| 704.960.4 | 49 |
| 704.960.5 | 65 |
| 704.960.5 | 66 |
| 704.960.5 | 69 |
| 704.960.5 | 71 |
| 704.960.5 | 74 |
| 704.960.5 | 76 |
| 704.960.8 | 61 |
| 704.960.9 | 62 |
| 704.963.0 | 60 |
| 704.963.1 | 60 |
| 704.963.2 | 60 |
| 704.963.3 | 60 |
| 704.963.5 | 60 |
| 704.963.6 | 60 |
| 704.963.7 | 60 |
| 704.963.8 | 60 |
| 704.964.5 | 56 |
| 704.964.7 | 49 |
| 704.964.8 | 49 |
| 704.964.9 | 49 |
| 704.965.1 | 56 |
| 704.965.2 | 56 |
| 704.965.3 | 56 |
| 704.965.4 | 56 |
| 704.965.5 | 56 |
| 704.965.6 | 56 |
| 704.965.7 | 56 |
| 704.965.8 | 56 |
| 704.965.9 | 56 |
| 704.966.0 | 56 |
| 704.966.1 | 56 |
| 704.966.2 | 56 |
| 704.968.0 | 48 |
| 704.968.1 | 48 |
| 704.968.2 | 48 |
| 704.968.3 | 48 |
| 704.968.4 | 48 |
| 704.968.5 | 48 |
| 704.970.3 | 59 |
| 704.970.4 | 59 |
| 704.970.5 | 59 |
| 704.970.6 | 59 |
| 704.989.251 | 49 |
| 704.990.0 | 62 |
| 98-968 | 62 |

**EAO AG**
Tannwaldstrasse 88
4601 Olten, Switzerland

**E-mail** info@eao.com
**Website** www.eao.com

**Austria**
Phone +49 201 85 87 0
Fax +49 201 85 87 210
E-mail sales.ede@eao.com

**Belgium**
Phone +32 3 777 82 36
Fax +32 3 777 84 19
E-mail sales.ebl@eao.com

**China**
Phone +852 27 86 91 41
Fax +852 27 86 95 61
E-mail sales.ehk@eao.com

**France**
Phone +33 1 64 43 37 37
Fax +33 1 64 43 37 49
E-mail sales.ese@eao.com

**Germany**
Phone +49 201 85 87 0
Fax +49 201 85 87 210
E-mail sales.ede@eao.com

**Italy**
Phone +39 035 481 0189
Fax +39 035 481 3786
E-mail sales.eit@eao.com

**Japan**
Phone +81 3 5444 5411
Fax +81 3 5444 0345
E-mail sales.esj@eao.com

**Netherlands**
Phone +31 78 653 17 00
Fax +31 78 653 17 99
E-mail sales.enl@eao.com

**Sweden**
Phone +46 8 683 86 60
Fax +46 8 724 29 12
E-mail sales.esw@eao.com

**Switzerland**
Phone +41 62 388 95 00
Fax +41 62 388 95 55
E-mail sales.ech@eao.com

**United Kingdom**
Phone +44 1444 236 000
Fax +44 1444 236 641
E-mail sales.euk@eao.com

**USA**
Phone +1 203 877 4577
Fax +1 203 877 3694
E-mail sales.eus@eao.com

**Other Countries**
Phone +41 62 286 92 10
Fax +41 62 296 21 62
E-mail info@eao.com

EAO reserves the right to alter specifications without further notice

eao

LifeElectronics
Живое партнерство

**ООО «ЛайфЭлектроникс»** **“LifeElectronics” LLC**

*ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703*

*Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.*

*С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров*

*Мы предлагаем:*

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

*В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.*

*Конструкторский отдел помогает осуществить:*

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

*Тел: +7 (812) 336 43 04 (многоканальный)*
*Email: org@lifeelectronics.ru*

***www.lifeelectronics.ru***