



IA_KP-*W Series

**1W/2W/3W, FIXED INPUT, ISOLATED & REGULATED
DUAL OUTPUT DC-DC CONVERTER**

multi-country patent protection **RoHS**

FEATURES

Low ripple
Good dynamic feature
1KVDC Isolation
DIP Package
Temperature Range: -40°C to +85°C
UL94-V0 Package
No Heatsink Required
No External Component Required
Internal SMD construction
RoHS Compliance

APPLICATIONS

The IA_KP-3W & IA_KP-2W & IA_KP-1W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 5\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% , Typ)
	Voltage (VDC)		Voltage (VDC)	Current (mA)		
	Nominal	Range		Max	Min	
IA0512KP-1W	5	4.75-5.25	±12	±42	±5	64
IA0515KP-1W			±15	±33	±4	65
IA0509KP-2W *			±9	±100	±10	62
IA0512KP-2W			±12	±83	±9	63
IA0515KP-2W			±15	±67	±7	64
IA0512KP-3W			±12	±100	±10	64
IA0515KP-3W			±15	±100	±10	62
IA1212KP-1W *	12	11.4-12.6	±12	±42	±5	64
IA1215KP-1W *			±15	±33	±4	65
IA1209KP-2W			±9	±100	±10	63
IA1212KP-2W			±12	±83	±9	65
IA1215KP-2W *			±15	±67	±7	66
IA1212KP-3W *			±12	±100	±10	65
IA1215KP-3W			±15	±100	±10	68
IA2412KP-1W *	24	22.8-25.2	±12	±42	±5	64
IA2415KP-1W			±15	±33	±4	65
IA2409KP-2W *			±9	±100	±10	63
IA2412KP-2W			±12	±83	±9	66
IA2415KP-2W			±15	±67	±7	67
IA2412KP-3W			±12	±100	±10	68
IA2415KP-3W *			±15	±100	±10	69

* Designing.


* Designing.

ISOLATION SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute and 1mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

MODEL SELECTION

IA0512KP-3W

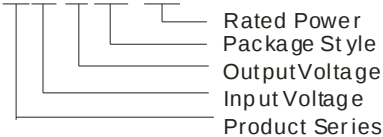

OUTPUT SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Line regulation	For V_{in} change of $\pm 5\%$ (1W&2W)			± 0.25	%
	For V_{in} change of $\pm 5\%$ (3W)			± 0.3	
	10% to 100% full load			± 1	
Output voltage accuracy	100% full load			± 3	
Temperature drift	100% full load			0.03	$^{\circ}\text{C}$
Output ripple*	20MHz Bandwidth(1W)		10	20	mVp-p
	20MHz Bandwidth(2W&3W)		20	40	
Output Noise*	20MHz Bandwidth(1W&2W)		50	150	
	20MHz Bandwidth(3W)		150	300	
Switching frequency	Full load, nominal input		75		KHz

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note:

1. All specifications measured at $T_A = 25^{\circ}\text{C}$, humidity $< 75\%$, nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details.

MORNSUN Science& Technology co., Ltd.

Address: 2th floor 6th building, Hangzhou Industrial District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272


<http://www.mornsun-power.com>

COMMON SPECIFICATION


Item	Test conditions	Min	Typ	Max	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			20	30	
Lead temperature)	1.5mm from case for 10 seconds			300	
Short circuit protection*				1	s
Cooling		Free air convection			
Case material		Plastic(UL94-V0)			
MTBF		3500			K hours
Weight			11		g

*Supply voltage must be discontinued at the end of short circuit duration.

TYPICAL CHARACTERISTICS

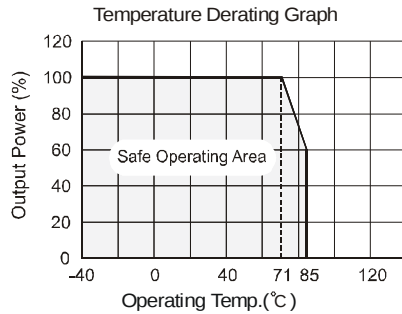

OUTLINE DIMENSIONS & PIN CONNECTIONS

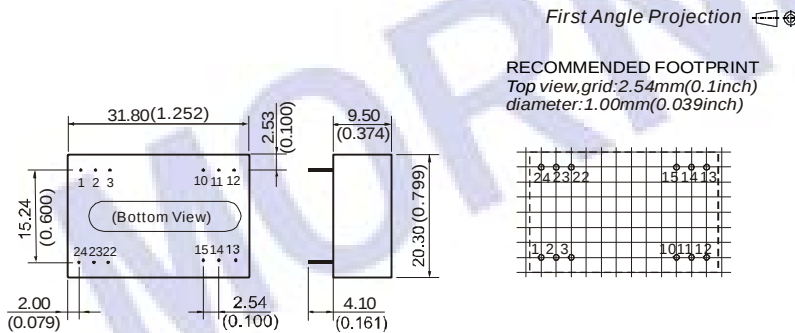

Note:
Unit:mm(inch)
Pin diameter:0.50mm(0.020inch)
Pin diameter tolerances:±0.10mm(±0.004inch)
General tolerances:±0.25mm(±0.010inch)

FOOTPRINT DETAILS

Pin	Duals
1, 24	Vin
2, 23	-Vo
3, 10, 15, 22	0V
11, 14	+Vo
12, 13	GND


APPLICATION NOTE

Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is not less than 10% of the full load, and that this product should **never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.

Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).



(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

EXTERNAL CAPACITOR TABLE (Table 1)

Vin(VDC)	Cin(uF)	Vout(VDC)	Cout(uF)
5	4.7	±5	4.7
12	2.2	±9	2.2
24	1	±12	1
-	-	±15	0.47

It's not recommended to connect any external capacitor in the application field with less than 0.5 watt output.

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

Input Over-voltage Protection Circuit

The simplest device for input over-voltage protection is a linear voltage regulator with overheat protection that is connected to the input end in series (Figure 2).



(Figure 2)

When the environment temperature is higher than 71°C, the product output power should be less then 60% of the rated power.

No parallel connection or plug and play.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru