

## Voltage Detector with Separated Sense Pin & Delay Capacitor Pin

### ■ GENERAL DESCRIPTION

The XC6118 series is a low power consumption voltage detector with high accuracy detection, manufactured using CMOS process and laser trimming technologies.

Since the sense pin is separated from the power supply pin, it allows the IC to monitor the other power supply.

The XC6118 can maintain the state of detection even when voltage of the monitored power supply drops to 0V.

Moreover, a release delay time can be adjusted by the external capacitor connected to the Cd pin.

The V<sub>OUT</sub> pin is available in both CMOS and N-channel open drain output configurations.


### ■ APPLICATIONS

- Microprocessor reset circuitry
- Charge voltage monitors
- Memory battery back-up switch circuits
- Power failure detection circuits

### ■ FEATURES


|                                      |                                                                                                                                       |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>High Accuracy</b>                 | : $\pm 2\%$ (Detect Voltage $\geq 1.5\text{V}$ )<br>: $\pm 30\text{mV}$ (Detect Voltage $< 1.5\text{V}$ )                             |
| <b>Low Power Consumption</b>         | : $0.4\ \mu\text{A}$ TYP. (Detect, $V_{\text{IN}}=1.0\text{V}$ )<br>: $0.8\ \mu\text{A}$ TYP. (Release, $V_{\text{IN}}=1.0\text{V}$ ) |
| <b>Detect Voltage Range</b>          | : $0.8\text{V} \sim 5.0\text{V}$ (0.1V increments)                                                                                    |
| <b>Operating Voltage Range</b>       | : $1.0\text{V} \sim 6.0\text{V}$                                                                                                      |
| <b>Temperature Characteristics</b>   | : $\pm 100\text{ppm}/^\circ\text{C}$ TYP.                                                                                             |
| <b>Output Configuration</b>          | : CMOS, N-channel open drain                                                                                                          |
| <b>Pin Function</b>                  | : Power supply separation<br>Release delay time adjustable                                                                            |
| <b>Operating Ambient Temperature</b> | : $-40^\circ\text{C} \sim +85^\circ\text{C}$                                                                                          |
| <b>Packages</b>                      | : USP-4, SOT-25                                                                                                                       |
| <b>Environmentally Friendly</b>      | : EU RoHS Compliant, Pb Free                                                                                                          |

### ■ TYPICAL APPLICATION CIRCUIT

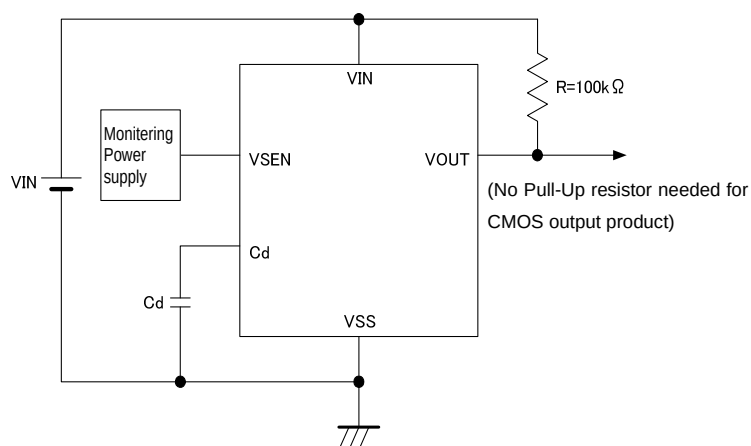


### ■ TYPICAL PERFORMANCE CHARACTERISTICS


#### ● Output Voltage vs. Sense Voltage

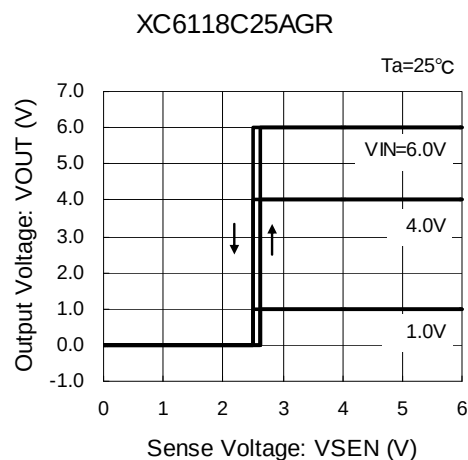

## PIN CONFIGURATION



USP-4  
(BOTTOM VIEW)



SOT-25  
(TOP VIEW)

- \* In the XC6118xxxA/B series, the dissipation pad should not be short-circuited with other pins.
- \* In the XC6118xxxC/D series, when the dissipation pad is short-circuited with other pins, connect it to the NC pin (No.2) pin before use.

## PIN ASSIGNMENT

| PIN NUMBER |        | PIN NAME         | FUNCTION                          |
|------------|--------|------------------|-----------------------------------|
| USP-4      | SOT-25 |                  |                                   |
| 1          | 1      | V <sub>OUT</sub> | Output (Detect "L")               |
| 2          | 5      | Cd               | Delay Capacitance <sup>(*)1</sup> |
| 2          | 5      | NC               | No Connection                     |
| 3          | 4      | V <sub>SEN</sub> | Sense                             |
| 4          | 3      | V <sub>IN</sub>  | Input                             |
| 5          | 2      | V <sub>SS</sub>  | Ground <sup>(*)2</sup>            |

NOTE:

- \*1: With the VSS pin of the USP-4 package, a tab on the backside is used as the pin No.5.
- \*2: In the case of selecting no built-in delay capacitance pin type, the delay capacitance (Cd) pin will be used as the NC.

## PRODUCT CLASSIFICATION

### Ordering Information

XC6118①②③④⑤⑥-⑦<sup>(\*)1</sup>


| DESIGNATOR | ITEM                  | SYMBOL | DESCRIPTION                                                              |
|------------|-----------------------|--------|--------------------------------------------------------------------------|
| ①          | Output Configuration  | C      | CMOS output                                                              |
|            |                       | N      | N-ch open drain output                                                   |
| ②③         | Detect Voltage        | 08~50  | e.g. 18 → 1.8V                                                           |
| ④          | Options               | A      | Built-in delay capacitance pin, hysteresis 5% (TYP.)(Standard*)          |
|            |                       | B      | Built-in delay capacitance pin, hysteresis less than 1%(Standard*)       |
|            |                       | C      | No built-in delay capacitance pin, hysteresis 5% (TYP.) (Semi-custom)    |
|            |                       | D      | No built-in delay capacitance pin, hysteresis less than 1% (Semi-custom) |
| ⑤⑥-⑦       | Packages (Order Unit) | GR-G   | USP-4 (3,000/Reel)                                                       |
|            |                       | MR-G   | SOT-25 (3,000/Reel)                                                      |

\*When delay function isn't used, open the delay capacitance pin before use.

<sup>(\*)1</sup> The "-G" suffix denotes Halogen and Antimony free as well as being fully RoHS compliant.


## ■ BLOCK DIAGRAMS

(1) XC6118CxxA

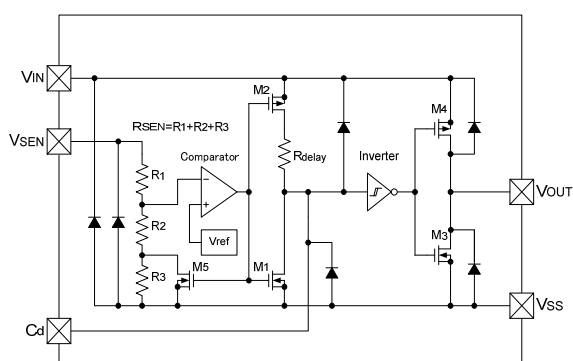


\*The delay capacitance pin (Cd) is not connected to the circuit in the block diagram of XC6118CxxC (semi-custom).

(2) XC6118CxxB

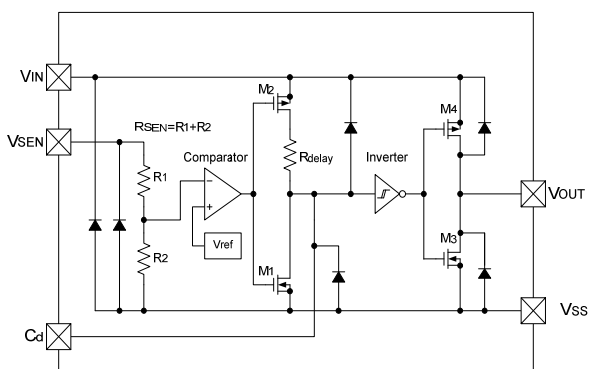


\*The delay capacitance pin (Cd) is not connected to the circuit in the block diagram of XC6118CxxD (semi-custom).

(3) XC6118NxxA

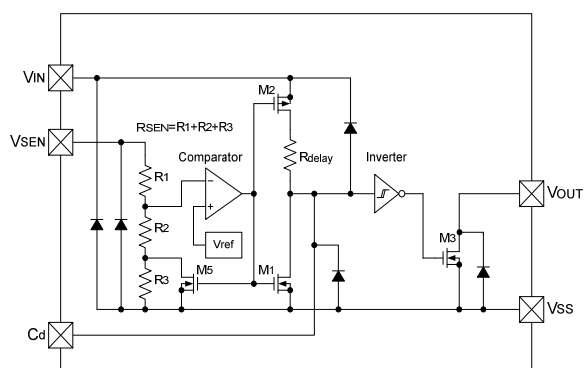

\*The delay capacitance pin (Cd) is not connected to the circuit in the block diagram of XC6118NxxC (semi-custom).

(4) XC6118NxxB

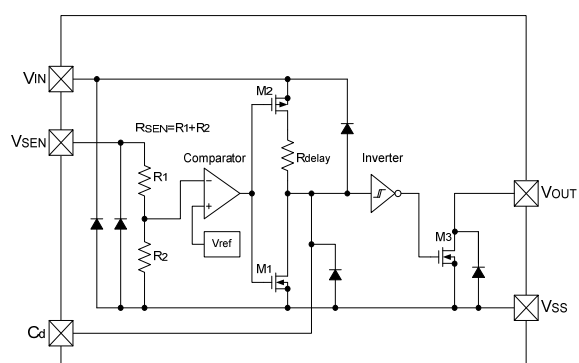

\*The delay capacitance pin (Cd) is not connected to the circuit in the block diagram of XC6118NxxD (semi-custom).

## ■ ABSOLUTE MAXIMUM RATINGS

### ● XC6118xxxA/B

Ta=25°C

| PARAMETER                     |                         | SYMBOL           | RATINGS                                   | UNITS |
|-------------------------------|-------------------------|------------------|-------------------------------------------|-------|
| Input Voltage                 |                         | V <sub>IN</sub>  | V <sub>SS</sub> -0.3~7.0                  | V     |
| Output Current                |                         | I <sub>OUT</sub> | 10                                        | mA    |
| Output Voltage                | XC6118C <sup>(*1)</sup> | V <sub>OUT</sub> | V <sub>SS</sub> -0.3~V <sub>IN</sub> +0.3 | V     |
|                               | XC6118N <sup>(*2)</sup> |                  | V <sub>SS</sub> -0.3~7.0                  |       |
| Sense Pin Voltage             |                         | V <sub>SEN</sub> | V <sub>SS</sub> -0.3~7.0                  | V     |
| Delay Capacitance Pin Voltage |                         | V <sub>CD</sub>  | V <sub>SS</sub> -0.3~V <sub>IN</sub> +0.3 | V     |
| Delay Capacitance Pin Current |                         | I <sub>CD</sub>  | 5.0                                       | mA    |
| Power Dissipation             | USP-4                   | Pd               | 120                                       | mW    |
|                               | SOT-25                  |                  | 250                                       |       |
| Operating Ambient Temperature |                         | Ta               | -40~+85                                   | °C    |
| Storage Temperature           |                         | Tstg             | -55~+125                                  | °C    |

### ● XC6118xxxC/D

Ta=25°C

| PARAMETER                     |                         | SYMBOL           | RATINGS                                   | UNITS |
|-------------------------------|-------------------------|------------------|-------------------------------------------|-------|
| Input Voltage                 |                         | V <sub>IN</sub>  | V <sub>SS</sub> -0.3~7.0                  | V     |
| Output Current                |                         | I <sub>OUT</sub> | 10                                        | mA    |
| Output Voltage                | XC6118C <sup>(*1)</sup> | V <sub>OUT</sub> | V <sub>SS</sub> -0.3~V <sub>IN</sub> +0.3 | V     |
|                               | XC6118N <sup>(*2)</sup> |                  | V <sub>SS</sub> -0.3~7.0                  |       |
| Sense Pin Voltage             |                         | V <sub>SEN</sub> | V <sub>SS</sub> -0.3~7.0                  | V     |
| Power Dissipation             | USP-4                   | Pd               | 120                                       | mW    |
|                               | SOT-25                  |                  | 250                                       |       |
| Operating Ambient Temperature |                         | Ta               | -40~+85                                   | °C    |
| Storage Temperature           |                         | Tstg             | -55~+125                                  | °C    |

NOTE:

\*1: CMOS output

\*2: N-ch open drain output

# ELECTRICAL CHARACTERISTICS

●XC6118xxxA

Ta=25°C

| PARAMETER                               |                        | SYMBOL                                        | CONDITIONS                                                                                                                           | MIN.                                   | TYP.                                   | MAX.           | UNITS            | CIRCUITS |
|-----------------------------------------|------------------------|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|----------------------------------------|----------------|------------------|----------|
| Operating Voltage                       |                        | $V_{IN}$                                      | $V_{DF(T)}=0.8\sim5.0V^{(*)1}$                                                                                                       | 1.0                                    |                                        | 6.0            | V                | -        |
| Detect Voltage                          |                        | $V_{DF}$                                      | $V_{IN}=1.0\sim6.0V$                                                                                                                 | E-1                                    |                                        |                | V                | ①        |
| Hysteresis Width                        |                        | $V_{HYS}$                                     | $V_{IN}=1.0\sim6.0V$                                                                                                                 | E-2                                    |                                        |                | V                | ①        |
| Detect Voltage Line Regulation          |                        | $\Delta V_{DF}/(\Delta V_{IN} \cdot V_{DF})$  | $V_{IN}=1.0\sim6.0V$                                                                                                                 |                                        | $\pm 0.1$                              |                | %/V              | ①        |
| Supply Current 1 <sup>(*)2</sup>        |                        | $I_{SS1}$                                     | $V_{SEN}=V_{DF} \times 0.9$<br>$V_{IN}=1.0V$<br>$V_{IN}=6.0V$                                                                        |                                        | 0.4<br>0.4                             | 1.0<br>1.0     | $\mu A$          | ②        |
| Supply Current 2 <sup>(*)2</sup>        |                        | $I_{SS2}$                                     | $V_{SEN}=V_{DF} \times 1.1$<br>$V_{IN}=1.0V$<br>$V_{IN}=6.0V$                                                                        |                                        | 0.8<br>0.9                             | 1.6<br>1.8     | $\mu A$          | ②        |
| Output Current <sup>(*)3</sup>          |                        | $I_{OUT1}$                                    | $V_{SEN}=0V, V_{DS}=0.5V(Nch)$<br>$V_{IN}=1.0V$<br>$V_{IN}=2.0V$<br>$V_{IN}=3.0V$<br>$V_{IN}=4.0V$<br>$V_{IN}=5.0V$<br>$V_{IN}=6.0V$ | 0.1<br>0.8<br>1.2<br>1.6<br>1.8<br>1.9 | 0.7<br>1.6<br>2.0<br>2.3<br>2.4<br>2.5 |                | mA               | ③        |
|                                         |                        | $I_{OUT2}$                                    | $V_{SEN}=6.0V,$<br>$V_{DS}=0.5V(Pch)$<br>$V_{IN}=1.0V$<br>$V_{IN}=6.0V$                                                              |                                        | -0.30<br>-1.00                         | -0.08<br>-0.70 | mA               | ④        |
| Leakage Current                         | CMOS Output (P-ch)     | $I_{LEAK}$                                    | $V_{IN}=6.0V, V_{SEN}=0V,$<br>$V_{OUT}=0V, Cd: Open$                                                                                 |                                        | -0.20                                  |                | $\mu A$          | ③        |
|                                         | N-ch Open Drain Output |                                               | $V_{IN}=6.0V, V_{SEN}=6.0V,$<br>$V_{OUT}=6.0V, Cd: Open$                                                                             |                                        | 0.20                                   | 0.40           |                  |          |
| Temperature Characteristics             |                        | $\Delta V_{DF}/(\Delta T_{opr} \cdot V_{DF})$ | $-40^{\circ}C \leq T_{opr} \leq 85^{\circ}C$                                                                                         |                                        | $\pm 100$                              |                | ppm/ $^{\circ}C$ | ①        |
| Sense Resistance <sup>(*)4</sup>        |                        | $R_{SEN}$                                     | $V_{SEN}=5.0V, V_{IN}=0V$                                                                                                            | E-4                                    |                                        |                | M $\Omega$       | ⑤        |
| Delay Resistance <sup>(*)5</sup>        |                        | $R_{DELAY}$                                   | $V_{SEN}=6.0V, V_{IN}=5.0V$<br>$Cd=0V$                                                                                               | 1.6                                    | 2.0                                    | 2.4            | M $\Omega$       | ⑥        |
| Delay capacitance pin Sink Current      |                        | $I_{CD}$                                      | $Cd=0.5V, V_{IN}=1.0V$                                                                                                               |                                        | 200                                    |                | $\mu A$          | ⑥        |
| Delay Capacitance Pin Threshold Voltage |                        | $V_{TCD}$                                     | $V_{SEN}=6.0V, V_{IN}=1.0V$<br>$V_{SEN}=6.0V, V_{IN}=6.0V$                                                                           | 0.4<br>2.9                             | 0.5<br>3.0                             | 0.6<br>3.1     | V                | ⑦        |
| Undefined Operation <sup>(*)6</sup>     |                        | $V_{UNS}$                                     | $V_{IN}=V_{SEN}=0\sim1.0V$                                                                                                           |                                        | 0.3                                    | 0.4            | V                | ⑧        |
| Detect Delay Time <sup>(*)7</sup>       |                        | $t_{DF0}$                                     | $V_{IN}=6.0V, V_{SEN}=6.0V \rightarrow 0V$<br>$Cd: Open$                                                                             |                                        | 30                                     | 230            | $\mu s$          | ⑨        |
| Release Delay Time <sup>(*)8</sup>      |                        | $t_{DR0}$                                     | $V_{IN}=6.0V, V_{SEN}=0V \rightarrow 6.0V$<br>$Cd: Open$                                                                             |                                        | 30                                     | 200            | $\mu s$          | ⑨        |

NOTE:

\*1:  $V_{DF(T)}$ : Nominal detect voltage

\*2: Current to the sense resistor is not included.

\*3:  $I_{OUT2}$  is applied only to the XC6118C series (CMOS output).\*4: It is calculated from the voltage value and the current value of the  $V_{SEN}$ .\*5: It is calculated from the voltage value of the  $V_{IN}$  and the current value of the  $Cd$ .\*6: Maximum  $V_{OUT}$  voltage when  $V_{IN}$  is changed from 0V to 1.0V under connecting the  $V_{IN}$  pin to the  $V_{SEN}$  pin.  
This value is effective only to the XC6118C series (CMOS output).\*7: Delay time from the time of  $V_{SEN}=V_{DF}$  to the time of  $V_{OUT}=0.6V$  when the  $V_{SEN}$  falls.\*8: Delay time from the time of  $V_{IN}=V_{DF}+V_{HYS}$  to the time of  $V_{OUT}=5.4V$  when the  $V_{SEN}$  rises.

## ELECTRICAL CHARACTERISTICS (Continued)

XC6118xxxB

Ta=25°C

| PARAMETER                               |                        | SYMBOL                                        | CONDITIONS                                                                                                                                                                                            | MIN.                                   | TYP.                                   | MAX.           | UNITS  | CIRCUITS |
|-----------------------------------------|------------------------|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|----------------------------------------|----------------|--------|----------|
| Operating Voltage                       |                        | V <sub>IN</sub>                               | V <sub>DF(T)</sub> =0.8~5.0V <sup>(*1)</sup>                                                                                                                                                          | 1.0                                    |                                        | 6.0            | V      | -        |
| Detect Voltage                          |                        | V <sub>DF</sub>                               | V <sub>IN</sub> =1.0~6.0V                                                                                                                                                                             | E-1                                    |                                        |                | V      | ①        |
| Hysteresis Width                        |                        | V <sub>HYS</sub>                              | V <sub>IN</sub> =1.0~6.0V                                                                                                                                                                             | E-3                                    |                                        |                | V      | ①        |
| Detect Voltage Line Regulation          |                        | $\Delta V_{DF}/(\Delta V_{IN} \cdot V_{DF})$  | V <sub>IN</sub> =1.0~6.0V                                                                                                                                                                             |                                        | ±0.1                                   |                | %/V    | ①        |
| Supply Current 1 <sup>(*2)</sup>        |                        | I <sub>SS1</sub>                              | V <sub>SEN</sub> =V <sub>DF</sub> × 0.9<br>V <sub>IN</sub> =1.0V<br>V <sub>IN</sub> =6.0V                                                                                                             |                                        | 0.4<br>0.4                             | 1.0<br>1.0     | μA     | ②        |
| Supply Current 2 <sup>(*2)</sup>        |                        | I <sub>SS2</sub>                              | V <sub>SEN</sub> =V <sub>DF</sub> × 1.1<br>V <sub>IN</sub> =1.0V<br>V <sub>IN</sub> =6.0V                                                                                                             |                                        | 0.8<br>0.9                             | 1.6<br>1.8     | μA     | ②        |
| Output Current <sup>(*3)</sup>          |                        | I <sub>OUT1</sub>                             | V <sub>SEN</sub> =0V V <sub>DS</sub> =0.5V(Nch)<br>V <sub>IN</sub> =1.0V<br>V <sub>IN</sub> =2.0V<br>V <sub>IN</sub> =3.0V<br>V <sub>IN</sub> =4.0V<br>V <sub>IN</sub> =5.0V<br>V <sub>IN</sub> =6.0V | 0.1<br>0.8<br>1.2<br>1.6<br>1.8<br>1.9 | 0.7<br>1.6<br>2.0<br>2.3<br>2.4<br>2.5 |                | mA     | ③        |
|                                         |                        | I <sub>OUT2</sub>                             | V <sub>SEN</sub> =6.0V V <sub>DS</sub> =0.5V(Pch)<br>V <sub>IN</sub> =1.0V<br>V <sub>IN</sub> =6.0V                                                                                                   |                                        | -0.30<br>-1.00                         | -0.08<br>-0.70 | mA     | ④        |
| Leakage Current                         | CMOS Output (P-ch)     | I <sub>LEAK</sub>                             | V <sub>IN</sub> =6.0V, V <sub>SEN</sub> =0V,<br>V <sub>OUT</sub> =0V, Cd: Open                                                                                                                        |                                        | -0.20                                  |                | μA     | ③        |
|                                         | N-ch Open Drain Output |                                               | V <sub>IN</sub> =6.0V, V <sub>SEN</sub> =6.0V,<br>V <sub>OUT</sub> =6.0V, Cd: Open                                                                                                                    |                                        | 0.20                                   | 0.40           |        |          |
| Temperature Characteristics             |                        | $\Delta V_{DF}/(\Delta T_{opr} \cdot V_{DF})$ | -40 °C ≤ T <sub>opr</sub> ≤ 85 °C                                                                                                                                                                     |                                        | ±100                                   |                | ppm/°C | ①        |
| Sense Resistance <sup>(*4)</sup>        |                        | R <sub>SEN</sub>                              | V <sub>SEN</sub> =5.0V V <sub>IN</sub> =0V                                                                                                                                                            | E-4                                    |                                        |                | MΩ     | ⑤        |
| Delay Resistance <sup>(*5)</sup>        |                        | R <sub>DELAY</sub>                            | V <sub>SEN</sub> =6.0V V <sub>IN</sub> =5.0V Cd=0V                                                                                                                                                    | 1.6                                    | 2.0                                    | 2.4            | MΩ     | ⑥        |
| Delay capacitance pin Sink Current      |                        | I <sub>CD</sub>                               | Cd=0.5V, V <sub>IN</sub> =1.0V                                                                                                                                                                        |                                        | 200                                    |                | μA     | ⑥        |
| Delay Capacitance Pin Threshold Voltage |                        | V <sub>TCD</sub>                              | V <sub>SEN</sub> =6.0V V <sub>IN</sub> =1.0V                                                                                                                                                          | 0.4                                    | 0.5                                    | 0.6            | V      | ⑦        |
|                                         |                        |                                               | V <sub>SEN</sub> =6.0V V <sub>IN</sub> =6.0V                                                                                                                                                          | 2.9                                    | 3.0                                    | 3.1            |        |          |
| Undefined Operation <sup>(*6)</sup>     |                        | V <sub>UNS</sub>                              | V <sub>IN</sub> =V <sub>SEN</sub> =0~1.0V                                                                                                                                                             |                                        | 0.3                                    | 0.4            | V      | ⑧        |
| Detect Delay Time <sup>(*7)</sup>       |                        | t <sub>DF0</sub>                              | V <sub>IN</sub> =6.0V, V <sub>SEN</sub> =6.0V→0V<br>Cd: Open                                                                                                                                          |                                        | 30                                     | 230            | μs     | ⑨        |
| Release Delay Time <sup>(*8)</sup>      |                        | t <sub>DR0</sub>                              | V <sub>IN</sub> =6.0V, V <sub>SEN</sub> =0V→6.0V<br>Cd: Open                                                                                                                                          |                                        | 30                                     | 200            | μs     | ⑨        |

NOTE:

\*1: V<sub>DF(T)</sub>: Nominal detect voltage

\*2: Current to the sense resistor is not included.

\*3: I<sub>OUT2</sub> is applied only to the XC6118C series (CMOS output).

\*4: It is calculated from the voltage value and the current value of the V<sub>SEN</sub>.

\*5: It is calculated from the voltage value of the V<sub>IN</sub> and the current value of the Cd.

\*6: Maximum V<sub>OUT</sub> voltage when V<sub>IN</sub> is changed from 0V to 1.0V under connecting the V<sub>IN</sub> pin to the V<sub>SEN</sub> pin.  
This value is effective only to the XC6118C series (CMOS output).

\*7: Delay time from the time of V<sub>SEN</sub>=V<sub>DF</sub> to the time of V<sub>OUT</sub>=0.6V when the V<sub>SEN</sub> falls.

\*8: Delay time from the time of V<sub>IN</sub>=V<sub>DF</sub>+V<sub>HYS</sub> to the time of V<sub>OUT</sub>=5.4V when the V<sub>SEN</sub> rises.

# ELECTRICAL CHARACTERISTICS (Continued)

●XC6118xxxC

Ta=25°C

| PARAMETER                           |                          | SYMBOL                                                | CONDITIONS                                                                                                                            | MIN.                                   | TYP.                                   | MAX.           | UNITS            | CIRCUITS |
|-------------------------------------|--------------------------|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|----------------------------------------|----------------|------------------|----------|
| Operating Voltage                   |                          | $V_{IN}$                                              | $V_{DF(T)}=0.8\sim 5.0V^{(*)1}$                                                                                                       | 1.0                                    |                                        | 6.0            | V                | -        |
| Detect Voltage                      |                          | $V_{DF}$                                              | $V_{IN}=1.0\sim 6.0V$                                                                                                                 | E-1                                    |                                        |                | V                | ①        |
| Hysteresis Width                    |                          | $V_{HYS}$                                             | $V_{IN}=1.0\sim 6.0V$                                                                                                                 | E-2                                    |                                        |                | V                | ①        |
| Detect Voltage<br>Line Regulation   |                          | $\Delta V_{DF}/$<br>( $\Delta V_{IN} \cdot V_{DF}$ )  | $V_{IN}=1.0\sim 6.0V$                                                                                                                 |                                        | $\pm 0.1$                              |                | %/V              | ①        |
| Supply Current 1 <sup>(*)2</sup>    |                          | $I_{SS1}$                                             | $V_{SEN}=V_{DF} \times 0.9$<br>$V_{IN}=1.0V$<br>$V_{IN}=6.0V$                                                                         |                                        | 0.4<br>0.4                             | 1.0<br>1.0     | $\mu A$          | ②        |
| Supply Current 2 <sup>(*)2</sup>    |                          | $I_{SS2}$                                             | $V_{SEN}=V_{DF} \times 1.1$<br>$V_{IN}=1.0V$<br>$V_{IN}=6.0V$                                                                         |                                        | 0.8<br>0.9                             | 1.6<br>1.8     | $\mu A$          | ②        |
| Output Current <sup>(*)3</sup>      |                          | $I_{OUT1}$                                            | $V_{SEN}=0V$ $V_{DS}=0.5V(Nch)$<br>$V_{IN}=1.0V$<br>$V_{IN}=2.0V$<br>$V_{IN}=3.0V$<br>$V_{IN}=4.0V$<br>$V_{IN}=5.0V$<br>$V_{IN}=6.0V$ | 0.1<br>0.8<br>1.2<br>1.6<br>1.8<br>1.9 | 0.7<br>1.6<br>2.0<br>2.3<br>2.4<br>2.5 |                | mA               | ③        |
|                                     |                          | $I_{OUT2}$                                            | $V_{SEN}=6.0V$ $V_{DS}=0.5V(Pch)$<br>$V_{IN}=1.0V$<br>$V_{IN}=6.0V$                                                                   |                                        | -0.30<br>-1.00                         | -0.08<br>-0.70 | mA               | ④        |
| Leakage<br>Current                  | CMOS Output<br>(P-ch)    | $I_{LEAK}$                                            | $V_{IN}=6.0V$ , $V_{SEN}=0V$ ,<br>$V_{OUT}=0V$                                                                                        |                                        | -0.20                                  |                | $\mu A$          | ③        |
|                                     | Nch Open Drain<br>Output |                                                       | $V_{IN}=6.0V$ , $V_{SEN}=6.0V$ ,<br>$V_{OUT}=6.0V$                                                                                    |                                        | 0.20                                   | 0.40           |                  |          |
| Temperature Characteristics         |                          | $\Delta V_{DF}/$<br>( $\Delta T_{opr} \cdot V_{DF}$ ) | $-40^{\circ}C \leq T_{opr} \leq 85^{\circ}C$                                                                                          |                                        | $\pm 100$                              |                | ppm/ $^{\circ}C$ | ①        |
| Sense Resistance <sup>(*)4</sup>    |                          | $R_{SEN}$                                             | $V_{SEN}=5.0V$ $V_{IN}=0V$                                                                                                            | E-4                                    |                                        |                | M $\Omega$       | ⑤        |
| Undefined Operation <sup>(*)5</sup> |                          | $V_{UNS}$                                             | $V_{IN}=V_{SEN}=0\sim 1.0V$                                                                                                           |                                        | 0.3                                    | 0.4            | V                | ⑦        |
| Detect Delay Time <sup>(*)6</sup>   |                          | $t_{DF0}$                                             | $V_{IN}=6.0V$ , $V_{SEN}=6.0\rightarrow 0V$                                                                                           |                                        | 30                                     | 230            | $\mu s$          | ⑨        |
| Release Delay Time <sup>(*)7</sup>  |                          | $t_{DR0}$                                             | $V_{IN}=6.0V$ , $V_{SEN}=0\rightarrow 6.0V$                                                                                           |                                        | 30                                     | 200            | $\mu s$          | ⑨        |

## NOTE:

\*1:  $V_{DF(T)}$ : Nominal detect voltage

\*2: Current to the sense resistor is not included.

\*3:  $I_{OUT2}$  is applied only to the XC6118C series (CMOS output).\*4: It is calculated from the voltage value and the current value of the  $V_{SEN}$ .\*5: Maximum  $V_{OUT}$  voltage when  $V_{IN}$  is changed from 0V to 1.0V under connecting the  $V_{IN}$  pin to the  $V_{SEN}$  pin.  
This value is effective only to the XC6118C series (CMOS output).\*6: Delay time from the time of  $V_{SEN}=V_{DF}$  to the time of  $V_{OUT}=0.6V$  when the  $V_{SEN}$  falls.\*7: Delay time from the time of  $V_{IN}=V_{DF}+V_{HYS}$  to the time of  $V_{OUT}=5.4V$  when the  $V_{SEN}$  rises.

## ELECTRICAL CHARACTERISTICS (Continued)

●XC6118xxxD

Ta=25°C

| PARAMETER                           |                       | SYMBOL                                        | CONDITIONS                                                                                                                            | MIN.                                   | TYP.                                   | MAX.           | UNITS            | CIRCUITS |
|-------------------------------------|-----------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|----------------------------------------|----------------|------------------|----------|
| Operating Voltage                   |                       | $V_{IN}$                                      | $V_{DF(T)}=0.8\sim5.0V$ <sup>(*)1</sup>                                                                                               | 1.0                                    |                                        | 6.0            | V                | -        |
| Detect Voltage                      |                       | $V_{DF}$                                      | $V_{IN}=1.0\sim6.0V$                                                                                                                  | E-1                                    |                                        |                | V                | ①        |
| Hysteresis Width                    |                       | $V_{HYS}$                                     | $V_{IN}=1.0\sim6.0V$                                                                                                                  | E-3                                    |                                        |                | V                | ①        |
| Detect Voltage Line Regulation      |                       | $\Delta V_{DF}/(\Delta V_{IN} \cdot V_{DF})$  | $V_{IN}=1.0\sim6.0V$                                                                                                                  |                                        | $\pm 0.1$                              |                | %/V              | ①        |
| Supply Current 1 <sup>(*)2</sup>    |                       | $I_{SS1}$                                     | $V_{SEN}=V_{DF} \times 0.9$<br>$V_{IN}=1.0V$<br>$V_{IN}=6.0V$                                                                         |                                        | 0.4<br>0.4                             | 1.0<br>1.0     | $\mu A$          | ②        |
| Supply Current 2 <sup>(*)2</sup>    |                       | $I_{SS2}$                                     | $V_{SEN}=V_{DF} \times 1.1$<br>$V_{IN}=1.0V$<br>$V_{IN}=6.0V$                                                                         |                                        | 0.8<br>0.9                             | 1.6<br>1.8     | $\mu A$          | ②        |
| Output Current <sup>(*)3</sup>      |                       | $I_{OUT1}$                                    | $V_{SEN}=0V$ $V_{DS}=0.5V(Nch)$<br>$V_{IN}=1.0V$<br>$V_{IN}=2.0V$<br>$V_{IN}=3.0V$<br>$V_{IN}=4.0V$<br>$V_{IN}=5.0V$<br>$V_{IN}=6.0V$ | 0.1<br>0.8<br>1.2<br>1.6<br>1.8<br>1.9 | 0.7<br>1.6<br>2.0<br>2.3<br>2.4<br>2.5 |                | mA               | ③        |
|                                     |                       | $I_{OUT2}$                                    | $V_{SEN}=6.0V$ $V_{DS}=0.5V(Pch)$<br>$V_{IN}=1.0V$<br>$V_{IN}=6.0V$                                                                   |                                        | -0.30<br>-1.00                         | -0.08<br>-0.70 | mA               | ④        |
| Leakage Current                     | CMOS Output (P-ch)    | $I_{LEAK}$                                    | $V_{IN}=6.0V$ , $V_{SEN}=0V$ ,<br>$V_{OUT}=0V$                                                                                        |                                        | -0.20                                  |                | $\mu A$          | ③        |
|                                     | Nch Open Drain Output |                                               | $V_{IN}=6.0V$ , $V_{SEN}=6.0V$ ,<br>$V_{OUT}=6.0V$                                                                                    |                                        | 0.20                                   | 0.40           |                  |          |
| Temperature Characteristics         |                       | $\Delta V_{DF}/(\Delta T_{opr} \cdot V_{DF})$ | $-40^{\circ}C \leq T_{opr} \leq 85^{\circ}C$                                                                                          |                                        | $\pm 100$                              |                | ppm/ $^{\circ}C$ | ①        |
| Sense Resistance <sup>(*)4</sup>    |                       | $R_{SEN}$                                     | $V_{SEN}=5.0V$ $V_{IN}=0V$                                                                                                            | E-4                                    |                                        |                | M $\Omega$       | ⑤        |
| Undefined Operation <sup>(*)5</sup> |                       | $V_{UNS}$                                     | $V_{IN}=V_{SEN}=0\sim1.0V$                                                                                                            |                                        | 0.3                                    | 0.4            | V                | ⑦        |
| Detect Delay Time <sup>(*)6</sup>   |                       | $t_{DF0}$                                     | $V_{IN}=6.0V$ $V_{SEN}=6.0\rightarrow 0V$                                                                                             |                                        | 30                                     | 230            | $\mu s$          | ⑨        |
| Release Delay Time <sup>(*)7</sup>  |                       | $t_{DR0}$                                     | $V_{IN}=6.0V$ $V_{SEN}=0\rightarrow 6.0V$                                                                                             |                                        | 30                                     | 200            | $\mu s$          | ⑨        |

NOTE:

\*1:  $V_{DF(T)}$ : Nominal detect voltage

\*2: Current to the sense resistor is not included.

\*3:  $I_{OUT2}$  is applied only to the XC6118C series (CMOS output).

\*4: It is calculated from the voltage value and the current value of the  $V_{SEN}$ .

\*5: Maximum  $V_{OUT}$  voltage when  $V_{IN}$  is changed from 0V to 1.0V under connecting the  $V_{IN}$  pin to the  $V_{SEN}$  pin.  
This value is effective only to the XC6118C series (CMOS output).

\*6: Delay time from the time of  $V_{SEN}=V_{DF}$  to the time of  $V_{OUT}=0.6V$  when the  $V_{SEN}$  falls.

\*7: Delay time from the time of  $V_{IN}=V_{DF}+V_{HYS}$  to the time of  $V_{OUT}=5.4V$  when the  $V_{SEN}$  rises.

## ■ VOLTAGE CHART

| SYMBOL             | E-1                           |       | E-2              |       | E-3              |       | E-4              |      |
|--------------------|-------------------------------|-------|------------------|-------|------------------|-------|------------------|------|
| PARAMETER          | DETECT VOLTAGE <sup>(*)</sup> |       | HYSTERESIS RANGE |       | HYSTERESIS RANGE |       | SENSE RESISTANCE |      |
| NOMINAL VOLTAGE    | (V)                           |       | (V)              |       | (V)              |       | (MΩ)             |      |
| V <sub>DF(T)</sub> | V <sub>DF</sub>               |       | V <sub>HYS</sub> |       | V <sub>HYS</sub> |       | R <sub>SEN</sub> |      |
| (V)                | MIN.                          | MAX.  | MIN.             | MAX.  | MIN.             | MAX.  | MIN.             | TYP. |
| 0.8                | 0.770                         | 0.830 | 0.015            | 0.066 | 0                | 0.008 | 10               | 20   |
| 0.9                | 0.870                         | 0.930 | 0.017            | 0.074 |                  | 0.009 |                  |      |
| 1.0                | 0.970                         | 1.030 | 0.019            | 0.082 |                  | 0.010 |                  |      |
| 1.1                | 1.070                         | 1.130 | 0.021            | 0.090 |                  | 0.011 |                  |      |
| 1.2                | 1.170                         | 1.230 | 0.023            | 0.098 |                  | 0.012 |                  |      |
| 1.3                | 1.270                         | 1.330 | 0.025            | 0.106 |                  | 0.013 |                  |      |
| 1.4                | 1.370                         | 1.430 | 0.027            | 0.114 |                  | 0.014 |                  |      |
| 1.5                | 1.470                         | 1.530 | 0.029            | 0.122 |                  | 0.015 |                  |      |
| 1.6                | 1.568                         | 1.632 | 0.031            | 0.131 |                  | 0.016 |                  |      |
| 1.7                | 1.666                         | 1.734 | 0.033            | 0.085 |                  | 0.017 |                  |      |
| 1.8                | 1.764                         | 1.836 | 0.035            | 0.147 |                  | 0.018 |                  |      |
| 1.9                | 1.862                         | 1.938 | 0.037            | 0.155 |                  | 0.019 |                  |      |
| 2.0                | 1.960                         | 2.040 | 0.039            | 0.163 |                  | 0.020 | 13               | 24   |
| 2.1                | 2.058                         | 2.142 | 0.041            | 0.171 |                  | 0.021 |                  |      |
| 2.2                | 2.156                         | 2.244 | 0.043            | 0.180 |                  | 0.022 |                  |      |
| 2.3                | 2.254                         | 2.346 | 0.045            | 0.188 |                  | 0.023 |                  |      |
| 2.4                | 2.352                         | 2.448 | 0.047            | 0.196 |                  | 0.024 |                  |      |
| 2.5                | 2.450                         | 2.550 | 0.049            | 0.204 |                  | 0.026 |                  |      |
| 2.6                | 2.548                         | 2.652 | 0.051            | 0.212 |                  | 0.027 |                  |      |
| 2.7                | 2.646                         | 2.754 | 0.053            | 0.220 |                  | 0.028 |                  |      |
| 2.8                | 2.744                         | 2.856 | 0.055            | 0.228 |                  | 0.029 |                  |      |
| 2.9                | 2.842                         | 2.958 | 0.057            | 0.237 |                  | 0.030 |                  |      |
| 3.0                | 2.940                         | 3.060 | 0.059            | 0.245 |                  | 0.031 |                  |      |
| 3.1                | 3.038                         | 3.162 | 0.061            | 0.253 |                  | 0.032 |                  |      |
| 3.2                | 3.136                         | 3.264 | 0.063            | 0.261 |                  | 0.033 |                  |      |
| 3.3                | 3.234                         | 3.366 | 0.065            | 0.269 |                  | 0.034 |                  |      |
| 3.4                | 3.332                         | 3.468 | 0.067            | 0.277 |                  | 0.035 |                  |      |
| 3.5                | 3.430                         | 3.570 | 0.069            | 0.286 |                  | 0.036 |                  |      |
| 3.6                | 3.528                         | 3.672 | 0.071            | 0.294 |                  | 0.037 |                  |      |
| 3.7                | 3.626                         | 3.774 | 0.073            | 0.302 |                  | 0.038 |                  |      |
| 3.8                | 3.724                         | 3.876 | 0.074            | 0.310 |                  | 0.039 | 15               | 28   |
| 3.9                | 3.822                         | 3.978 | 0.076            | 0.318 |                  | 0.040 |                  |      |
| 4.0                | 3.920                         | 4.080 | 0.078            | 0.326 |                  | 0.041 |                  |      |
| 4.1                | 4.018                         | 4.182 | 0.080            | 0.335 |                  | 0.042 |                  |      |
| 4.2                | 4.116                         | 4.284 | 0.082            | 0.343 |                  | 0.043 |                  |      |
| 4.3                | 4.214                         | 4.386 | 0.084            | 0.351 |                  | 0.044 |                  |      |
| 4.4                | 4.312                         | 4.488 | 0.086            | 0.359 |                  | 0.045 |                  |      |
| 4.5                | 4.410                         | 4.590 | 0.088            | 0.367 |                  | 0.046 |                  |      |
| 4.6                | 4.508                         | 4.692 | 0.090            | 0.375 |                  | 0.047 |                  |      |
| 4.7                | 4.606                         | 4.794 | 0.092            | 0.384 |                  | 0.048 |                  |      |
| 4.8                | 4.704                         | 4.896 | 0.094            | 0.392 |                  | 0.049 |                  |      |
| 4.9                | 4.802                         | 4.998 | 0.096            | 0.400 |                  | 0.050 |                  |      |
| 5.0                | 4.900                         | 5.100 | 0.098            | 0.408 |                  | 0.051 |                  |      |


NOTE:

\*1: When V<sub>DF(T)</sub> ≤ 1.4V, the detection accuracy is ±30mV.


When V<sub>DF(T)</sub> ≥ 1.5V, the detection accuracy is ±2%.

## TEST CIRCUITS


Circuit 1

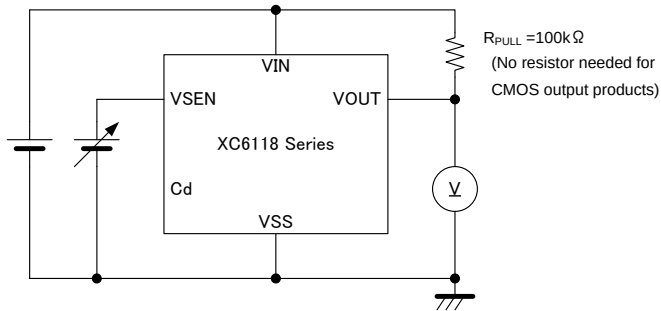


Circuit 2

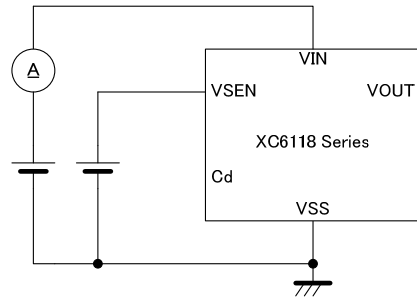


Circuit 3

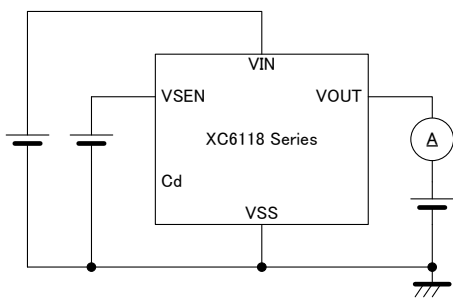


Circuit 4

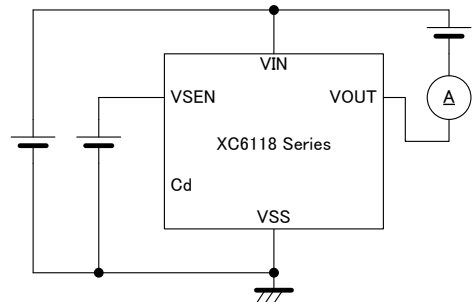


Circuit 5

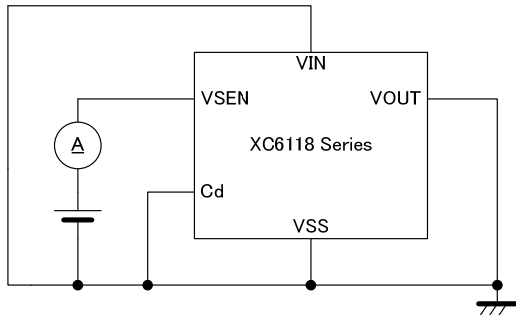


Circuit 6

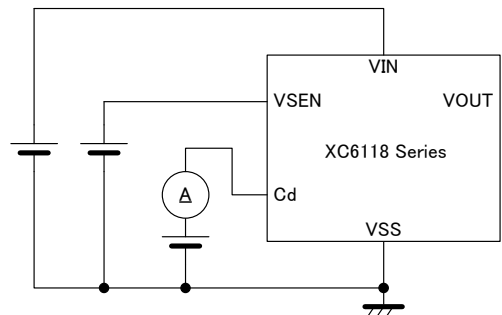


Circuit 7

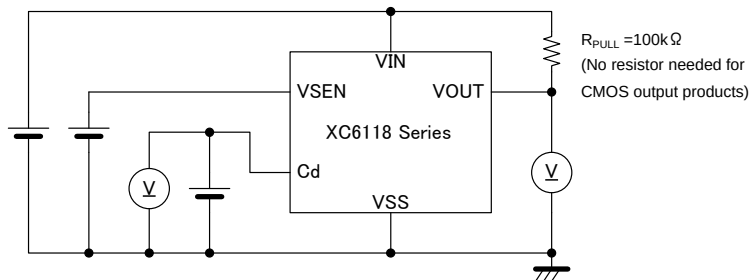

Circuit 8

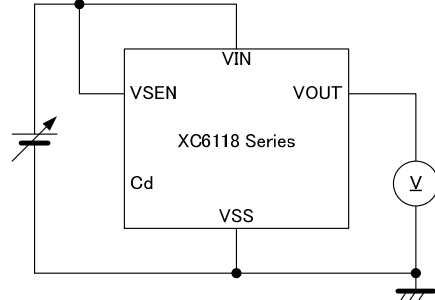


Circuit 9

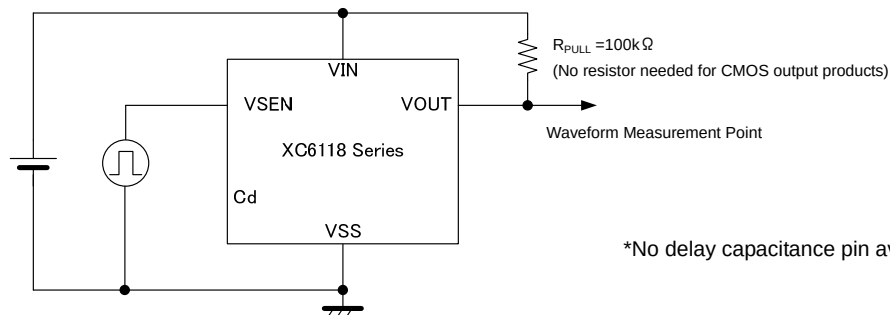

\*No delay capacitance pin available in the XC6118xxx C/D series.

## ■ OPERATIONAL EXPLANATION

A typical circuit example is shown in Figure 1, and the timing chart of Figure 1 is shown in Figure 2.

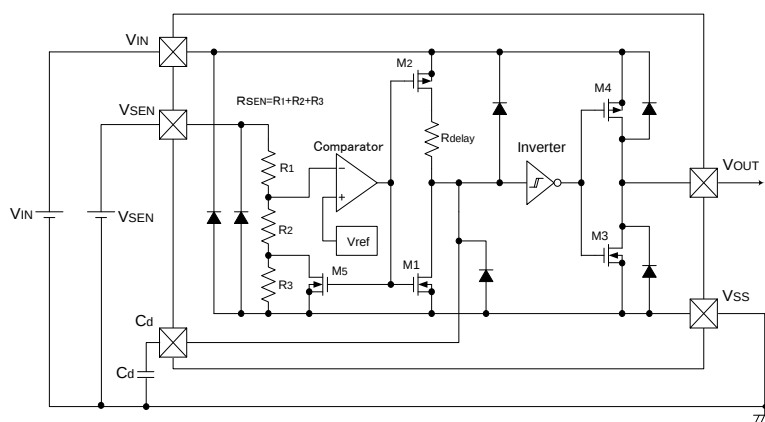

\*The XC6118N series (N-ch open drain output) requires a pull-up resistor for pulling up output.

Figure 1: Typical application circuit example

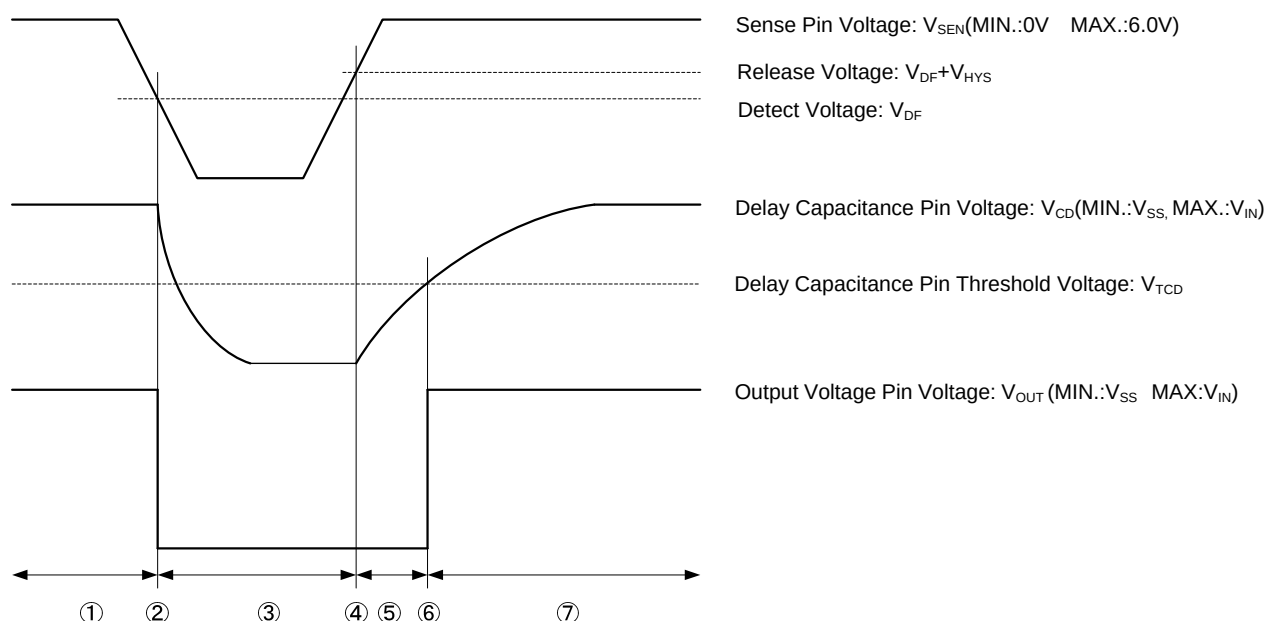


Figure 2: The timing chart of Figure 1

- ① As an early state, the sense pin is applied sufficiently high voltage (6.0V MAX.) and the delay capacitance (Cd) is charged to the power supply input voltage, (VIN: 1.0V MIN., 6.0V MAX.). While the sense pin voltage (VSEN) starts dropping to reach the detect voltage (VDF) (VSEN > VDF), the output voltage (VOUT) keeps the "High" level (=VIN).  
\* If a pull-up resistor of the XC6118N series (N-ch open drain) is connected to added power supply different from the input voltage pin, the "High" level will be a voltage value where the pull-up resistor is connected.
- ② When the sense pin voltage keeps dropping and becomes equal to the detect voltage (VSEN = VDF), an N-ch transistor (M1) for the delay capacitance (Cd) discharge is turned ON, and starts to discharge the delay capacitance (Cd). An inverter (Inv.1) operates as a comparator of the reference voltage VIN, and the output voltage changes into the "Low" level (=VSS). The detect delay time [tDF] is defined as time which ranges from VSEN = VDF to the VOUT of "Low" level (especially, when the Cd pin is not connected: tDF0).
- ③ While the sense pin voltage keeps below the detect voltage, the delay capacitance (Cd) is discharged to the ground voltage (=VSS) level. Then, the output voltage maintains the "Low" level while the sense pin voltage increases again to reach the release voltage (VSEN < VDF + VHYS).

## ■ OPERATIONAL EXPLANATION (Continued)

- ④ When the sense pin voltage continues to increase up to the release voltage level ( $V_{DF}+V_{HYS}$ ), the N-ch transistor (M1) for the delay capacitance (Cd) discharge will be turned OFF, and the delay capacitance (Cd) will start discharging via a delay resistor ( $R_{DELAY}$ ). The inverter (Inv.1) will operate as a comparator (Rise Logic Threshold:  $V_{TLH}=V_{TCD}$ , Fall Logic Threshold:  $V_{THL}=V_{SS}$ ) while the sense pin voltage keeps higher than the detect voltage ( $V_{SEN} > V_{DF}$ ).
- ⑤ While the delay capacitance pin voltage ( $V_{CD}$ ) rises to reach the delay capacitance pin threshold voltage ( $V_{TCD}$ ) with the sense pin voltage equal to the release voltage or higher, the sense pin will be charged by the time constant of the RC series circuit. Assuming the time to the release delay time ( $t_{DR}$ ), it can be given by the formula (1).

$$t_{DR} = -R_{DELAY} \times Cd \times \ln(1 - V_{TCD}/V_{IN}) \quad \cdots(1)$$

The release delay time can also be briefly calculated with the formula (2) because the delay resistance is  $2.0M\Omega$  (TYP.) and the delay capacitance pin threshold voltage is  $V_{IN}/2$  (TYP.)

$$t_{DR} = R_{DELAY} \times Cd \times 0.69 \quad \cdots(2)$$

\* :  $R_{DELAY}$  is  $2.0M\Omega$  (TYP.)

As an example, presuming that the delay capacitance is  $0.68\mu F$ ,  $t_{DR}$  is :

$$2.0 \times 10^6 \times 0.68 \times 10^{-6} \times 0.69 = 938(ms)$$

\* Note that the release delay time may remarkably be short when the delay capacitance (Cd) is not discharged to the ground (=VSS) level because time described in ③ is short.

- ⑥ When the delay capacitance pin voltage reaches to the delay capacitance pin threshold voltage ( $V_{CD}=V_{TCD}$ ), the inverter (Inv.1) will be inverted. As a result, the output voltage changes into the "High" (=V<sub>IN</sub>) level.  $t_{DRO}$  is defined as time which ranges from  $V_{SEN}=V_{DF}+V_{HYS}$  to the V<sub>OUT</sub> of "High" level without connecting to the Cd.
- ⑦ While the sense voltage is higher than the detect voltage ( $V_{SEN} > V_{DF}$ ), the delay capacitance pin is charged until the delay capacitance pin voltage becomes the input voltage level. Therefore, the output voltage maintains the "High" (=V<sub>IN</sub>) level.

### ● Function Chart

| V <sub>SEN</sub> | Cd | TRANSITION OF V <sub>OUT</sub> CONDITION *1 |   |   |
|------------------|----|---------------------------------------------|---|---|
|                  |    | ①                                           |   | ② |
| L                | L  | L                                           | ⇒ | L |
|                  | H  |                                             |   |   |
|                  | L  | H                                           |   |   |
|                  | H  |                                             |   |   |
| H                | L  | L                                           | ⇒ | L |
|                  | H  |                                             | ⇒ | H |
|                  | L  | H                                           | ⇒ |   |
|                  | H  |                                             | ⇒ |   |

\*1: V<sub>OUT</sub> transits from condition ① to ② because of the combination of V<sub>SEN</sub> and V<sub>CD</sub>, V<sub>IN</sub>.

V<sub>IN</sub> should be more than the lowest operation voltage.

#### ● Example

ex. 1) V<sub>OUT</sub> ranges from 'L' to 'H' in case of V<sub>SEN</sub> = 'H' ( $V_{DR} \geq V_{SEN}$ ), Cd='H' ( $V_{TCD} \geq Cd$ ) while V<sub>OUT</sub> is 'L'.

ex. 2) V<sub>OUT</sub> maintains 'H' when Cd ranges from 'H' to 'L', V<sub>SEN</sub>= 'H' and Cd='L' when V<sub>OUT</sub> becomes 'H' in ex.1.

### ● Release Delay Time Chart

| DELAY CAPACITANCE [Cd]<br>( $\mu F$ ) | RELEASE DELAY TIME [t <sub>DR</sub> ]<br>(TYP.)<br>(ms) | RELEASE DELAY TIME [t <sub>DR</sub> ] *2<br>(MIN. ~ MAX.)<br>(ms) |
|---------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------|
| 0.010                                 | 13.8                                                    | 11.0 ~ 16.6                                                       |
| 0.022                                 | 30.4                                                    | 24.3 ~ 36.4                                                       |
| 0.047                                 | 64.9                                                    | 51.9 ~ 77.8                                                       |
| 0.100                                 | 138                                                     | 110 ~ 166                                                         |
| 0.220                                 | 304                                                     | 243 ~ 364                                                         |
| 0.470                                 | 649                                                     | 519 ~ 778                                                         |
| 1.000                                 | 1380                                                    | 1100 ~ 1660                                                       |

\* The release delay time values above are calculated by using the formula (2).

\*2: The release delay time (t<sub>DR</sub>) is influenced by the delay capacitance Cd.

## ■NOTES ON USE

1. Please use this IC within the stated maximum ratings. For temporary, transitional voltage drop or voltage rising phenomenon, the IC is liable to malfunction should the ratings be exceeded.
2. The power supply input pin voltage drops by the resistance between power supply and the  $V_{IN}$  pin, and by through current at operation of the IC. At this time, the operation may be wrong if the power supply input pin voltage falls below the minimum operating voltage range. In CMOS output, for output current, drops in the power supply input pin voltage similarly occur. Moreover, in CMOS output, when the  $V_{IN}$  pin and the sense pin are short-circuited and used, oscillation of the circuit may occur if the drops in voltage, which caused by through current at operation of the IC, exceed the hysteresis voltage. Note it especially when you use the IC with the  $V_{IN}$  pin connected to a resistor.
3. When the setting voltage is less than 1.0V, be sure to separate the  $V_{IN}$  pin and the sense pin, and to apply the voltage over 1.0V to the  $V_{IN}$  pin.
4. Note that a rapid and high fluctuation of the power supply input pin voltage may cause a wrong operation.
5. Power supply noise may cause operational function errors, Care must be taken to put the capacitor between  $V_{IN}$ -GND and test on the board carefully.
6. When there is a possibility of which the power supply input pin voltage falls rapidly (e.g.: 6.0V to 0V) at release operation with the delay capacitance pin ( $C_d$ ) connected to a capacitor, use a Schottky barrier diode connected between the  $V_{IN}$  pin and the  $C_d$  pin as the Figure 3 shown below.
7. In N channel open drain output,  $V_{OUT}$  voltage at detect and release is determined by resistance of a pull up resistor connected at the  $V_{OUT}$  pin. Please choose proper resistance values with refer to Figure 4;

During detection:  $V_{OUT} = V_{PULL} / (1 + R_{PULL} / R_{ON})$

$V_{PULL}$ : Pull up voltage

$R_{ON}(\times 1)$ : On resistance of N channel driver M3 can be calculated as  $V_{DS} / I_{OUT1}$  from electrical characteristics,

For example, when  $(\times 2) R_{ON} = 0.5 / 0.8 \times 10^{-3} = 625 \Omega$  (MAX.) at  $V_{IN}=2.0V$ ,  $V_{PULL} = 3.0V$  and  $V_{OUT} \leq 0.1V$  at detect,

$$R_{PULL} = (V_{PULL} / V_{OUT} - 1) \times R_{ON} = (3 / 0.1 - 1) \times 625 \div 18 k \Omega$$

In this case,  $R_{PULL}$  should be selected higher or equal to 18k $\Omega$  in order to keep the output voltage less than 0.1V during detection.

( $\times 1$ )  $R_{ON}$  is bigger when  $V_{IN}$  is smaller, be noted.

( $\times 2$ ) For calculation, Minimum  $V_{IN}$  should be chosen among the input voltage range.

During releasing :  $V_{OUT} = V_{PULL} / (1 + R_{PULL} / R_{OFF})$

$V_{PULL}$ : Pull up voltage

$R_{OFF}$ : On resistance of N channel driver M3 is 15M $\Omega$  (MIN.) when the driver is off (as to  $V_{OUT} / I_{LEAK}$ )

For example : when  $V_{PULL} = 6.0V$  and  $V_{OUT} \geq 5.99V$ ,

$$R_{PULL} = (V_{PULL} / V_{OUT} - 1) \times R_{OFF} = (6 / 5.99 - 1) \times 15 \times 10^6 \div 25 k \Omega$$

In this case,  $R_{PULL}$  should be selected smaller or equal to 25 k $\Omega$  in order to obtain output voltage higher than 5.99V during releasing.

8. Torex places an importance on improving our products and their reliability.

We request that users incorporate fail-safe designs and post-aging protection treatment when using Torex products in their systems.

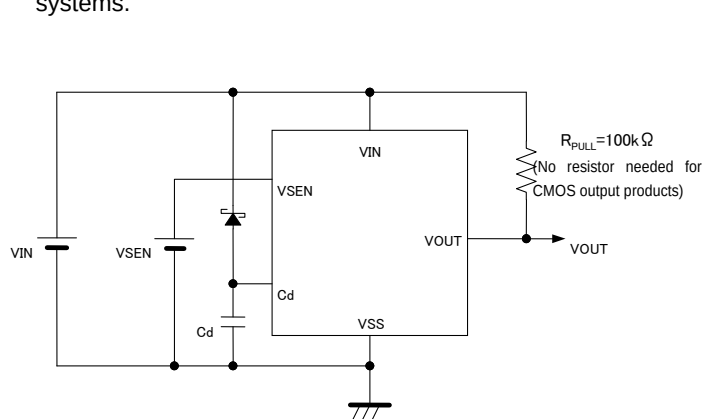


Figure 3: Circuit example with the delay capacitance pin ( $C_d$ ) connected to a Schottky barrier diode


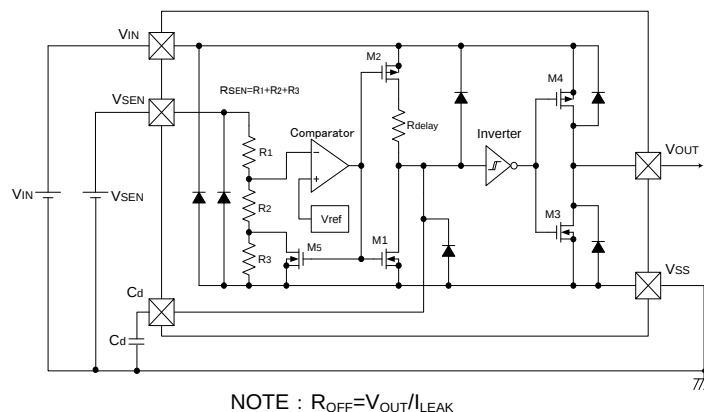




Figure 4: Circuit example of XC6118N Series

## TYPICAL PERFORMANCE CHARACTERISTICS


### (1) Supply Current vs. Sense Voltage

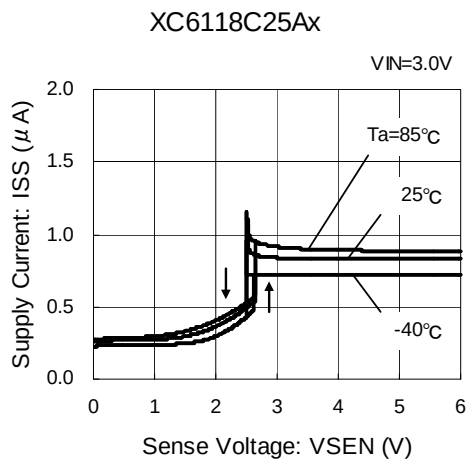


### (2) Supply Current vs. Input Voltage

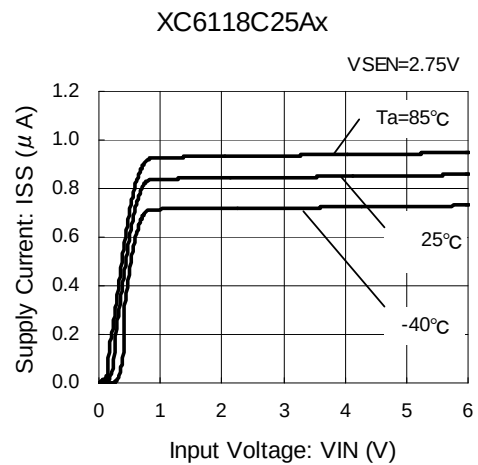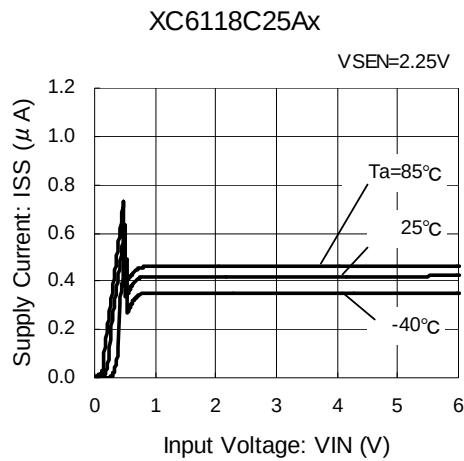

### (3) Detect Voltage vs. Ambient Temperature

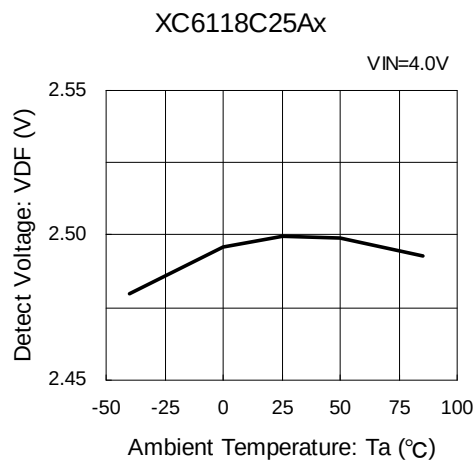


### (4) Detect Voltage vs. Input Voltage

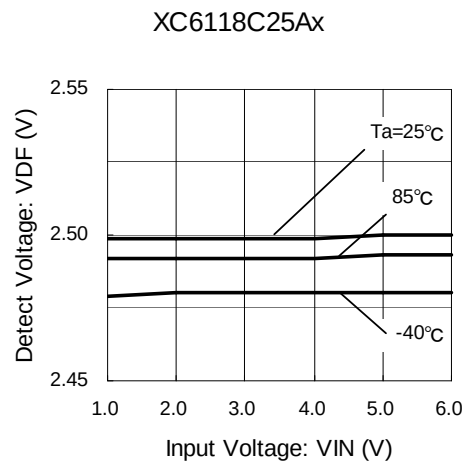


## ■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(5) Hysteresis Voltage vs. Ambient Temperature

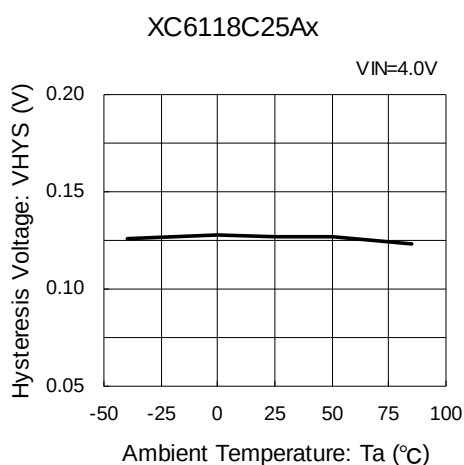


(6) CD Pin Sink Current vs. Input Voltage

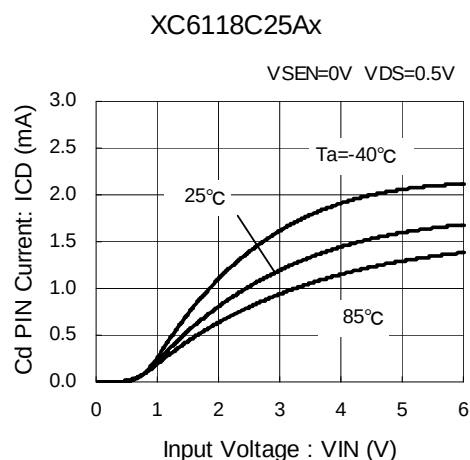



(7) Output Voltage vs. Sense Voltage

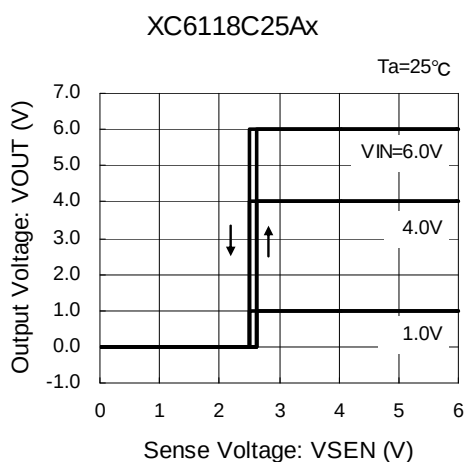

(8) Output Voltage vs. Input Voltage

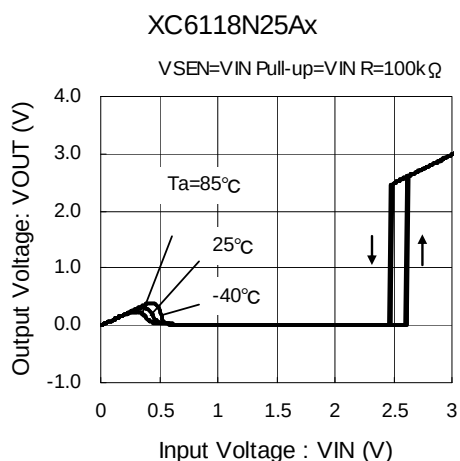


(9) Output Current vs. Input Voltage

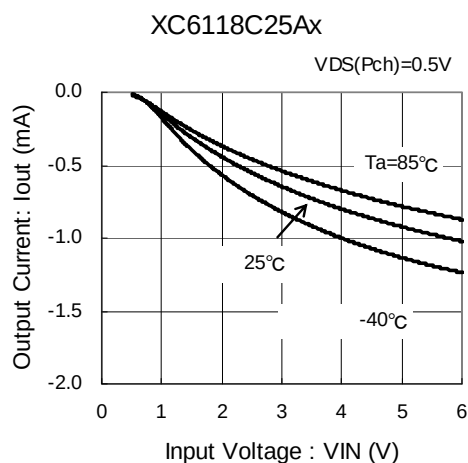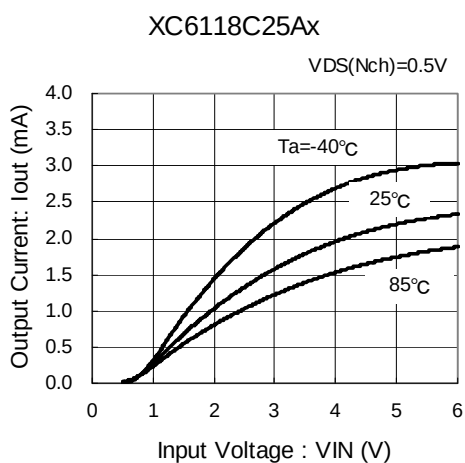


## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(10) Delay Resistance vs. Ambient Temperature

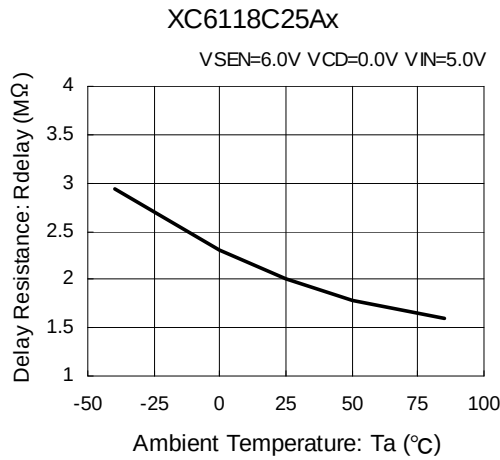


(11) Release Delay Time vs. Delay Capacitance

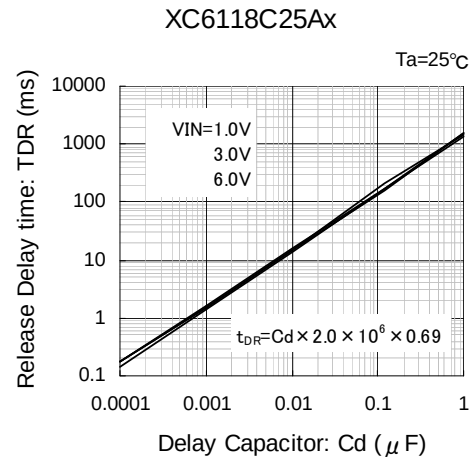


(12) Detect Delay Time vs. Delay Capacitance

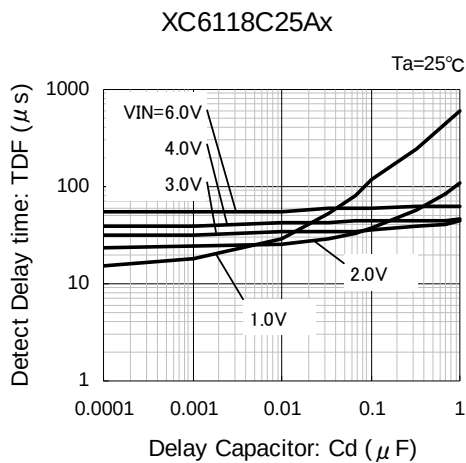

(13) Leakage Current vs. Ambient Temperature

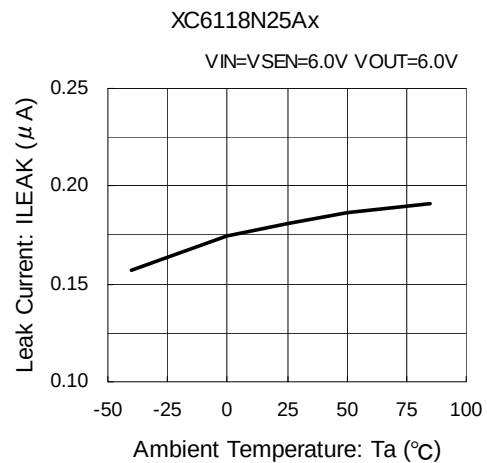


(14) Leakage Current vs. Supply Voltage

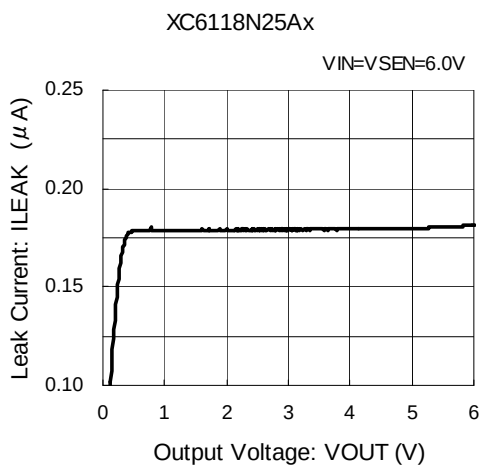


## ■ PACKAGING INFORMATION


### ● USP-4

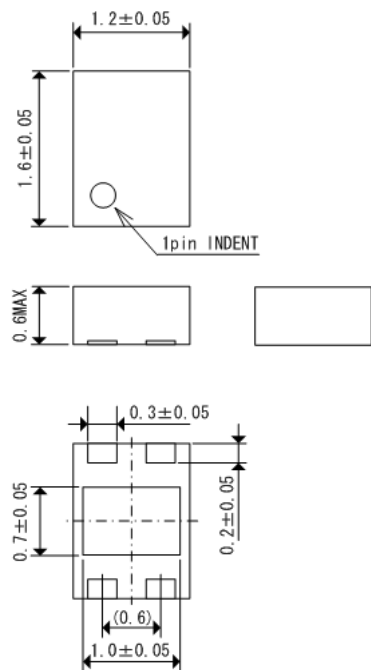

### ● USP-4 Reference Pattern Layout

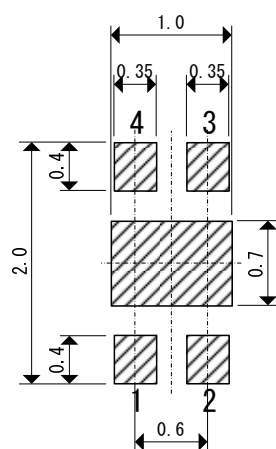


### ● USP-4 Reference Metal Mask Design

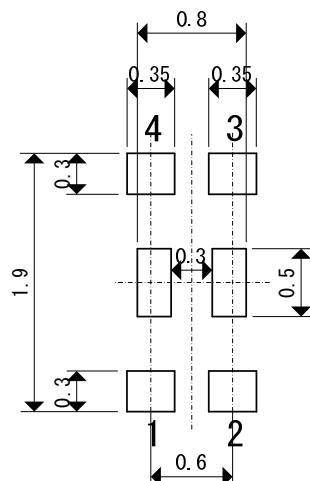

### ● SOT-25

(unit : mm)

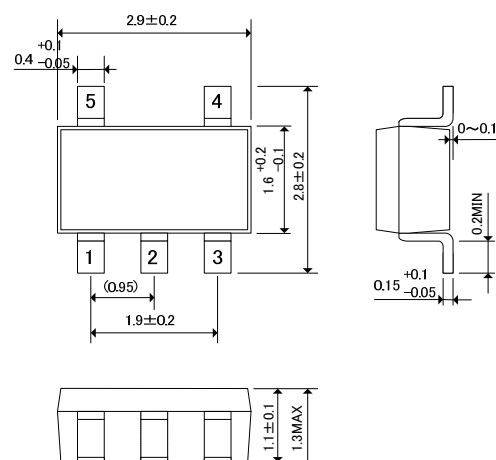

## MARKING RULE

### ●SOT-25


① represents output configuration and integer number of detect voltage

CMOS Output (XC6118C Series)

| MARK | VOLTAGE (V) |
|------|-------------|
| L    | 0.X         |
| M    | 1.X         |
| N    | 2.X         |
| P    | 3.X         |
| R    | 4.X         |
| S    | 5.X         |

N-ch Open Drain Output (XC6118N Series)

| MARK | VOLTAGE (V) |
|------|-------------|
| T    | 0.X         |
| U    | 1.X         |
| V    | 2.X         |
| X    | 3.X         |
| Y    | 4.X         |
| Z    | 5.X         |



SOT-25  
(TOP VIEW)

② represents decimal number of detect voltage

(ex.)

| MARK | VOLTAGE (V) | PRODUCT SERIES |
|------|-------------|----------------|
| 3    | X.3         | XC6118**3***   |
| 0    | X.0         | XC6118**0***   |

③ represents options

| MARK | OPTIONS                                                                         | PRODUCT SERIES |
|------|---------------------------------------------------------------------------------|----------------|
| A    | Built-in delay capacitance pin with hysteresis 5% (TYP.)<br>(Standard)          | XC6118***A**   |
| B    | Built-in delay capacitance pin with hysteresis less than 1%<br>(Standard)       | XC6118***B**   |
| C    | No built-in delay capacitance pin with hysteresis 5% (TYP.)<br>(Semi-custom)    | XC6118***C**   |
| D    | No built-in delay capacitance pin with hysteresis less than 1%<br>(Semi-custom) | XC6118***D**   |

④⑤ represents production lot number

0 to 9 A to Z, or inverted characters of 0 to 9, A to Z repeated.

(G, I, J, O, Q, and W excluded)

\*No character inversion used.

## ■ MARKING RULE (Continued)

### ● USP-4


① represents output configuration and integer number of detect voltage

CMOS Output (XC6118C Series)

| MARK | VOLTAGE (V) |
|------|-------------|
| L    | 0.X         |
| M    | 1.X         |
| N    | 2.X         |
| P    | 3.X         |
| R    | 4.X         |
| S    | 5.X         |

N-ch Open Drain Output (XC6118N Series)

| MARK | VOLTAGE (V) |
|------|-------------|
| T    | 0.X         |
| U    | 1.X         |
| V    | 2.X         |
| X    | 3.X         |
| Y    | 4.X         |
| Z    | 5.X         |



USP-4  
(TOP VIEW)

② represents decimal number of detect voltage

(ex.)

| MARK | VOLTAGE (V) | PRODUCT SERIES |
|------|-------------|----------------|
| 3    | X.3         | XC6118**3***   |
| 0    | X.0         | XC6118**0***   |

③ represents options

| MARK | OPTIONS                                                                         | PRODUCT SERIES |
|------|---------------------------------------------------------------------------------|----------------|
| A    | Built-in delay capacitance pin with hysteresis 5% (TYP.)<br>(Standard)          | XC6118***A**   |
| B    | Built-in delay capacitance pin with hysteresis less than 1%<br>(Standard)       | XC6118***B**   |
| C    | No built-in delay capacitance pin with hysteresis 5% (TYP.)<br>(Semi-custom)    | XC6118***C**   |
| D    | No built-in delay capacitance pin with hysteresis less than 1%<br>(Semi-custom) | XC6118***D**   |

④⑤ represents production lot number

0 to 9, A to Z or inverted characters of 0 to 9, A to Z repeated.

(G, I, J, O, Q, and W excluded)

\*No character inversion used.

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet.
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure or malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.  
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges.  
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

**TOREX SEMICONDUCTOR LTD.**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)