



## 30W Single Port Power over Ethernet Midspan IEEE802.3at Compliant Power Injector



### Features

- Compliant with IEEE802.3at Standard
- Non-vented Case
- Full Protection OVP, OCP
- 1 year warranty
- Limited Power Source
- Gigabit Compatible
- May power Cisco AP1250 with ACCY125X dongle

### Applications

- IP Telephones
- Wireless Access Points
- Bluetooth® Access Points
- Security Cameras
- IP Print Servers
- WiMAX® Access Points

### Safety Approvals

- CE
- cUL/US

### Mechanical Characteristics

- Length: 140mm (5.51in.)
- Width: 65mm (2.55in.)
- Height: 36mm (1.42in.)
- Weight: 0.2Kg (7.58oz)

### Output Specifications

Model	AC Input	DC Output Voltage	Load		Regulation	
			Min.	Max.	Line	Load
POE31U-1AT-R <sup>1</sup>	Three Wire	56V	10mA	535mA	54-57V	
POE31W-1AT-R <sup>1</sup>	Two Wire	56V	10mA	535mA	54-57V	

Notes: (1) Consult factory for availability

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at [www.phihong.com](http://www.phihong.com) for the most up-to-date specifications and contact information.

**INPUT:**

**AC Input Voltage Rating**  
100 to 240VAC

**AC Input Voltage Range**  
90 to 264VAC

**AC Input Current**  
0.8A (RMS) maximum at 120VAC  
0.55A (RMS) maximum at 240VAC

**AC Input Frequency**  
47 to 63Hz

**Leakage Current**  
350uA maximum for U models  
250uA maximum for W models

**Max In-rush Current**  
60A maximum at 240VAC and maximum  
load (Cold Start at ambient 25°C)

**OUTPUT:**

**Output Power**  
30W

**Hold up Time**  
10mSec min at max load at 120VAC, 60Hz

**Transient O/P Voltage Protection**  
60V max at switch on/off at any AC line  
phase

**Efficiency**  
80% Typical at max load at 120VAC, 60Hz

**Environment**

Operating Temperature 0 to +40°C  
Non-operating Temperature -20 to +65°C  
Relative Humidity 5 to 90%

**EMI**

Complies with FCC Class B  
Complies with EN55032 Class B

**EMC**

ESD: IEC61000-4-2 Level 3  
RS: IEC61000-4-3 Level 3  
EFT/Burst: IEC61000-4-4 Level 2  
Surge: IEC61000-4-5 Level 3  
CS: IEC61000-4-6 Level 3  
Voltage Dips: IEC61000-4-11  
Harmonic: IEC61000-3-2 Class A

**Isolation (HI-POT)**

Primary to secondary: 1500VAC for 1  
minute, 10mA

**Insulation Resistance**

Primary to secondary: 10M Ohm 500VDC

**FEATURES:****Over Voltage/Current, Short Circuit Protection**

The output is equipped with short-circuit protection and overload protection as per the IEEE 802.3at specification and conforms to UL60950-2. The output can be shorted permanently without damage.

**Indicator**

Solid Green: Valid IEEE802.3at load detected and connected "ON"  
Blinking Green: Power "ON" ready for connection  
Blinking Red/Green: Invalid load connected  
Blinking Red: fault

**AC Input Connector**

IEC320 C14 - U Models – three wire  
IEC320 C8 – W Models – two wire

**Output Connection**

+pins 3,6 / -pins 1,2


**Data IN/POE OUT Connector**

RJ45

**Warranty**

1 year

**Dimension Diagram Unit: mm**

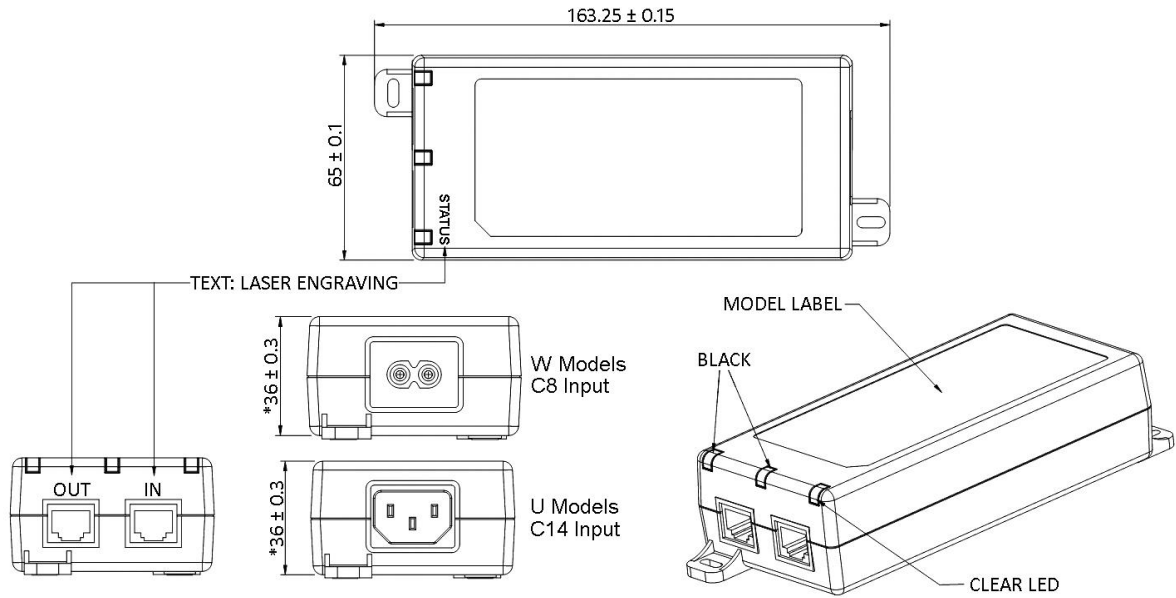

**Supplier's Declaration of Conformity**  
**47 CFR § 2.1077 Compliance Information**

Phihong USA Corporation  
47800 Fremont Boulevard  
Fremont, CA 94538  
Telephone: (510) 445-0100  
[www.phihong.com](http://www.phihong.com)

NOTE: This model has/The models in this products series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)