


ULTRA MINIATURE RELAY SIGNAL RELAY

FTR-C1 Series

RoHS compliant

■ FEATURES

- Dimensions of large contact gap relay
Height: 9.3 mm maximum (THT)
9.65 mm maximum (SMT)
Length: 15 mm maximum
Width: 7.5 mm maximum
- Conforms to IEC60950 / EN60950 / UL1950/ C22.2
No.950 spacing & high breakdown voltage
Clearance: 2.0 mm (coil and contacts)
Creepage: 2.5 mm (coil and contacts)
- HIGH RELIABILITY
Bifurcated contacts
- Low power consumption 280 mW (latching type
140mW)
- RoHS Compliant since beginning of production

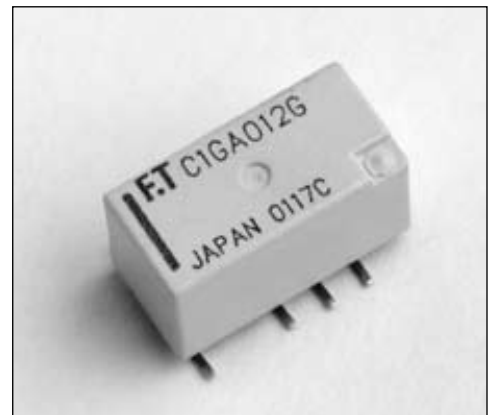

■ ORDERING INFORMATION

[Example] FTR-C1 C A 012 G-(B05)*
 (a) (b) (c) (d) (e) (f)

(a)	Series Name	FTR-C1
(b)	Terminal Appearance	C: Through hole type G: Surface mount type
(c)	Operation Function	A: Standard Type B: Single coil latching type
(d)	Coil Number	Nominal Voltage
(e)	Contact Material	G: Silver alloy

Remarks: Actual marking on relay would not carry code FTR and be as below:

Ordering code Actual marking
FTR-C1CA03G → C1CA03G

* If ordering tape and reel package, please add "B05" after the partnumber (tape and reel is only available for SMT type, example: FTR-C1GA003G-B05)

FTR-C1 Series

■ COIL DATA CHART

Standard type

Model		Nominal Voltage	Coil Resistance ($\pm 10\%$)	Must Operate Voltage	Must Release Voltage	Nominal Operating Power ($\pm 10\%$)
THT	SMT					
FTR-C1CA003G	FTR-C1GA003G	3 VDC	32.1 Ω	2.25 VDC	0.3 VDC	280 mW
FTR-C1CA4.5G	FTR-C1GA4.5G	4.5 VDC	72.3 Ω	3.38 VDC	0.45 VDC	280 mW
FTR-C1CA005G	FTR-C1GA005G	5 VDC	89.3 Ω	3.75 VDC	0.5 VDC	280 mW
FTR-C1CA012G	FTR-C1GA012G	12VDC	514 Ω	9.00 VDC	1.2 VDC	280 mW
FTR-C1CA024G	FTR-C1GA024G	24VDC	1920 Ω	18.0 VDC	2.4 VDC	300 mW

Note: All values in the table are measured at 20°C.

Single coil latching type

Model		Nominal Voltage	Coil Resistance ($\pm 10\%$)	Set Voltage	Reset Voltage	Nominal Operating Power ($\pm 10\%$)
THT	SMT					
FTR-C1CB003G	FTR-C1GB003G	3 VDC	64 Ω	2.25 VDC	2.25 VDC	140 mW
FTR-C1CB4.5G	FTR-C1GB4.5G	4.5 VDC	145 Ω	3.38 VDC	3.38 VDC	140 mW
FTR-C1CB005G	FTR-C1GB005G	5 VDC	179 Ω	3.75 VDC	3.75 VDC	140 mW
FTR-C1CB012G	FTR-C1GB012G	12VDC	1029 Ω	9.00 VDC	9.00 VDC	140 mW
FTR-C1CB024G	FTR-C1GB024G	24VDC	3200 Ω	18.0 VDC	18.0 VDC	180 mW


Note: - All values in the table are measured at 20°C.
 - Single coil latching type is applying to the standard now.

■ SPECIFICATIONS

Item			FTR-C1CA ()G FTR-C1GA ()G
Contact	Arrangement		2 Form C
	Material		Silver alloy
	Resistance (initial)		Max. 100m ohm (at 1A 6VDC)
	Max. Switching Power		37.5AV / 30W
	Max. Switching Voltage		250VAC, 220 VDC
	Max. Switching Current		1 A
Coil	Operating Temperature		-40° C to + 85° C (no frost)
	Max. Allowable Voltage		150% nominal voltage (at 20° C)
Time Value	Operate Time		Max. 10ms (at nominal voltage, without bounce)
	Release Time (without diode)		Max. 10ms (at nominal voltage, without bounce)
Insulation	Resistance (at 500 VDC)		Min. 1,000M ohm S
	Dielectric Strenght	Between open contacts	1,500VAC, 1 minute
		Between adjacent contacts	1,500VAC, 1 minute
		Between coil and contacts	3,000VAC, 1 minute
	Surge Strength	Between open contacts	2,500V (at 2/10 microsec)
		Between adjacent contacts	2,500V (at 2/10 microsec)
		Between coil and contacts	5,000V (at 2/10 microsec)
Life	Mechanical		10x10 ⁶ operations min. (at 10Hz)
	Electrical (resistive load)		100x10 ³ operations min. at 1A, 30VDC, 0.5Hz 100x10 ³ operations min. at 0.1A, 48VDC, 0.5Hz 100x10 ³ operations min. at 0.3A, 125VDC, 0.5Hz
Vibration Resistance	Misoperation		10 to 55 Hz at double amplitude of 3.3 mm
	Endurance		10 to 55 Hz at double amplitude of 5 mm
Shock Resistance	Misoperation		Min. 500 m/s ²
	Endurance		Min. 1,000 m/ s ²
UL / CSA	Contact Rating		0.3A 125 VAC 1A 30VDC 0.3 110VDC
IEC060950 UL1950 C22.2 No.950 EN60950	Insulation Class		Supplementary Insulation
	Working Voltage		250 V
	Pollution Degree		2
	Clearance		2.0 mm (between coil and contacts)
	Creepage Distance		2.5 mm (between coil and contacts)

■ DIMENSIONS AND SCHEMATICS


Through hole type

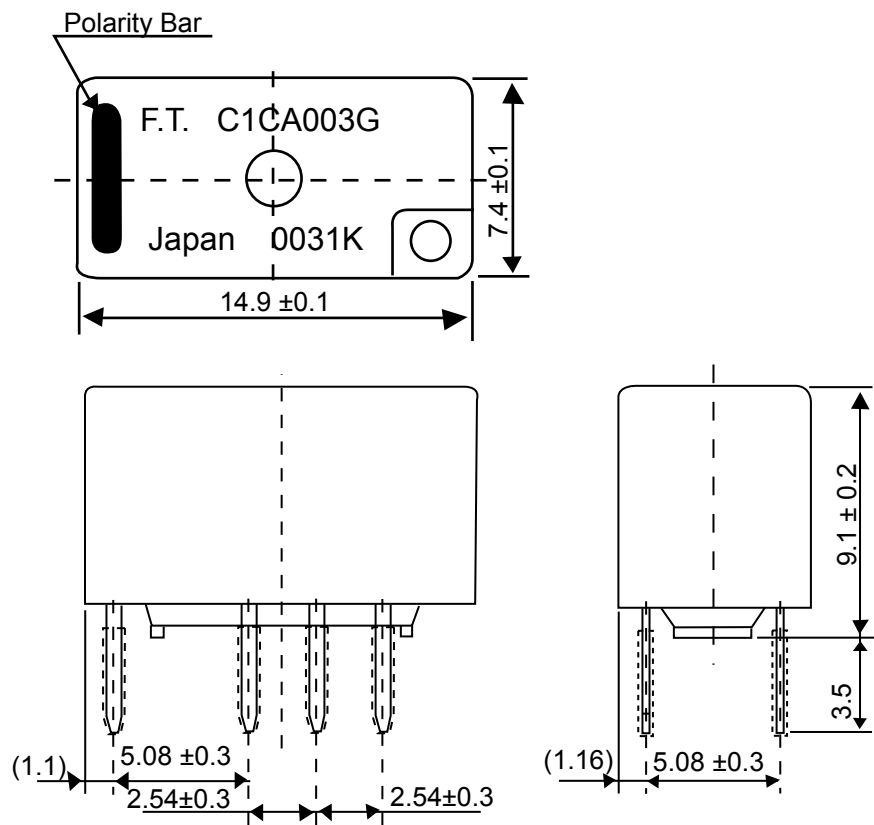


Unit: mm

■ TERMINAL DESIGNATIONS

Standard type
(Bottom view de-energized position)

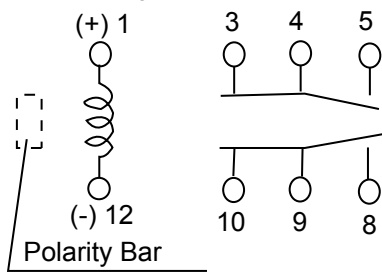


Single Coil Latching type
(Bottom view reset position)

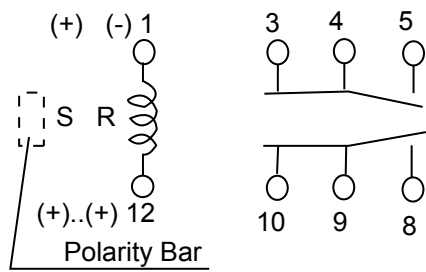

S shows the polarity of set position
R shows the polarity of reset position


Unit: mm

■ RECOMMENDED MOUNTING PAD

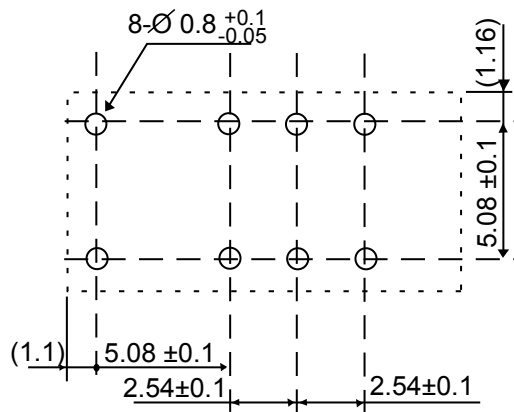

■ DIMENSIONS AND SCHEMATICS

Surface mount type

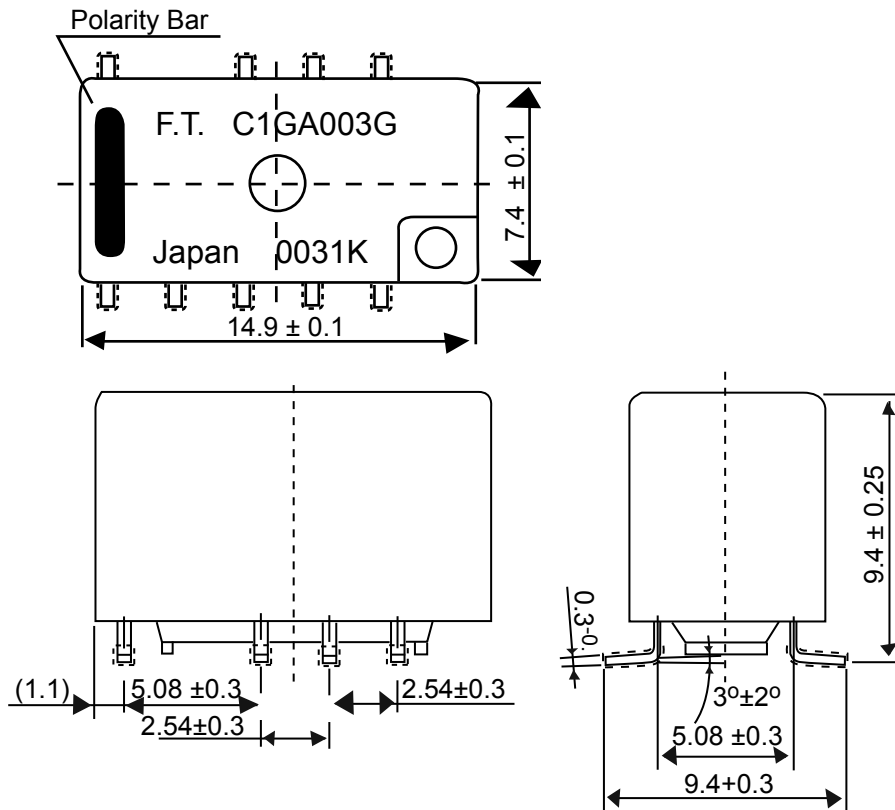


Unit: mm

■ TERMINAL DESIGNATIONS


Standard type

(Top view de-energized position)

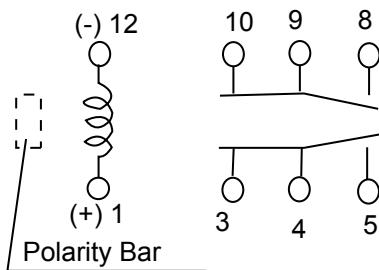


Single Coil Latching type

(Bottom view reset position)

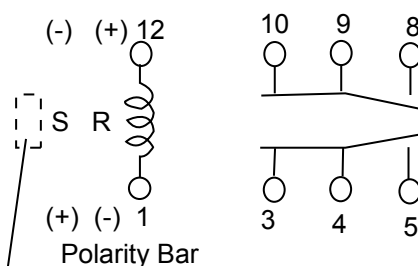


■ RECOMMENDED MOUNTING PAD

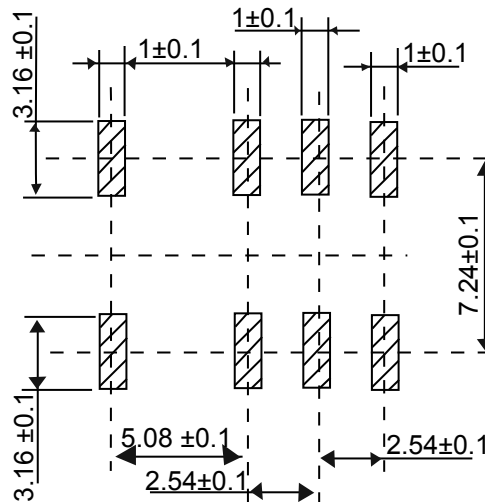

S shows the polarity of set position
R shows the polarity of reset position

Unit: mm

■ RECOMMENDED SOLDERING CONDITIONS (TEMPERATURE PROFILE)

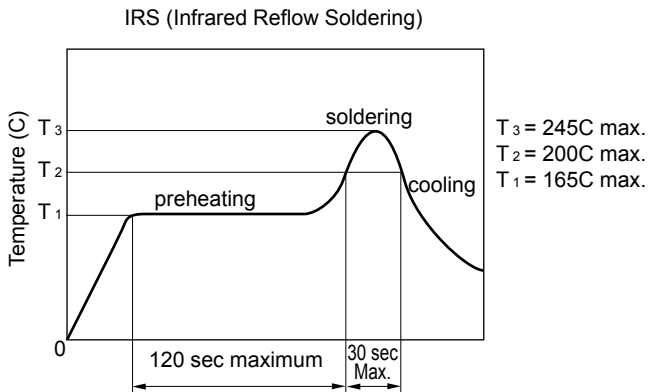


- Note:
1. Temperature profiles show the temperature of PC board surface.
 2. Please perform soldering test with your actual PC board before mass production, since the temperatures of PC board surfaces vary according to the size of PC board, status of parts mounting and heating method.


■ PACKAGING

Packaging method (only tape packaging is available)


1. Taping standards: JIS C 0806 and RC-10092B (EIAJ)
2. Reel type: TB2416 or TB2416
3. Reel type: RD24D
4. Quantity of 1 reel: 500 pieces

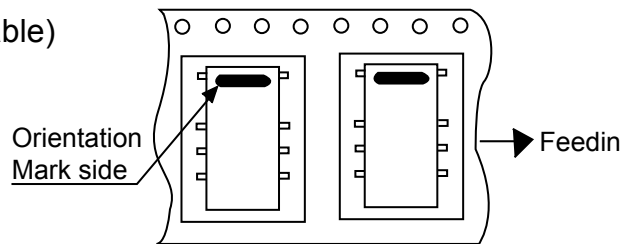

Tape Dimensions:

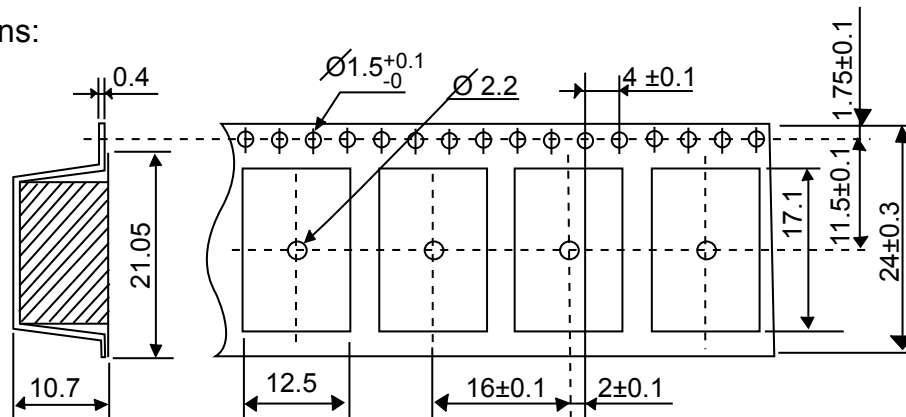

Reel Dimensions:

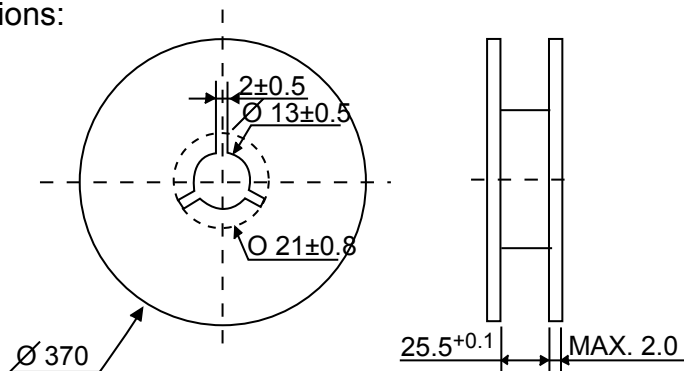

Unit: mm

RoHS Compliance and Lead Free Relay Information

1. General Information


- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and most power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu and Sn-3.0 Cu-Ni (only FTR-B3 and FTR-B4 from February 2005).

Reflow Solder condition for SMT

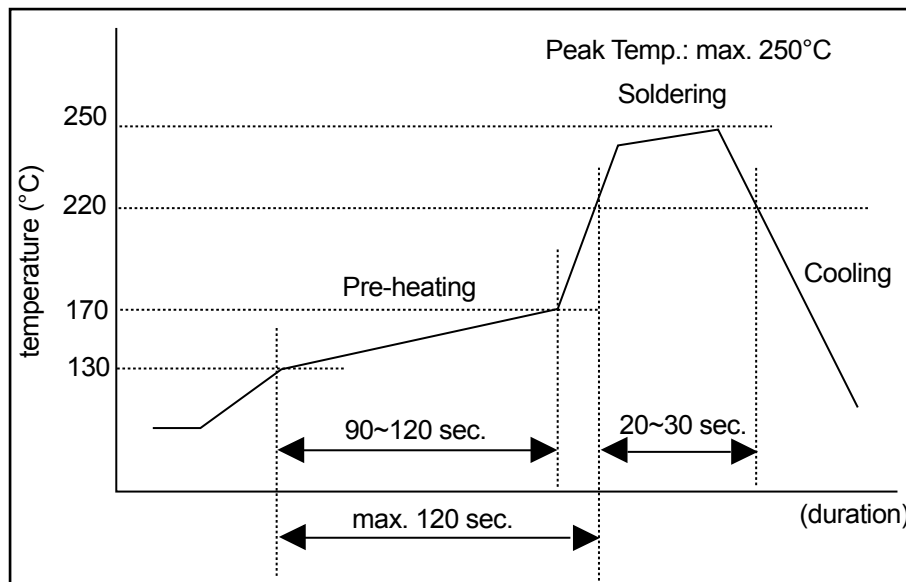

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at 260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

4. Tin Whisker

- SnAgCu and SnCuNi solder is known as low risk of tin whisker. No considerable length whisker was found by our in-house test.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/components/>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: <http://www.fujitsu.com/emea/services/components/>

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#04-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2007 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America does not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. reserves the right to change specifications/datasheets without prior notice. Rev. April 13, 2007

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru