



# 74VHCT132A


## QUAD 2-INPUT SCHMITT NAND GATE

- HIGH SPEED:  $t_{PD} = 6.5 \text{ ns}$  (TYP.) at  $V_{CC} = 5V$
- LOW POWER DISSIPATION:  
 $I_{CC} = 2 \mu A$  (MAX.) at  $T_A = 25^\circ C$
- TYPICAL HYSTERESIS:  $0.7V$  at  $V_{CC} = 4.5V$
- POWER DOWN PROTECTION ON INPUTS & OUTPUTS
- SYMMETRICAL OUTPUT IMPEDANCE:  
 $|I_{OH}| = I_{OL} = 8 \text{ mA}$  (MIN)
- BALANCED PROPAGATION DELAYS:  
 $t_{PLH} \cong t_{PHL}$
- OPERATING VOLTAGE RANGE:  
 $V_{CC}$  (OPR) =  $4.5V$  to  $5.5V$
- PIN AND FUNCTION COMPATIBLE WITH 74 SERIES 132
- IMPROVED LATCH-UP IMMUNITY
- LOW NOISE:  $V_{OLP} = 0.8V$  (Max.)

### DESCRIPTION

The 74VHCT132A is an advanced high-speed CMOS QUAD 2-INPUT SCHMITT NAND GATE fabricated with sub-micron silicon gate and double-layer metal wiring  $C^2$ MOS technology.

Power down protection is provided on all inputs and outputs and 0 to 7V can be accepted on

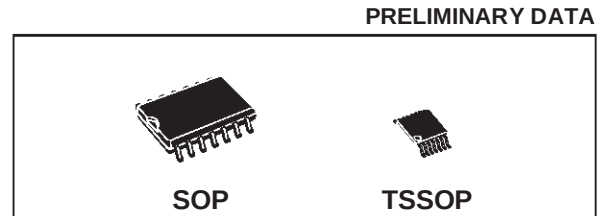

| ORDER CODES |             |               |
|-------------|-------------|---------------|
| PACKAGE     | TUBE        | T & R         |
| SOP         | 74VHCT132AM | 74VHCT132AMTR |
| TSSOP       |             | 74VHCT132ATTR |


inputs with no regard to the supply voltage. This device can be used to interface 5V to 3V.

Pin configuration and function are the same as those of the VHCT00A but the VHCT132A has hysteresis.


This together with its schmitt trigger function allows it to be used on line receivers with slow rise/fall input signals.

All inputs and outputs are equipped with protection circuits against static discharge, giving them 2KV ESD immunity and transient excess voltage.

### PIN CONNECTION AND IEC LOGIC SYMBOLS

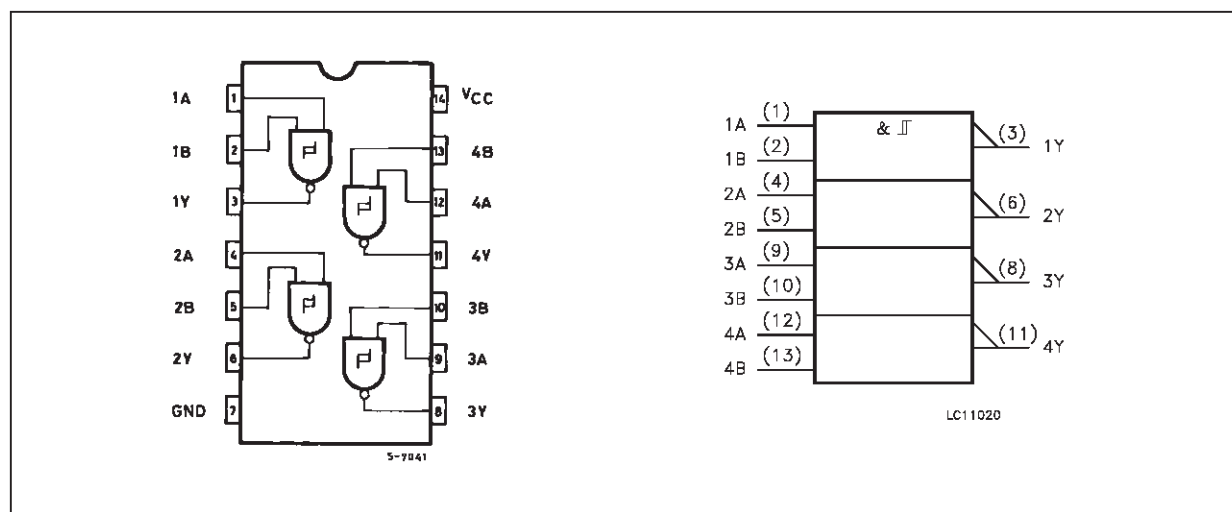

## INPUT EQUIVALENT CIRCUIT

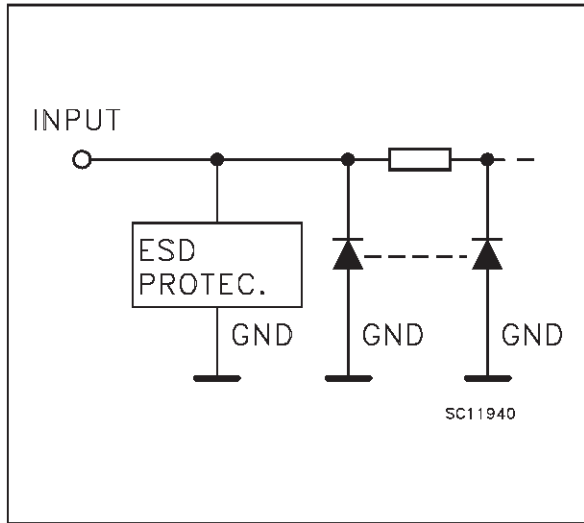

## PIN DESCRIPTION

| PIN No       | SYMBOL          | NAME AND FUNCTION       |
|--------------|-----------------|-------------------------|
| 1, 4, 9, 12  | 1A to 4A        | Data Inputs             |
| 2, 5, 10, 13 | 1B to 4B        | Data Inputs             |
| 3, 6, 8, 11  | 1Y to 4Y        | Data Outputs            |
| 7            | GND             | Ground (0V)             |
| 14           | V <sub>CC</sub> | Positive Supply Voltage |

## TRUTH TABLE

| A | B | Y |
|---|---|---|
| L | L | H |
| L | H | H |
| H | L | H |
| H | H | L |

## ABSOLUTE MAXIMUM RATINGS

| Symbol                              | Parameter                            | Value                         | Unit |
|-------------------------------------|--------------------------------------|-------------------------------|------|
| V <sub>CC</sub>                     | Supply Voltage                       | -0.5 to +7.0                  | V    |
| V <sub>I</sub>                      | DC Input Voltage                     | -0.5 to +7.0                  | V    |
| V <sub>O</sub>                      | DC Output Voltage (see note 1)       | -0.5 to +7.0                  | V    |
| V <sub>O</sub>                      | DC Output Voltage (see note 2)       | -0.5 to V <sub>CC</sub> + 0.5 | V    |
| I <sub>IK</sub>                     | DC Input Diode Current               | - 20                          | mA   |
| I <sub>OK</sub>                     | DC Output Diode Current              | ± 20                          | mA   |
| I <sub>O</sub>                      | DC Output Current                    | ± 25                          | mA   |
| I <sub>CC</sub> or I <sub>GND</sub> | DC V <sub>CC</sub> or Ground Current | ± 50                          | mA   |
| T <sub>stg</sub>                    | Storage Temperature                  | -65 to +150                   | °C   |
| T <sub>L</sub>                      | Lead Temperature (10 sec)            | 300                           | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

1) V<sub>CC</sub> = 0V

2) High or Low State

## RECOMMENDED OPERATING CONDITIONS

| Symbol          | Parameter                   | Value                | Unit |
|-----------------|-----------------------------|----------------------|------|
| V <sub>CC</sub> | Supply Voltage              | 4.5 to 5.5           | V    |
| V <sub>I</sub>  | Input Voltage               | 0 to 5.5             | V    |
| V <sub>O</sub>  | Output Voltage (see note 1) | 0 to 5.5             | V    |
| V <sub>O</sub>  | Output Voltage (see note 2) | 0 to V <sub>CC</sub> | V    |
| T <sub>op</sub> | Operating Temperature       | -40 to +85           | °C   |

1) V<sub>CC</sub> = 0V

2) High or Low State

## DC SPECIFICATIONS

| Symbol           | Parameter                            | Test Conditions        |                                                          | Value                  |      |      |              |      | Unit |
|------------------|--------------------------------------|------------------------|----------------------------------------------------------|------------------------|------|------|--------------|------|------|
|                  |                                      | V <sub>CC</sub><br>(V) |                                                          | T <sub>A</sub> = 25 °C |      |      | -40 to 85 °C |      |      |
|                  |                                      |                        |                                                          | Min.                   | Typ. | Max. | Min.         | Max. |      |
| V <sub>t+</sub>  | High Level Threshold Voltage         | 4.5                    |                                                          | 2.0                    |      |      | 2.0          |      | V    |
|                  |                                      | 5.5                    |                                                          | 2.0                    |      |      | 2.0          |      |      |
| V <sub>t-</sub>  | Low Level Threshold Voltage          | 4.5                    |                                                          |                        |      | 0.6  |              | 0.6  | V    |
|                  |                                      | 5.5                    |                                                          |                        |      | 0.6  |              | 0.6  |      |
| V <sub>h</sub>   | Hysteresis Voltage                   | 4.5                    |                                                          | 0.4                    |      | 1.4  | 0.4          | 1.4  | V    |
|                  |                                      | 5.5                    |                                                          | 0.4                    |      | 1.5  | 0.4          | 1.5  |      |
| V <sub>OH</sub>  | High Level Output Voltage            | 4.5                    | I <sub>O</sub> =-50 μA                                   | 4.4                    | 4.5  |      | 4.4          |      | V    |
|                  |                                      | 4.5                    | I <sub>O</sub> =-8 mA                                    | 3.94                   |      |      | 3.8          |      |      |
| V <sub>OL</sub>  | Low Level Output Voltage             | 4.5                    | I <sub>O</sub> =50 μA                                    |                        | 0.0  | 0.1  |              | 0.1  | V    |
|                  |                                      | 4.5                    | I <sub>O</sub> =8 mA                                     |                        |      | 0.36 |              | 0.44 |      |
| I <sub>I</sub>   | Input Leakage Current                | 0 to 5.5               | V <sub>I</sub> = 5.5V or GND                             |                        |      | ±0.1 |              | ±1.0 | μA   |
| I <sub>CC</sub>  | Quiescent Supply Current             | 5.5                    | V <sub>I</sub> = V <sub>CC</sub> or GND                  |                        |      | 2    |              | 20   | μA   |
| ΔI <sub>CC</sub> | Additional Worst Case Supply Current | 5.5                    | One Input at 3.4V, other input at V <sub>CC</sub> or GND |                        |      | 1.35 |              | 1.5  | mA   |
| I <sub>OPD</sub> | Output Leakage Current               | 0                      | V <sub>OUT</sub> = 5.5V                                  |                        |      | 0.5  |              | 5.0  | μA   |

AC ELECTRICAL CHARACTERISTICS (Input t<sub>r</sub> = t<sub>f</sub> = 3 ns)

| Symbol           | Parameter              | Test Condition             |                        |  | Value                  |      |      |              |      | Unit |
|------------------|------------------------|----------------------------|------------------------|--|------------------------|------|------|--------------|------|------|
|                  |                        | V <sub>CC</sub> (*)<br>(V) | C <sub>L</sub><br>(pF) |  | T <sub>A</sub> = 25 °C |      |      | -40 to 85 °C |      |      |
|                  |                        |                            |                        |  | Min.                   | Typ. | Max. | Min.         | Max. |      |
| t <sub>PLH</sub> | Propagation Delay Time | 5.0                        | 15                     |  |                        | 6.5  | 8.8  | 1.0          | 10.4 | ns   |
| t <sub>PHL</sub> |                        | 5.0                        | 50                     |  |                        | 7.2  | 9.8  | 1.0          | 11.4 |      |

(\*) Voltage range is 5V ± 0.5V

## CAPACITIVE CHARACTERISTICS

| Symbol          | Parameter                              | Test Conditions | Value                  |      |      |              |      | Unit |
|-----------------|----------------------------------------|-----------------|------------------------|------|------|--------------|------|------|
|                 |                                        |                 | T <sub>A</sub> = 25 °C |      |      | -40 to 85 °C |      |      |
|                 |                                        |                 | Min.                   | Typ. | Max. | Min.         | Max. |      |
| C <sub>IN</sub> | Input Capacitance                      |                 |                        | 6    | 10   |              | 10   | pF   |
| C <sub>PD</sub> | Power Dissipation Capacitance (note 1) |                 |                        | 18   |      |              |      | pF   |


1) C<sub>PD</sub> is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average operating current can be obtained by the following equation. I<sub>CC(oper)</sub> = C<sub>PD</sub> • V<sub>CC</sub> • f<sub>IN</sub> + I<sub>CC</sub>/4 (per Gate)

DYNAMIC SWITCHING CHARACTERISTICS

| Symbol           | Parameter                                    | Test Conditions        |                        | Value                  |      |      |              |      | Unit |
|------------------|----------------------------------------------|------------------------|------------------------|------------------------|------|------|--------------|------|------|
|                  |                                              | V <sub>CC</sub><br>(V) |                        | T <sub>A</sub> = 25 °C |      |      | -40 to 85 °C |      |      |
|                  |                                              |                        |                        | Min.                   | Typ. | Max. | Min.         | Max. |      |
| V <sub>OLP</sub> | Dynamic Low Voltage Quiet Output (note 1, 2) | 5.0                    | C <sub>L</sub> = 50 pF |                        | 0.3  | 0.8  |              |      | V    |
| V <sub>OLV</sub> |                                              |                        |                        | -0.8                   | -0.3 |      |              |      |      |
| V <sub>IHD</sub> | Dynamic High Voltage Input (note 1, 3)       | 5.0                    |                        | 2.0                    |      |      |              |      |      |
| V <sub>ILD</sub> | Dynamic Low Voltage Input (note 1, 3)        | 5.0                    |                        |                        |      | 0.6  |              |      |      |


- 1) Worst case package.  
2) Max number of outputs defined as (n). Data inputs are driven 0V to 3.0V, (n-1) outputs switching and one output at GND.  
3) Max number of data inputs (n) switching. (n-1) switching 0V to 3.0V. Inputs under test switching: 3.0V to threshold (V<sub>ILD</sub>), 0V to threshold (V<sub>IHD</sub>), f=1MHz.

TEST CIRCUIT

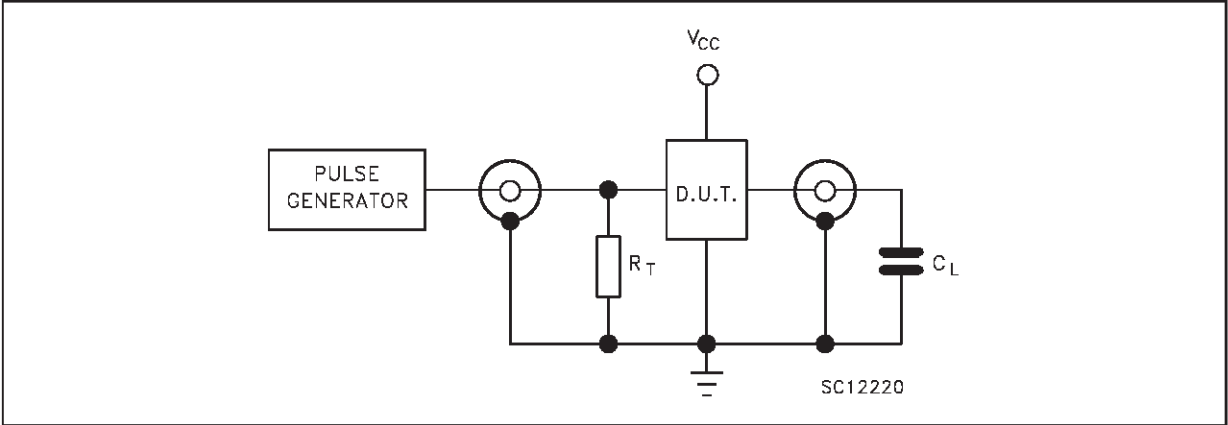


C<sub>L</sub> = 15/50 pF or equivalent (includes jig and probe capacitance)  
R<sub>T</sub> = Z<sub>OUT</sub> of pulse generator (typically 50Ω)

WAVEFORM: PROPAGATION DELAYS (f=1MHz; 50% duty cycle)

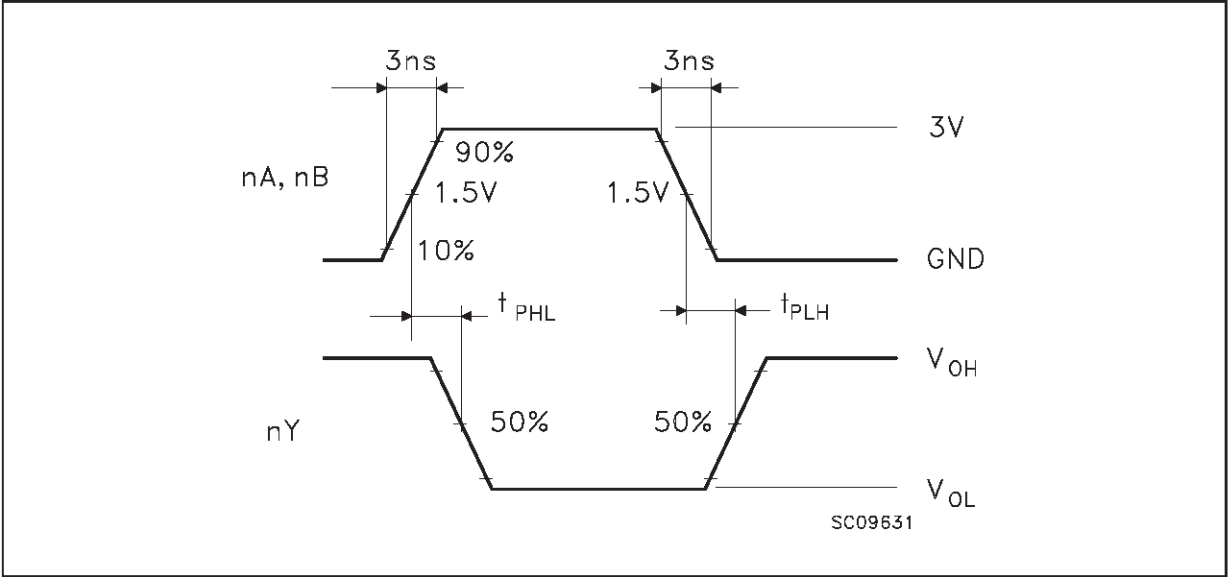


## SO-14 MECHANICAL DATA

| DIM. | mm        |      |      | inch  |       |       |
|------|-----------|------|------|-------|-------|-------|
|      | MIN.      | TYP. | MAX. | MIN.  | TYP.  | MAX.  |
| A    |           |      | 1.75 |       |       | 0.068 |
| a1   | 0.1       |      | 0.2  | 0.003 |       | 0.007 |
| a2   |           |      | 1.65 |       |       | 0.064 |
| b    | 0.35      |      | 0.46 | 0.013 |       | 0.018 |
| b1   | 0.19      |      | 0.25 | 0.007 |       | 0.010 |
| C    |           | 0.5  |      |       | 0.019 |       |
| c1   | 45 (typ.) |      |      |       |       |       |
| D    | 8.55      |      | 8.75 | 0.336 |       | 0.344 |
| E    | 5.8       |      | 6.2  | 0.228 |       | 0.244 |
| e    |           | 1.27 |      |       | 0.050 |       |
| e3   |           | 7.62 |      |       | 0.300 |       |
| F    | 3.8       |      | 4.0  | 0.149 |       | 0.157 |
| G    | 4.6       |      | 5.3  | 0.181 |       | 0.208 |
| L    | 0.5       |      | 1.27 | 0.019 |       | 0.050 |
| M    |           |      | 0.68 |       |       | 0.026 |
| S    | 8 (max.)  |      |      |       |       |       |

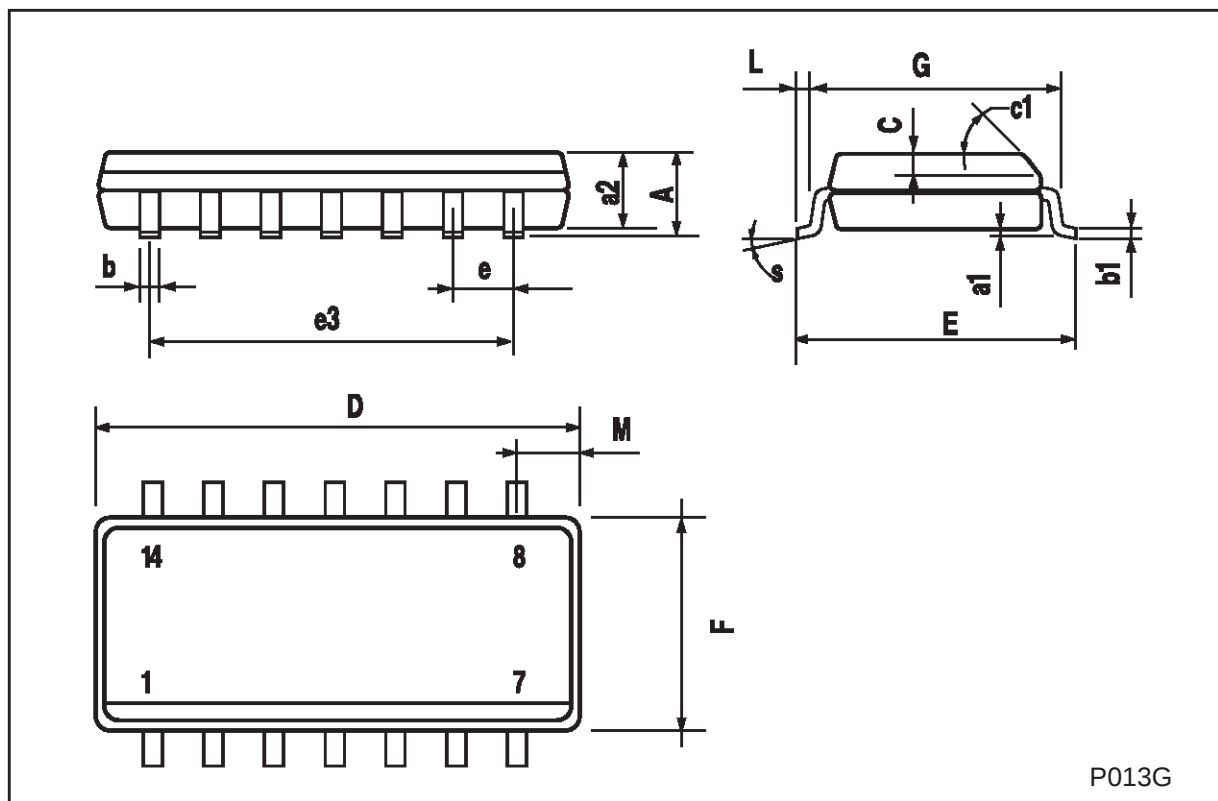

TSSOP14 MECHANICAL DATA

| DIM. | mm   |          |      | inch   |            |        |
|------|------|----------|------|--------|------------|--------|
|      | MIN. | TYP.     | MAX. | MIN.   | TYP.       | MAX.   |
| A    |      |          | 1.1  |        |            | 0.433  |
| A1   | 0.05 | 0.10     | 0.15 | 0.002  | 0.004      | 0.006  |
| A2   | 0.85 | 0.9      | 0.95 | 0.335  | 0.354      | 0.374  |
| b    | 0.19 |          | 0.30 | 0.0075 |            | 0.0118 |
| c    | 0.09 |          | 0.20 | 0.0035 |            | 0.0079 |
| D    | 4.9  | 5        | 5.1  | 0.193  | 0.197      | 0.201  |
| E    | 6.25 | 6.4      | 6.5  | 0.246  | 0.252      | 0.256  |
| E1   | 4.3  | 4.4      | 4.48 | 0.169  | 0.173      | 0.176  |
| e    |      | 0.65 BSC |      |        | 0.0256 BSC |        |
| K    | 0°   | 4°       | 8°   | 0°     | 4°         | 8°     |
| L    | 0.50 | 0.60     | 0.70 | 0.020  | 0.024      | 0.028  |

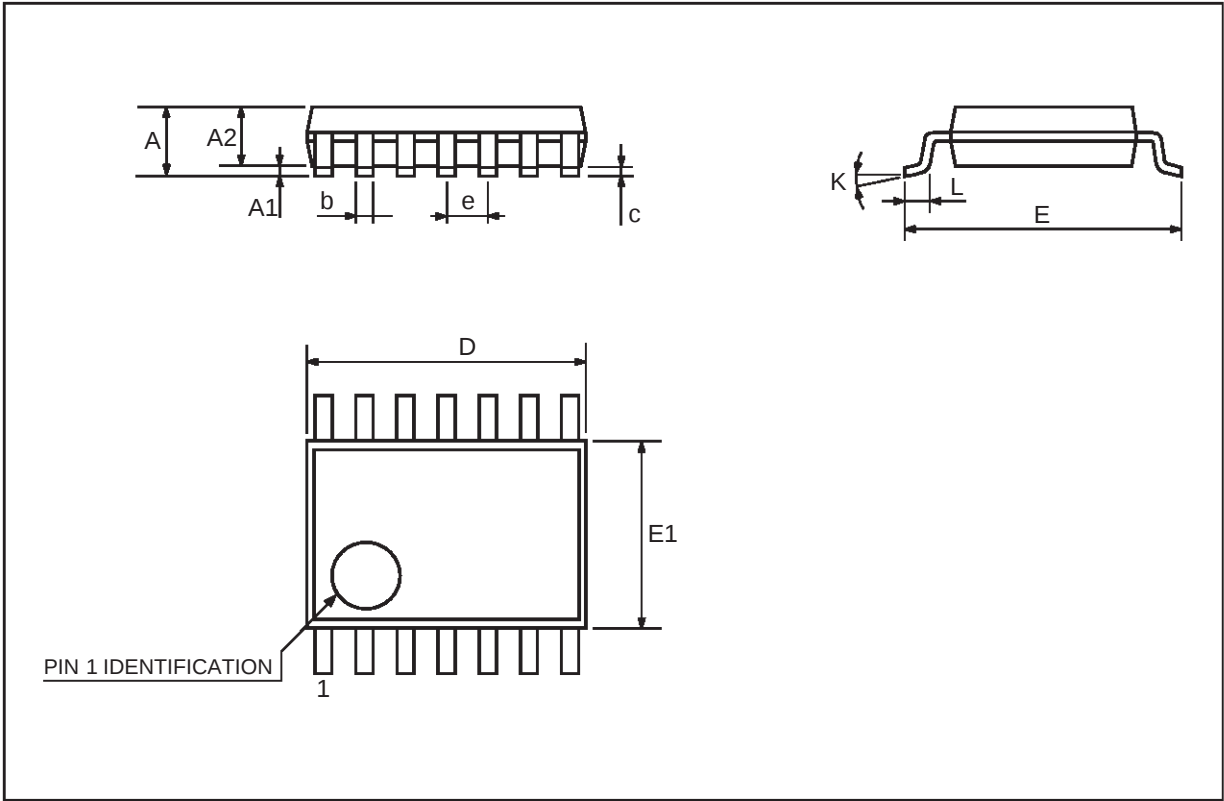

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2000 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)