



RF360 Europe GmbH

A Qualcomm – TDK Joint Venture



## SAW Components

### SAW Duplexer

Automotive telematics

Series/type:	B4400
Ordering code:	B39212B4400P810
Date:	November 07, 2014
Version:	2.3

RF360 products mentioned within this document are offered by RF360 Europe GmbH and other subsidiaries of RF360 Holdings Singapore Pte. Ltd. (collectively, the “RF360 Subsidiaries”). RF360 Holdings Singapore Pte. Ltd. is a joint venture of Qualcomm Global Trading Pte. Ltd. and EPCOS AG. References in this documentation to EPCOS AG should properly reference, and shall be read to reference, the RF360 Subsidiaries.

RF360 Europe GmbH, Anzinger Str. 13, München, Germany

© 2016 RF360 Europe GmbH and/or its affiliated companies. All rights reserved.

These materials, including the information contained herein, may be used only for informational purposes by the customer. The RF360 Subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein. The RF360 Subsidiaries reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and the RF360 Subsidiaries assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm and Qualcomm RF360 are trademarks of Qualcomm Incorporated, registered in the United States and other countries. RF360 is a trademark of Qualcomm Incorporated. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

# SAW Components


## SAW Duplexer

Automotive telematics

<b>Series/type:</b>	<b>B4400</b>
<b>Ordering code:</b>	<b>B39212B4400P810</b>
<b>Date:</b>	<b>November 07, 2014</b>
<b>Version:</b>	<b>2.3</b>


### Application

- Low-loss SAW duplexer for W-CDMA Band 1 (UMTS) systems
- Low insertion attenuation
- Low amplitude ripple
- Usable passband 60 MHz
- Single-ended to balanced transformation in Antenna-Rx path
- Impedance transformation 50  $\Omega$  to 100  $\Omega$  in Antenna-Rx path
- High isolation between Tx and Rx

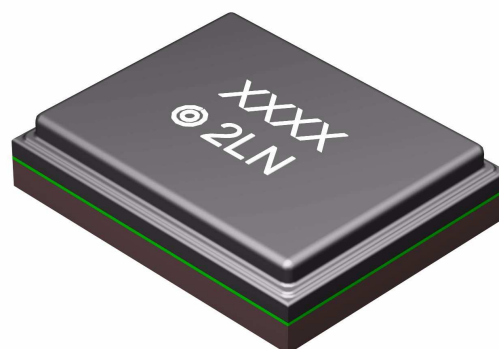


### Features

- Package size 2.0 \* 1.6 mm<sup>2</sup>
- Package height max. 0.45mm
- RoHS compatible
- Approximate weight 0.005 g
- Package for **Surface Mount Technology (SMT)**
- Ni terminals, Au-plated
- AEC-Q200 qualified component family (operable temperature range -40°C to +85°C)
- **Electrostatic Sensitive Device (ESD)**

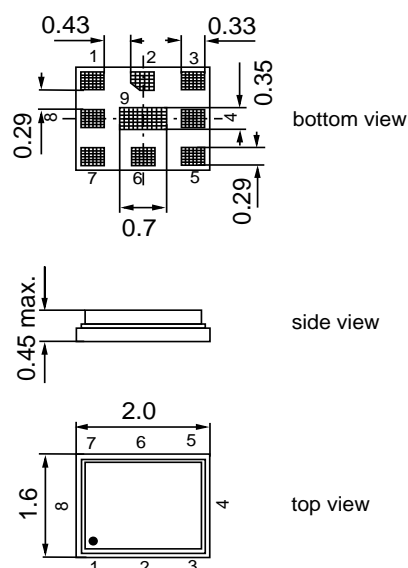

### Pin configuration

- 3 Tx input
- 1, 8 Rx output (balanced)
- 6 Antenna
- 2, 4, 5, 7, 9 To be grounded

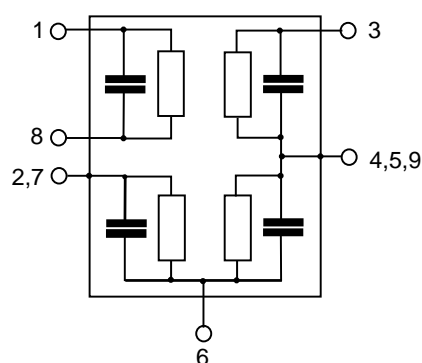

**SAW Components**
**B4400**
**SAW Duplexer**
**1950.0 / 2140.0 MHz**

Data sheet


**Characteristics**

Temperature range for specification:	T = -20 °C to +85 °C
TX terminating impedance:	Z <sub>Tx</sub> = 50 Ω    6.0 nH
ANT terminating impedance:	Z <sub>Ant</sub> = 50 Ω    2.2 nH
RX terminating impedance:	Z <sub>Rx</sub> = 100 Ω (balanced)    17 nH

Characteristics Tx-Antenna				min.	typ. @ 25 °C	max.	
<b>Center frequency</b>	f <sub>c</sub>				1950.0		MHz
<b>Maximum insertion attenuation</b>	α <sub>W-CDMA</sub> <sup>1)</sup>						
1922.4 ... 1977.6 MHz				—	1.7	2.3	dB
<b>Amplitude ripple (p-p)</b>	α <sub>W-CDMA</sub> <sup>1)</sup>						
1922.4 ... 1977.6 MHz				—	0.5	1.1	dB
<b>Error Vector Magnitude</b>	EVM <sup>2)</sup>						
1922.4 ... 1977.6 MHz				—	1.4	2.3	%
<b>TX port VSWR</b>							
1920.0 ... 1980.0 MHz				—	1.6	2.0	
<b>ANT port VSWR</b>							
1920.0 ... 1980.0 MHz				—	1.4	2.0	
<b>Attenuation</b>	α						
10.0 ... 410.0 MHz				45	69	—	dB
420.0 ... 494.0 MHz				43	64	—	dB
843.0 ... 894.0 MHz				40	47	—	dB
1565.0 ... 1574.0 MHz				41	45	—	dB
1574.0 ... 1577.0 MHz				42	46	—	dB
1577.0 ... 1586.0 MHz				42	47	—	dB
1597.0 ... 1605.0 MHz				43	48	—	dB
1605.0 ... 1805.0 MHz				34	39	—	dB
1805.0 ... 1865.0 MHz				30	36	—	dB
1865.0 ... 1880.0 MHz				12	33	—	dB
2112.4 ... 2167.6 MHz	α <sub>W-CDMA</sub> <sup>1)</sup>			46	54	—	dB
2400.0 ... 2500.0 MHz				31	38	—	dB
2620.0 ... 2690.0 MHz				30	36	—	dB
3830.0 ... 3970.0 MHz				28	34	—	dB
5150.0 ... 5950.0 MHz				18	22	—	dB

1) Attenuation of W-CDMA signal (Power Transfer Function). Please, refer to page 7 of this document.

2) Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141

**SAW Components**
**B4400**
**SAW Duplexer**
**1950.0 / 2140.0 MHz**
**Data sheet**

**Characteristics**

Temperature range for specification:	$T = -20\text{ °C to }+85\text{ °C}$
TX terminating impedance:	$Z_{Tx} = 50\ \Omega \parallel 6.0\text{ nH}$
ANT terminating impedance:	$Z_{Ant} = 50\ \Omega \parallel 2.2\text{ nH}$
RX terminating impedance:	$Z_{Rx} = 100\ \Omega\text{ (balanced)} \parallel 17\text{ nH}$

Characteristics Antenna-Rx		min.	typ. @ 25 °C	max.	
<b>Center frequency</b>	$f_c$		2140.0		MHz
<b>Maximum insertion attenuation</b>	$\alpha_{W-CDMA}^{1)}$				
2112.4 ... 2167.6 MHz		—	2.2	2.4	dB
<b>Amplitude ripple (p-p)</b>	$\alpha_{W-CDMA}^{1)}$				
2112.4 ... 2167.6 MHz		—	0.4	0.8	dB
<b>Error Vector Magnitude</b>	$EVM^{2)}$				
2112.4 ... 2167.6 MHz		—	1.0	2.0	%
<b>ANT port VSWR</b>					
2110.0 ... 2170.0 MHz		—	1.8	2.2	
<b>RX port VSWR</b>					
2110.0 ... 2170.0 MHz		—	1.6	2.0	

1) Attenuation of W-CDMA signal (Power Transfer Function). Please, refer to page 7 of this document.

2) Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141

**SAW Components**
**B4400**
**SAW Duplexer**
**1950.0 / 2140.0 MHz**
**Data sheet**

**Characteristics**

Temperature range for specification:	$T = -20\text{ °C to }+85\text{ °C}$
TX terminating impedance:	$Z_{Tx} = 50\ \Omega \parallel 6.0\text{ nH}$
ANT terminating impedance:	$Z_{Ant} = 50\ \Omega \parallel 2.2\text{ nH}$
RX terminating impedance:	$Z_{Rx} = 100\ \Omega\text{ (balanced)} \parallel 17\text{ nH}$

Characteristics Antenna-Rx				min.	typ. @ 25 °C	max.	
<b>Attenuation</b>							
			$\alpha$				
10.0	...	1920.0	MHz	45	53	—	dB
1922.4	...	1977.6	MHz	50	55	—	dB
1980.0	...	2025.0	MHz	33	49	—	dB
2255.0	...	2400.0	MHz	25	45	—	dB
2400.0	...	2484.0	MHz	41	44	—	dB
2484.0	...	5600.0	MHz	40	45	—	dB
5600.0	...	6000.0	MHz	28	32	—	dB

<sup>1)</sup> Attenuation of W-CDMA signal (Power Transfer Function). Please, refer to page 7 of this document.

**SAW Components**
**B4400**
**SAW Duplexer**
**1950.0 / 2140.0 MHz**
**Data sheet**

**Characteristics**

Temperature range for specification:	T = -20 °C to +85 °C
TX terminating impedance:	Z <sub>Tx</sub> = 50 Ω    6.0 nH
ANT terminating impedance:	Z <sub>Ant</sub> = 50 Ω    2.2 nH
RX terminating impedance:	Z <sub>Rx</sub> = 100 Ω (balanced)    17 nH

Characteristics Tx-Rx				min.	typ. @ 25 °C	max.	
<b>Differential Mode Isolation</b>							
			α				
1574.0	...	1577.0	MHz	40	79	—	dB
1922.4	...	1977.6	MHz	52	57	—	dB
2112.4	...	2167.6	MHz	53	59	—	dB
3830.0	...	3970.0	MHz	30	61	—	dB
5750.0	...	5950.0	MHz	30	44	—	dB
<b>Common Mode Isolation</b>							
			α				
1922.4	...	1977.6	MHz	42	45	—	dB

<sup>1)</sup> Attenuation of W-CDMA signal (Power Transfer Function). Please, refer to page 7 of this document.



**Annotation for characteristics section**

Attenuation of W-CDMA signal (Power Transfer Function,  $\alpha_{W-CDMA}$ ) is determined by

$$\int_{-\infty}^{\infty} |S_{ds21}(f)H_{RRC}(f - f_{Carrier})|^2 df$$

with  $f_{Carrier}$  according to 3GPP TS 25.101 (e.g. for UMTS pass band,  $f_{Carrier}$  ranges from 1922.4 MHz (lowest Tx channel) to 2167.6 MHz (highest Tx channel)). Here,  $H_{RRC}(f)$  is the transfer function of the root-raised cosine transmit pulse shaping filter according to 3GPP TS 25.101 with the following normalization:

$$\int_{-\infty}^{\infty} |H_{RRC}(f)|^2 df = 1$$



**SAW Components**
**B4400**
**SAW Duplexer**
**1950.0 / 2140.0 MHz**



Data sheet




**Maximum Ratings**

Operable temperature range	T	−40/+85	°C	
Storage temperature range	T <sub>stg</sub>	−40/+85	°C	
DC voltage	V <sub>DC</sub>	0	V	
ESD voltage	V <sub>ESD</sub>	50 <sup>1)</sup>	V	machine model, 10 pulses
Input power at				
1920.0 ... 1980.0 MHz	P <sub>in</sub>	29	dBm	} continuous wave
elsewhere	P <sub>in</sub>	10	dBm	

<sup>1)</sup> According to JESD22-A115A (machine model), 10 negative and 10 positive pulses.

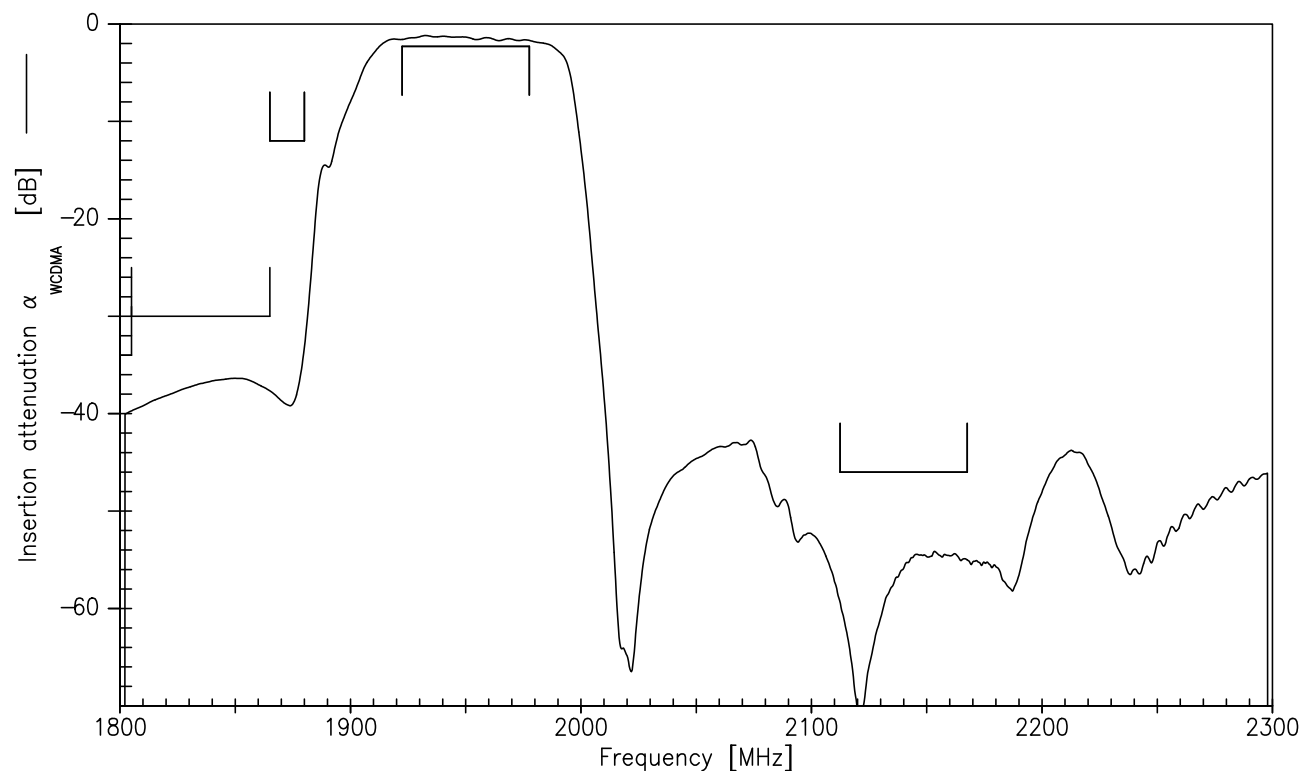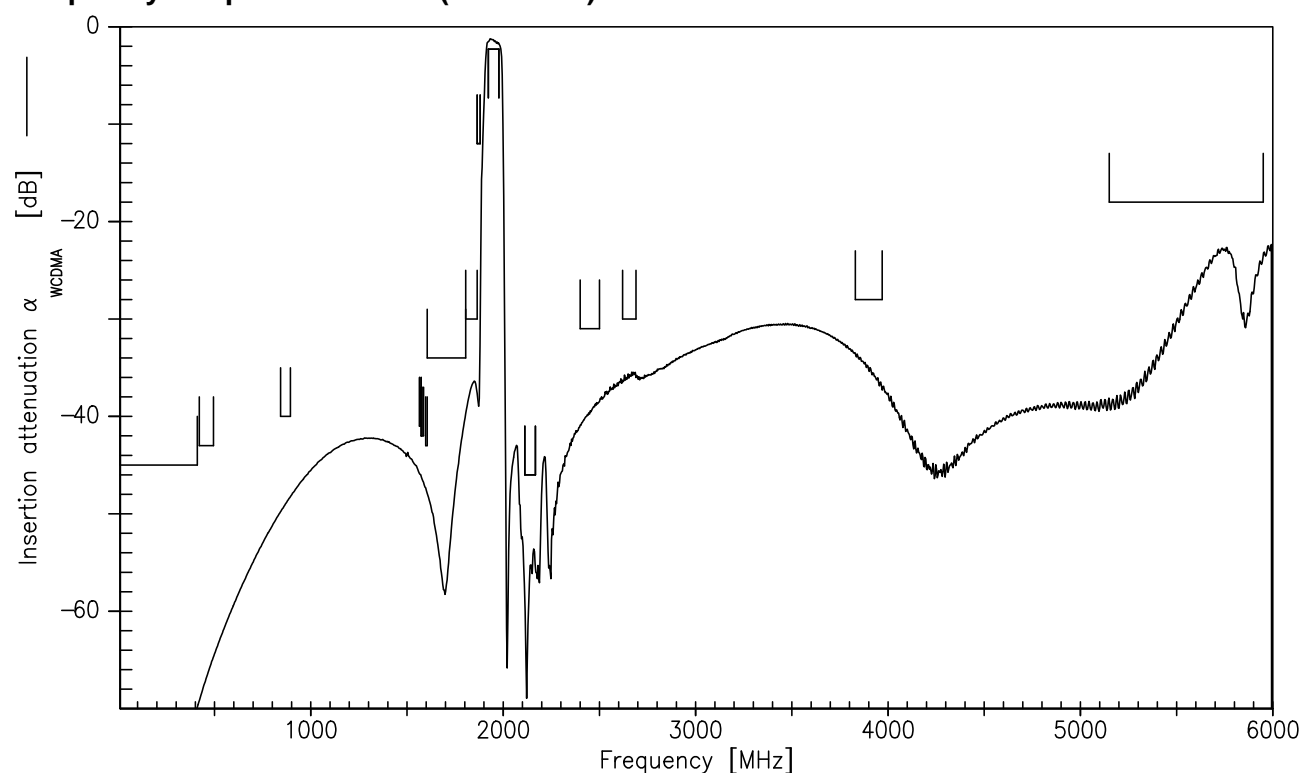**Frequency Response TX-ANT**

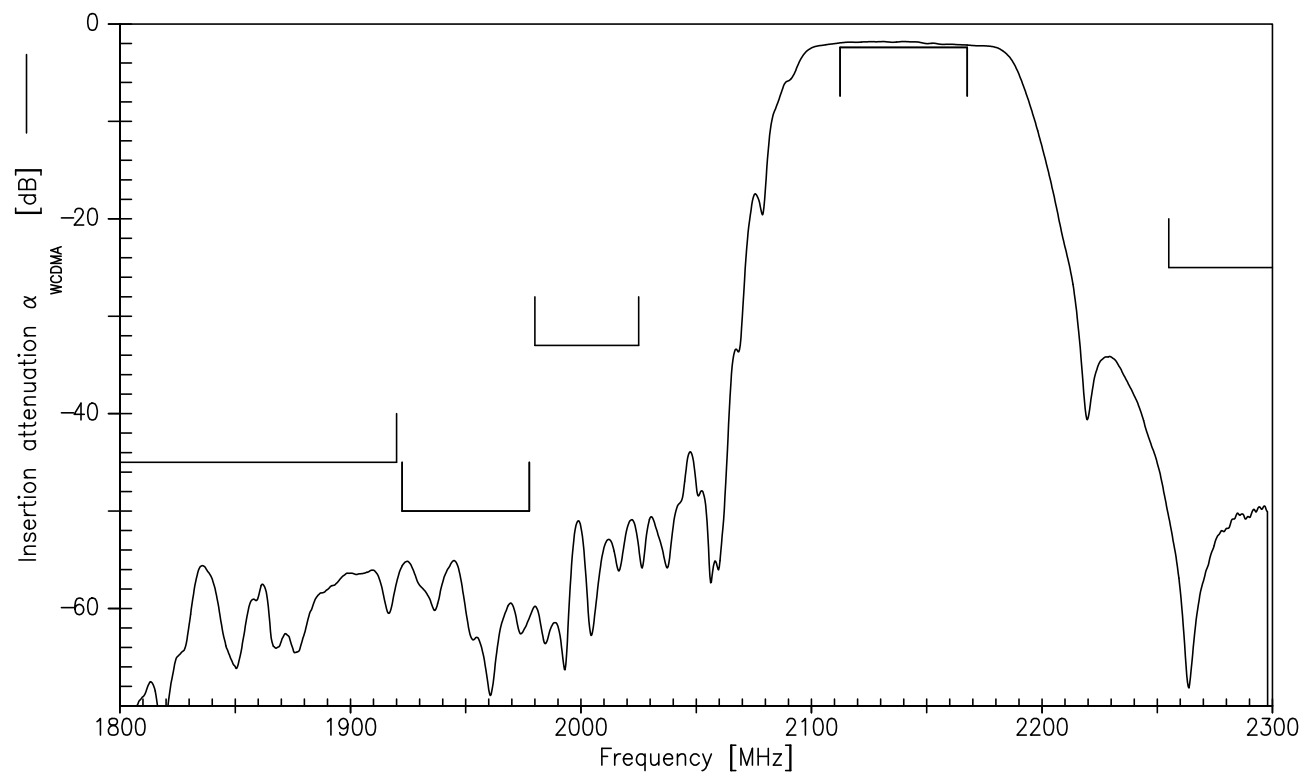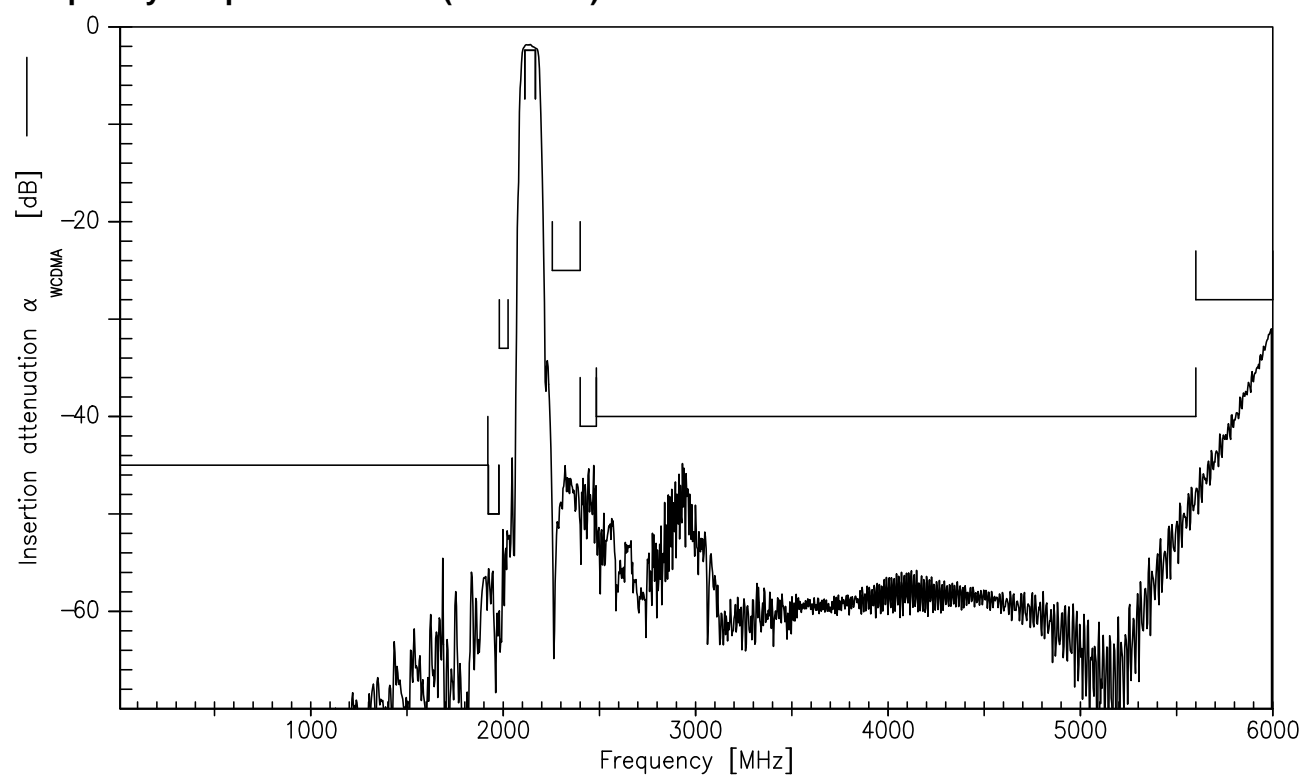**Frequency Response TX-ANT (wideband)**

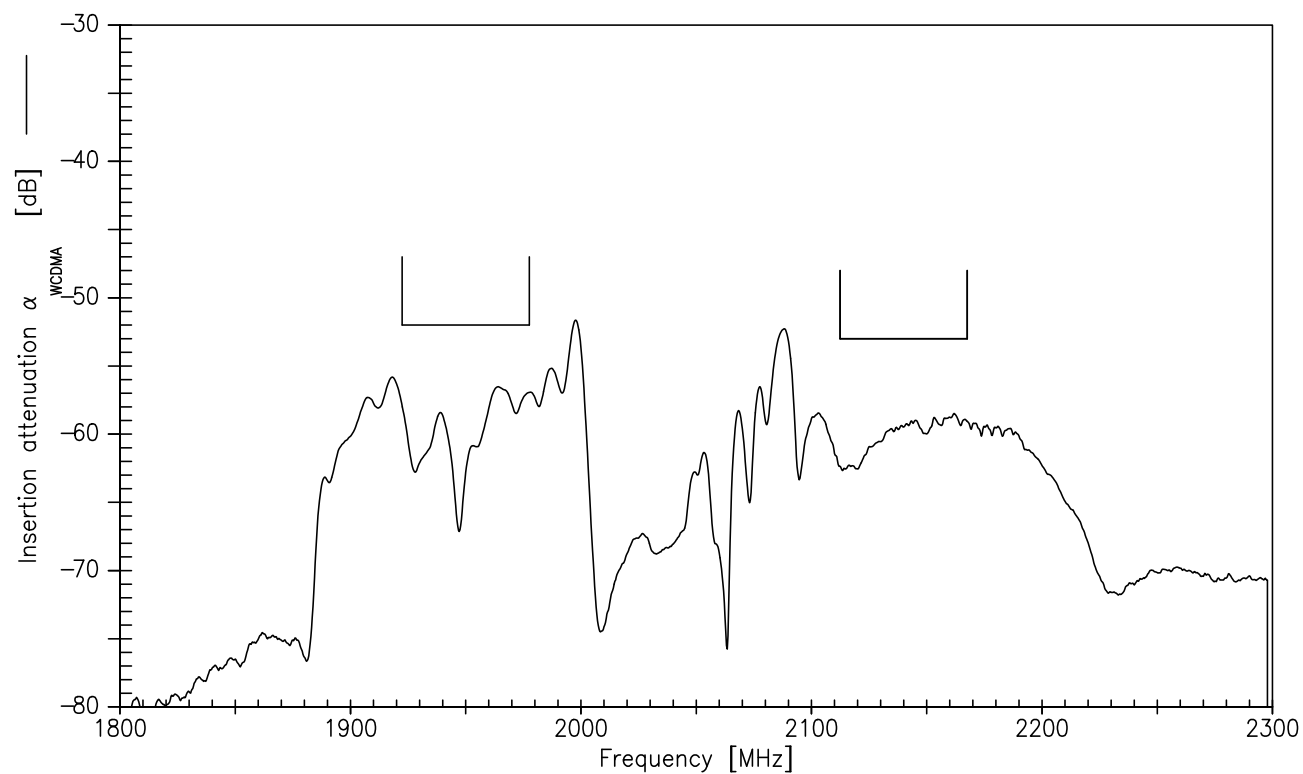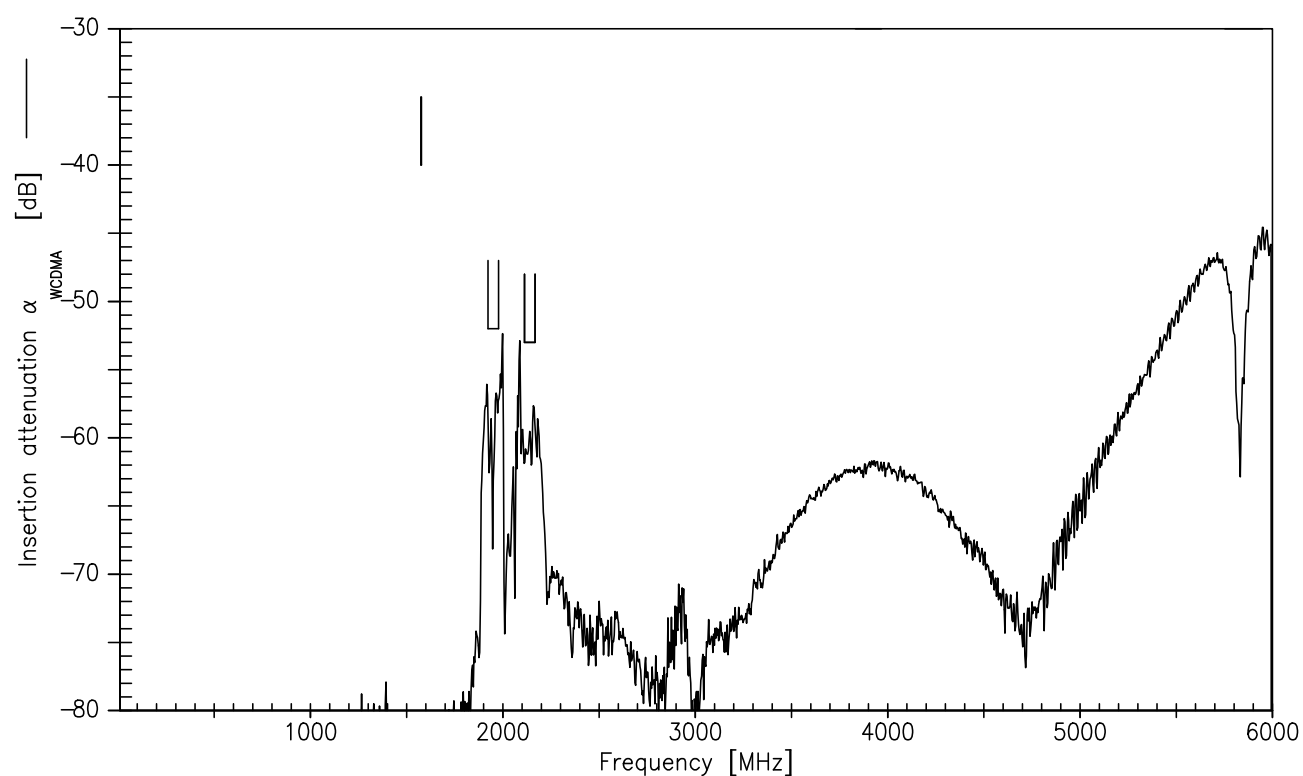
**Frequency Response RX-ANT**

**Frequency Response RX-ANT (wideband)**


**Frequency Response TX-RX**

**Frequency Response TX-RX (wideband)**


# SAW Components

B4400

## SAW Duplexer

1950.0 / 2140.0 MHz

Data sheet







**SMD**

Return Loss

$S_{11}$  TX- port

$S_{33}$  RX-port

$S_{22}$  ANT-port

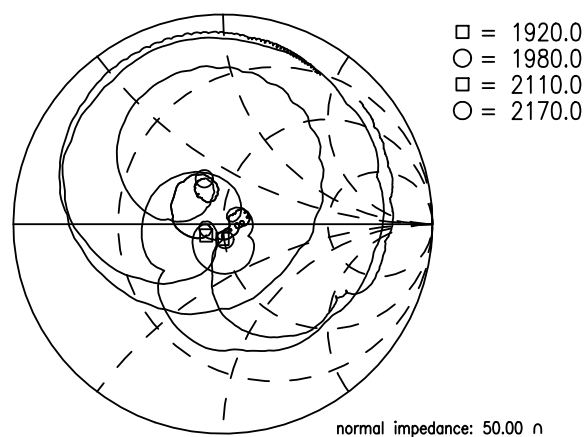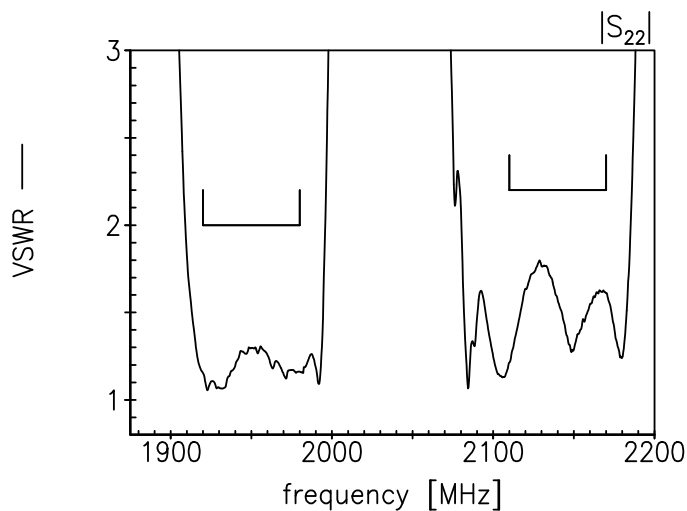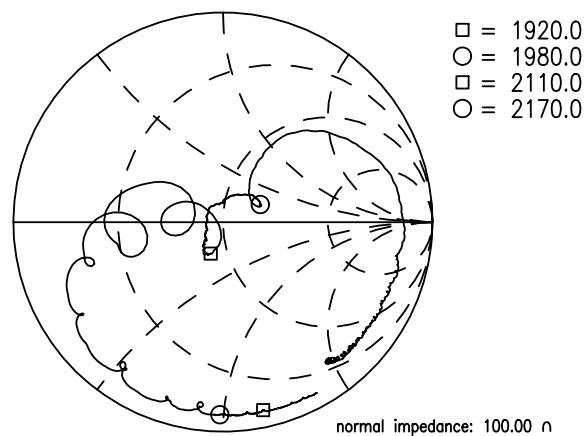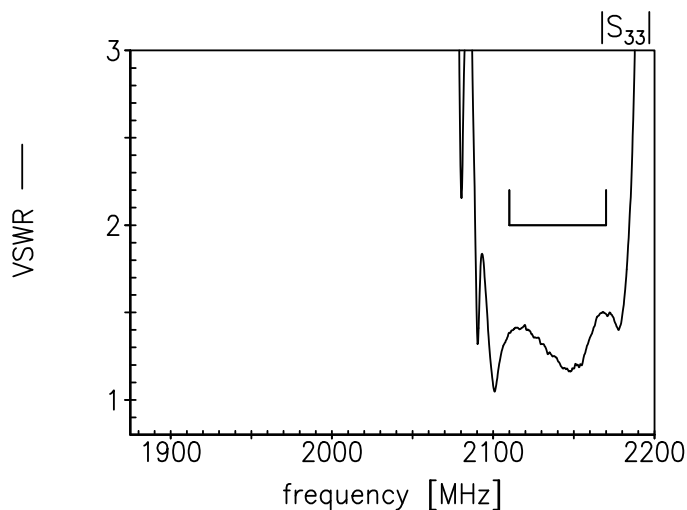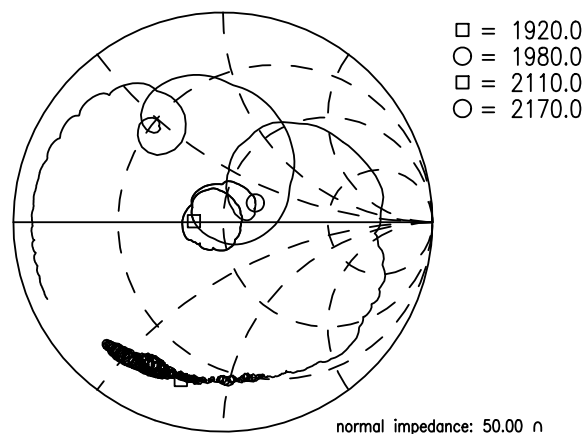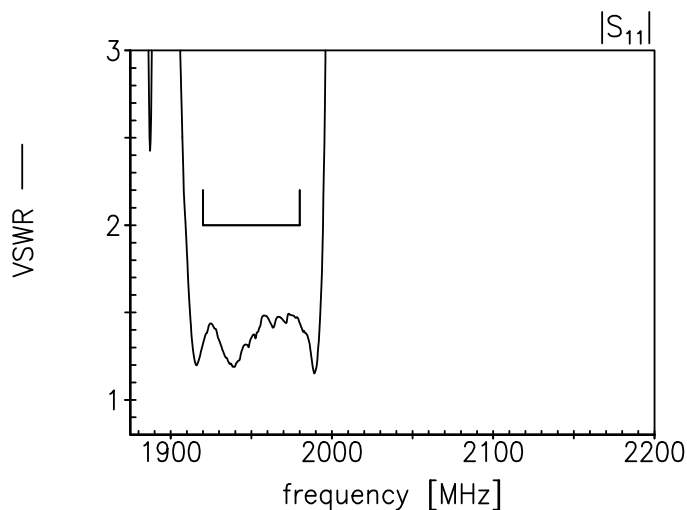

**SAW Components**
**B4400**
**SAW Duplexer**
**1950.0 / 2140.0 MHz**

Data sheet



References

<b>Type</b>	B4400
<b>Ordering code</b>	B39212B4400P810
<b>Marking and package</b>	C61157-A8-A50
<b>Packaging</b>	F61074-V8247-Z000
<b>Date codes</b>	L_1126
<b>S-parameters</b>	B4400_NB_UN.s4p, B4400_WB_UN.s4p See file header for port/pin assignment table.
<b>Soldering profile</b>	S_6001
<b>RoHS compatible</b>	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 <sup>th</sup> , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
<b>Moldability</b>	Before using in overmolding environment, please contact your EPCOS sales office.
<b>Matching coils</b>	See Inductor pdf-catalog <a href="http://www.tdk.co.jp/tefe02/coil.htm#aname1">http://www.tdk.co.jp/tefe02/coil.htm#aname1</a> and Data Library for circuit simulation <a href="http://www.tdk.co.jp/etvcl/index.htm">http://www.tdk.co.jp/etvcl/index.htm</a>

For further information please contact your local EPCOS sales office or visit our webpage at [www.epcos.com](http://www.epcos.com).

**Published by EPCOS AG**

**Systems, Acoustics, Waves Business Group**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2014. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.  
We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, TFAP, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qualcomm RF360:](#)

[B39212B4400P810](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)